
SKYWORTH
Make Every Ray of Sunshine Count

*High Efficiency Series-66*

# 620-640W

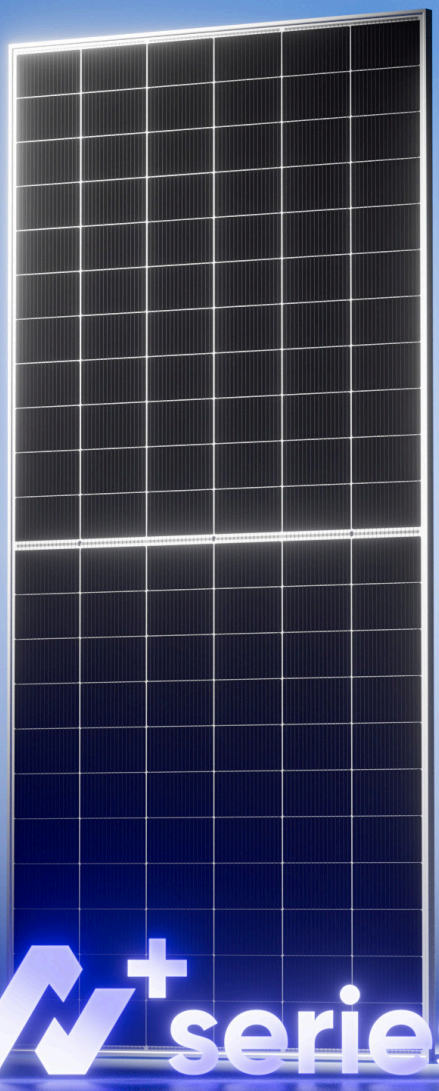

N+ series

**Highly Anti PID**
linear power warranty with first year ≤1% degradation and an annual degradation rate of up to 0.4% after that

**Better low irradiance response**
Superior power generation under shading conditions

**Highly reliable**
15-year product warranty,30-year linear power output warranty

**Improvement in power generation performance**
Conversion efficiency up to **23.7%**

**Bifacial Energy Yield | N-type Silicon Wafer**
Bifacial rate of up to 80%, module additional power generation of up to 10% over regular modules

## QUALITY SYSTEM


IEC 61215(2021), IEC 61730(2018)
ISO 9001:2015: Quality management systems
ISO 14001:2015: Environmental management systems
ISO 45001:2018: Occupational health and safety management systems

All Rights Reserved @Shenzhen Skyworth Photovoltaic Technology Co., LTD. Please refer to the latest version for any updates

## Electrical Characteristics

| Module Type | QM210R THCD-620-66 | QM210R THCD-625-66 | QM210R THCD-630-66 | QM210R THCD-635-66 | QM210R THCD-640-66 |
|---|---|---|---|---|---|
| | STC | STC | STC | STC | STC |
| Maximum Power[W] | 620 | 625 | 630 | 635 | 640 |
| Maximum Power Voltage[V] | 41.40 | 41.70 | 42.00 | 42.30 | 42.60 |
| Maximum Power Current[A] | 14.99 | 15.00 | 15.01 | 15.02 | 15.03 |
| Open circuit voltage[V] | 49.60 | 49.90 | 50.20 | 50.50 | 50.80 |
| Short Circuit Current[A] | 15.91 | 15.92 | 15.93 | 15.94 | 15.95 |
| Module Efficiency | **23.0%** | **23.2%** | **23.4%** | **23.6%** | **23.7%** |
| Operating Temperature | -40℃~+85℃ | | | | |
| Maximum System Voltage | DC 1500V | | | | |
| Maximum Series Fuse Rating | 25A/30A | | | | |
| Power Tolerance[W] | 0~+5W | | | | |
| Voc Temperature Coefficient | -0.28%/℃ | | | | |
| Pmax Temperature Coefficient | -0.29%/℃ | | | | |
| Isc Temperature Coefficient | 0.04%/℃ | | | | |
| Nominal Opearting Cell Temperature | 45±2℃ | | | | |


## Technical drawing

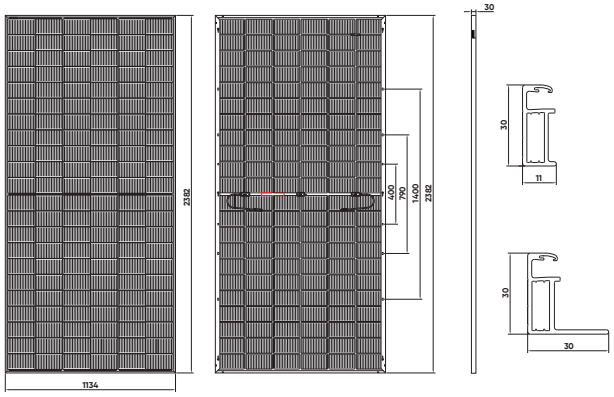



## Mechanical Specifications


| | |
|---|---|
| Solar Cells | 132(66×2) |
| Dimension | 2382×1134×30mm |
| Weight | 32.5kg |
| Front Glass | 2.0mm AR coated heat strengthened-Glass |
| Back Glass | 2.0mm heat strengthened-Glass |
| Frame | Anodized aluminium alloy |
| Junction Box | IP68 / 3 diodes |
| Output Cables | 4mm²(IEC),+400mm/-200mm or customized |
| Bifaciality | 80%±5% |

## Characteristic

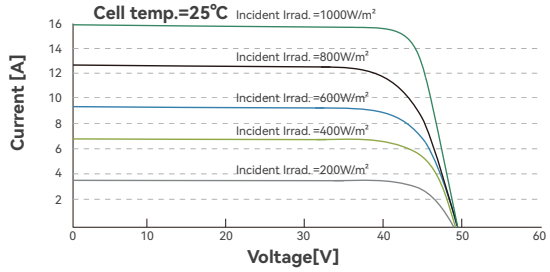

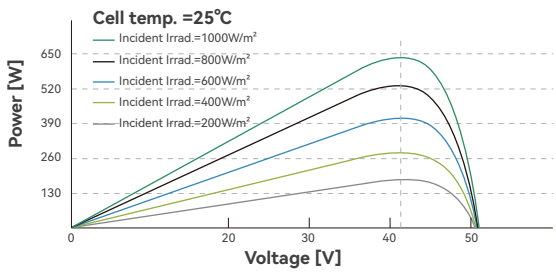
## Linear Performace Warranty

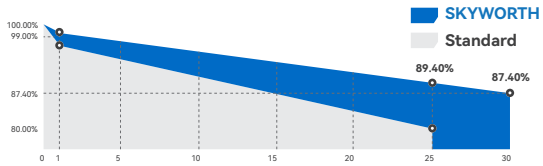


**15 YEARS** 15-year product warranty
**30 YEARS** 30-year linear power output warranty
**0.4%** year 2-30 power degradation

## Level

| | |
|---|---|
| Fire Performance | C |
| Security Protection | Class II |

## Packing Configuration

| | |
|---|---|
| Pallet | 36pcs/Pallet |
| Container | 720pcs/40HQ Container |

SKYWORTH
Make Every Ray of Sunshine Count

Global-V1.01-2025EN


Tel: 400-063-8989
Email: sales@solavita-ess.com
Web: www.solavita.com / www.skyworth-pv.com
Add: Room No.0801,C Block, 5th Building, HuaQiang Creative Park, Guangming Street, Guangming District, Shenzhen