

Application of Bernoulli's Equation: Flow through a sharp-edged orifice

■ For a sharp orifice, there is no surface in the jet direction so viscous effects are minimal

■ Streamlines are curved as they reach the orifice.

■ X-sectional area of jet reduces slightly as it exits:
Streamline curvature continues through the exit

■ X-sectional area reaches minimum, streamlines parallel:
Condition known as “vena contracta” where

Pressure in jet uniform & equal to p_a


■ Apply Bernoulli's equation between a general point in the container, 1,
& a point in the centre of the jet at the vena contracta, 2.

$$p_1 + \frac{1}{2} \rho V_1^2 + \rho g z_1 = p_2 + \frac{1}{2} \rho V_2^2 + \rho g z_2 = p_a + \frac{1}{2} \rho V_2^2$$

■ If container large then change in height of surface is negligible and $V_1 \approx 0$

$$p_1 = p_a + \rho g(h - z_1)$$

■ And so $V_2 = \sqrt{2gh}$

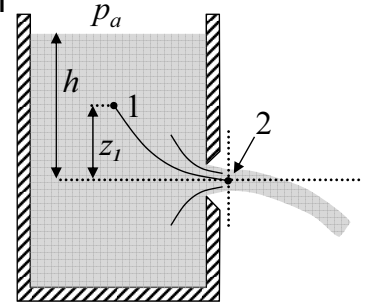

Fluids 1 : 1D flow.13

Flow through a sharp-edged orifice (2)

■ We have only worked out the speed of the jet

■ The area of the jet can be found from experiment

■ Define volume flow rate Q as

$$Q = V_2 A_2 = C_d \sqrt{2gh} \times A_{\text{orifice}}$$


■ For a sharp edge circular orifice C_d is found from experiment to be between 0.6 and 0.66.

■ We can eliminate the contraction of the jet after the orifice by a) a smooth “bell mouth” orifice or b) a short length of tube

■ Velocity across the jet then becomes non uniform – viscous losses from boundary layer now present

■ For a gas where hydrostatic terms are negligible, if we consider a container pressurised to p venting to atmosphere and follow a similar analysis then

$$V_{\text{jet}} = \sqrt{\frac{2(p - p_a)}{\rho}}$$

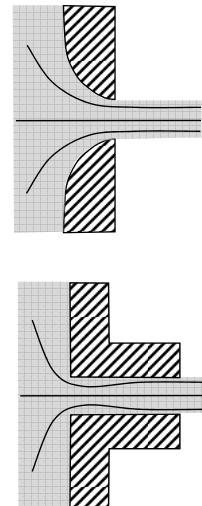


Fluids 1 : 1D flow.14

Application of Bernoulli's Equation: Stagnation pressure and Pitot tube


- Bernoulli's equation shows that for a steady incompressible flow, brought to rest (frictionless process with no change in hydrostatic pressure)

$$\underbrace{p_1}_{\text{static pressure}} + \underbrace{\frac{1}{2}\rho V_1^2}_{\text{dynamic pressure}} = \underbrace{p_2}_{\text{static pressure}} = \underbrace{P_o}_{\text{total pressure}}$$

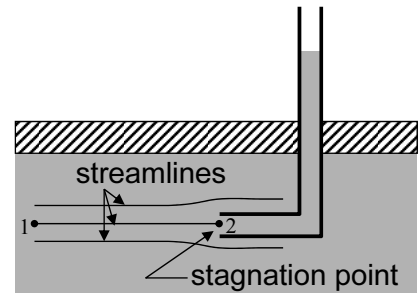

- Measurement of total (pitot) and static pressure often combined into a Pitot-Static tube

- Around the pitot opening the flow is accelerated and so the static pressure drops. The static pressure holes must be placed far enough away from the pitot opening to allow the static pressure to recover.

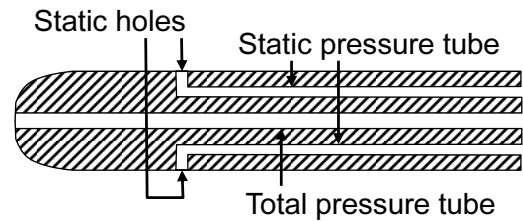

Fluids 1 : 1D flow.15

Application of Bernoulli's Equation: Convergent Flow Passage


- Bernoulli's equation and continuity applied to the flow between points 1 and 2

$$p_1 + \frac{1}{2}\rho V_1^2 + \rho g z_1 = p_2 + \frac{1}{2}\rho V_2^2 + \rho g z_2 = P_o$$

$$A_1 V_1 = A_2 V_2$$

- Considering flow with negligible hydrostatic component then as $A_1 > A_2$ we have

$$V_1 < V_2 \quad p_1 > p_2$$

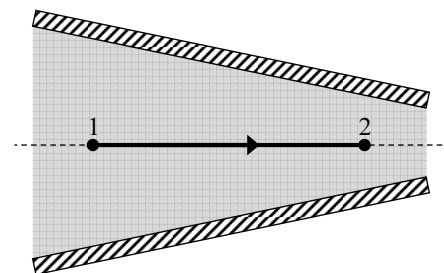

- Not intuitive

- Convergent ducts (nozzles) are also useful as any flow non-uniformities tend to be reduced. This is true for large and small nonlinearities, hence convergent sections upstream of test section in wind tunnels

Fluids 1 : 1D flow.16

Application of Bernoulli's Equation: Divergent Flow Passage


- Bernoulli's equation and continuity applied to the flow between points 1 and 2

$$p_1 + \frac{1}{2} \rho V_1^2 + \rho g z_1 = p_2 + \frac{1}{2} \rho V_2^2 + \rho g z_2 = P_o$$

$$A_1 V_1 = A_2 V_2$$

- Considering flow with negligible hydrostatic component again then as $A_1 < A_2$ we have


$$V_1 > V_2 \quad p_1 < p_2$$

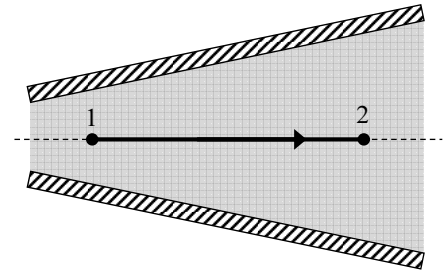

- Average velocity defined by continuity so independent of viscous effects but total pressure drops as static pressure losses turned into entropy

- Pressure gradient related to rate of change of area.

If expansion too rapid then flow will separate from the walls leading to large total pressure losses

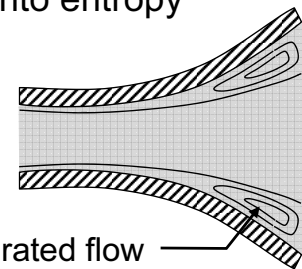

Fluids 1 : 1D flow.17

Application of Bernoulli's Equation: Venturi-meter

- Can be used to calculate velocity by taking pressure at two points with known cross sectional areas. Long diverging duct (6°) returns the velocity back to original with a small loss in total pressure.


- Bernoulli's equation and continuity applied to the flow between points 1 and 2 (keep heights fixed or ρ small so hydrostatic terms neglected)

$$p_1 + \frac{1}{2} \rho V_1^2 = p_2 + \frac{1}{2} \rho V_2^2 = P_o$$

$$A_1 V_1 = A_2 V_2 \quad V_1 \frac{A_1}{A_2} = V_2$$

$$p_1 = p_2 + \frac{1}{2} \rho V_1^2 \left(\frac{A_1^2}{A_2^2} - 1 \right)$$

$$V_1 = \sqrt{\frac{2 A_2^2 (p_1 - p_2)}{(A_1^2 - A_2^2) \rho}}$$

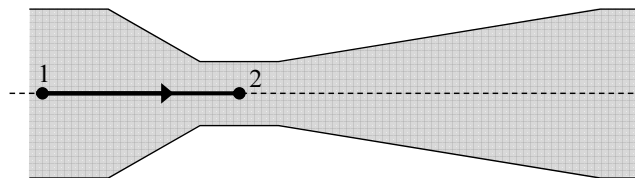

- We can calculate the difference in static pressure using a manometer

Fluids 1 : 1D flow.18

Worked Examples: (1) Vertical Jet of Water

■ A vertical jet of water from a 25mm diameter nozzle has a cross section that can be assumed to remain circular. Neglecting any energy loss, what will be the diameter of the jet at a point 4m above the nozzle if the velocity at the nozzle exit is 10m/s?

Solⁿ: Flow is steady, incompressible (water) and inviscid (no walls)

■ Applying Bernoulli's eqn between 1 & 2 and using $p_1 = p_2 = p_a$

$$p_1 + \frac{1}{2} \rho V_1^2 + \rho g z_1 = p_2 + \frac{1}{2} \rho V_2^2 + \rho g z_2$$

$$\frac{1}{2} \rho V_1^2 + \rho g z_1 = \frac{1}{2} \rho V_2^2 + \rho g z_2$$


$$V_2 = \sqrt{V_1^2 - 2g(z_2 - z_1)} = \sqrt{10^2 - 2 \times 9.81 \times 4} = 4.64 \text{ m/s}$$

■ Applying continuity to the circular jet

$$A_1 V_1 = A_2 V_2 \rightarrow \frac{1}{4} \pi d_1^2 V_1 = \frac{1}{4} \pi d_2^2 V_2 \rightarrow d_2 = d_1 \sqrt{V_1 / V_2} = 25 \sqrt{10 / 4.64} = 36.7 \text{ mm}$$

Notes:

- If jet were pointing downward then jet diameter would decrease
- A force is required on the nozzle to hold it in place (see CV analysis)
- Note that the jet adjusts within the nozzle so that $p = p_a$ throughout

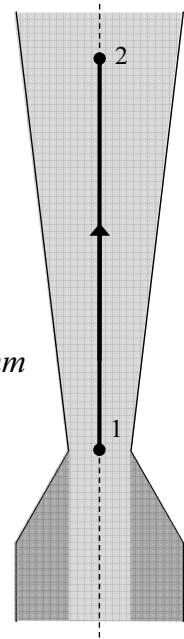

Fluids 1 : 1D flow.19

Worked Examples: (2) A Suction Device

■ A Venturi (convergent-divergent circular duct) produces low pressure at the throat which draws fluid upward from a reservoir. The Venturi centreline is at a height h above this lower reservoir's free surface. The Venturi is supplied by fluid from a second reservoir at a height H above the Venturi centreline and it exhausts to atmosphere. If the throat and exit diameters are D_t & D_e and the flow is assumed inviscid, show that the minimum H that just draws fluid from the lower reservoir into the throat is given by $H_{\min} = \frac{h}{(D_e^4/D_t^4) - 1}$

Solⁿ: Lower reservoir fluid just in throat when

$$p_t = p_a - \rho g h$$

■ Applying continuity between throat & exit

$$V_t / V_e = (A_e / A_t) = (D_e / D_t)^2$$

■ Applying Bernoulli's equation between upper reservoir surface and exit


$$p_a + 0 + \rho g H = p_a + \frac{1}{2} \rho V_e^2 + 0 \quad V_e^2 = 2gH$$

■ Applying Bernoulli's equation between throat and exit

$$p_t + \frac{1}{2} \rho V_t^2 + 0 = p_a + \frac{1}{2} \rho V_e^2 + 0$$

$$\rightarrow p_a - p_t = \rho g h \left((D_e / D_t)^4 - 1 \right) \rightarrow \rho g h = \rho g H \left((D_e / D_t)^4 - 1 \right)$$

$$H_{\min} = \frac{h}{(D_e^4 / D_t^4) - 1}$$

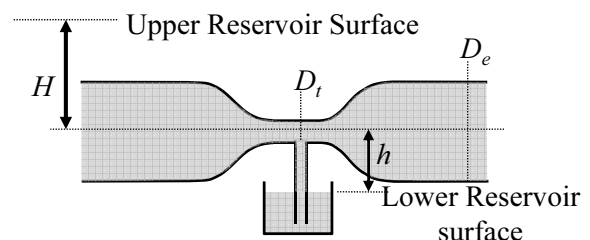

Fluids 1 : 1D flow.20

Worked Examples: (3) Wind Tunnel

■ Calculate the velocity in the working section of a low-speed open circuit wind tunnel, in terms of the air density ρ_a , manometer fluid density ρ_m and manometer height Δh

Solⁿ: assume that flow conditions are uniform in the wind tunnel so pressure is constant across width

$$p_1 = p_a - \rho_m g \Delta h$$


■ Note that air density neglected

■ Assume the flow is steady incompressible and inviscid, so applying Bernoulli's equation between far upstream & 1

$$p_a + 0 + 0 = p_1 + \frac{1}{2} \rho_a V_1^2 + 0$$

■ Combining manometer and Bernoulli's equation $p_a - p_1 = \frac{1}{2} \rho_a V_1^2 = \rho_m g \Delta h$

$$V_1 = \sqrt{2 \frac{\rho_m}{\rho_a} g \Delta h}$$

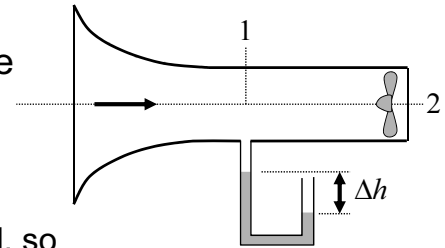

Note: The fan sucks air into the working section with no losses.

Bernoulli's equation can't be applied between 1 & 2 as the fan adds energy

Estimate power output of fan assuming area at 2 the same as at 1

Fluids 1 : 1D flow.21

$$\dot{E}_{fan} = \frac{1}{2} \dot{m} V_2^2 = \frac{1}{2} (\rho_a A_1 V_1) V_2^2$$

Worked Examples: (4) Siphon

■ Consider the siphon shown (constant x-section). Assuming the lowest pressure at point 3 is the vapour pressure of the liquid p_v (a lower pressure will cause cavitation and lead to the siphon failing). Show the maximum value of h is

$$h_{\max} = \frac{(p_a - p_v)}{\rho g} - H$$

Solⁿ: Note that we cannot just apply static eqn's between 3 & 4 as the fluid has a velocity.

Applying continuity between 3 & 4


$$A_3 V_3 = A_4 V_4 \rightarrow V_3 = V_4$$

Applying Bernoulli's equation between 3 & 4

$$p_3 + \frac{1}{2} \rho V_3^2 + \rho g(H + h) = p_4 + \frac{1}{2} \rho V_4^2 + 0$$

Discharge to atmosphere, $p_4 = p_a$, and we want a solution to $p_3 = p_v, h = h_{\max}$

Hence rearranging $h_{\max} = \frac{(p_a - p_v)}{\rho g} - H$

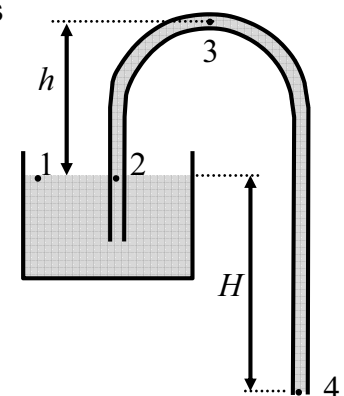

Note: Gain more insight by applying Bernoulli between 1 & 2: $p_a = p_2 + \frac{1}{2} \rho V_2^2$


so the pressure at 2 is lower than 1 even though they are at the same height. Applying Bernoulli's equation between 1 & 4 gives: $p_a + \rho g H = p_a + \frac{1}{2} \rho V_4^2$ and shows

that the discharge is only dependant on the height H and siphon diameter, while h defines the minimum pressure.

Fluids 1 : 1D flow.22

When the Flow is quasi-1D

■ Consider the flow upstream and downstream of a sudden enlargement (1 & 2). The flow is parallel & steady at 1 & 2 so the static pressure is constant through the depth at each location. We can use Bernoulli's equation in two ways, either using the average velocities (\bar{V}_1, \bar{V}_2) or using the velocities along a single streamline (V_1, V_2)

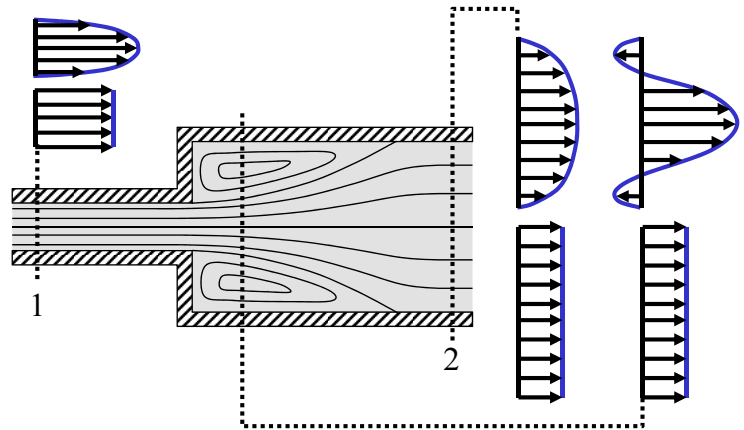

$$p_1 + \frac{1}{2} \rho \bar{V}_1^2 + \rho g z_1 = p_2 + \frac{1}{2} \rho \bar{V}_2^2 + \rho g z_2 + \Delta p_{\text{loss}} \quad \Delta p_{\text{loss}} \geq 0$$

$$p_1 + \frac{1}{2} \rho V_1^2 + \rho g z_1 = p_2 + \frac{1}{2} \rho V_2^2 + \rho g z_2 + \Delta p_{\text{SL loss}} \quad \Delta p_{\text{SL loss}} \geq 0$$

■ Note that the pressure losses are always positive and that the loss associated with average values may be large ($\Delta p_{\text{loss}} / \frac{1}{2} \rho \bar{V}_1^2 \geq 0.6$ for a sudden contraction). The losses along streamlines with small cross stream velocity gradients and hence small viscous effects, such as the centreline above, will have negligible total pressure loss

■ Consider the Pitot probe measurements inside a boundary layer - the deceleration is inviscid even though the flow is not, so Pitot still measures the correct total pressure.

Fluids 1 : 1D flow.23

Learning Outcomes: “What you should have learnt”

- The principle of 1D flow as an approximation to flows in ducts and between streamlines.
- Application of conservation of mass to 1D flow.
- Bernoulli's Equation: Most importantly you must understand the conditions under which it can be applied. You do NOT need to memorise the derivation of the equation.
- Definition of Total pressure in terms of static dynamic and hydrostatic
- Cross-stream pressure gradient: Again, you do not need to memorise the derivation. You need to understand the main results it leads to: only hydrostatic variation across straight parallel streamlines, pressure decrease on the inside of a curved streamline.
- Understand the Vena Contracta condition.
- Know how a Pitot-Static tube & Venturi can be used to measure flow speed.
- You must be able to apply Bernoulli's equation and the conservation of mass to a range of engineering situations.

Remember: learn how to apply the Bernoulli & continuity equations, Fluids I is a unit focussed on understanding not memory.