


The **TERRAMAX** A/T is designed to deliver superior traction for SUVs, pickups and vans both off and on road. The A/T provides exceptional handling and on-and-off-road stability while maintaining a comfortable ride.

- Aggressive open shoulder tread design expels water, snow, slush and mud for optimum traction in all terrain conditions.
- Solid center rib provides superior comfort comfort and control.

Quietness:

Tread Life:

• Extra deep tread sipes at varying angles improves comfort without sacrificing traction.

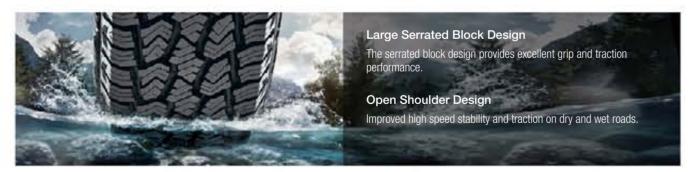




Tread Pattern:

Effectively removes gravel and is capable of withstanding punctures from harsh pavements. Protects the tread from damage.

Staggered Tread Blocks
Can effectively prevent uneven wear to improve off-road performance.



-High Strength
-Cut and Puncture Resistant
-High Wear Resistance
-Stong grip
-Great Hydroplaning Resistance
-Low Rolling Resistance
-Highly Elastic at Low Temperatures
-Excellent Winter Performance
-Exceptional Driving Safety
-Low Heat Buildup
-Long Tread Life

TERRAMAX A/T

Downard Claw-like Shoulder Design


Domineering style that effectively dissipates heat when driving long distances and at high speeds.

Sidewall Rim Protector

A shield design protects the alloy rims from collisions, impacts, and supports the sidewall.

Three-dimensional Peak Siedewall Design

Strengthens the sidewall to improve abrasion resistance.



Aggressive Open Shoulder Tread design: effeciently expels snow, water, slush, and mud for optimum traction in all-terrain conditions.



Shoulder Tread
xpels snow, water,
imum traction in all
Multi-directic
System: Extra
at varying angles
without sacrificin





44 TERRAMAX A/T | WWW.SAILUNTIRE.COM







TERRAMAX A/T

	SIZE	PR	LI	SR	X OR	OD	SW	TD	RW	UTQG
						mm	mm	mm	Inch	
15	235/70R15		103	S		711	240	10.5	7J	500/A/B
	265/70R15		112	S		753	272	10.5	8J	500/A/B
	215/75R15		100	S		703	216	10	6J	500/A/B
	235/75R15		109	S	XL	733	235	10.5	6 1/2J	500/A/B
	LT215/75R15	6PR	100/97	R		703	216	12.5	6J	
	LT235/75R15	6PR	104/101	R		733	235	13	6 1/2J	
	225/75R15C	6PR	110/108	S		719	223	12.5	6J	
	31×10.50R15LT	6PR	109	S		775	268	13	8 1/2J	
16	235/70R16		106	S		736	240	10.5	7J	500/A/B
	245/70R16		107	S		750	248	10.5	7J	500/A/B
	265/70R16		112	T		778	272	10.5	8J	500/A/B
	275/70R16		114	S		792	279	10.5	8J	500/A/B
	LT245/70R16	8PR	113/110	S		750	248	13	7J	
	245/75R16		111	S		774	248	10.5	7J	500/A/B
	265/75R16		116	S		804	267	10.5	7 1/2J	500/A/B
	LT225/75R16	10PR	115/112	S		744	223	13	6J	
	LT245/75R16	10PR	120/116	S		774	248	13	7J	
	LT265/75R16	10PR	123/120	S		804	267	13	7 1/2J	
	LT285/75R16	10PR	126/123	R		834	286	13	8J	
	LT235/85R16	10PR	120/116	R		806	235	13	6 1/2J	
	205R16C	8PR	110/108	Q		736	208	12.5	6J	

	SIZE	PR	Ш	SR	X OR	OD	SW	TD	RW	UTQG
						mm	mm	mm	Inch	
17	235/65R17		104	S		738	240	10.5	7J	500/A/B
	245/65R17		107	S		750	248	10.5	7J	500/A/B
	265/65R17		112	S		776	272	10.5	8J	500/A/B
	275/65R17		115	S		790	279	10.5	8J	500/A/B
	245/70R17		110	T		776	248	10.5	7J	500/A/B
	265/70R17		115	S		804	272	10.5	8J	500/A/B
	LT245/70R17	10PR	119/116	S		776	248	13	7J	
	LT265/70R17	10PR	121/118	S		804	272	13	8J	
	LT285/70R17	10PR	121/118	R		832	292	13	8 1/2J	
	LT245/75R17	10PR	121/118	S		800	248	13	7J	
	LT235/80R17	10PR	120/117	R		808	235	13	6 1/2J	
18	265/60R18		110	T		775	272	10.5	8J	
	265/65R18		114	T		801	272	10.5	8J	500/A/B
	275/65R18		116	T		815	279	10.5	8J	500/A/B
	LT275/65R18	10PR	123/120	R		815	279	13	8J	
	LT265/70R18	10PR	124/121	R		829	272	13	8J	
	LT275/70R18	10PR	125/122	R		843	279	13	8J	
20	265/50R20		111	T	XL	774	277	10.5	8 1/2J	500/A/B
	275/55R20		117	T	XL	810	284	10.5	8 1/2J	500/A/B
	LT305/55R20	10PR	121/118	R		844	316	13	9 1/2J	
	275/60R20		115	T		838	279	10.5	8J	500/A/B
	LT265/60R20	10PR	121/118	R		826	272	13	8J	
	LT275/60R20	10PR	123/120	R		838	279	13	8J	
	LT325/60R20	10PR	126/123	R		898	331	13	9 1/2J	
	LT275/65R20	10PR	126/123	R		866	279	13	8J	

47 46 TERRAMAX A/T | WWW.SAILUNTIRE.COM