





ULTRA HIGH PERFORMANCE TIRE

# ATREZZO ZSR

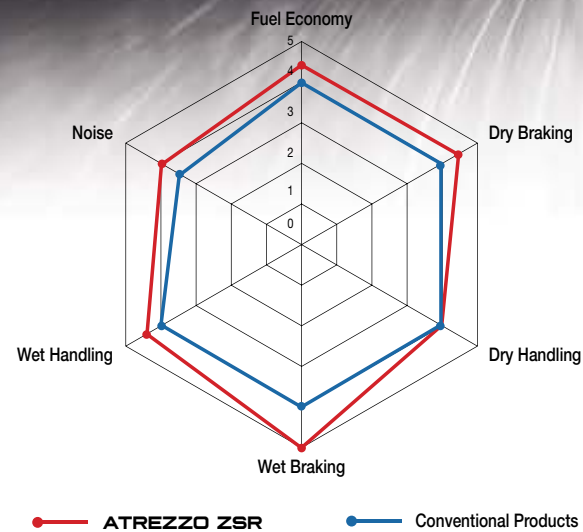

## PERFORMANCE RATINGS:

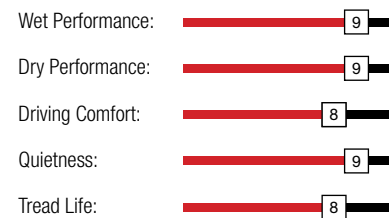


The new generation **ATREZZO ZSR** is engineered to deliver precise wet and dry handling performance. With an asymmetrical tread design and enhanced tread rubber formula, Atrezzo ZSR rises to the challenge and provides exceptional performance on the street and on the highway.

- Asymmetrical tread design for uncompromising performance.
- Wide shoulder blocks and high angle sipes improve high speed performance.
- Variable pitch tread design provides a smooth, quiet ride.
- Advanced tread compound delivers superior cornering and exceptional handling.
- Deep, circumferential grooves and hundreds of biting edges deliver excellent wet and dry traction.


- 1** Special tread compound formula reduces rolling resistance and improves skid resistance.

### White Carbon Black Filler




White carbon black sticks better to the body of the tire which creates less friction. This greatly reduces the tire's rolling resistance. White carbon black is more flexible making it better at absorbing shocks from road deformations and improves grip.

### Carbon Black Filler



- 2** Main tread rubber material greatly improves hydroplaning resistance to provide you with a safer ride.



High content of Styrene Vinyl which provides great hydroplaning resistance.




## Excellent Drainage Performance

Grooves with varying widths efficiently drain water to reduce hydroplaning and improve fuel efficiency.



## Noise Emission


The various groove angles evenly distribute vibrations generated while running to reduce noise emissions. The design has been measured to reduce noise emissions by about 3%.



In 2011, the series was selected by the global automotive media to be awarded the

**“SEMA 2011 Best New Product Award.”**

They also won the China domestic tire brand award for the first time.



## Longer Tread Life

Through our testing, we have ensured greater driving stability and promoted uniform wear by increasing the tire's ground contact area by 6%.

## High Speed Stability

The central rib pattern improves high speed stability to improve driving comfort.


## Cornering

The reinforced shoulder design improves grip for effective corner capabilities.




## ATREZZO ZSR Formula Intro

### Rolling Resistance

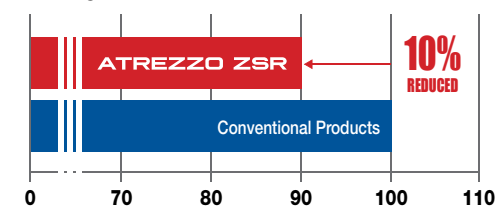

### Skid Resistance

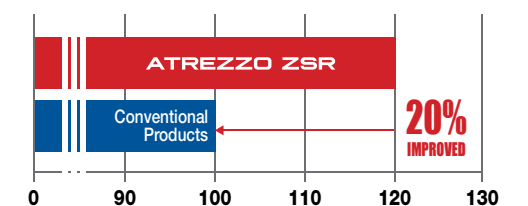



ATREZZO ZSR

	SIZE	PR	LI	SR	X OR	OD	SW	TD	RW	UTQG
						mm	mm	mm	Inch	
15	195/45R15	--	78	V	--	557	195	8	6 1/2J	340/A/A
16	195/40ZR16	--	80	W	XL	562	200	8.2	7J	340/A/A
	195/45R16	--	84	V	XL	582	195	8	6 1/2J	340/A/A
	205/45R16	--	87	V	XL	590	206	8.2	7J	340/A/A
	205/45R16	--	87	W	XL	590	206	8.2	7J	340/A/A
	205/50ZR16	--	87	W	--	612	214	8.2	6 1/2J	340/A/A
	195/55RF16	--	87	V	--	620	201	8.2	6J	340AA
	205/55ZR16	--	91	W	--	632	214	8.3	6 1/2J	340/A/A
	205/55ZRF16	--	91	W	--	632	214	8.3	6 1/2J	340/A/A
	215/55ZR16	--	97	W	XL	642	226	8.2	7J	340/A/A
	225/55ZR16	--	99	W	XL	654	233	8.2	7J	340/A/A
	215/35ZR17	--	83	W	XL	582	218	8.2	7 1/2J	340/A/A
17	195/40R17	--	81	V	XL	588	200	8.2	7J	340/A/A
	205/40ZR17	--	84	W	XL	596	212	8.2	7 1/2J	340/A/A
	215/40ZR17	--	87	W	XL	604	218	8	7 1/2J	340/A/A
	245/40ZR17	--	95	W	XL	628	248	8.2	8 1/2J	340/A/A
	205/45ZR17	--	88	W	XL	616	206	8.2	7J	340/A/A
	205/45RF17	--	84	V	--	616	206	8.2	7J	340/A/A
	205/45RF17	--	88	W	XL	616	206	8.2	7J	340/A/A
	215/45ZR17	--	91	W	XL	626	213	8	7J	340/A/A
	225/45ZR17	--	94	W	XL	634	225	8.2	7 1/2J	340/A/A
	225/45ZRF17	--	91	W	--	634	225	8.2	7 1/2J	340/A/A
	225/45ZRF17	--	91	Y	--	634	225	8.2	7 1/2J	340/A/A
	235/45ZR17	--	97	W	XL	644	236	8.2	8J	340/A/A
	245/45ZR17	--	99	W	XL	652	243	8.2	8J	340/A/A
	205/50ZR17	--	93	W	XL	638	214	8.2	6 1/2J	340/A/A
	205/50ZRF17	--	89	W	--	638	214	8.2	6 1/2J	340/A/A
	215/50ZR17	--	95	W	XL	648	226	8.2	7J	340/A/A
	215/50R17	--	95	V	XL	648	226	8.2	7J	340/A/A
	225/50ZR17	--	98	W	XL	658	233	8.2	7J	340/A/A
	225/50ZRF17	--	94	W	--	658	233	8.2	7J	340AA
	215/55ZR17	--	98	W	XL	668	226	8.2	7J	340/A/A
	225/55ZR17	--	101	W	XL	680	233	8.2	7J	340/A/A
	225/55R17	--	101	V	XL	680	233	8.2	7J	340/A/A
	225/55ZRF17	--	97	Y	--	680	233	8.2	7J	340/A/A
18	215/35ZR18	--	84	W	XL	607	218	8	7 1/2J	340/A/A
	225/35ZR18	--	87	W	XL	615	230	8.2	8J	340/A/A
	255/35ZR18	--	94	W	XL	635	260	8.2	9J	340/A/A
	255/35ZRF18	--	90	Y	--	635	260	8.2	9J	340/A/A
	265/35ZR18	--	97	W	XL	643	271	8.2	9 1/2J	340/A/A
	215/40R18	--	89	V	XL	629	218	8	7 1/2J	340/A/A
	225/40ZR18	--	92	W	XL	637	230	8.2	8J	340/A/A

	SIZE	PR	LI	SR	X OR	OD	SW	TD	RW	UTQG
						mm	mm	mm	Inch	
18	225/40ZRF18	--	92	Y	XL	637	230	8.2	8J	340/A/A
	235/40ZR18	--	95	W	XL	645	241	8.2	8 1/2J	340/A/A
	235/40ZR18	--	95	Y	XL	645	241	8.2	8 1/2J	340/A/A
	245/40ZR18	--	97	W	XL	653	248	8.2	8 1/2J	340/A/A
	245/40ZRF18	--	97	Y	XL	653	248	8.2	8 1/2J	340/A/A
	215/45ZR18	--	93	W	XL	651	213	8.2	7J	340/A/A
	215/45ZR18	--	93	Y	XL	651	213	8.2	7J	340/A/A
	225/45ZR18	--	95	W	XL	659	225	8.2	7 1/2J	340/A/A
	225/45ZR18	--	95	Y	XL	659	225	8.2	7 1/2J	340/A/A
	235/45ZR18	--	98	W	XL	669	236	8.2	8J	340/A/A
	245/45ZR18	--	100	W	XL	677	243	8.2	8J	340/A/A
	245/45ZRF18	--	100	W	XL	677	243	8.2	8J	340/A/A
	255/45ZR18	--	103	W	XL	687	255	8.2	8 1/2J	340/A/A
	225/50ZR18	--	95	W	--	683	233	8.2	7J	340/A/A
	235/50ZR18	--	101	W	XL	693	245	8.2	7 1/2J	340/A/A
	235/50ZR18	--	101	Y	XL	693	245	8.2	7 1/2J	340/A/A
	245/50ZRF18	--	100	Y	--	703	253	8.2	7 1/2J	340/A/A
19	275/30ZR19	--	96	W	XL	649	278	8.2	9 1/2J	340/A/A
	275/30ZR19	--	96	Y	XL	649	278	8.2	9 1/2J	340/A/A
	215/35ZR19	--	85	W	XL	633	218	8.2	7 1/2J	340/A/A
	215/35ZR19	--	85	Y	XL	633	218	8.2	7 1/2J	340/A/A
	225/35ZR19	--	88	W	XL	641	230	8.2	8J	340/A/A
	235/35ZR19	--	91	W	XL	647	241	8.2	8 1/2J	340/A/A
	235/35ZR19	--	91	Y	XL	647	241	8.2	8 1/2J	340/A/A
	245/35ZR19	--	93	W	XL	655	248	8.2	8 1/2J	340/A/A
	255/35ZR19	--	96	Y	XL	661	260	8.2	9J	340/A/A
	275/35ZR19	--	96	W	--	675	278	8.2	9 1/2J	340/A/A
	275/35ZRF19	--	96	Y	--	675	278	8.2	9 1/2J	340/A/A
	275/35ZRF19	--	100	Y	XL	675	278	8.2	9 1/2J	340/A/A
	245/40ZR19	--	98	W	XL	679	248	8.2	8 1/2J	340/A/A
	245/40ZRF19	--	98	Y	XL	679	248	8.2	8 1/2J	340/A/A
	245/40ZRF19	--	94	Y	--	679	248	8.2	8 1/2J	340/A/A
20	245/30ZR20	--	95	W	XL	656	248	8.2	8 1/2J	340/A/A
	275/30ZR20	--	97	W	XL	674	278	8.2	9 1/2J	340/A/A
	275/30ZR20	--	97	Y	XL	674	278	8.2	9 1/2J	340/A/A
	225/35ZR20	--	90	W	XL	666	230	8.2	8J	340/A/A
	225/35ZR20	--	93	Y	XL	666	230	8.2	8J	340/A/A
	245/35ZR20	--	95	W	XL	680	248	8.2	8 1/2J	340/A/A
	245/35ZR20	--	95	Y	XL	680	248	8.2	8 1/2J	340/A/A
	255/35ZR20	--	97	W	XL	686	260	8.2	9J	340/A/A
	255/35ZR20	--	97	Y	XL	686	260	8.2	9J	340/A/A