



J3 Ali Express FTDI breakout left J4 Ali Express FTDI breakout right





Select for flow control disabled.






Select for flow control enabled.

DR low asserts -CTS.
DR high de-asserts -CTS.

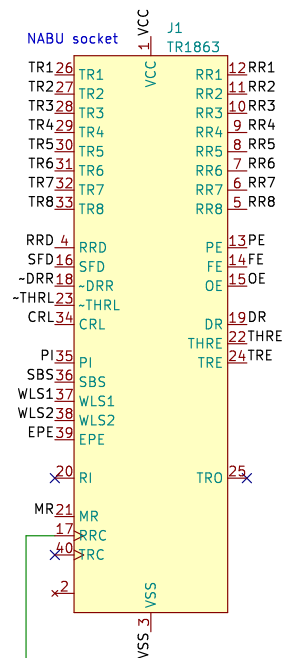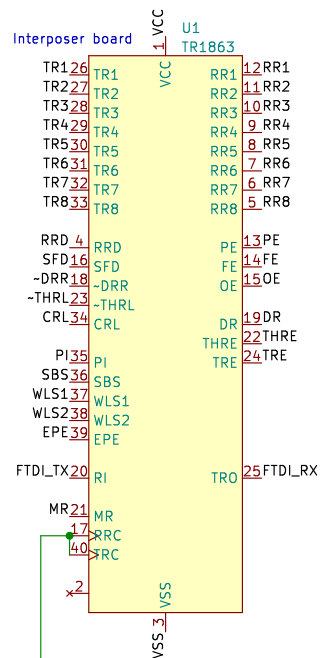

Select for 115200 baud.

Select for 111860 baud.



Two oscillator footprints provided. Populate only one!

Jason R. Thorpe, based on work from MyGeekyHobby.com

Sheet: /
File: nabu-ftdi-serial.kicad_sch

Title: NABU FTDI Serial Adapter

Size: A4 Date: 2023-02-12
KiCad E.D.A. kicad (6.0.11-0)

Rev: 1.0
Id: 1/1