

• ELECTRICAL CIRCUIT (1/2)

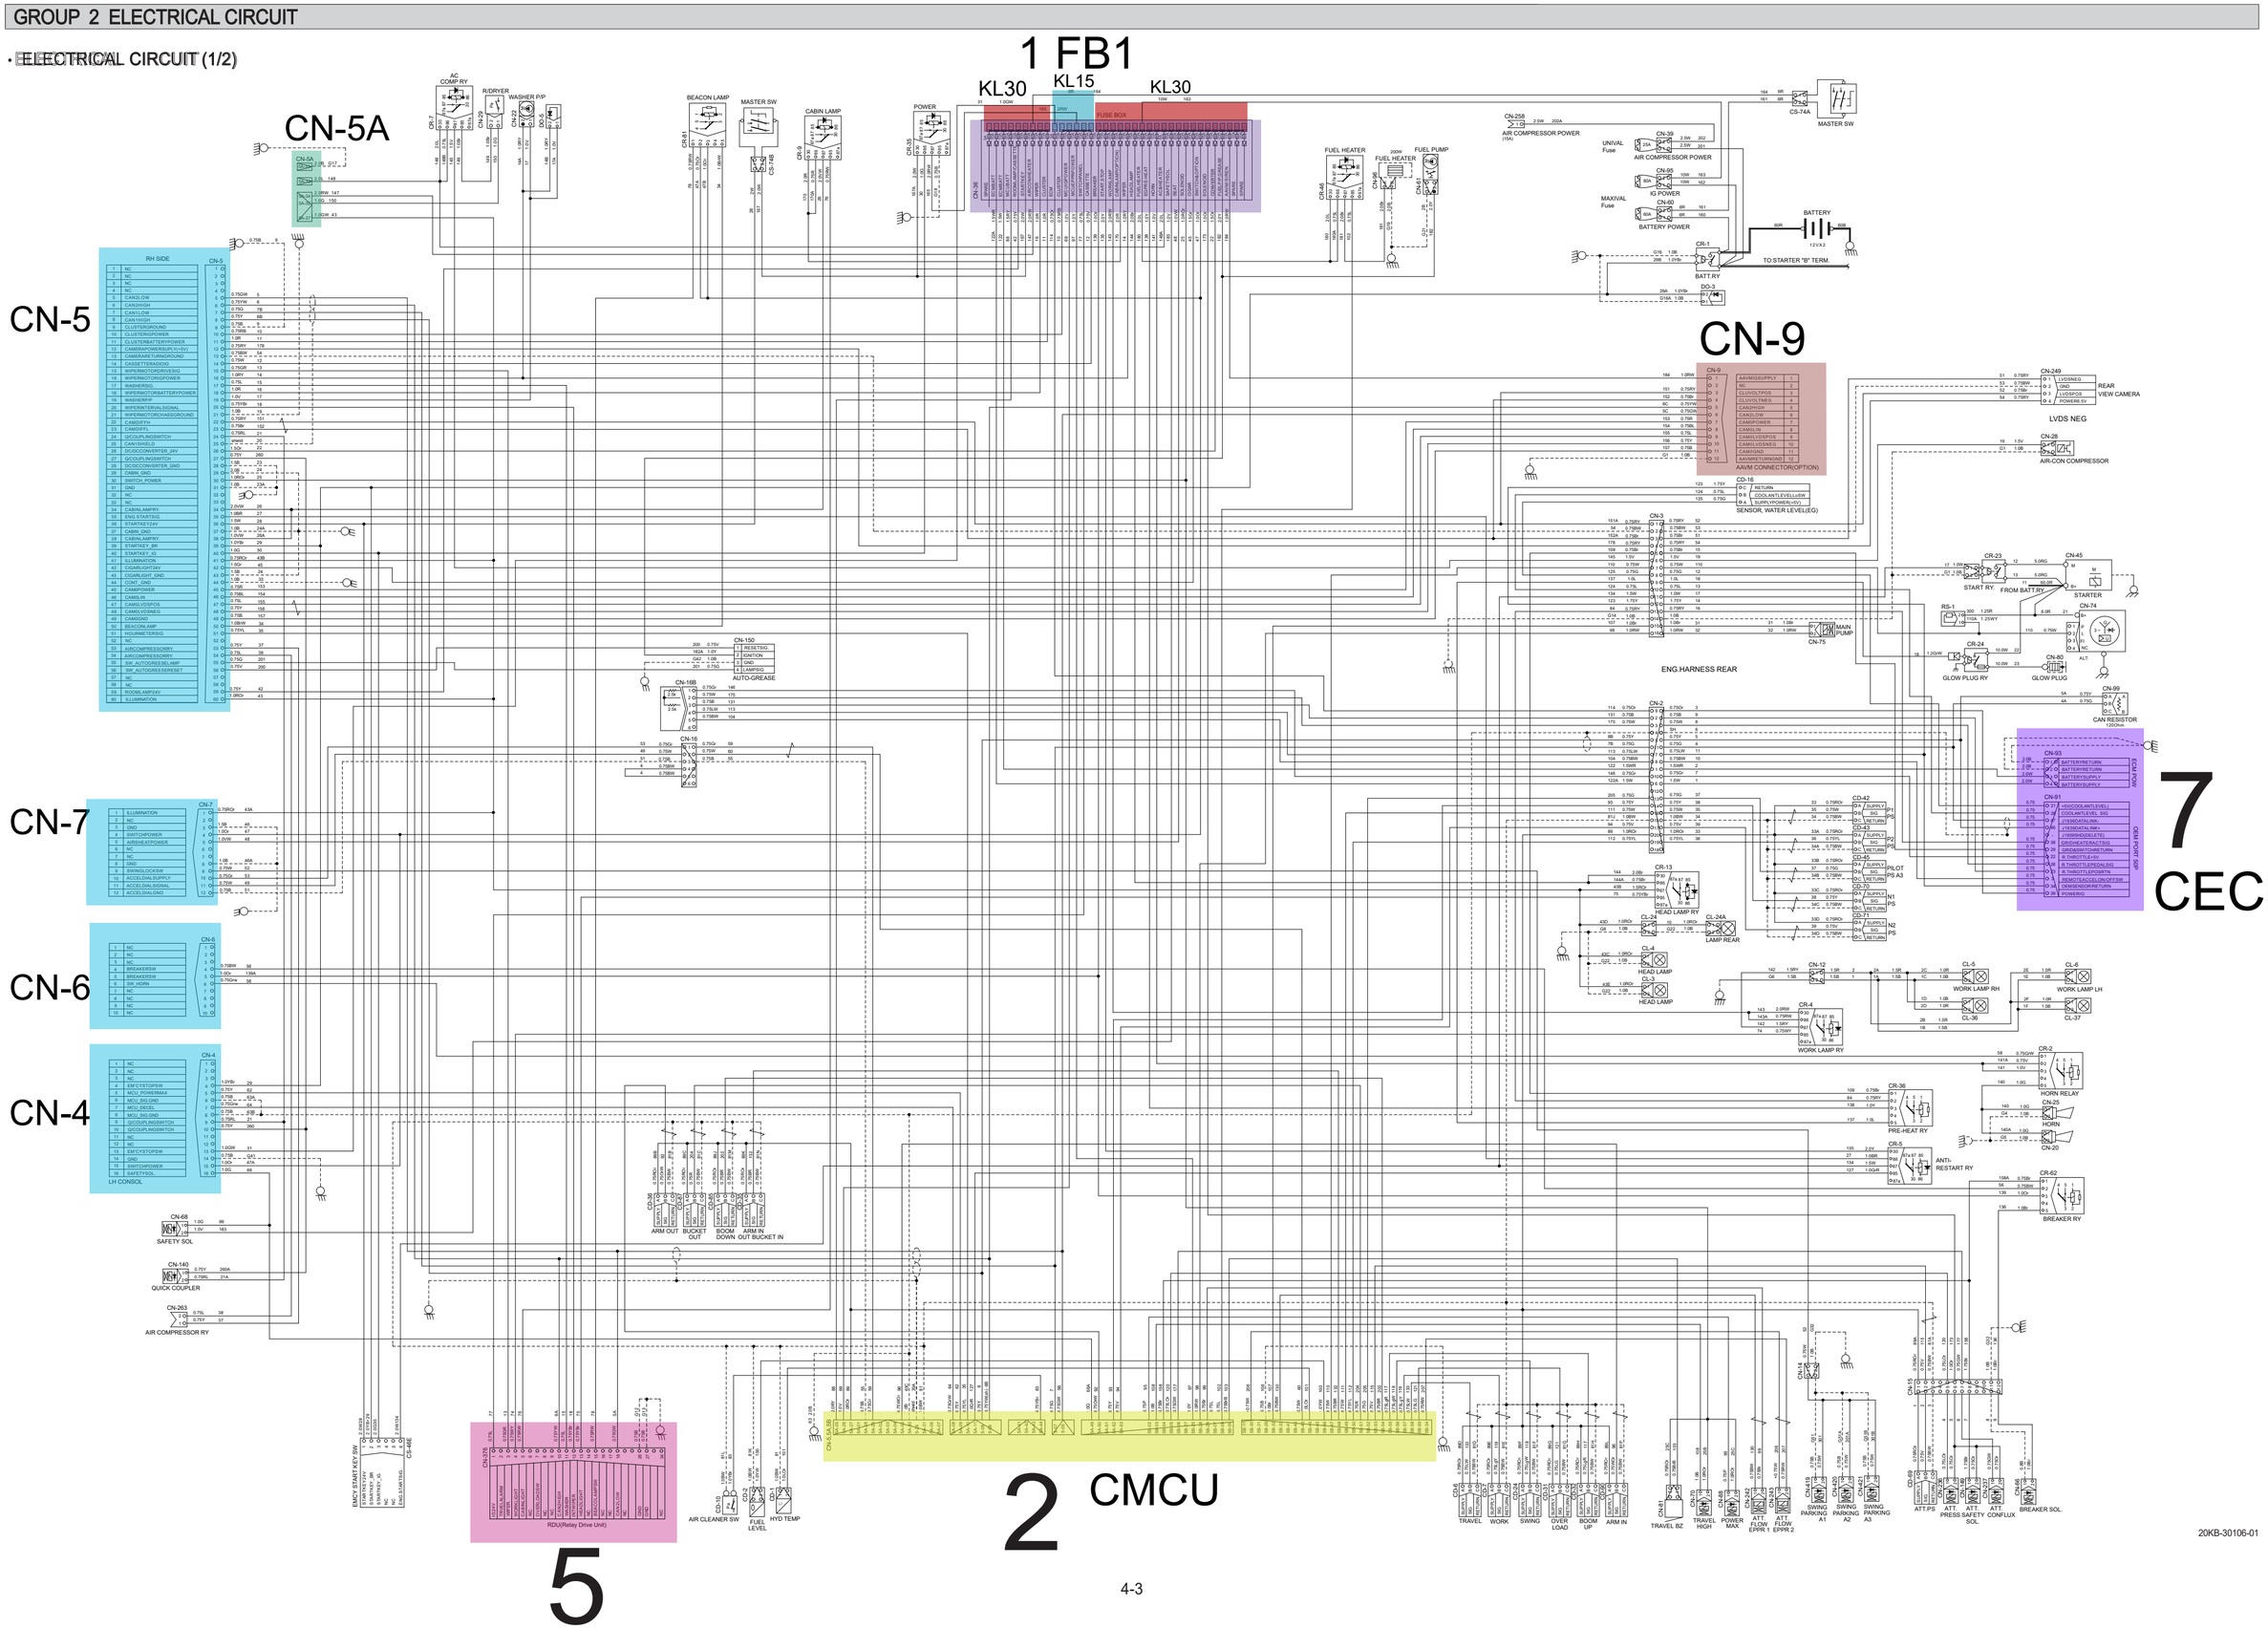

- Machine Serial No. : HX480S L : #00039- / HX520S L : #00066-

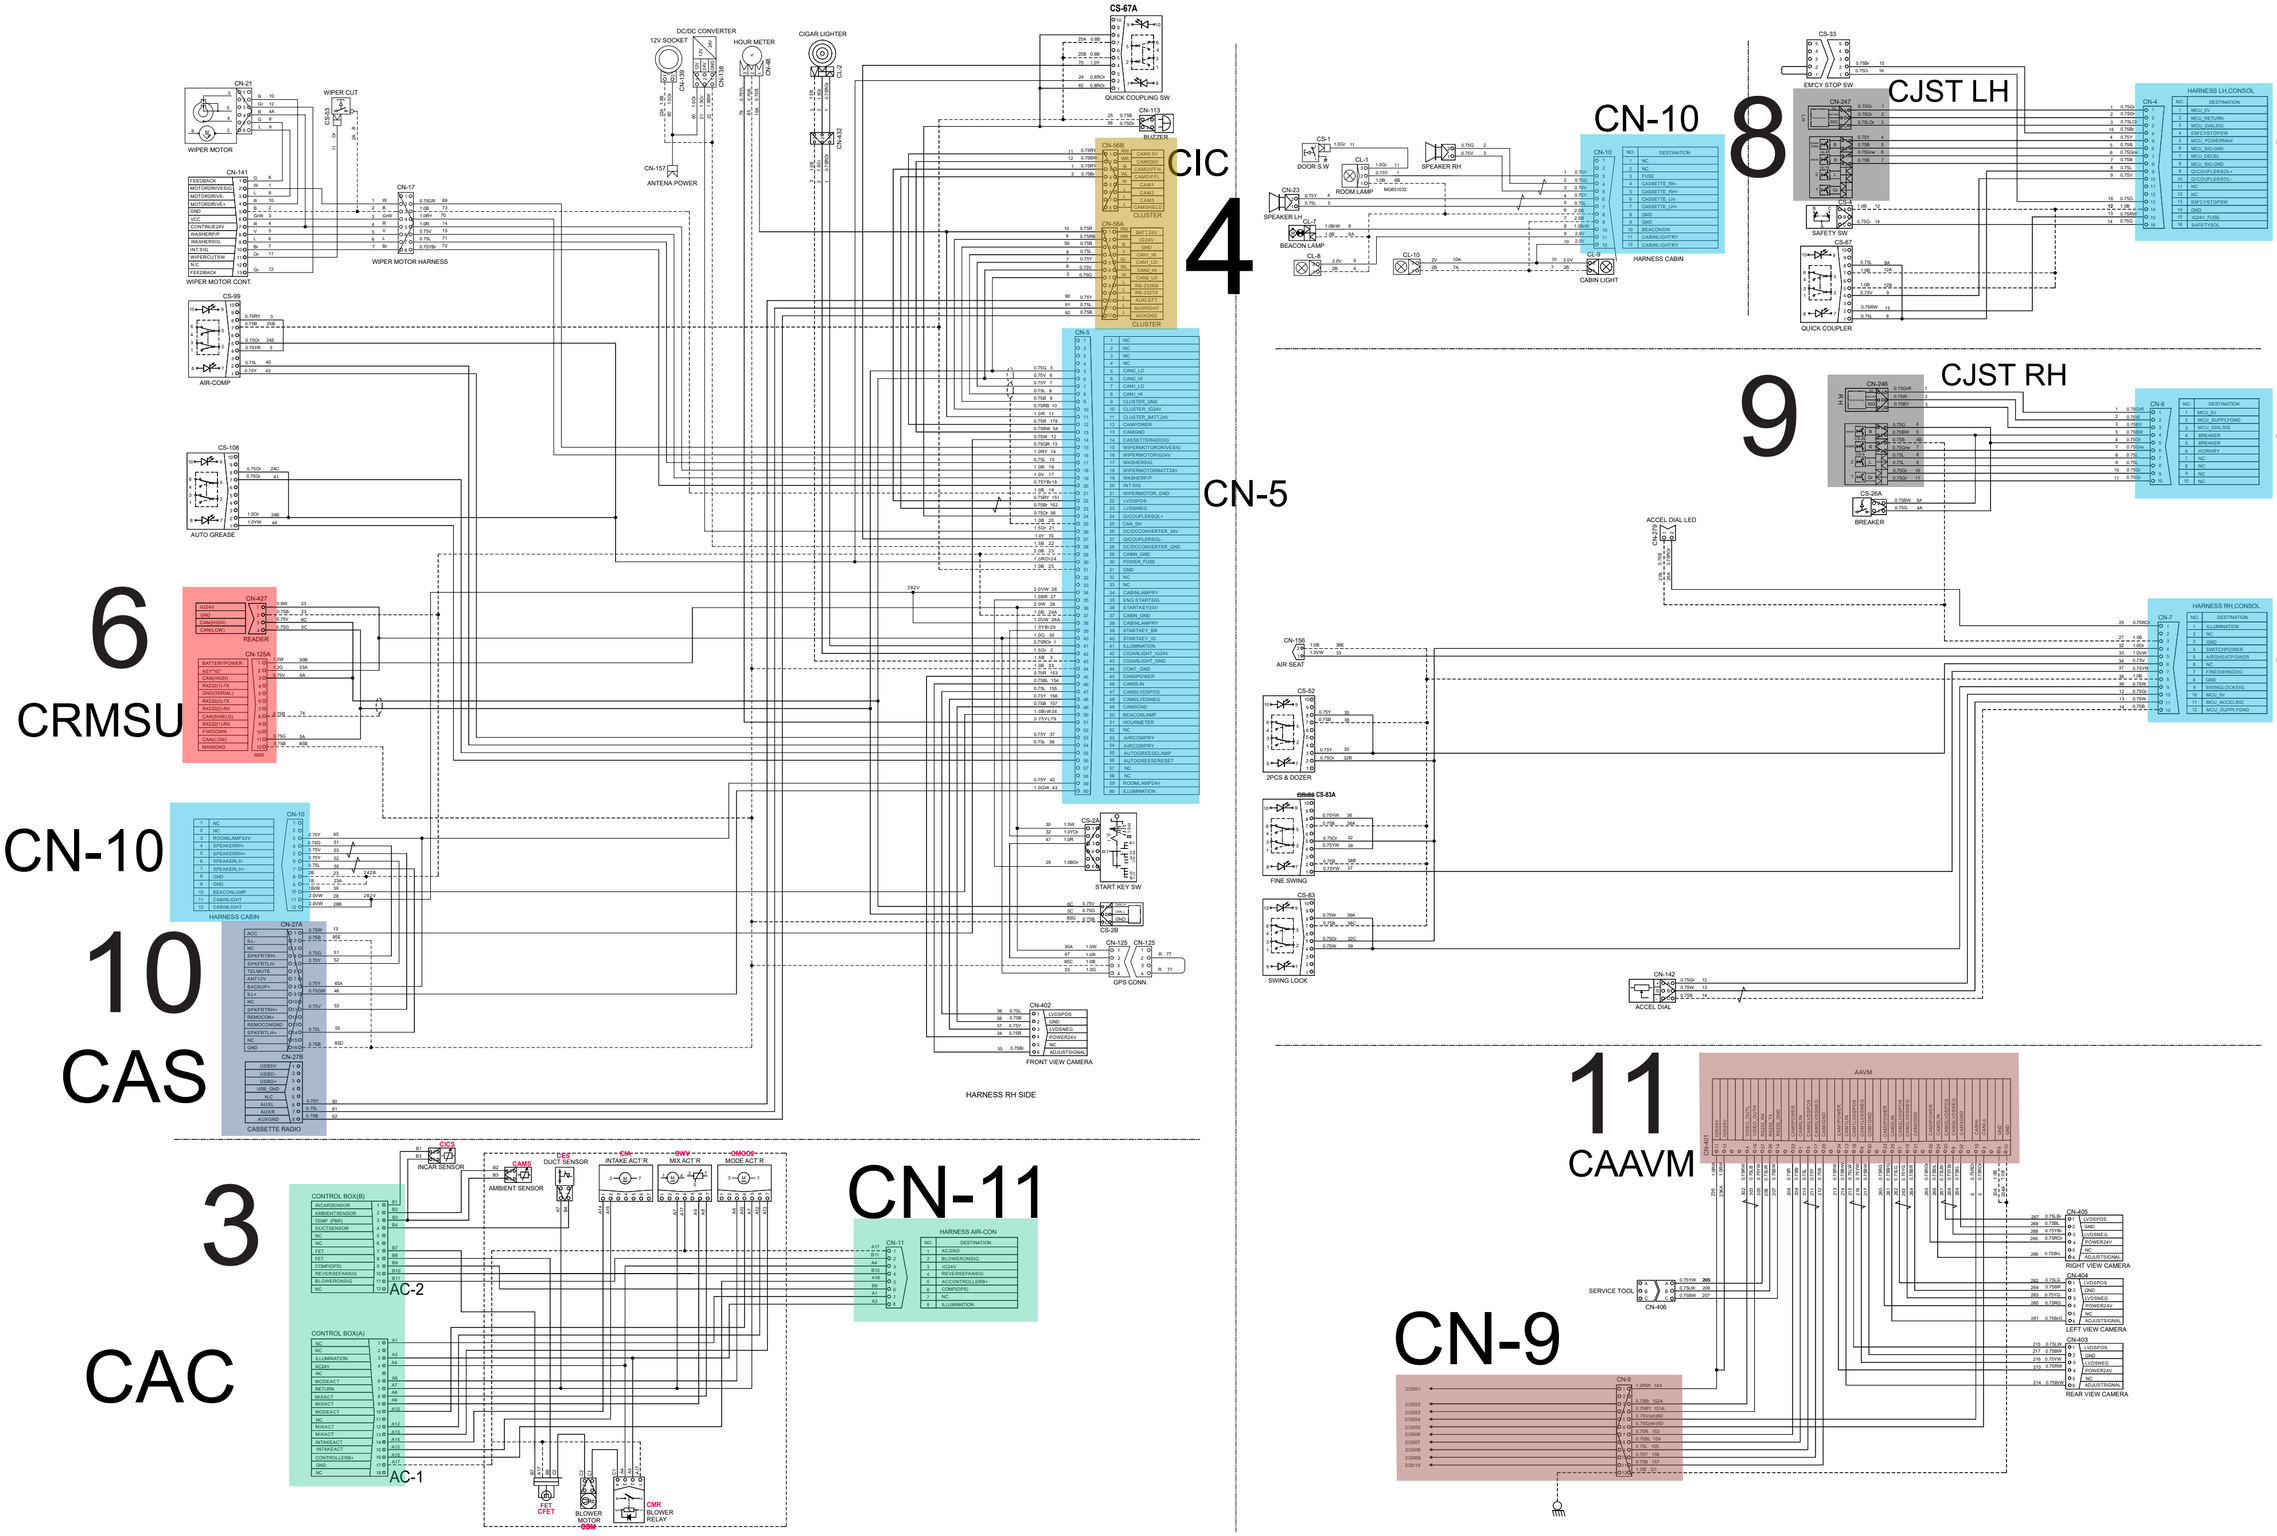

20KB-95100-01 1OF2

- Machine Serial No. : HX480S L : #00039- / HX520S L : #00066-

CN-11

3

NO.	DESTINATION
1	AC GND
2	BLOWER SIG.
3	AC 24V
4	REVERSE FAN SIG
5	AC CONTROLLER B+
6	AC COMP
7	AC CONDENSOR FAN
8	ILLUMINATION

AIR-CON

CN-11 1 2 3 4 5 6 7 8

2.0 B G17 — CN-5A 5A-33
0.75LY 91
2.0 L 148 — 5A-32
1.0 G 3001 — 5B-10
2.0 RW 147 — 5A-34
1.0 G 150 — 5A-35
1.0 GW 43 — 5A-37

6

Service Tool

IG 24V
CAN2_Lo
CAN2_Hi
CAN_Lo
CAN_Hi
GND
RS232_TX
RS232_RX
RS232 P_DUMP

J 0.75G
H 0.75G
G 0.75G
F 0.75G
E 0.75V
D 0.75B
C 0.75R
B 0.75G
A 0.75BW

CN-126 10 9 8 7 6 5 4 3 2 1

1.0 V 69 — CN-5, 5A 5A-26
0.75G(sh) 5 — 5-05
0.75G(sh) 6 — 5-06
0.75Y(sh) 7 — 5-07
0.75L(sh) 8 — 5-08
0.75B 71 — 5A-30
0.75R 70
0.75G 68
0.75BW 72

CCAN

2 CMCU

CN-5, 5A, 5B

CN-51

1	1.5 RY 88	5A-25
2	1.0 V 69	5A-26
3	1.0 RO 89	5A-27
4	1.0Y	5A-01
5	1.0 B 55	5A-28
6	1.0 Gr 53	5A-29
7	0.75V	5A-02
8	0.75G	5A-03
9	0.75W 90	5A-04
10	1.0 B 63A	5A-05
11	1.0 B 20A	5A-30
12	0.75BW 81	5-25
13	0.75BW 172	5A-31
14	0.75GrW 164	5A-06
15	0.75BW 72	5A-07
16	0.75GrW 64	5A-08
17	0.75Y 62	5A-09
18	0.75YL 35	5A-10
19	1.0 GrR 127	5A-11
20	0.75L(sh) 9A	5-09
21	0.75V(sh) 6B	5-06
22	0.75R 70	
23	0.75R 70	
24	0.75Y 90	5A-41
25	0.75YW	5A-42
26	0.75G	5A-43
27	1.0 YBr 83	5A-44
28	0.75LY 91	
29	0.75Y(sh) 17A	5-07
30	0.75G(sh) 5B	5-05
31	0.75G 68	
32	0.75G 66B	5A-49
33	0.75GrW 92	5A-50
34	0.75WY	5A-51
35	1.0 L 93	5A-52
36	1.0 Gr 94	5A-53

CN-52

1	1.0 P 95	5B-02
2	1.0 B 108	5B-03
3	0.75Br 158	5B-04
4	0.75LOr 120	5B-05
5	0.75GW 177	5B-06
6	0.75RG 96	5B-27
7	1.0 Y 97	5B-45
8	1.0 RW 98	5B-28
9	0.75Br 99	5B-29
10	0.75L 402	5B-07
11	0.75L 102	5B-08
12	0.75BrB 103	5B-09
13	1.0 G 3001	5B-10
14	0.75Y 104	5B-30
15	0.75VW 105	5B-31
16	0.75B 106	5B-26
17	1.0 V 107	5B-32
18	0.75BW 130	5B-33
19	1.0W 279	5B-41
20	1.0 LOr 271	5B-42
21	0.75W 179	5B-43
22	1.0 LOr 101	5B-44
23	0.75W	5B-45
24	1.0 YW 100	5B-46
25	0.75W 110	5B-47
26	0.75Gr 135	5B-48
27	0.75G 111	5B-49
28	0.750rW 112	5B-50
29	0.75R 113	5B-51
30	0.75WR 114	5B-52
31	0.75Y 115	5B-53
32	0.75BR 132	5B-54
33	0.75LgR 117	5B-55
34	0.75LgW 118	5B-56
35	0.75LgY 119	5B-57
36	0.75LW 133	5B-58
37	0.75LG 121	5B-59
38	0.75GrW 122	5B-34
39		
40		

CN-51 signals: BATT POWER_24V, KEY IG 24V, SENSOR 24V, ENG. SPEED INPUT+, GND(5V), POWER_5V OUT, GOV MOTOR+, GOV MOTOR-, STRAIGHT TRAVEL SOLENOID, ARM IN, OILOT PRESSURE, GND_MAIN, CAN_SHIELD, GROUND (SENSOR), SPEED SENSOR +, SPEED SENSOR -, PROGRAM DUMP, ONE TOUCH DECEL SIG, POWER BOOST SW, HOUR METER, ANTI RESTART RY, CAN #1 Hi, CAN #2 Hi, RS485 TX, RS232 #1 TX, RS232 #2 TX, FINE SWING SELECTION SW, ENG. OIL PS, COOLANT WATER LEVEL, AIR CLEANER CLOGGING SW, A/C BLOWER STATE, CAN #1 Lo, CAN #2 Lo, RS485 RX, RS232 #1 RX, RS232 #2 RX, SAFETY LEVER S/W, ARM OUT PILOT PRESSURE, OPTION PILOT PRESSURE SW, N1 PRESSURE, N2 PRESSURE

CN-52 signals: ARM REGEN SOL, POWER BOOST SOL, TAVEL SPEED SOL, ATT. SAFETY SOL, ATT. PRESSURE SOL, ATT. CONFLUX SOL, BOOM PRIORITY EPPR(+), EPPR POWER 24V, PUMP SHIFT EPPR+, ATT. FLOW EPPR1(+), REVERSE FAN SOL, FUEL WARMER RELAY, TRAVEL BUZZER, REVERSE FAN SIG, PREHEAT RELAY, ATT. FLOW EPPR2(-), BOOM PIORITY EPPR(-), GROUND(EPPR), PUMP SHIFT EPPR-, ATT. FLOW EPPR1(-), COOLING FAN EPPR(+), COOLING FAN EPPR(-), ACCEL DIAL SIG., HYD. OIL TEMP SENDOR, ENG. COOLANT TEMP, FUEL LEVEL SENDOR, ALT VOLTAGE, ARM IN/OUT BUCKET IN PRESSURE, P1 PRESSURE SENSOR, P2 PRESSURE SENSOR, BUCKET OUT PILOT PRESSURE, PUMP EPPR 2ND PRESSURE SENSOR, ATT. PILOT PRESSURE, BOOM DOWN PILOT PRESSURE, BOOM UP PILOT PRESSURE, SWING PILOT PRESSURE, WORKING PILOT PRESSURE, TRAVEL PILOT PRESSURE, OVERLOAD PRESSURE, ATT. FLOW EPPR2(+)

HARNESS RH SIDE