



1


USER RGB LED

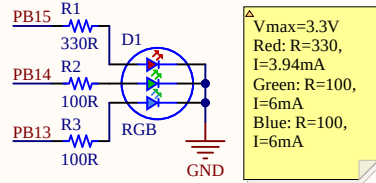


INPUT POWER

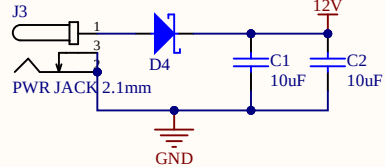


3.3V REGULATION

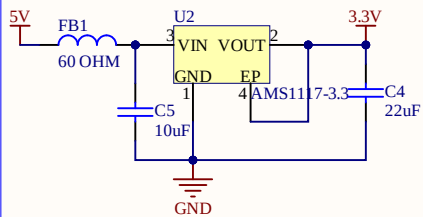


RST PROTECTION




PIR PROTECTION



DCDC 12V - 5V

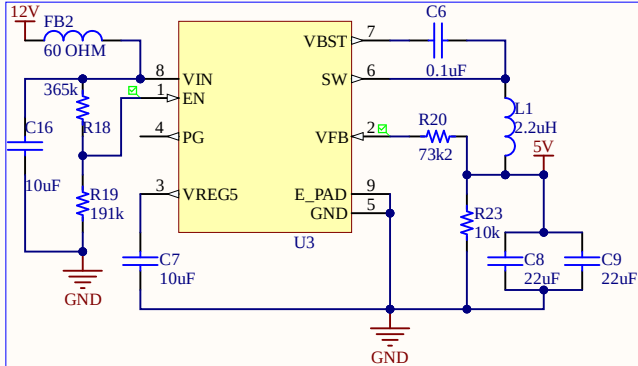


STM32 CONN

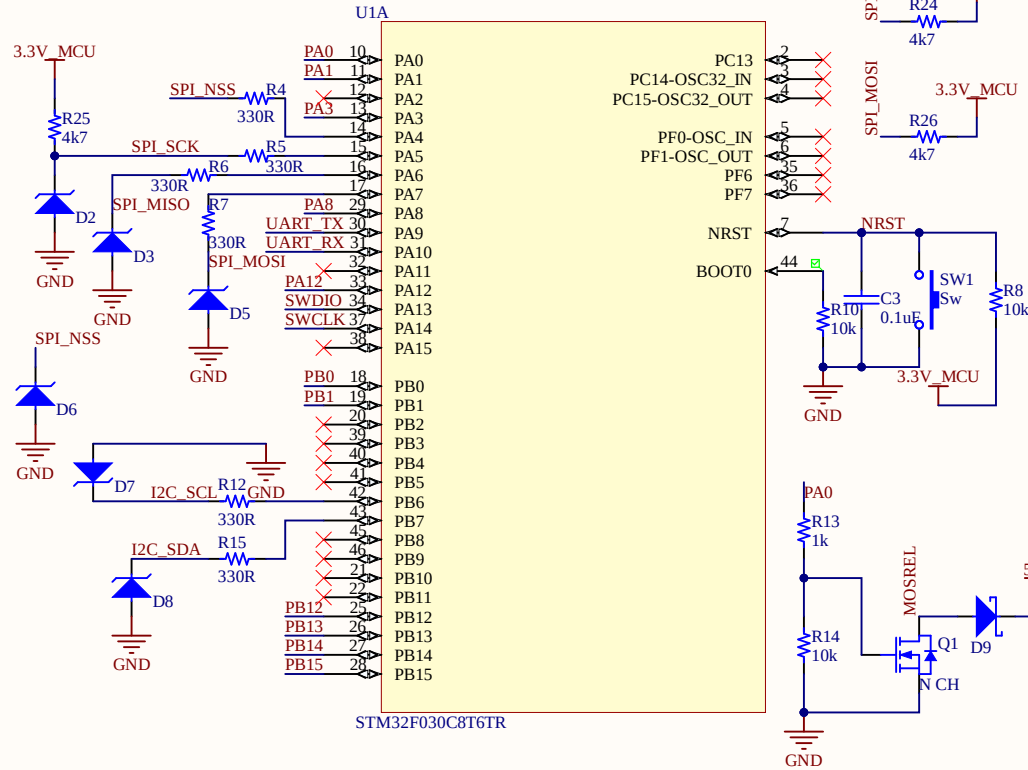


STM32F030C8T6TR


STM32 INPUT POWER

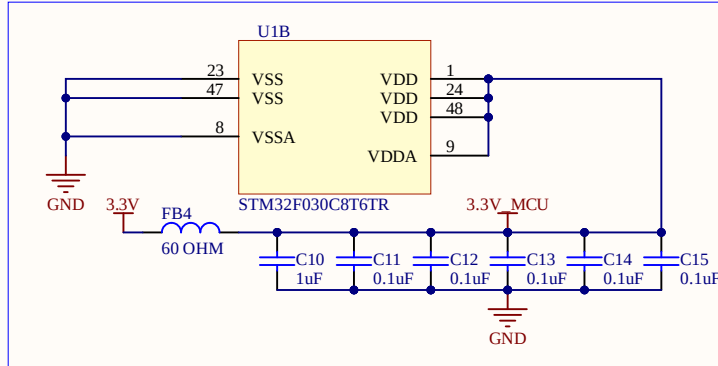


USER LED




STM32 PROG




PIR SENSOR IN




I2C DISPLAY

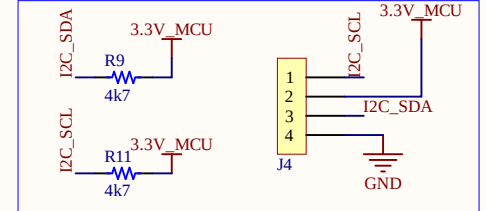

RFID INPUT




UART ANDEP



User LED
Vmax=3.3V
R=330
I=3.03mA

Status LED
R=84R5
I=1.18mA

STATUS LED

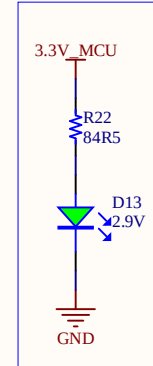

RELAY

