#### Series TB100

#### **Double Row Terminal Blocks**

#### **SPECIFICATIONS**

Rating: UL: 20A, 250V\* CSA: 20A. 150V\*

Center Spacing: .375" or 3/8" (9.52 mm)

Wire Size: #14 - 22 AWG CU Screw Size: #6-32 philslot screws Torque Rating: 9 in-lb. max.

Distance Between Barriers: .30" (7.62 mm)

Mounting: #6 screws

Materials: Molded base: Black, UL rated 94VO thermoplastic Terminal plating: Tin over brass; Screws: Zinc plated steel Operating Temperature: 130°C (260°F) max., -40°C (-40°F) min.

Breakdown Voltage: 3600V rms

Approvals: UL E62622; CSA LR15364; IEC Compliance;


**CE** Certified

<sup>\*</sup> Max. rating shown; some options may be rated lower - consult factory.

Poles	Α	В	Poles	Α	В	Poles	Α	В
02 03 04 05 06 07 08 09 10 11	1.40 1.78 2.16 2.53 2.90 3.28 3.66 4.03 4.40 4.78 5.16	1.12 1.50 1.88 2.25 2.62 3.00 3.38 3.75 4.12 4.50 4.88	14 15 16 17 18 19 20 21 22 23 24	5.90 6.28 6.66 7.03 7.40 7.78 8.16 8.53 8.90 9.28 9.66	5.62 6.00 6.38 6.75 7.12 7.50 7.88 8.25 8.62 9.00 9.38	26 27 28 29 30 31 32 33 34 35	10.40 10.78 11.16 11.53 11.90 12.28 12.66 13.03 13.40 13.78 14.16	10.12 10.50 10.88 11.25 11.62 12.00 12.38 12.75 13.12 13.50 13.88
13	5.53	5.25	25	10.03	9.75			

<sup>\*</sup> Dimensions in inches. To convert to millimeters, multiply by 25.4.





### Part Numbering System

Series

ħħħħA

Poles

n n 02 to 36

Screw Options

n n

Blank - std. screws 00 - screws shipped bulk

B - brass philslot, nickel plated

BS - brass Sems philslot, nickel plated SP - steel Sems philslot, zinc plated ST - stainless steel, philslot

Marking

n n

L1 to L6 - std. marking Marker strips (pg 33) Covers (pg 32)

Hardware Options

nnnn

QC1 to QC20 - quick connects

Cooper Bussmann 1 7300 W. Wilson Ave 1

Chicago, IL 60656-4708 | Fax: 708-867-2211 | Phone: 708-867-4600

25

Website: http://www.busscc.com

# **MAGNUM**<sub>®</sub>

# **Screw Options**



Brass Philslot Nickel Plated



BS Brass SEMS Philslot Nickel Plated




SP Steel SEMS Philslot Zinc Plated




ST Stainless Steel Philslot

## **Hardware Options**

Quick Connects - Assembled Terminals .187" x .020". Max. current rating 13 Amps. For other orientations, contact factory.

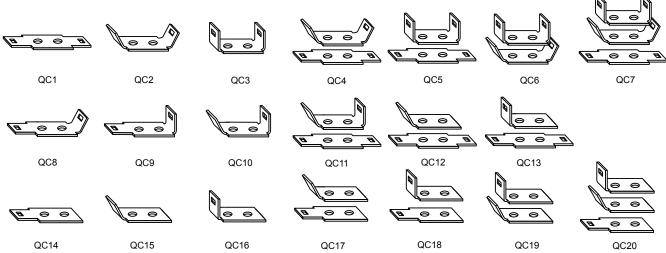

Quick Connects - Bulk Min. order per part no. - 100 pieces.



26



Jumpers – Bulk Min. order per part no. – 100 pieces. Contact factory for jumper assembly.

