



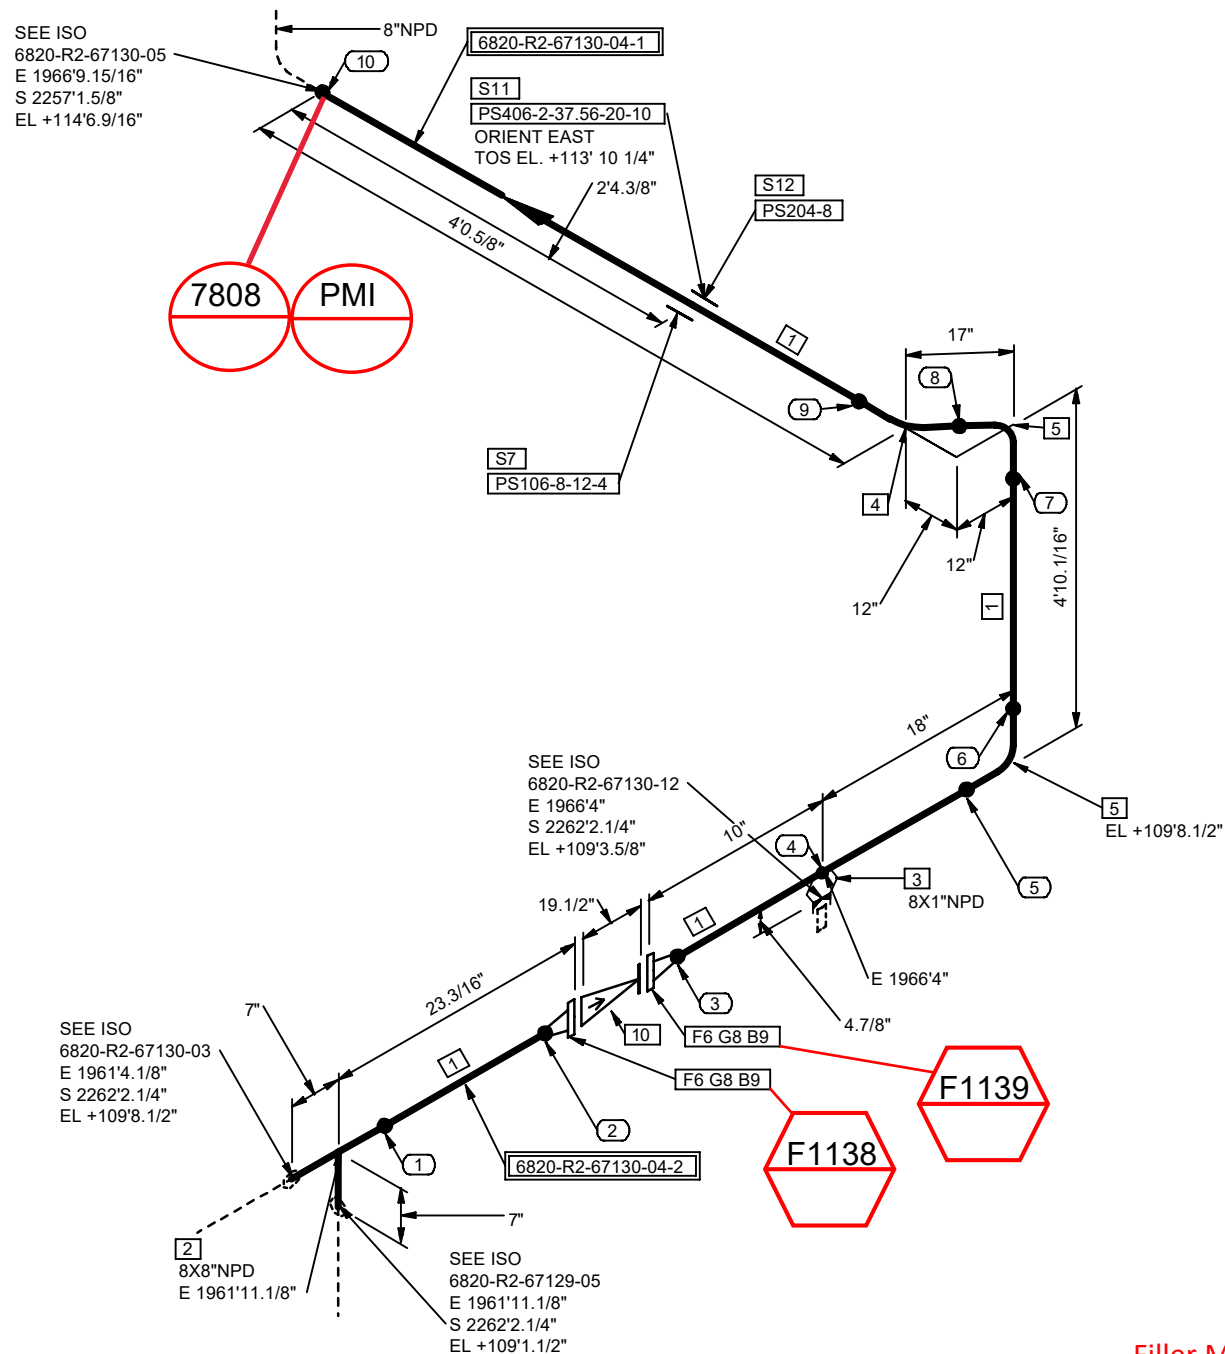

NOTES:

1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



0	2024-07-25	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	BRD	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

Date: 8-2-24

Line Class: EPCL-SS01

WPS: 802

Electrode: ER308L

Signature: Glenn Sumrall Jr

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	8	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP304L, BE, -, -, S-10S	C7FCT25	8.5
2	8X8	Eq Te, Seamless, ASME B16.9, ASTM A403 Gr.WP304L, BW Ends, -, Annealed, S-10S	C6SEUJ1B	1
3	8X1	Threadolet, ASTM A182 Gr.F304L, 3000 Lbs, NPTF Ends, -, Annealed,	C7BP7RN7	1
4	8	45° Elb LR, Seamless, ASME B16.9, ASTM A403 Gr.WP304L, BW Ends, -, Annealed, S-10S	C6SEUKDW	1
5	8	90° Elb LR, Seamless, ASME B16.9, ASTM A403 Gr.WP304L, BW Ends, -, Annealed, S-10S	C6SEUJRF	2
6	8	WN Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/BW End, Annealed, S-10S	C7W2U6T4	2
<u>PIPE SUPPORTS</u>				
7	8	PS106-8-12-4	PS106	1
<u>OTHER THAN SHOP MATERIALS</u>				
NO	NPD	DESCRIPTION	IDENT	QTY
8	8	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -	C7CT1ZG2	2
9	3/4	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 4.5 in. Length	C6S4K8BD	16
10	8	SwgChk Flg, ASME B16.34, ASTM A351 Gr.CF8M, 150 Lbs, RF, Ends as per ASME B16.5, -, Valve Tag: CH-0276	C76KHSRG	1
<u>PIPE SUPPORTS</u>				
11	8	PS406-2-37.56-20-10	PS406	1
12	8	PS204-8	PS204	1
<u>PIECE MARKS</u>				
6820-R2-67130-04-1 6820-R2-67130-04-2				



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
 OxyChem Redstone Battleground PROJECT				PID: 202998C-001-PID-0021-0329				
				UNIT#: 6800	LEWP AREA: 6820	SPEC: EPCL-SS01	STRESS CALC #: CN-0404	
				LINE No. 8"-R2-67130-EPCL-SS01-H				
				DRAWING NUMBER 6820-R2-67130-04				REV. 0