


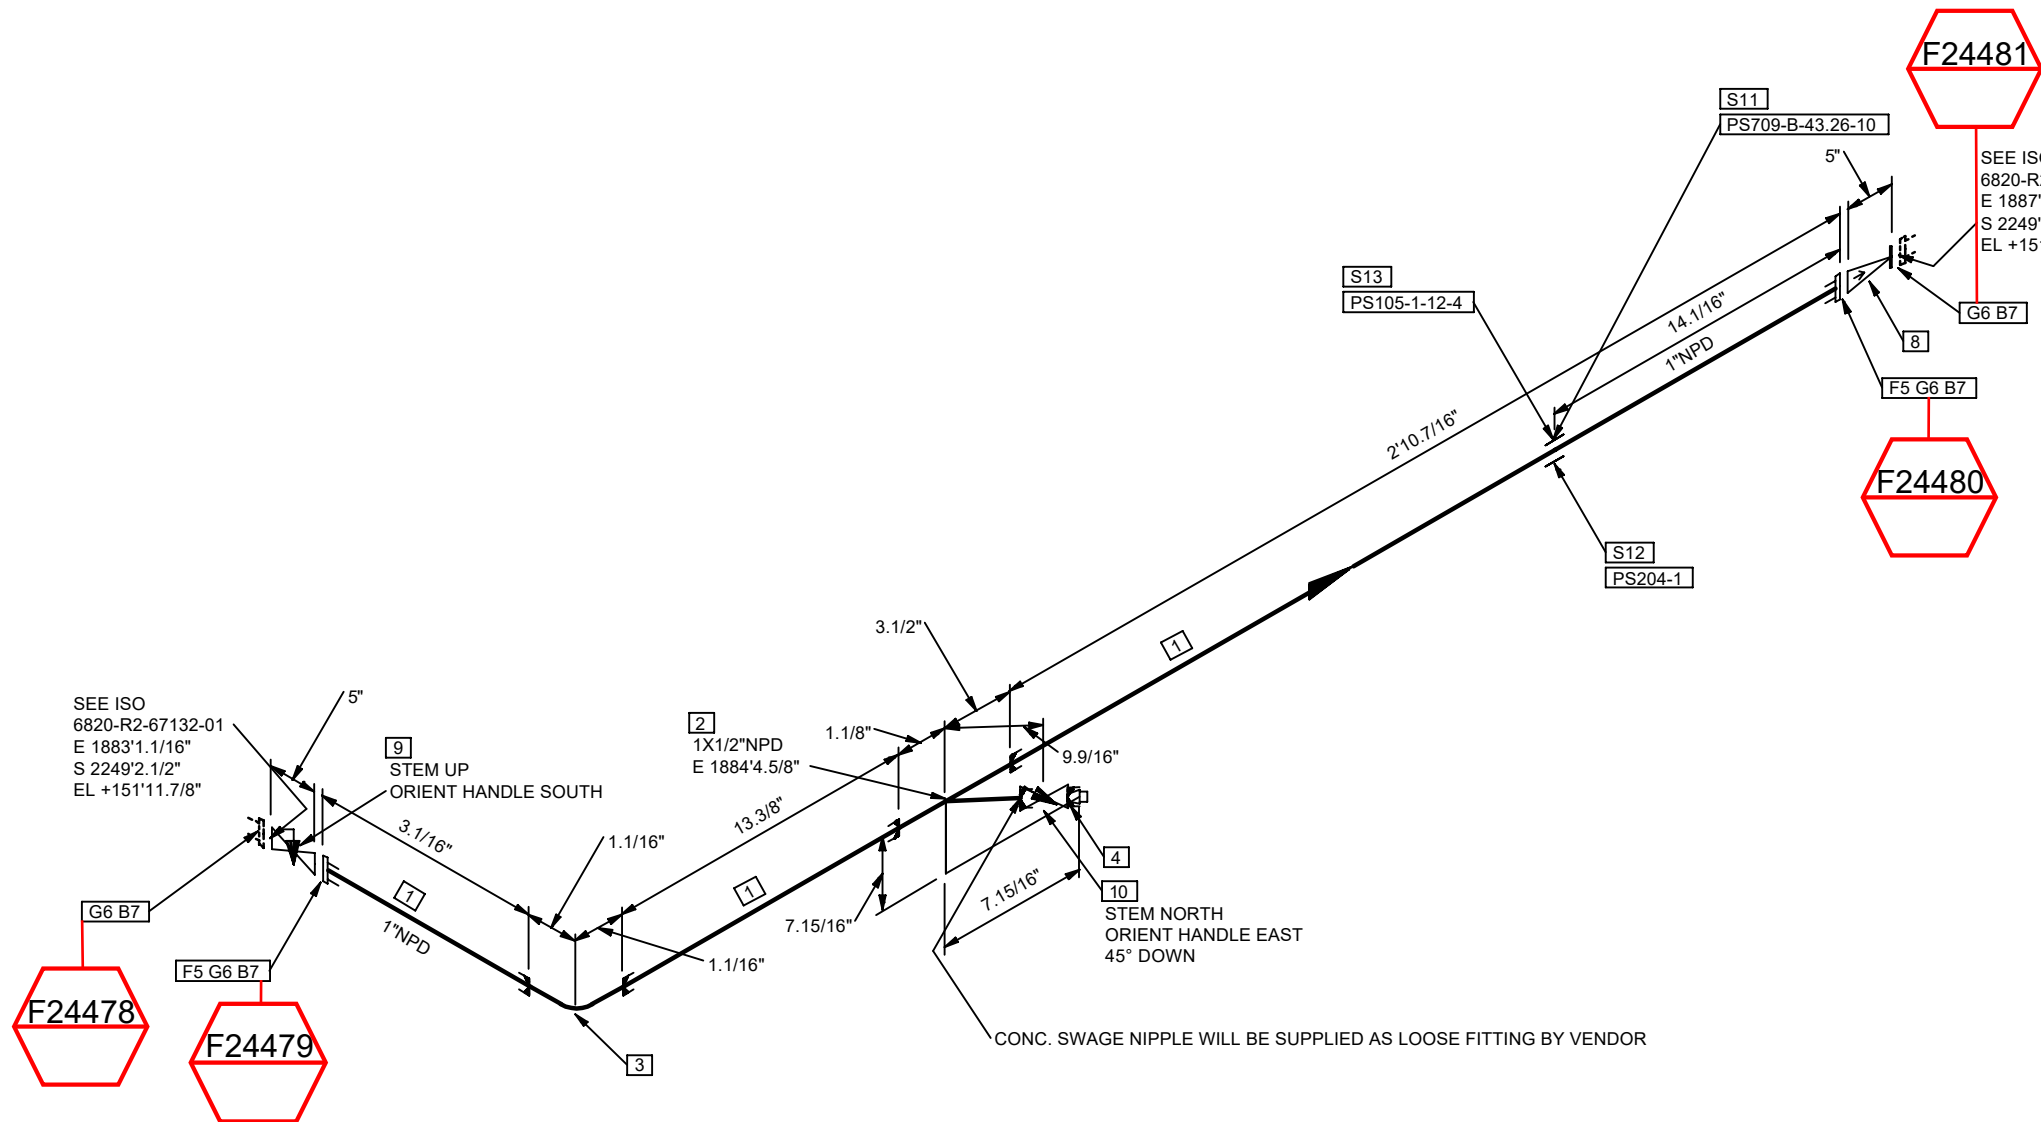

NOTES:

FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC.
REFER TO LATEST REVISION OF LDT.

FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.


FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.

FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.

ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.

FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD
9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.

REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Signature: Pedro Morin

OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	1	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP304L, NPTM Ends, w/ coupling, -, S-80S	C76KFFTD	4.3
2	1X1/2	SP-6805	SP-6805	1
3	1	90° Elb, ASME B16.11, ASTM A182 Gr.F304L, 3000 Lbs, NPTF Ends, Annealed,	C7BP5GGW	1
4	1/2	Plug, Solid Round Head Type, ASME B16.11, ASTM A182 Gr.F304L, NPTM End, Annealed,	C6SEUHBR	1
5	1	THD Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/NPTF End, Annealed,	C7W2U48L	2
6	1	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C7CT1ZFH	4
7	1/2	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length	C6S4K87U	16
8	1	SwgChk Flg, ASME B16.34, ASTM A351 Gr.CF8M, 150 Lbs, RF, Ends as per ASME B16.5,-, Valve Tag: CH-0276	C7CX48BE	1
9	1	Plug Flg, SP, Tapered Plug, Non Lubricated, API 599, ASTM A351 Gr.CF8M, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0548	C76KHSRR	1
10	1/2	Plug Fem,RgP, Tapered Plug, Non Lubricated, API 599, ASTM A351 Gr.CF8M, 300 Lbs, NPTF Ends, Ends as per ASME B1.20.1,-, LO, -, Valve Tag: PL-0547	C6TYYMRF	1
PIPE SUPPORTS				
11	1	PS709-B-43.26-10	PS709	1
12	1	PS204-1	PS204	1
13	1	PS105-1-12-4	PS105	1



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: N	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
 OxyChem Redstone Battleground PROJECT				P&ID: 202998C-001-PID-0021-0329			
				UNIT#: 6800	SWP AREA: 6820	SPEC: EPCL-SS01	STRESS CALC #: -
				LINE No. 1"-R2-67132-EPCL-SS01-H			
				DRAWING NUMBER 6820-R2-67132-02			
				REV. 0			