


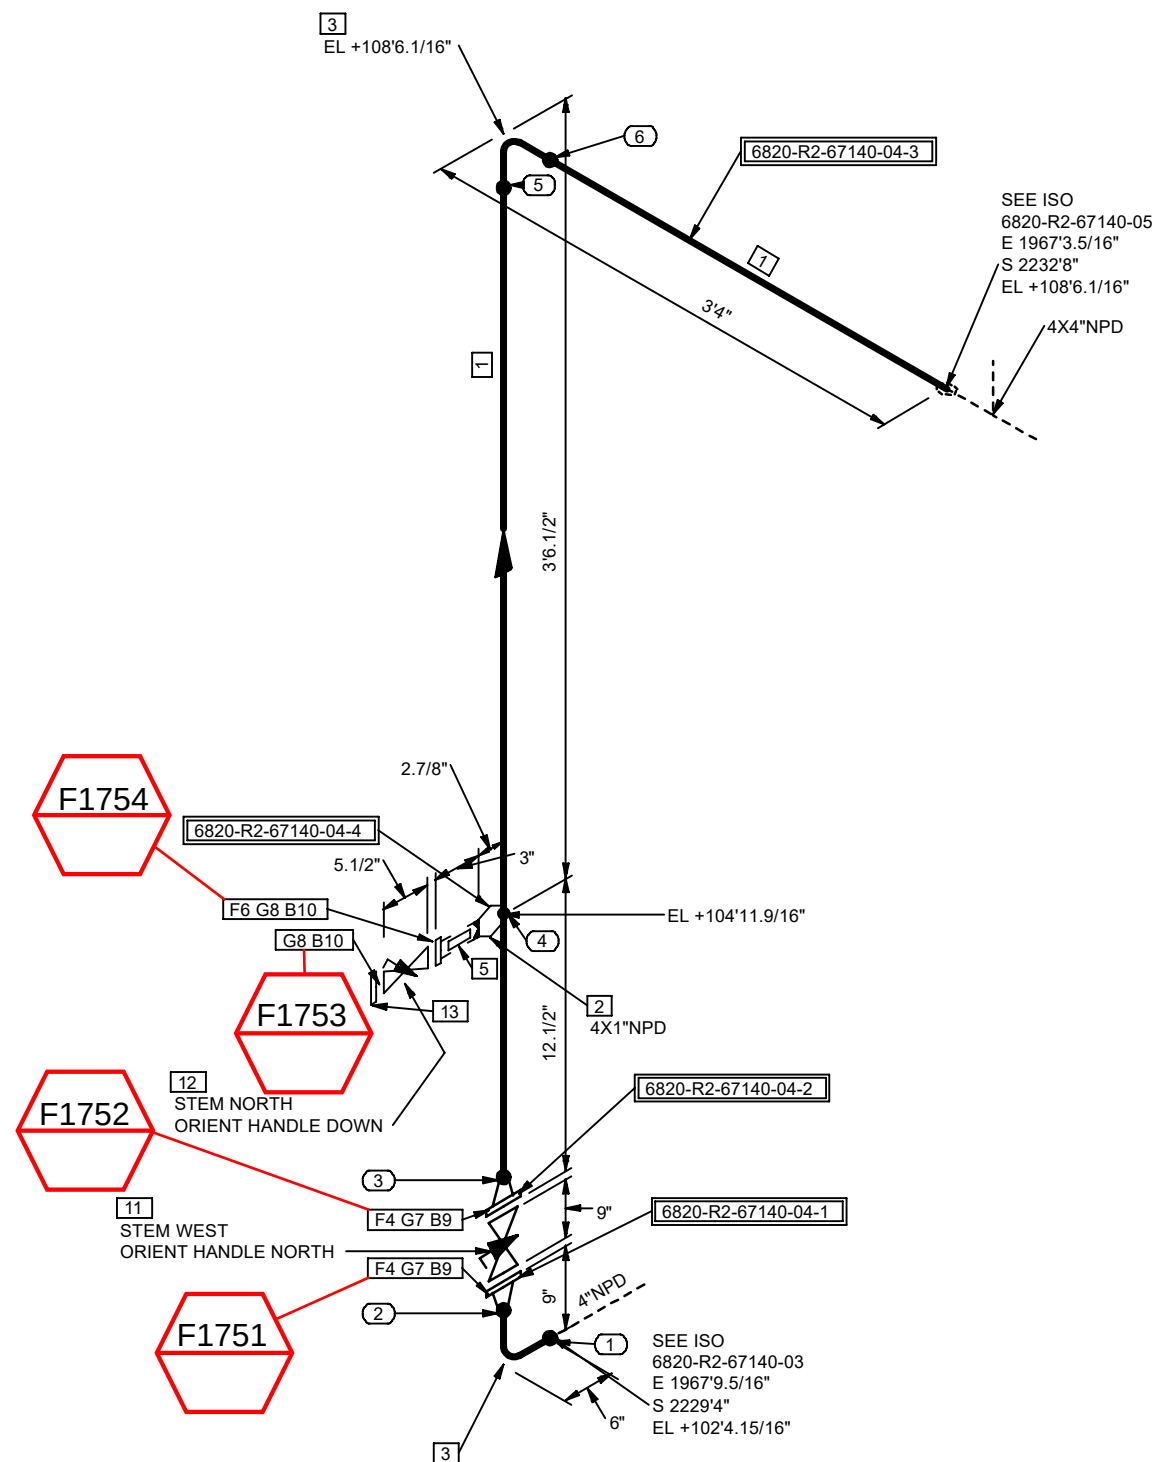

Signature: Pedro Morin

P&ID: 202998C-001-PID-0021-0330			
UNIT#: 6800	W/P AREA: 6820	SPEC: CTWL-CS01	STRESS CALC #: CN-0406
LINE No. 4"-R2-67140-CTWL-CS01-N			
DRAWING NUMBER 6820-R2-67140-04			REV. 0

OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
5	1	Nipple, ASTM A106 Gr.B Galv. as per ASTM A153, NPTM Ends, L = 3in, -, S-XS	C41B2D94	1
6	1	THD Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF/NPTF End, -,	C1DR2JM	1
7	4	NM Flat Gk, Aramid Fiber Reinforced SBR, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C76KHSS7	2
8	1	NM Flat Gk, Aramid Fiber Reinforced SBR, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C76KHSRZ	2
9	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.75 in. Length	C6S4K88S	16
10	1/2	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length	C6S4K87U	8
11	4	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM A395 Gr.60-40-18, 150 Lbs, RF, Ends as per ASME B16.5, -, GO,-, -, Valve Tag: PL-0546	C76RJXJ1	1
12	1	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM A395 Gr.60-40-18, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0546	C76RJXHV	1
13	1	Bld Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF, -,	C1DR2JV	1

6820-R2-67140-04-1 6820-R2-67140-04-2 6820-R2-67140-04-3
6820-R2-67140-04-4

