


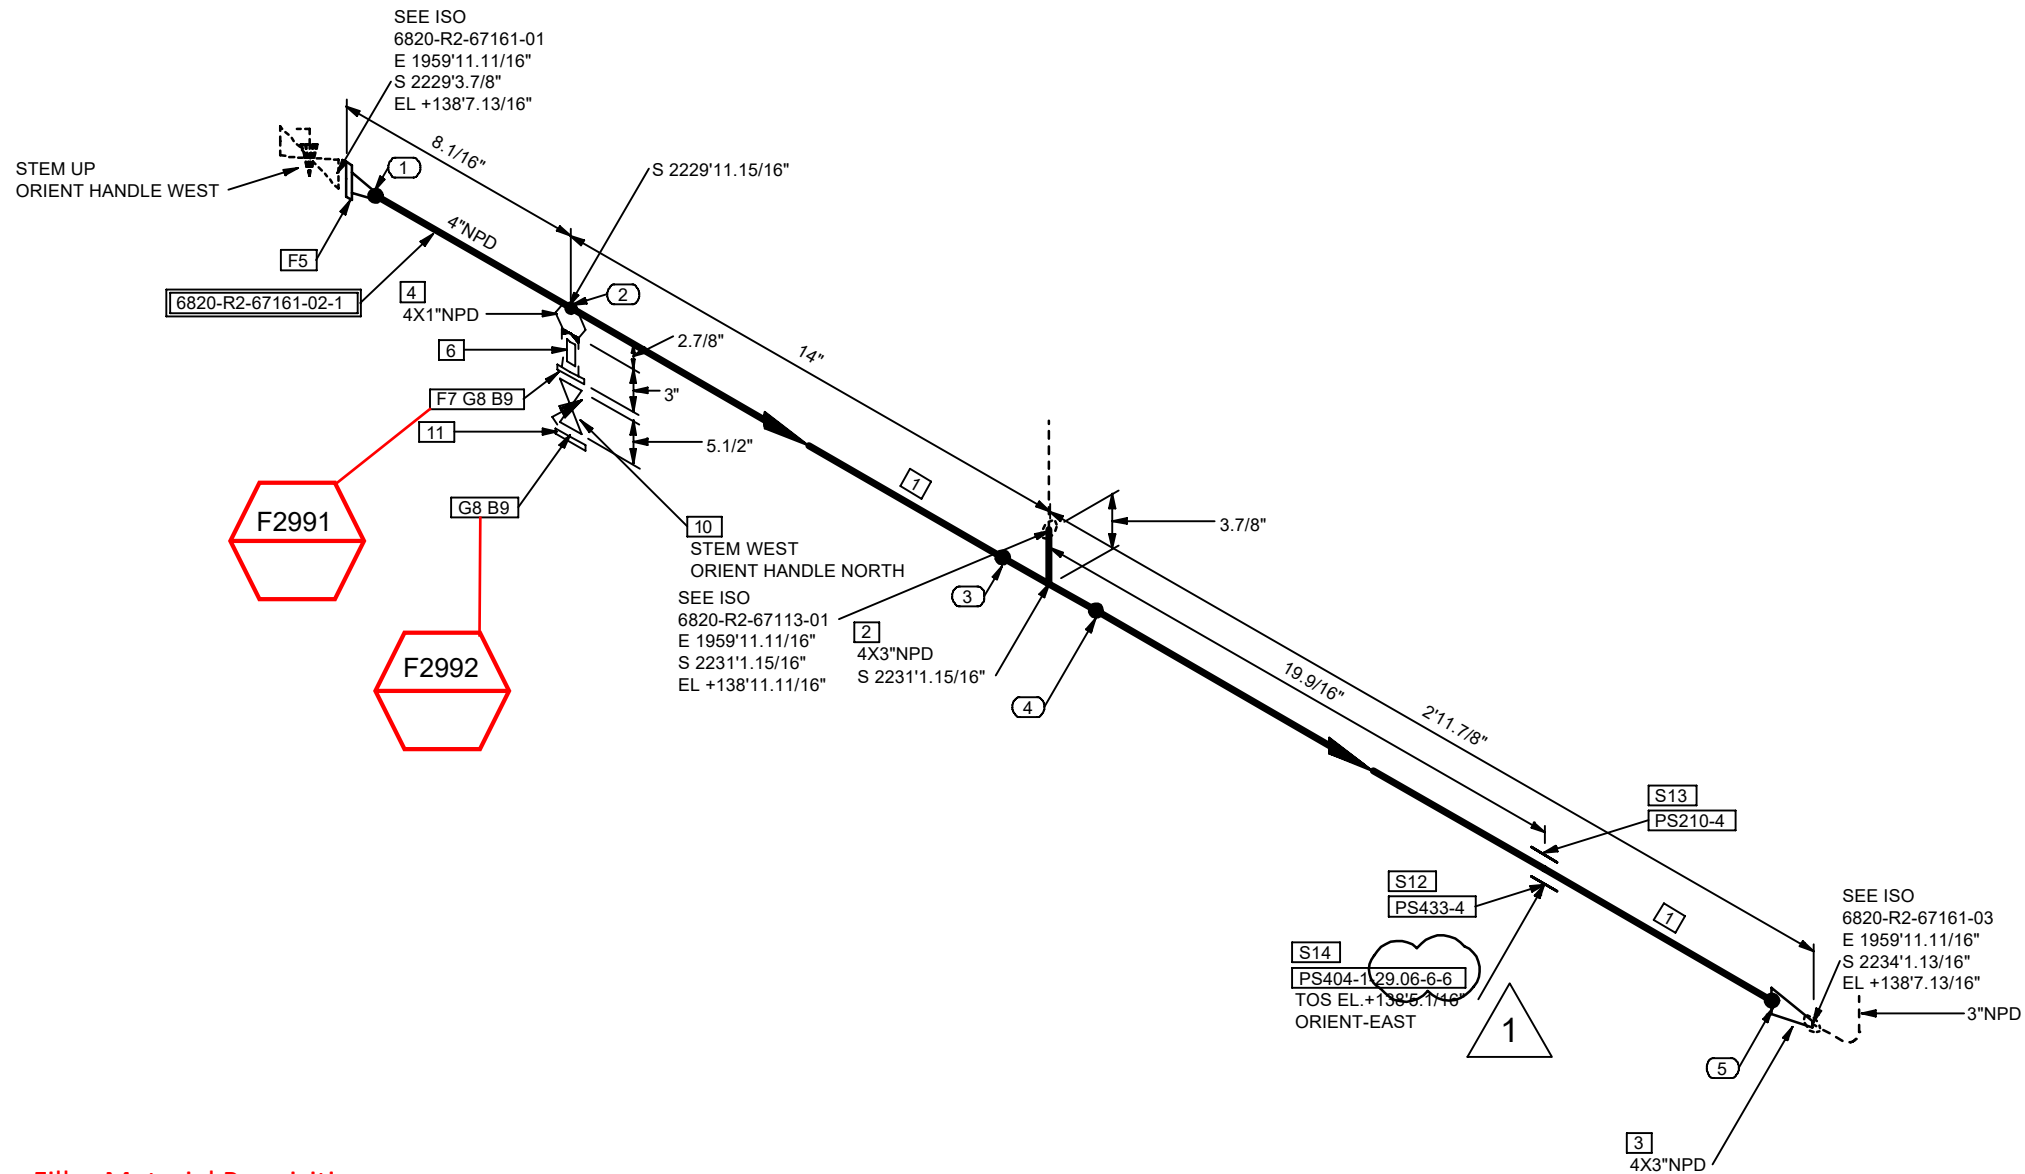

Date: 1-31-25

Line Class: CTWL-CS01

WPS: 10245

Electrode: ER70S-2

Signature: *Glenn Sumrall Jr*

ES:

FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC.
REFER TO LATEST REVISION OF LDT.

FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.


WELD SHIM TO SUIT UNLESS OTHERWISE NOTED.

FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.

ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.

FW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 1/4 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.

REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



1	2025-01-23	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
0	2024-08-17	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTD	STRESS	APRVD

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	4	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, BE, -, -, S-STD	CPP0AAXH	3.6
2	4X3	Red Te, Seamless, ASME B16.9, ASTM A234 Gr.WPB, BW Ends, -, -, S-STD	CDB0D8SB	1
3	4X3	Conc Reducer, Seamless, ASME B16.9, ASTM A234 Gr.WPB, BW Ends, -, -, S-STD	CDB68L0Z	1
4	4X1	Threadolet, ASTM A105N Galv. as per ASTM A153, 3000 Lbs, NPTF Ends, -, -,	C59MKP0	1
5	4	WN Flg, ASME B16.5, ASTM A105N, 150 Lbs, RF/BW End, -, S-STD	CFG6WJF4	1

OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
6	1	Nipple, ASTM A106 Gr.B Galv. as per ASTM A153, NPTM Ends, L = 3in, -, S-XS	C41B2D94	1
7	1	THD Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF/NPTF End, -,	C1DR2JM	1
8	1	NM Flat Gk, Aramid Fiber Reinforced SBR, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C76KHSRZ	2
9	1/2	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length	C6S4K87U	8
10	1	Plug Flg,SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM A395 Gr.60-40-18, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0546	C76RJXHV	1
11	1	Bld Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF, -,	C1DR2JV	1

12	4	PS433-4	PS433	1
13	4	PS210-4	PS210	1
14	4	PS404-1-29.06-6-6	PS404	1

6820-R2-67161-02-1



P&ID:			
202998C-001-PID-0021-0333			
UNIT#:	EMP AREA:	SPEC:	STRESS CALC #:
6800	6820	CTWL-CS01	-
LINE No.			
4"-R2-67161-CTWL-CS01-N			
DRAWING NUMBER			
6820-R2-67161-02			
			REV.
			1

