


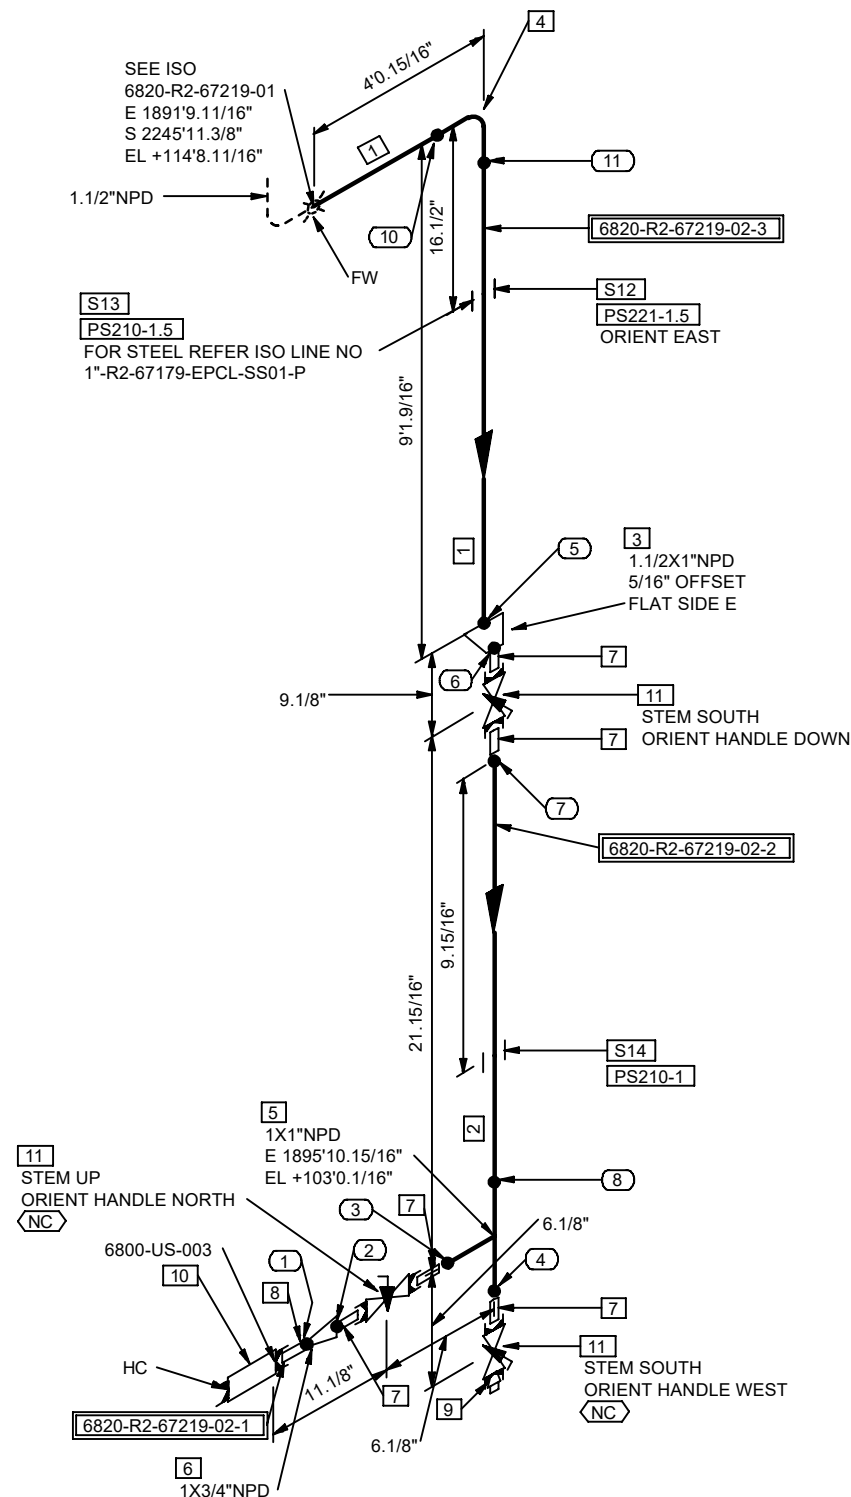

Filler Material Requisition
Date: 1-31-25
Line Class: ARWW-CS01
WPS: 10245
Electrode: ER70S-2
Signature: *Glenn Sumrall Jr.*

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2025-01-24	RVA	ISSUED FOR CONSTRUCTION			SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION			CHKD	MTO	STRESS	APRVD

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	1.1/2	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, BE, -, -, S-XS	C2UE2CJ	12.9 '
2	1	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, BE, -, -, S-XS	C2UE2BC	1.4 '
3	1.1/2X1	Eccentric swage, MSS SP-95, ASTM A234 Gr.WPB,BE,-, -, S-XS	CDFJSAY6	1
4	1.1/2	90° Elb LR, Seamless, ASME B16.9, ASTM A234 Gr.WPB, BW Ends, -, -, S-XS	C2UE494	1
5	1X1	Eq Te, Seamless, ASME B16.9, ASTM A234 Gr.WPB, BW Ends, -, -, S-XS	C2UF5Z7	1
6	1X3/4	Concentric swage, MSS SP-95, ASTM A234 Gr.WPB,BE,-, -, S-XS	C3SSSC3S	1
7	1	Nipple, ASTM A106 Gr.B, BE/NPTM End, L = 3in, -, S-XS	C80UCV6H	5
8	3/4	Nipple, ASTM A106 Gr.B, BE/NPTM End, L = 3in, -, S-XS	C80SZG0M	1

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
9	1	Plug, Solid Round Head Type, ASME B16.11, ASTM A105N, NPTM End, -,	CBBPLK4	1
10	3/4	SP-6833	SP-6833	1
11	1	Plug Fem,RgP, Tapered Plug, Non Lubricated, API 599, ASTM A395 Gr.60-40-18, 300 Lbs, NPTF Ends, Ends as per ASME B16.11,-, LO, -, Valve Tag: PL-0545	C76N9VBG	3

PIPE SUPPORTS

12	1.1/2	PS221-1.5	PS221	1
13	1.1/2	PS210-1.5	PS210	1
14	1	PS210-1	PS210	1

PIECE MARKS

6820-R2-67219-02-1 6820-R2-67219-02-2 6820-R2-67219-02-3



SERVICE: R2	VAPOR/LIQUID: V	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				P&ID: 202998C-001-PID-0021-0337			
UNIT#: 6800		EWPA AREA: 6820	SPEC: ARWW-CS01	STRESS CALC #: -			
LINE No: 1.5"-R2-67219-ARWW-CS01-N							
				DRAWING NUMBER 6820-R2-67219-02			REV. 0

