


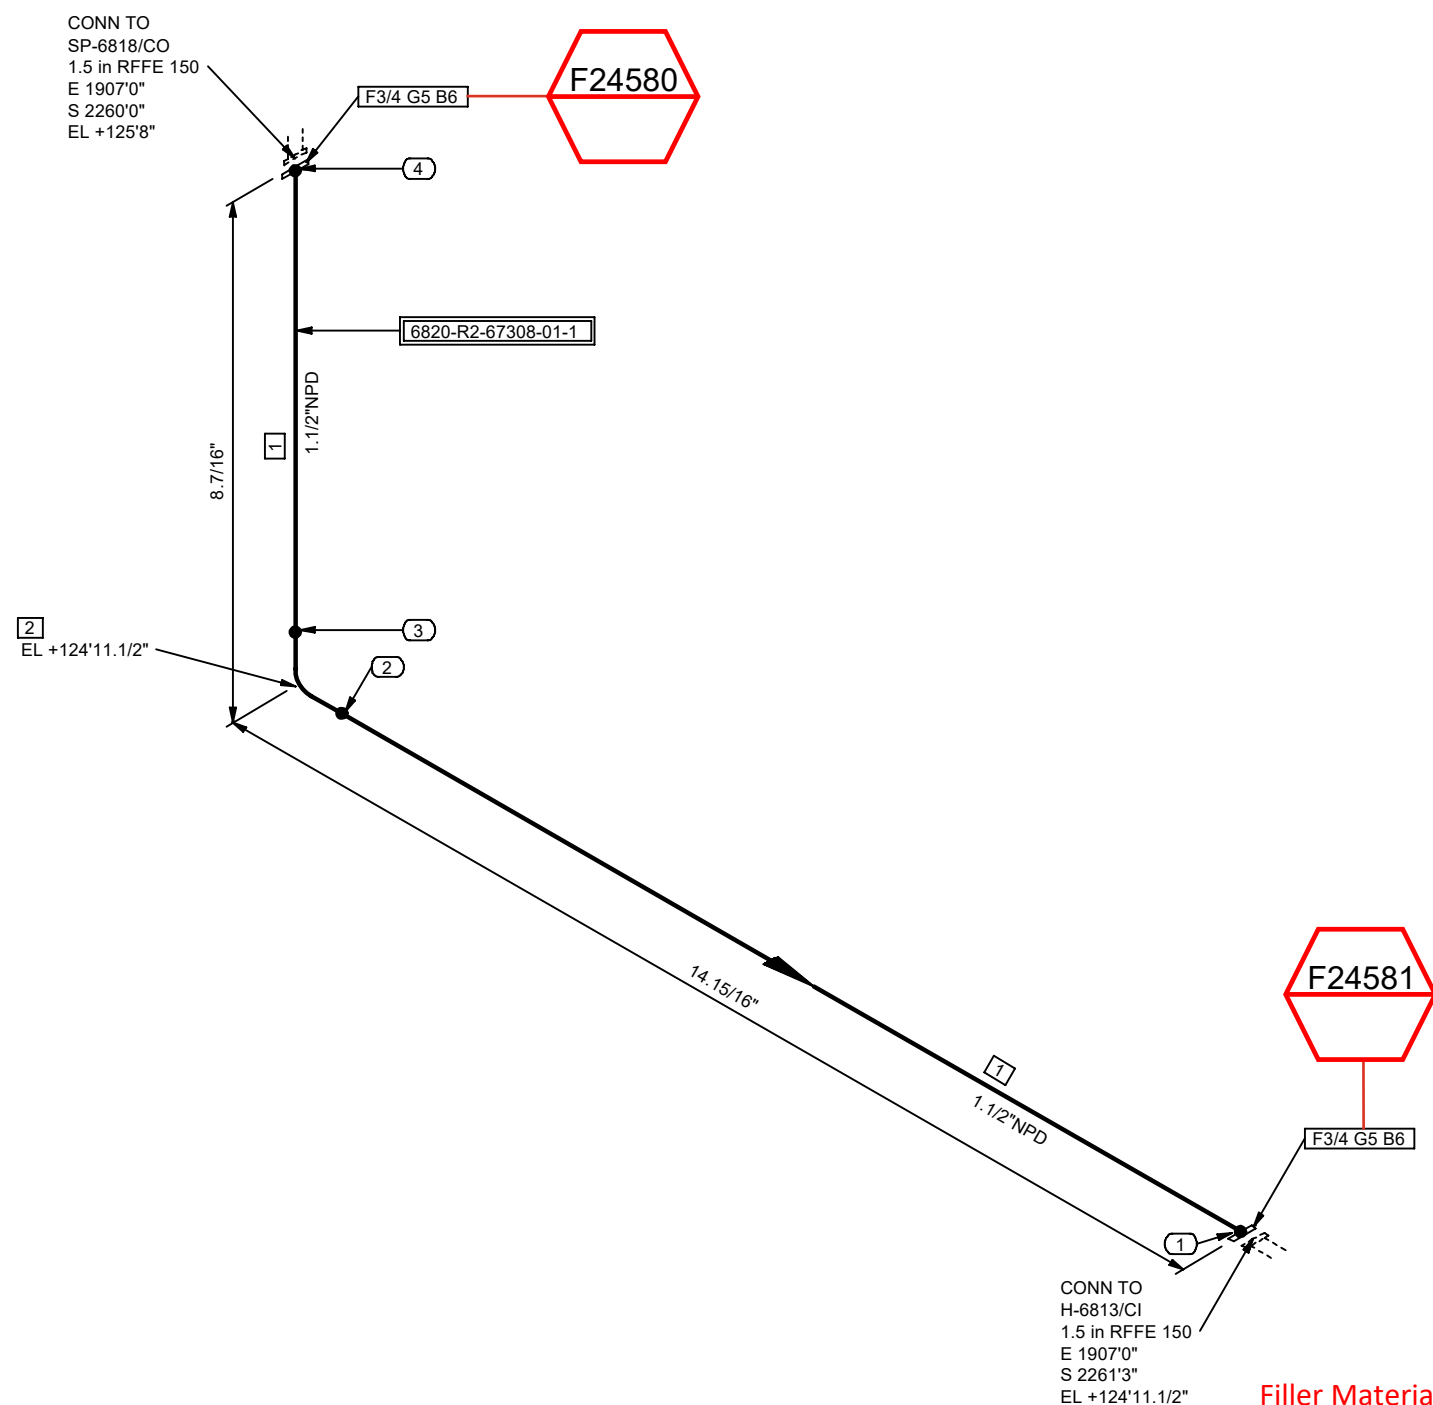

NOTES

- 

Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2025-02-26	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

Signature: Glenn Sumrall, Jr.

N0	NPD	DESCRIPTION	IDENT	QTY
5	1.1/2	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -	C6S4K87H	2
6	1/2	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3 in. Length	C6S4K87V	8

6820-R2-67308-01-1



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				PID: 202998C-001-PID-0021-0324			
				UNIT#: 6800	SWP AREA: 6820	SPEC: NOHD-NI01	STRESS CALC #: -
				LINE No. 1.5"-R2-67308-NOHD-NI01-N			
				DRAWING NUMBER 6820-R2-67308-01			
				REV. 0			
OxyChem Redstone Battleground PROJECT							

