


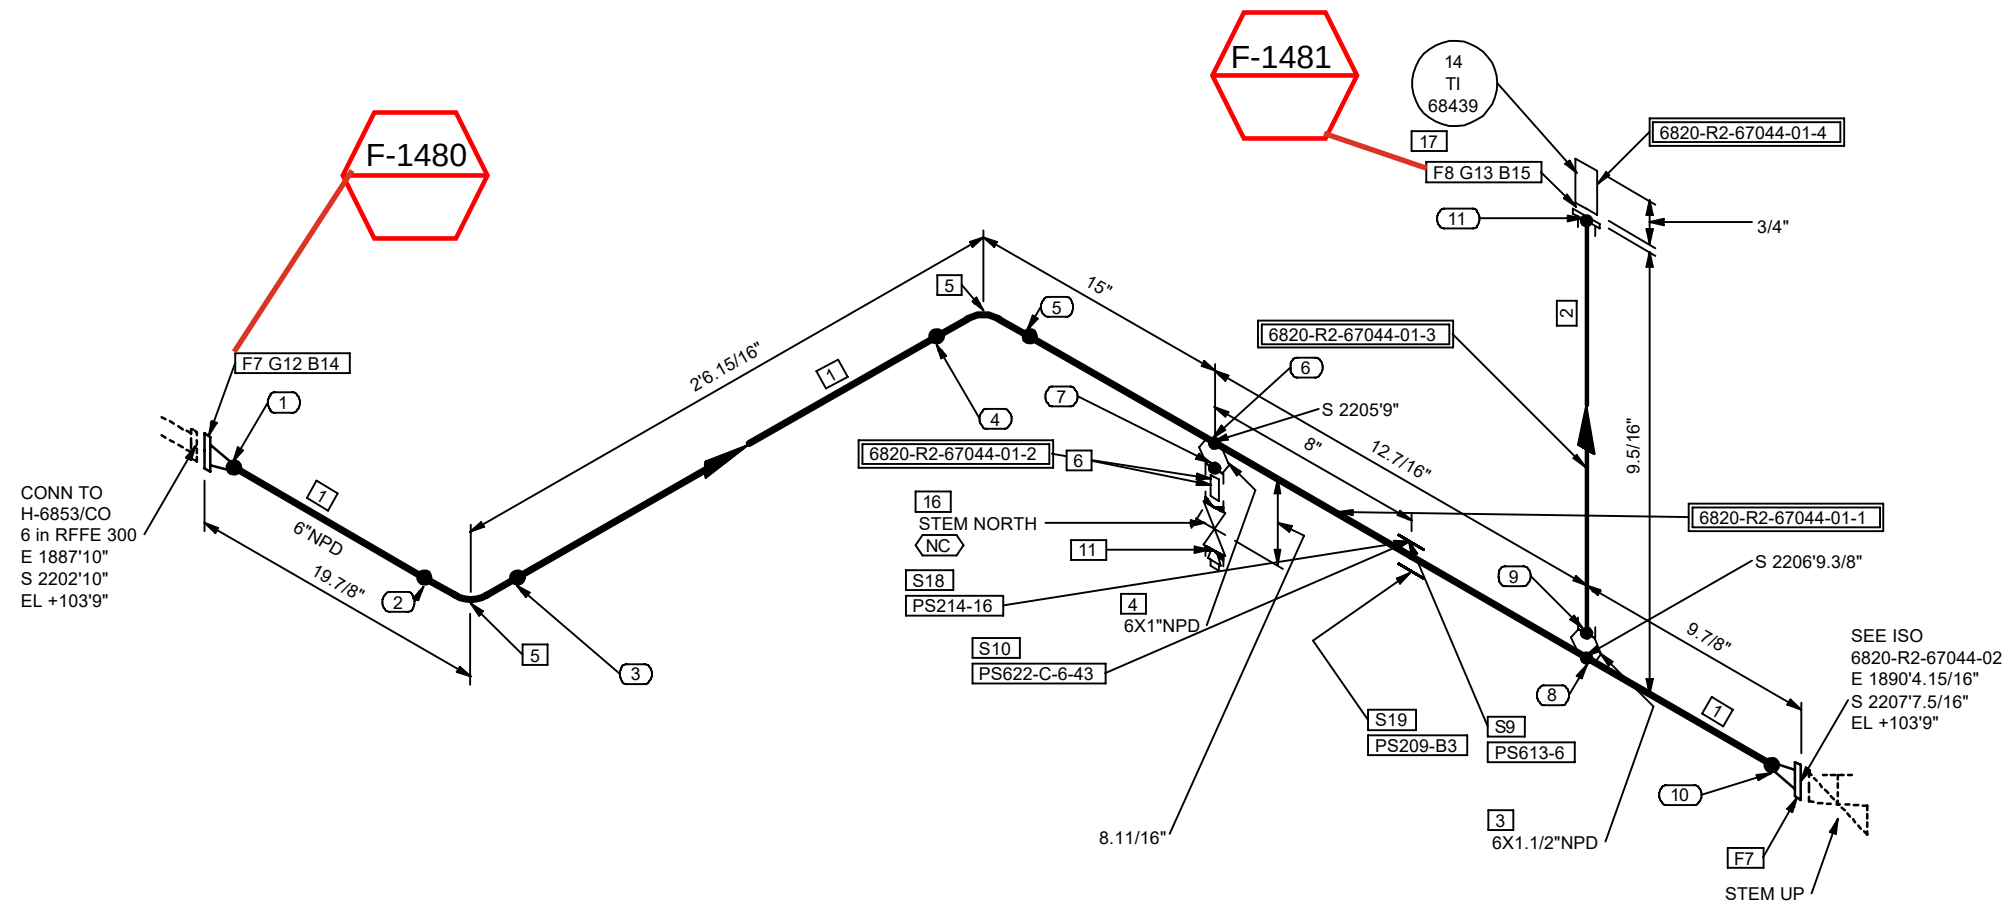

Date: 8-6-24

Line Class: SCXL-CS02

WPS: 10245

Electrode: ER70S-2

Signature: *Pedro Morin*

NOTES:

FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC.
REFER TO LATEST REVISION OF LDT.

FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.


FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.

FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.

ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.

FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD
9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.

REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



0	2024-08-02	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	BRD	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	6	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, BE, -, -, S-STD	CPP00336	3.7
2	1.1/2	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, PE, -, -, S-XS	CPP0AMLT	0.4
3	6X1.1/2	Sockolet, ASTM A105N, 3000 Lbs, SW Ends, -, -,	CYU3F0	1
4	6X1	Sockolet, ASTM A105N, 3000 Lbs, SW Ends, -, -,	CYU3EY	1
5	6	90° Elb LR, Seamless, ASME B16.9, ASTM A234 Gr.WPB, BW Ends, -, -, S-STD	CDB66GNP	2
6	1	Nipple, ASTM A106 Gr.B, PE/NPTM End, L = 3in, -, S-XS	C12GGPTC	1
7	6	WN Flg, ASME B16.5, ASTM A105N, 300 Lbs, RF/BW End, -, S-STD	CFG6WKU7	2
8	1.1/2	SW Flg, ASME B16.5, ASTM A105N, 300 Lbs, RF/SW End, -, x S-XS	CFG70GNH	1
PIPE SUPPORTS				
9	6	PS613-6	PS613	1
10	6	PS622-C-6-43	PS622	1
OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
11	1	Plug, Solid Round Head Type, ASME B16.11, ASTM A105N, NPTM End, -,	CBBPLK4	1
12	6	NM Flat Gk, Barium Sulfate filled PTFE, 300 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C7CX7CST	1
13	1.1/2	NM Flat Gk, Barium Sulfate filled PTFE, 300 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C7W3AL3N	1
14	3/4	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 5 in. Length	C6S4K8BF	12
15	3/4	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.5 in. Length	C6S4K8B9	4
16	1	Gat Fem, API 602, ASTM A105N,800 Lbs, NPTF Ends, HO,-, Valve Tag: GA-0120	C76SPABV	1
INSTRUMENTS				
17	1.1/2	14-TI-68439	14-TI-68439	1
PIPE SUPPORTS				
18	6	PS214-16	PS214	1
19	6	PS209-B3	PS209	1
PIECE MARKS				
6820-R2-67044-01-1 6820-R2-67044-01-2 6820-R2-67044-01-3 6820-R2-67044-01-4				



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
 OxyChem Redstone Battleground PROJECT				P&ID: 202998C-001-PID-0021-0323				
				UNIT#: 6800	EWP AREA: 6820	SPEC: SCXL-CS02	STRESS CALC #: CN-0385/CN-0394	
				LINE No. 6"-R2-67044-SCXL-CS02-H				
				DRAWING NUMBER 6820-R2-67044-01				REV. 0

