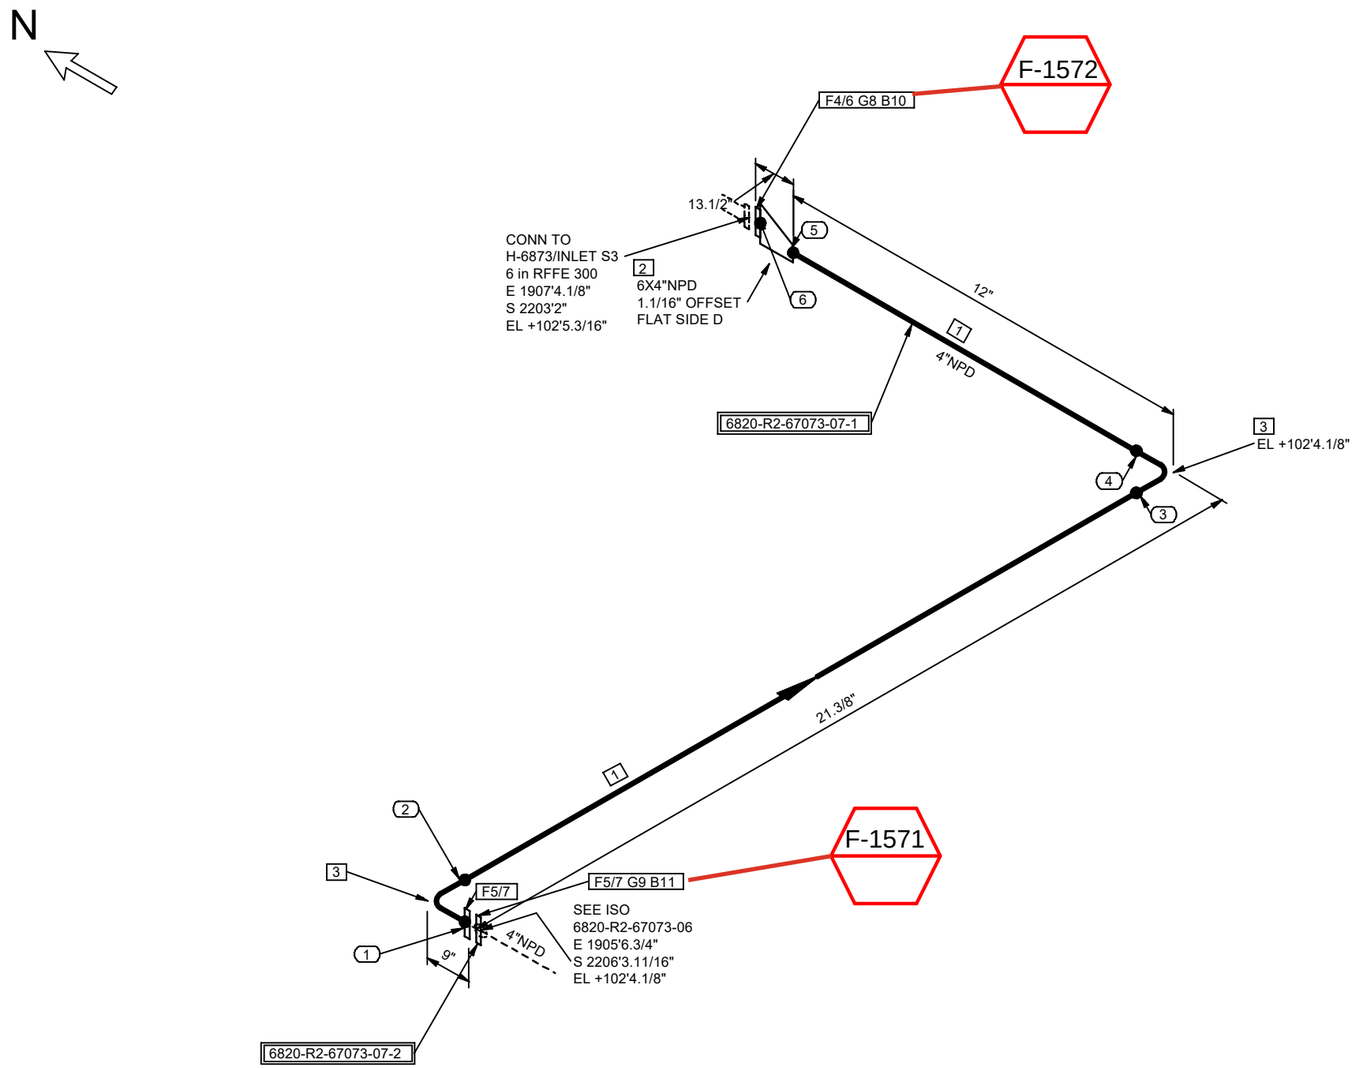

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	4	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP316L, BE, -, -, S-10S	CPP5F90U	1.3 '
2	6X4	Ecc Reducer, Seamless, ASME B16.9, ASTM A403 Gr.WP316L, BW Ends, -,Annealed, S-10S	C6SDRH4D	1
3	4	90° Elb LR, Seamless, ASME B16.9, ASTM A403 Gr.WP316L, BW Ends, -,Annealed, S-10S	C6SDP2PZ	2
4	6	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 300 Lbs, FF, -,	C2EMACW5	1
5	4	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 150 Lbs, FF, -,	C26WFFFM	2

MISCELLANEOUS COMPONENTS

6	6	Stub SP, Seamless, ASME B16.9, ASTM A403 Gr.WP316L, BW Ends, -,Annealed, x S-10S	C8A57S2C	1
7	4	Stub SP, Seamless, ASME B16.9, ASTM A403 Gr.WP316L, BW Ends, -,Annealed, x S-10S	C8A57S0A	2

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
8	6	NM Flat Gk, Barium Sulfate filled PTFE, 300 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87E	1
9	4	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87N	1
10	3/4	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 4.5 in. Length	C6S4K8BD	12
11	5/8	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 4 in. Length	C6S4K88T	8

PIECE MARKS

6820-R2-67073-07-1 6820-R2-67073-07-2

Filler Material Requisition
Date: 8-6-24
Line Class: NOHD-SS01
WPS: 802
Electrode: ER316L
Signature: Pedro Morin

COORDINATE SYSTEM : PLANTCOORDINATES

Turner Industries Group, LLC
Received
August 6,2024
DOCUMENT CONTROL

NOTES:
1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.

T.EN TECHNIP ENERGIES

Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client.use of this information is restricted in accordance with conditions specified by the contract.Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD
0	2024-08-02	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	BRD	GR

SERVICE:	VAPOR/LIQUID:	INSUL TYPE:	INSUL THK:	SHOP:	FIELD:	PAINT CODE:	MODULE:
R2	L	Per LDT	Per LDT	Y	Y	Per LDT	-

OXY
OxyChem Redstone Battleground
PROJECT

P&ID: 202998C-001-PID-0021-0325

UNIT#:	EWP AREA:	SPEC:	STRESS CALC #:
6800	6820	NOHD-SS01	CN-0393

LINE No.: 6"-R2-67073-NOHD-SS01-H

DRAWING NUMBER: **6820-R2-67073-07**

REV.: **0**

02 AUG 2024 04:58