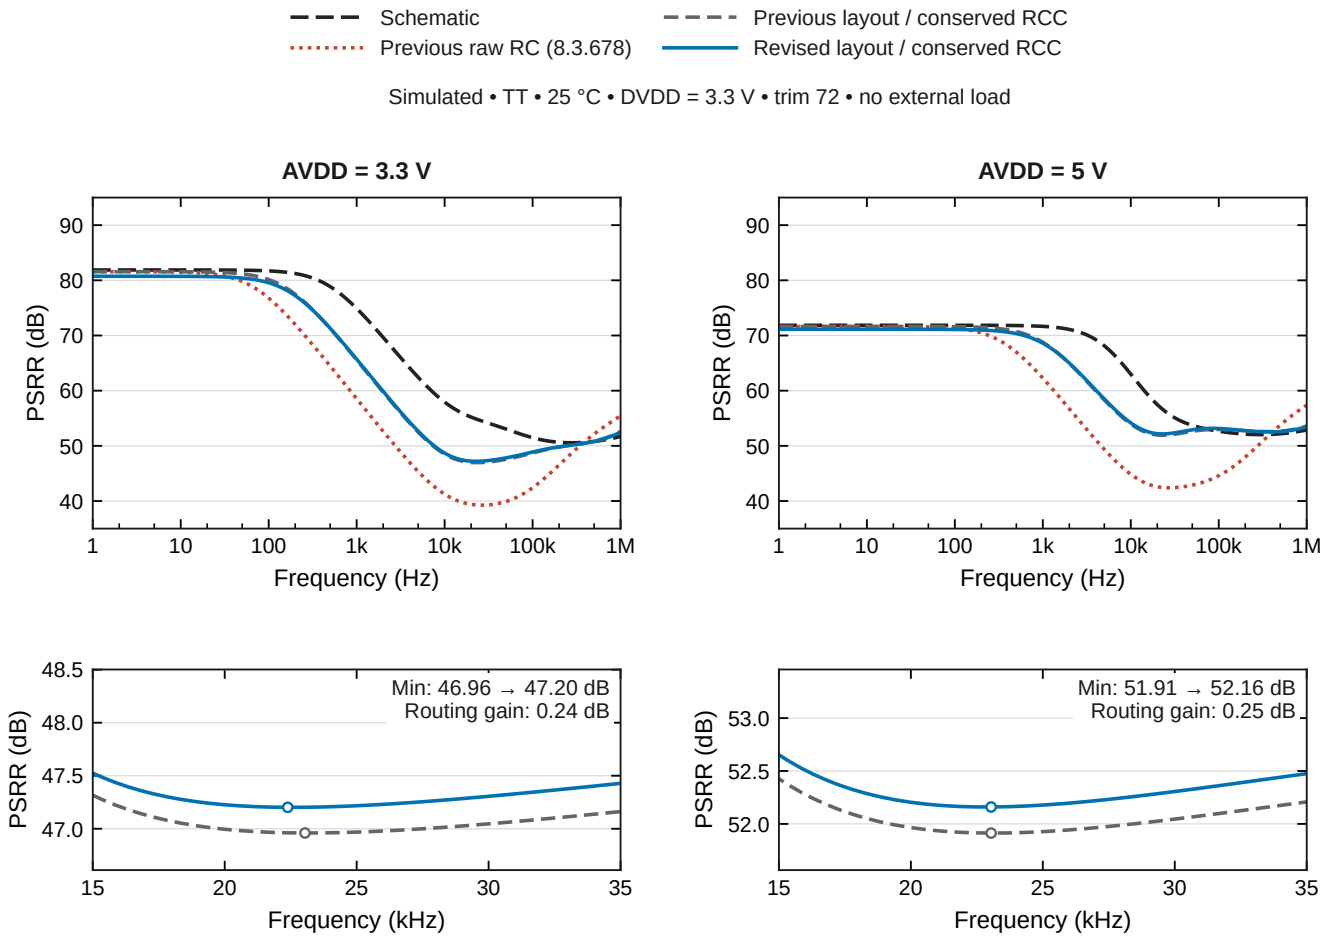

Schematic
Previous raw RC (8.3.678)
Previous layout / conserved RCC
Revised layout / conserved RCC
Simulated • TT • 25 °C • DVDD = 3.3 V • trim 72 • no external load
AVDD = 3.3 V
AVDD = 5 V
PSRR (dB)
Frequency (Hz)
Min: 46.96 → 47.20 dB
Routing gain: 0.24 dB
Min: 51.91 → 52.16 dB
Routing gain: 0.25 dB
Frequency (kHz)