SERVOMOTORS LEVEL AND ELEVATION

QCR 1901

PROJECT: Seven Mile | Unit: 4 | ITP step no.: 1505

SM#2 : before plate machining.

Measurement Instruments	Ambient Temperature
N3 20434	Before: ______
Ruler	After: ______

LEVEL AND ELEVATION mm		
PTS	SM #1	SM #2
A		462694.33
B		462693.57
C		462690.94

ELEVATION		SM #1	SM #2
VARIATION (mm)	A-C		
	B-C		
TOLERANCE (mm)***		+/- 0.5	+/- 0.5
THICKNESS AT SM END FOR REFERENCE			
THICKNESS AT OPERATING RING END FOR REFERENCE			

LEVEL*	SM #1	SM #2
VARIATION (mm) A-B		0.76
TOLERANCE (mm)	1.0	1.0

*ROD END

** Servomotor-operating ring

*** Machining of thrust washer is normally required to meet elevation tolerance

AFTER MACHINING OF ONE THRUST WASHER/SM (when applicable) (mm)	SM #1 (mm)	SM #2 (mm)
Thickness at SM end (1)		
Thickness at operating ring end (1)		
Difference		
A - C corrected		
B - C corrected		
Tolerance	+/- 0.5	+/- 0.5

(1) Minimum thickness is 3mm.

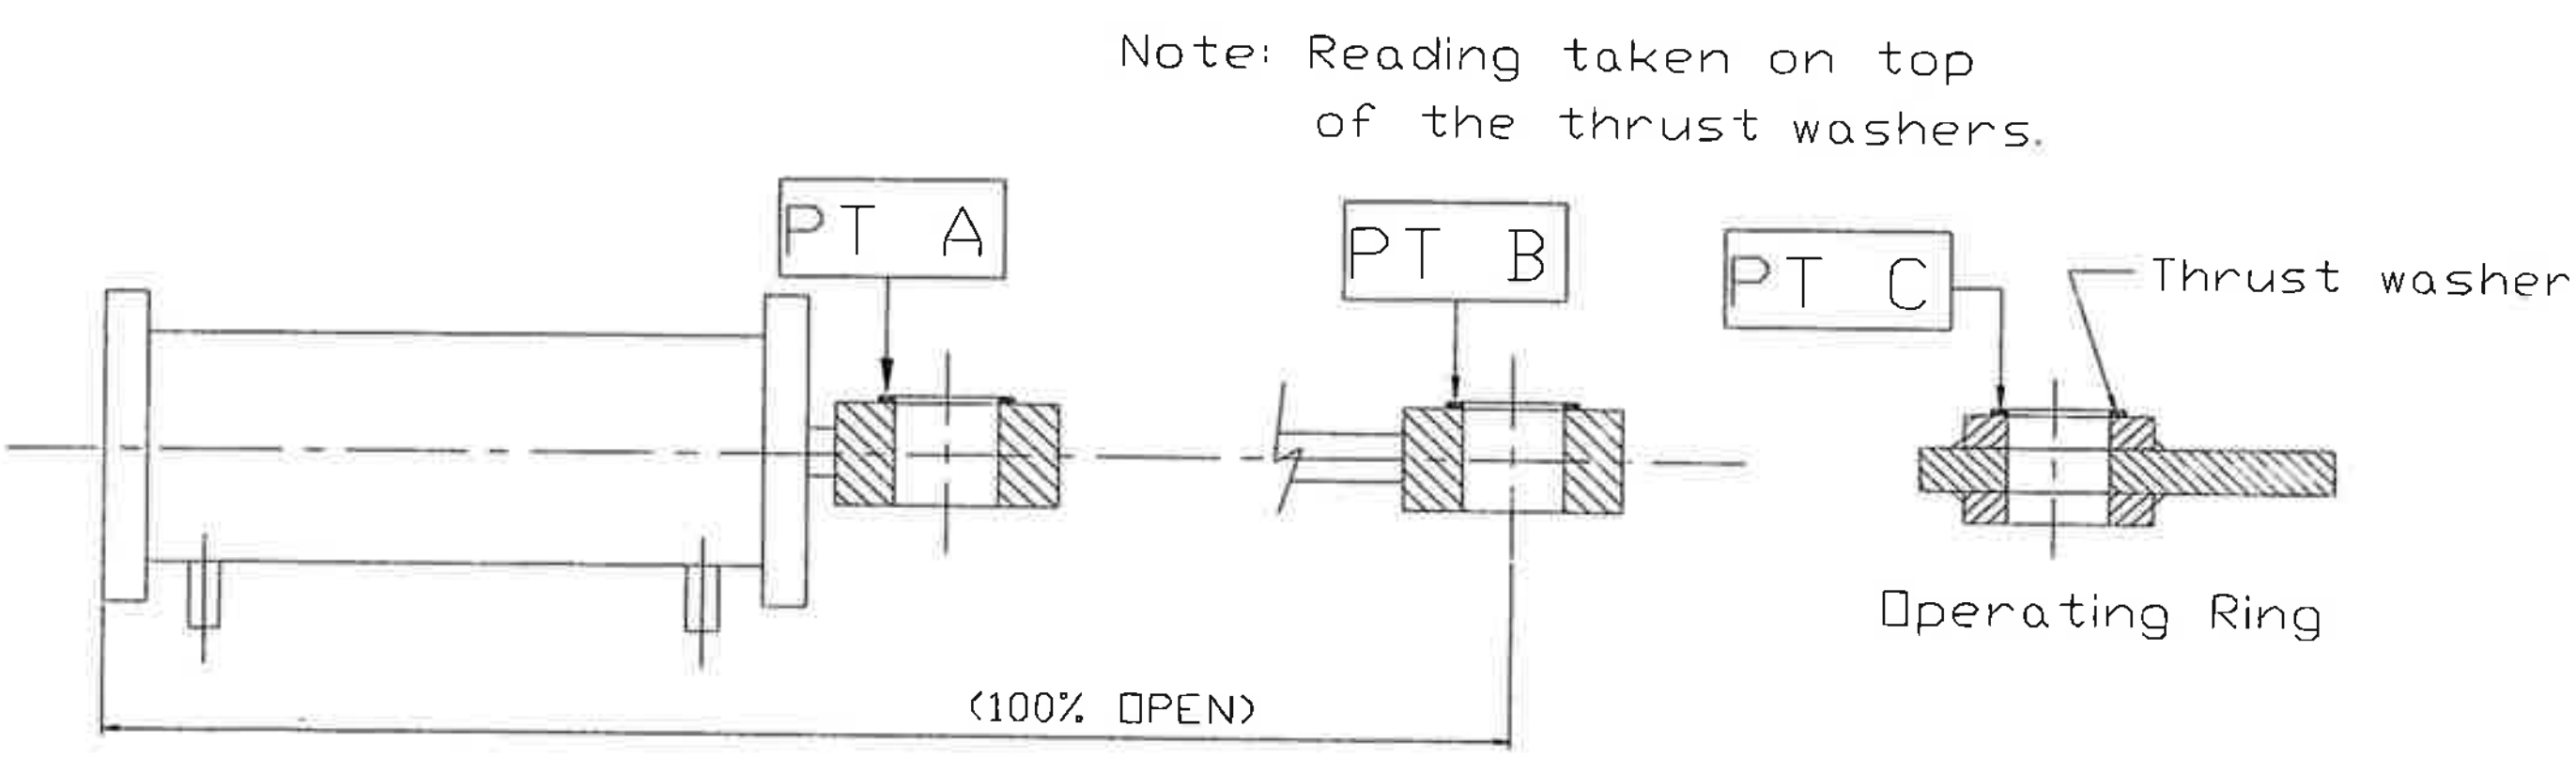

JAN 23 2003

Measured by.: Marc Kitchin (Jan/21st/2003)

GE Repres.: [signature] (Jan/22nd/2003)

Cust. Repres.: ______ (/ /)

GE Canada International Inc.

Reference NC no.: ______

Comments: ______

Rev.: 0

Date: 02-11-30

GE	SERVOMOTORS STROKE	QCR 1903
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1505

SM#2 : before plate machining.

Measurement Instruments	Ambient Temperature
Tape	Before:
	After:

PTS	SM #1	SM #2
A (mm)		1924
B (mm)		2621
STROKE B - A		697

Reference Nominal Stroke - uncoupled: 698 mm

Reference Nominal Stroke - coupled: 682 mm ± 3

* These measurements have been taken with the rod end screwed all the way in.

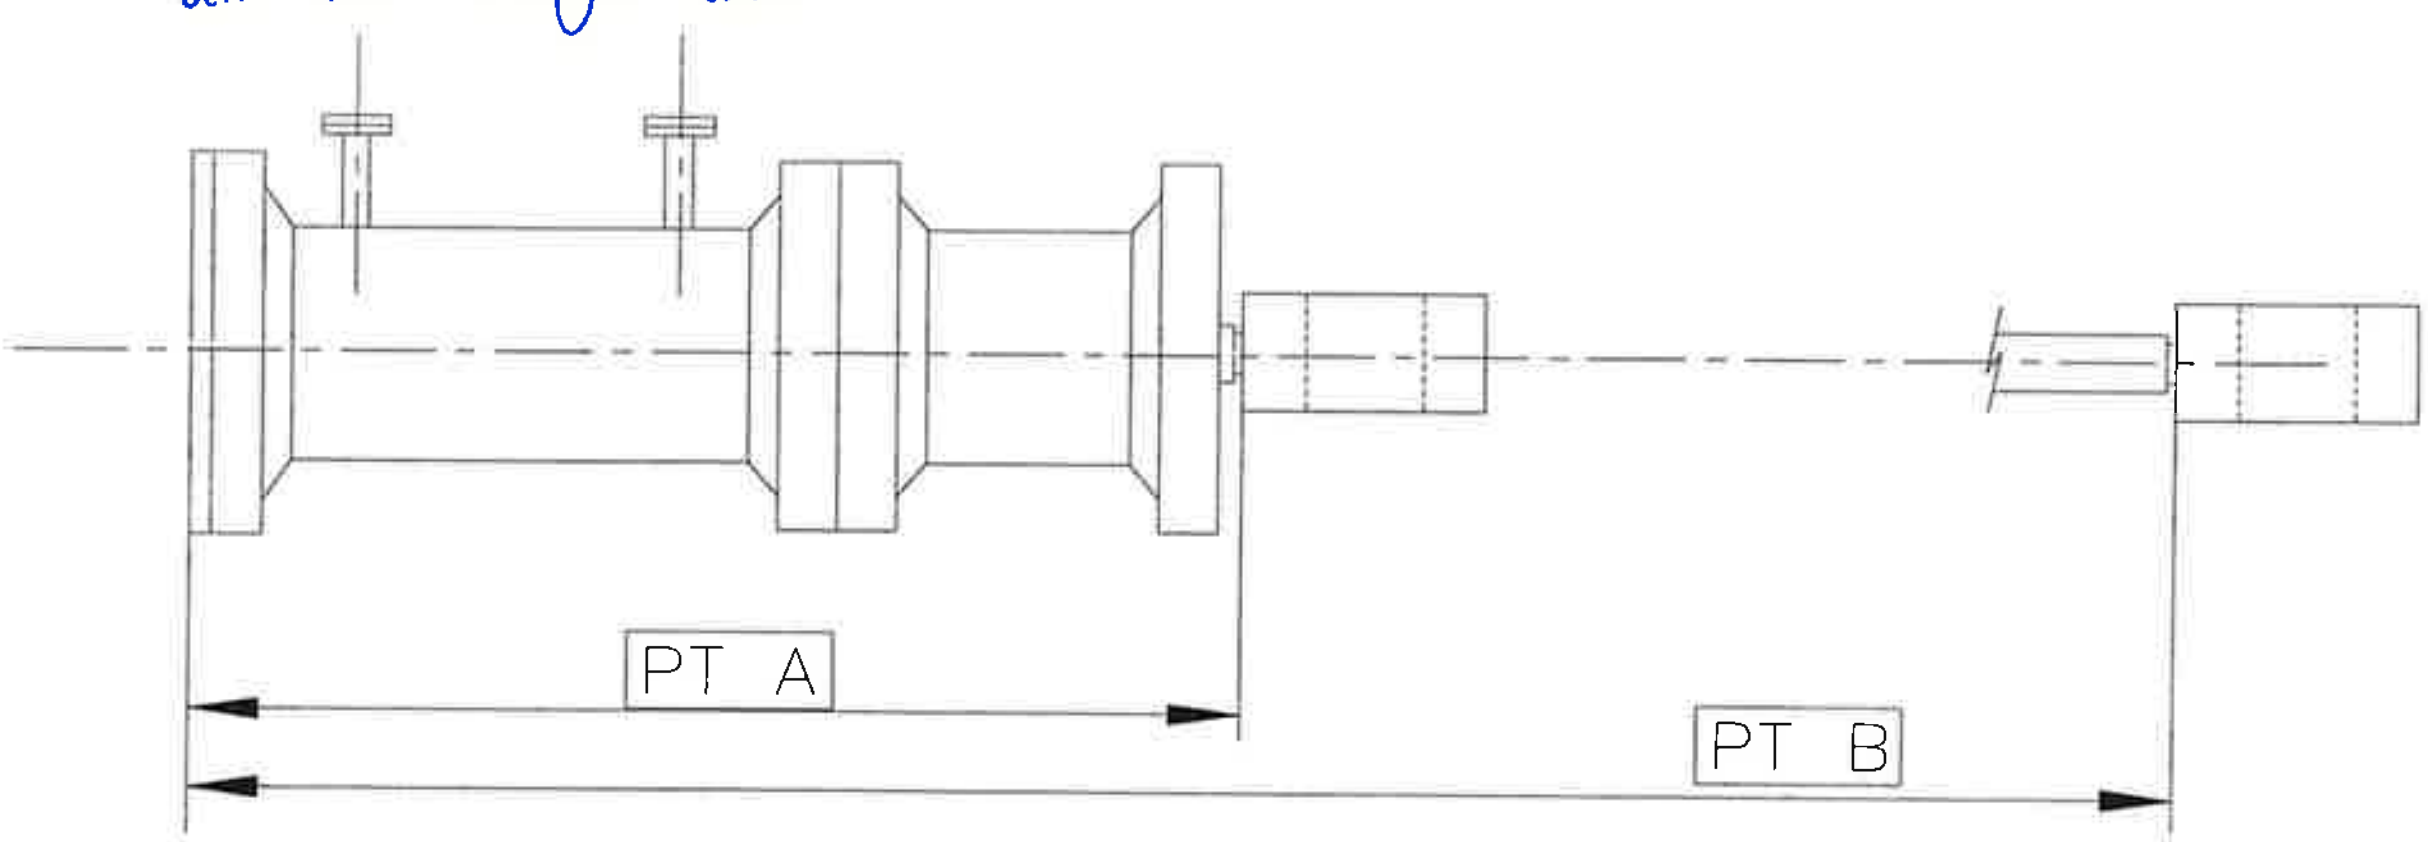

JAN 2 3 2003

Measured by.:	Marc Kitchin	(Jan/20th/2003)
GE Repres.:	[signature]	(Jan/22nd/2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 02-12-09

SERVOMOTORS ALIGNMENT

QCR 1905

PROJECT: Seven Mile — Unit: 4 — ITP step no.: 1505

SM #2: before plate machining.

Measurement Instruments	Ambient Temperature
BC Hydro's theodolite	Before: ______
	After: ______

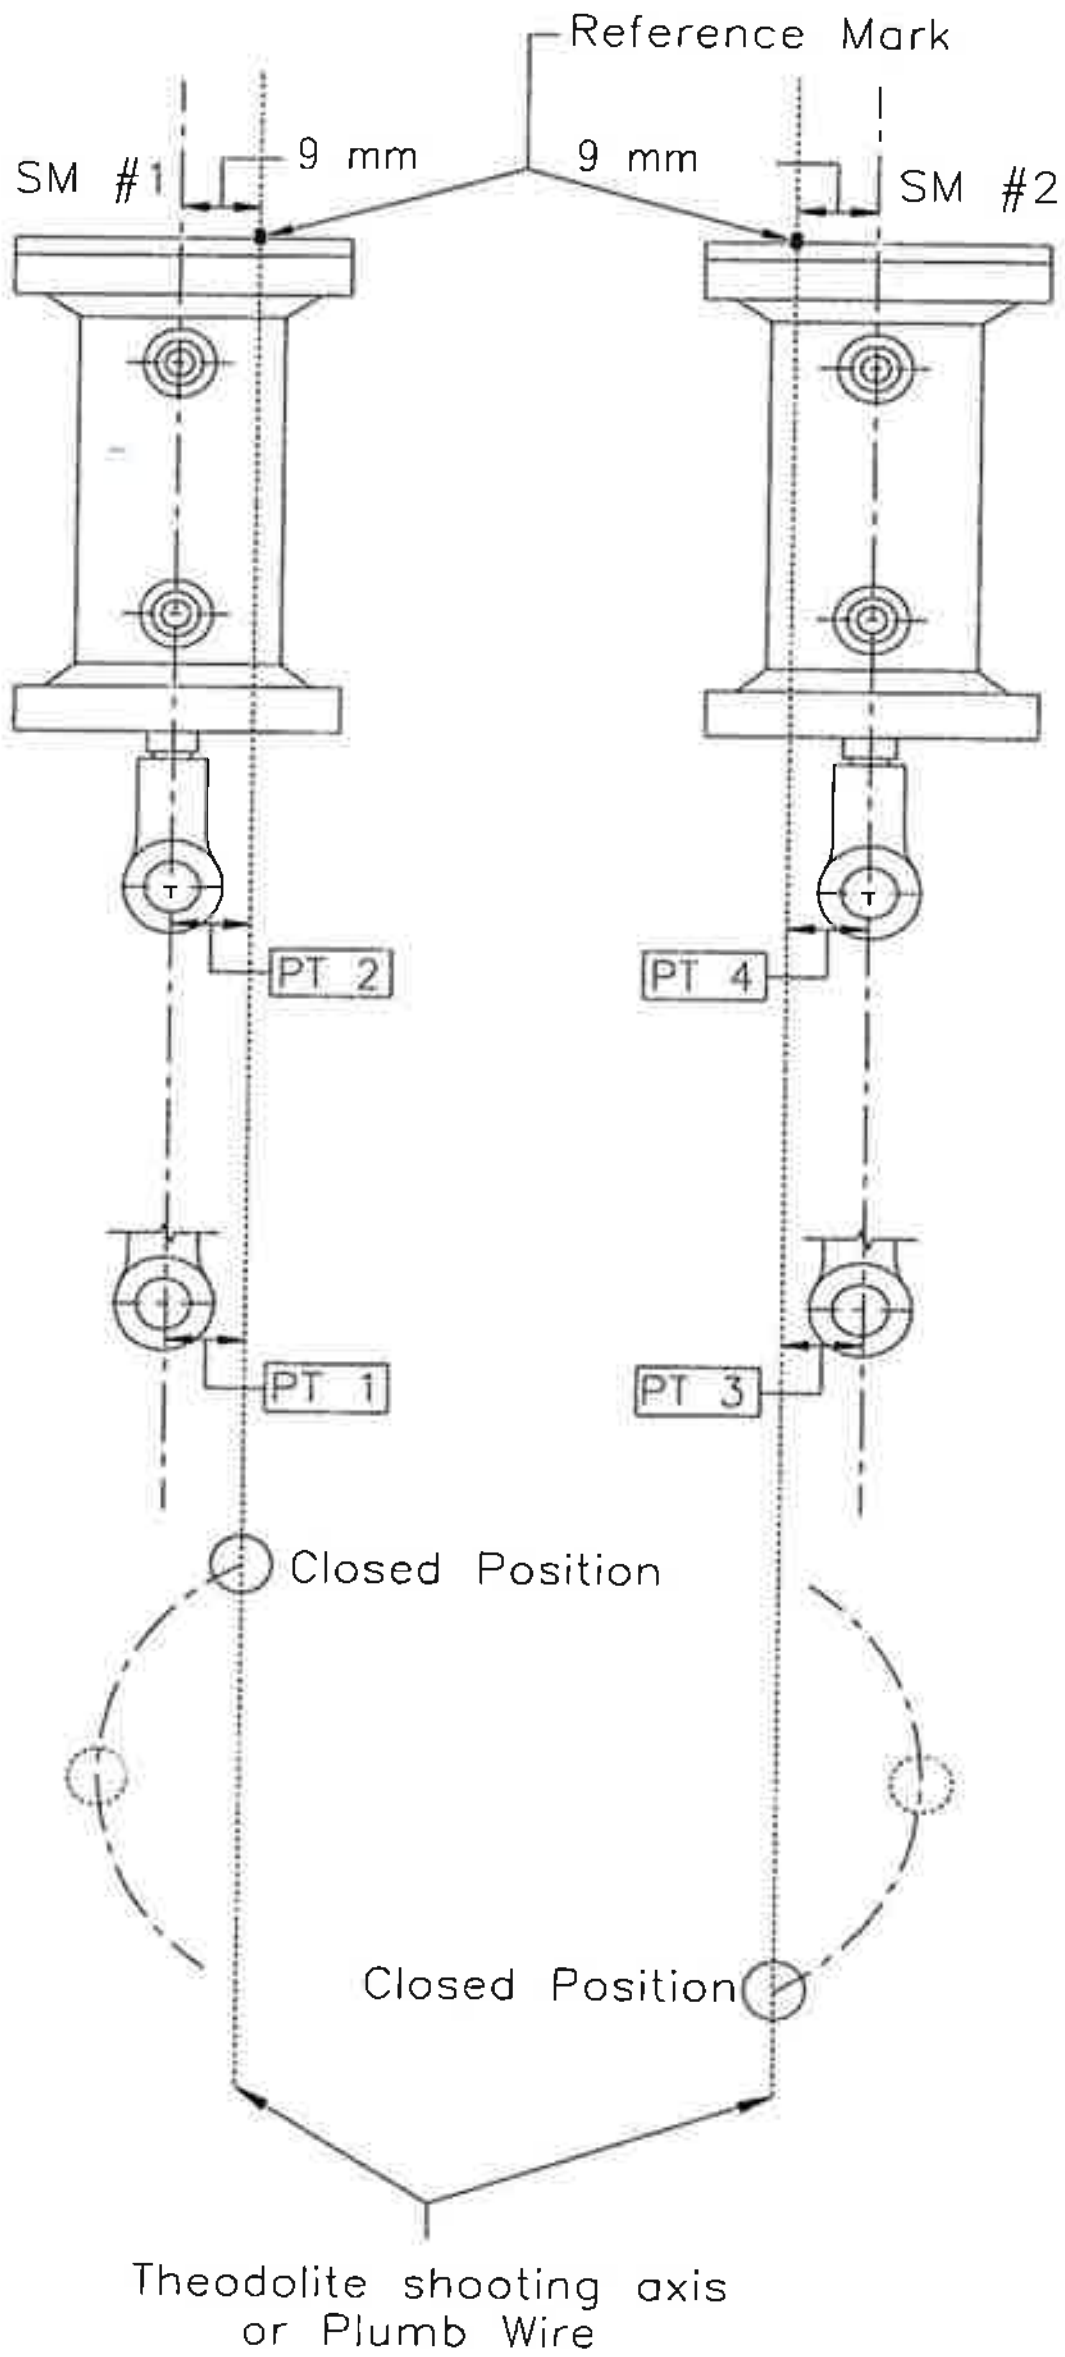

SERVOMOTOR #1		
	Point 1	Point 2
Distance (mm)		
Variation* (mm)		
Tolerance (mm)		+/- 3.00

SERVOMOTOR #2		
	Point 3	Point 4
Distance (mm)	8	8
Variation* (mm)	-1	-1
Tolerance (mm)		+/- 3.00

*Variation in relation to the theoretical value (9 mm)

JAN 23 2003

Measured by.: Marc Kitchin (Jan/21st/2003)

GE Repres.: [signature] (Jan/22nd/2003)

Cust. Repres.: ______ (/ /)

GE Canada International Inc.	Reference NC no.: ______ Comments: ______	Rev.: 0 Date: 02-12-09

	SERVOMOTORS LEVEL AND ELEVATION	QCR 1901
	PROJECT: Seven Mile Unit: 4	ITP step no.: 5.08

Final SM#1

Measurement Instruments	Ambient Temperature
N3 20434	Before:
Ruler	After:

LEVEL AND ELEVATION mm		
PTS	SM #1	SM #2
A	462692,81	
B	462692,43	
C	462690,53	

LEVEL*	SM #1	SM #2
VARIATION (mm) A-B	0,38	—
TOLERANCE (mm)	1.0	1.0

*ROD END

ELEVATION		SM #1	SM #2
VARIATION (mm)	A-C		
	B-C		
TOLERANCE (mm)***		+/- 0.5	+/- 0.5
THICKNESS AT SM END FOR REFERENCE			
THICKNESS AT OPERATING RING END FOR REFERENCE			

** Servomotor-operating ring

*** Machining of thrust washer is normally required to meet elevation tolerance

~~AFTER~~ MACHINING OF ONE THRUST WASHER/SM (when applicable) (mm)	SM #1 (mm)	SM #2 (mm)
Thickness at SM end (1)	462692,62	
Thickness at operating ring end (1)	462690,53	
Difference	2,09	
A - C corrected		
B - C corrected		
Tolerance	+/- 0.5	+/- 0.5

(1) Minimum thickness is 3mm.

(Before machining the thrust washer)

⇒ Thickness of the Op. ring washer: 19,05. Desired thickness of SM1 washer: 16,96.

Note: Reading taken on top of the thrust washers.

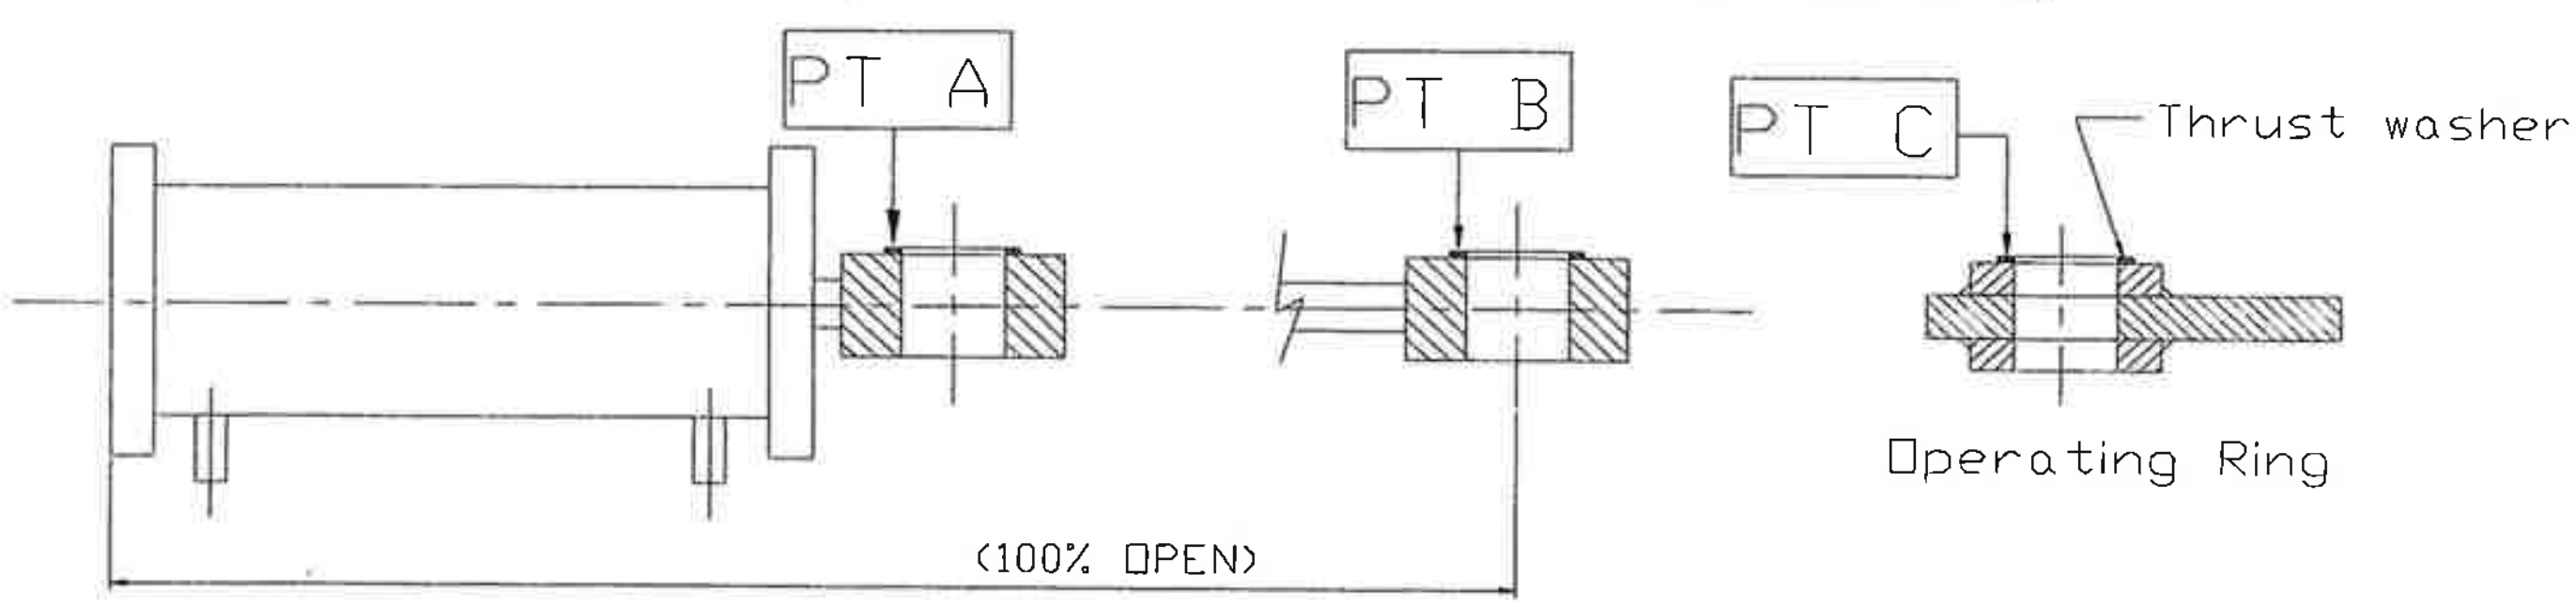

Measured by.:	Marc Kitching	(Jan 20th 2003)
GE Repres.:	[signature]	(Jan 22nd 2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 02-11-30

	SERVOMOTORS STROKE	QCR 1903
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1508

SM#1 Final

Measurement Instruments	Ambient Temperature
Tape	Before:
	After:

PTS	SM #1	SM #2
A (mm)	1922,5	
B (mm)	2620,5	
STROKE B - A	698	

Reference Nominal Stroke - uncoupled: 698 mm

Reference Nominal Stroke - coupled: 682 mm ± 3

* These measurements have been taken with the rod end screwed all the way in. Nominal value of A: 1925

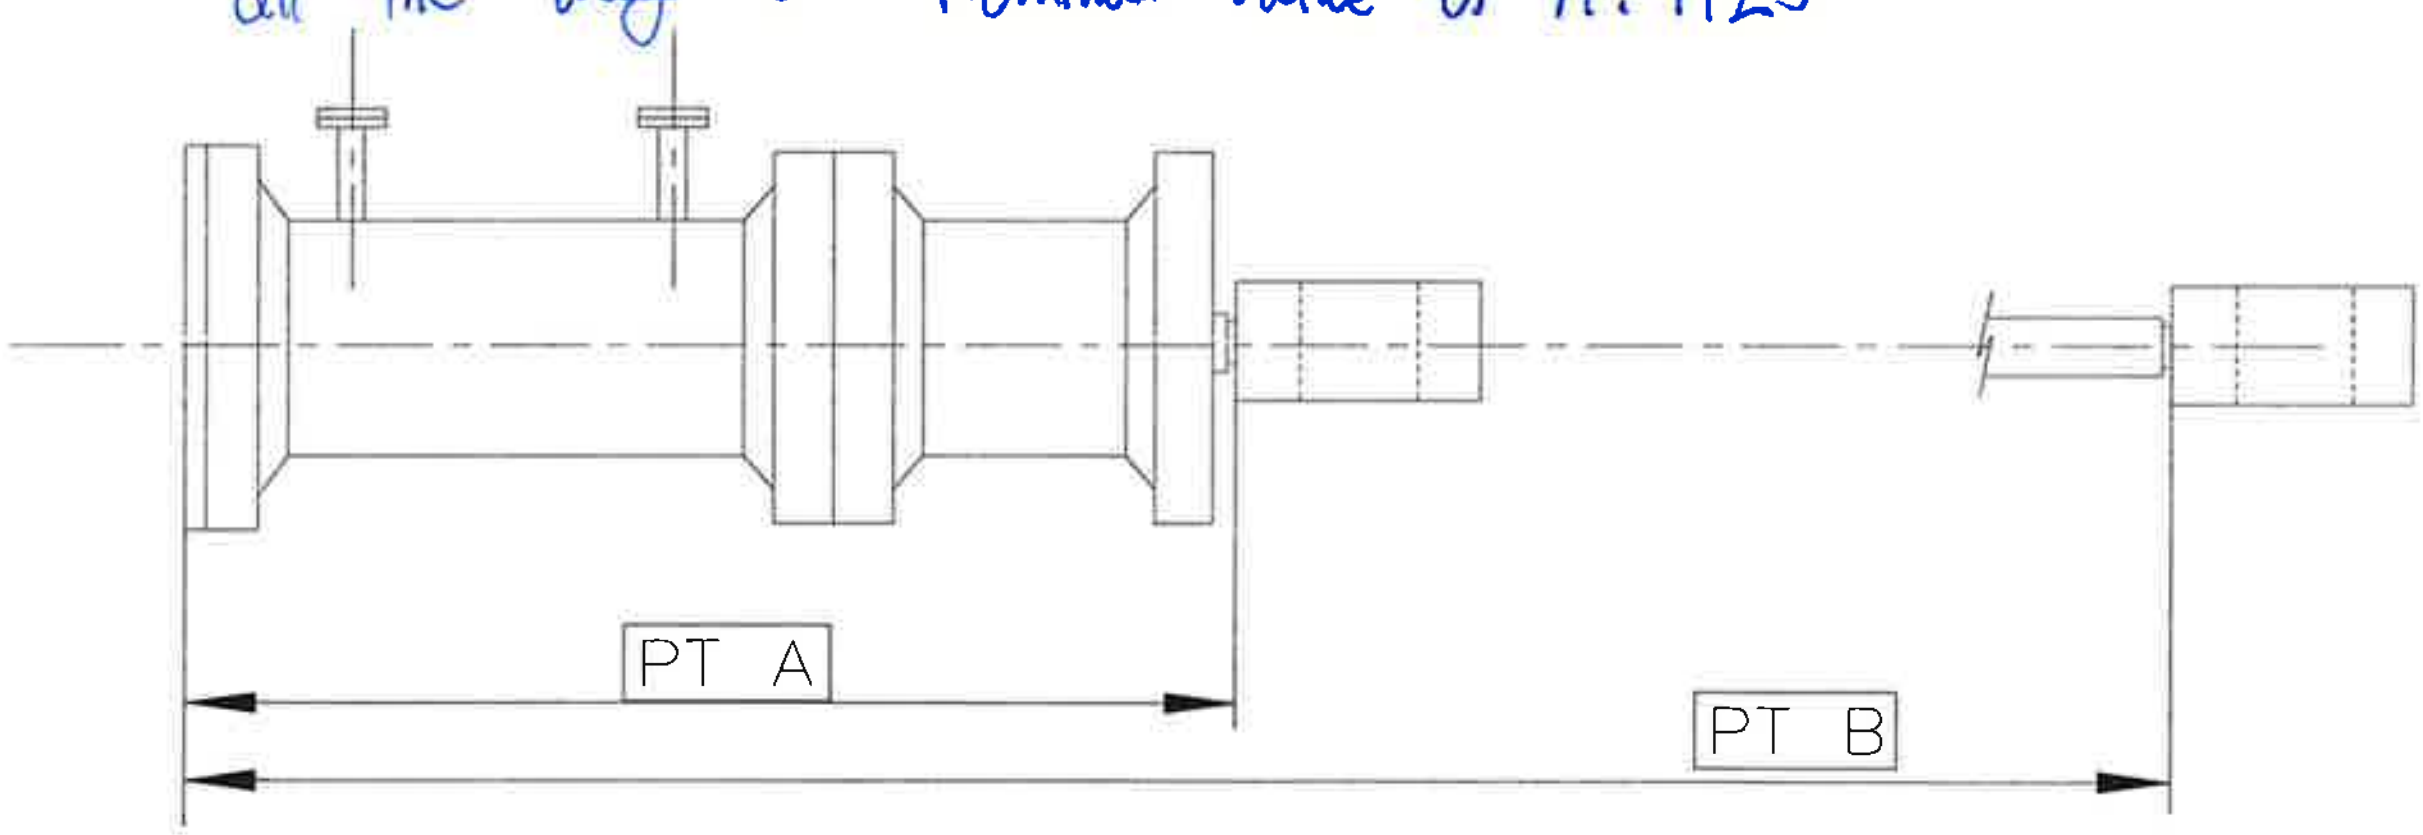

JAN 2 3 2003 CA

Measured by.:	Marc Kitchin	(Jan /21st/2003)
GE Repres.:	[signature]	(Jan /22nd/2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 02-12-09

SERVOMOTORS ALIGNMENT

QCR 1905

PROJECT: Seven Mile — Unit: 4 — ITP step no.: 1508

Final SM#1

Measurement Instruments	Ambient Temperature
BC Hydro's theodolite	Before:
	After:

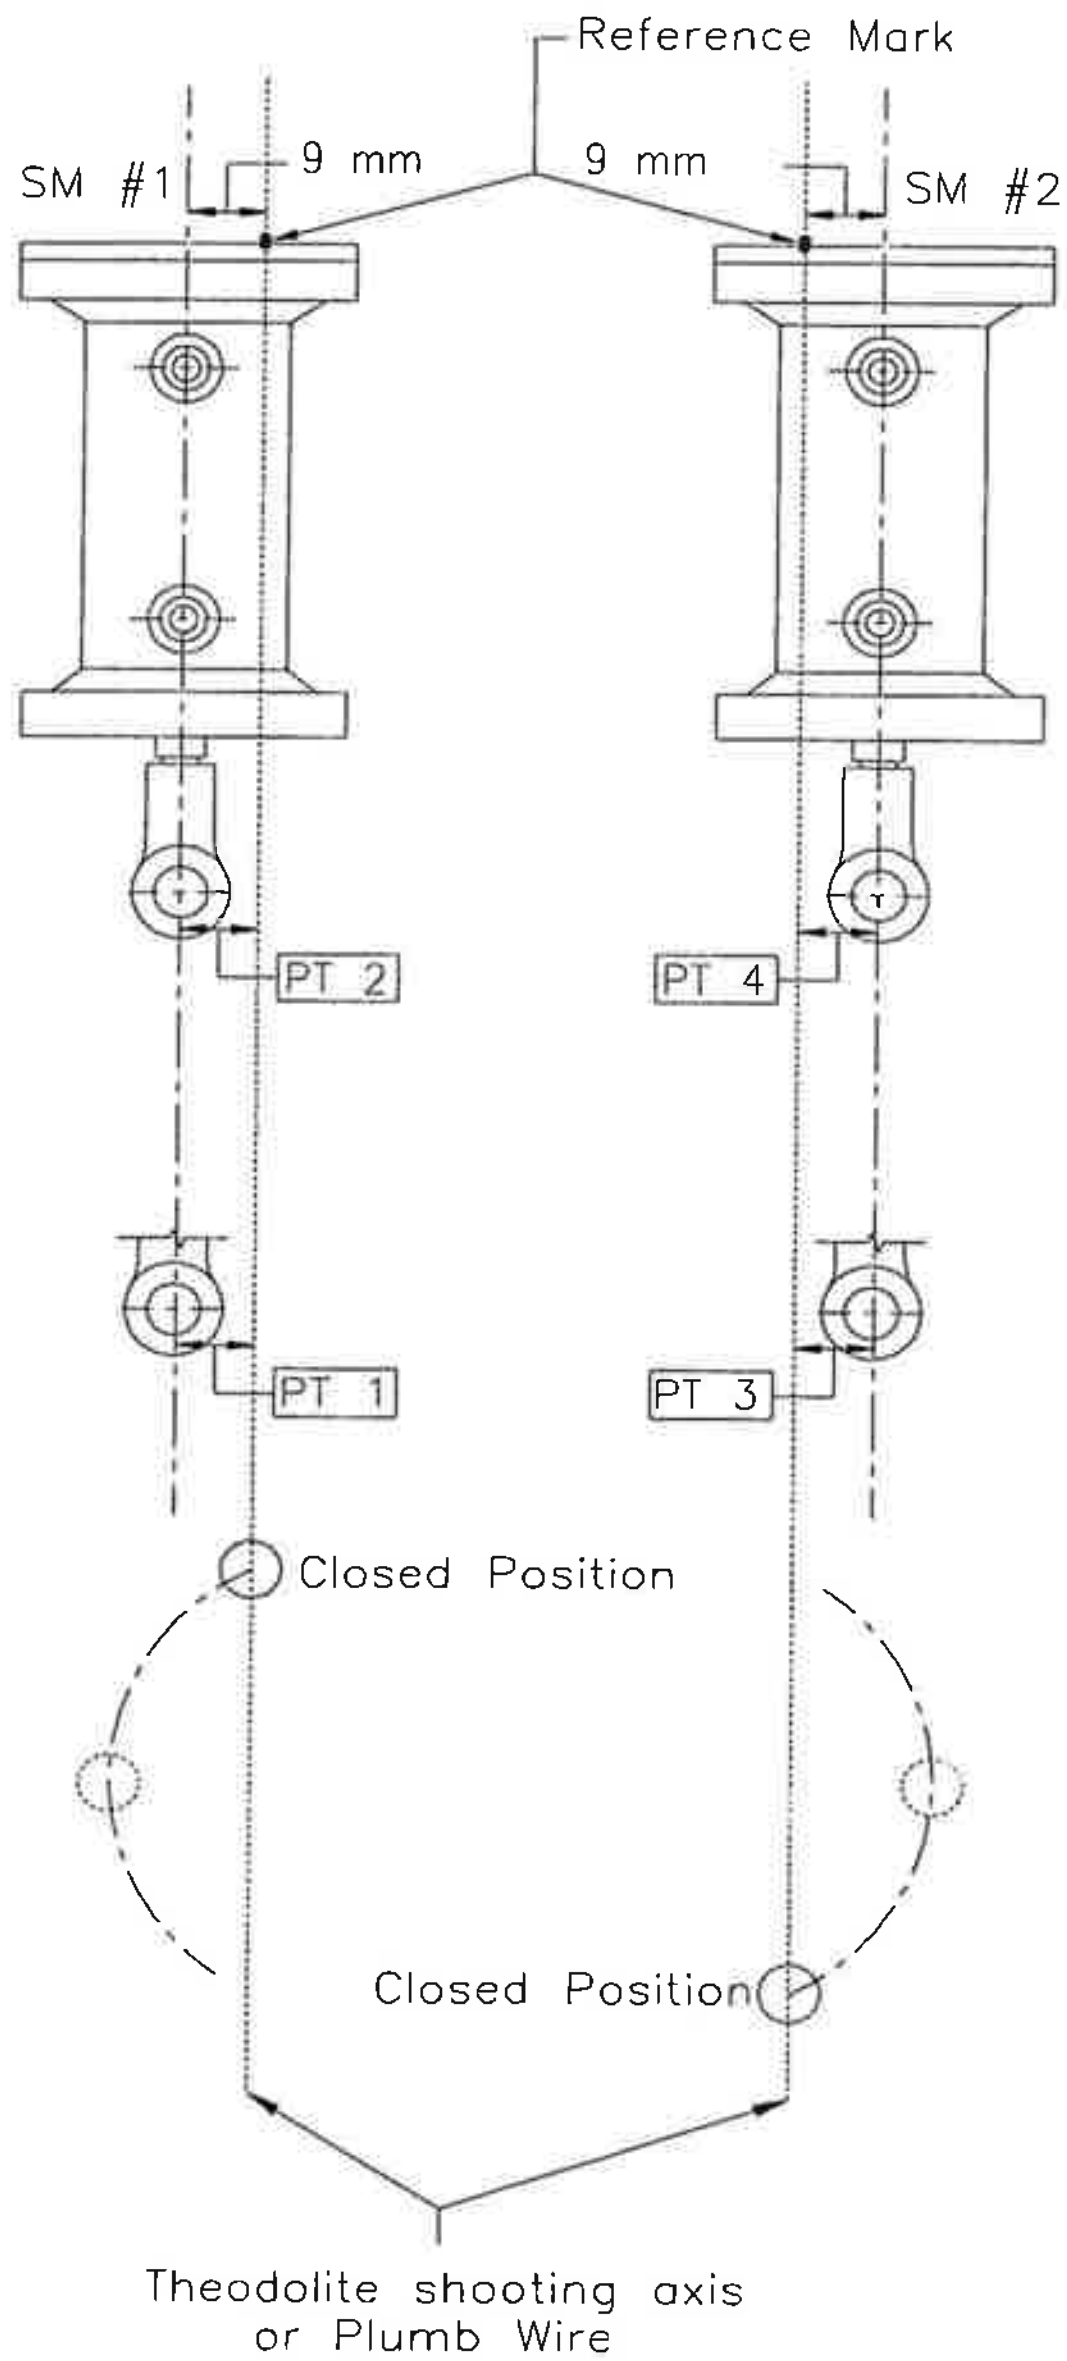

SERVOMOTOR #1		
	Point 1	Point 2
Distance (mm)	11,5	10,75
Variation* (mm)	+2,5	+1,75
Tolerance (mm)		+/- 3.00

SERVOMOTOR #2		
	Point 3	Point 4
Distance (mm)		
Variation* (mm)		
Tolerance (mm)		+/- 3.00

*Variation in relation to the theoretical value (9 mm)

Measured by.: Marc Kitching (Jan/20th/2003)

GE Repres.: [signature] (Jan/22nd/2003)

Cust. Repres.: (/ /)

GE Canada International Inc.

Reference NC no.:

Comments:

Rev.: 0

Date: 02-12-09

SERVOMOTORS LEVEL AND ELEVATION

QCR 1901

PROJECT: Seven Mile

Unit: 4

ITP step no.: 1508

Measurement Instruments	Ambient Temperature
N3 20434	Before: ______
Ruler	After: ______

SM#2: Final

LEVEL AND ELEVATION mm		
PTS	SM #1	SM #2
A		462694,56
B		462694,66
C		462690,89

LEVEL*	SM #1	SM #2
VARIATION (mm) A-B		0,1
TOLERANCE (mm)	1.0	1.0

*ROD END

ELEVATION		SM #1	SM #2
VARIATION (mm)	A-C		
	B-C		
TOLERANCE (mm)***		+/- 0.5	+/- 0.5
THICKNESS AT SM END FOR REFERENCE			
THICKNESS AT OPERATING RING END FOR REFERENCE			

** Servomotor-operating ring

*** Machining of thrust washer is normally required to meet elevation tolerance

AFTER MACHINING OF ONE THRUST WASHER/SM (when applicable) (mm)	SM #1 (mm)	SM #2 (mm)
Thickness at SM end (1)		462694,61
Thickness at operating ring end (1)		462690,89
Difference		3,72
A - C corrected		
B - C corrected		
Tolerance	+/- 0.5	+/- 0.5

(1) Minimum thickness is 3mm.

⇒ Thickness of Op. ring washer: 19,04. Desired thickness of SM2 washer: 15,32

Note: Reading taken on top of the thrust washers.

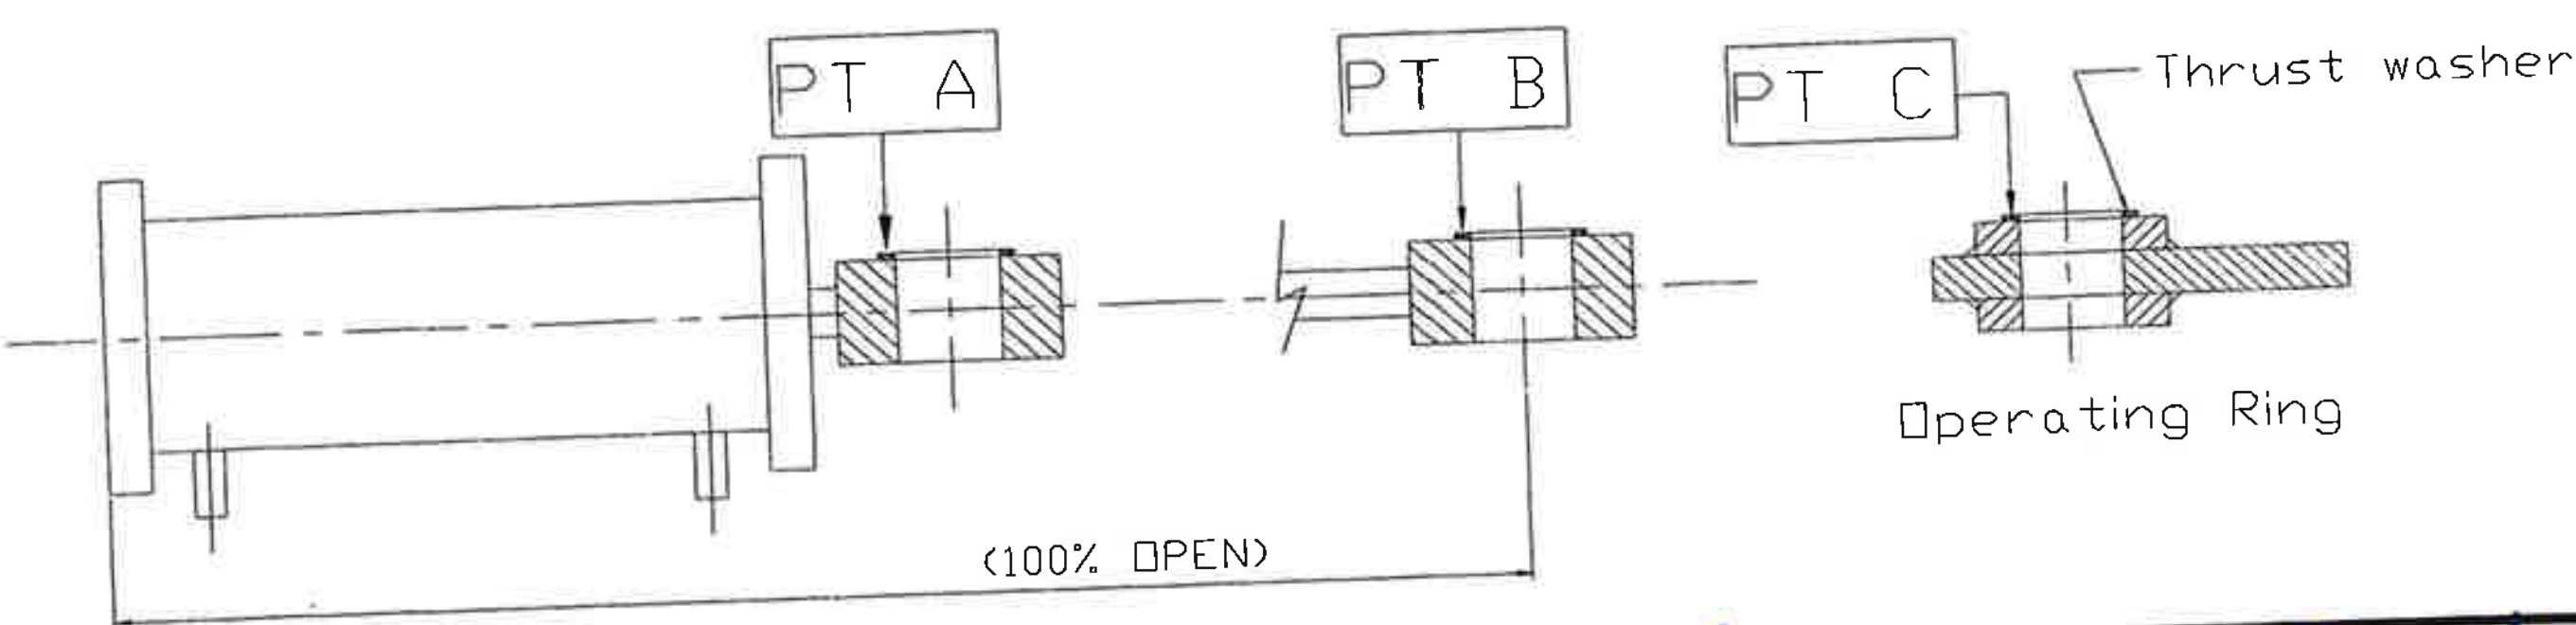

JAN 23 2003

Measured by.:	Marc Kitchin	(Jan 23rd 2003)
GE Repres.:	[signature]	(Jan 23rd 2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.

Reference NC no.: ______________

Comments: ______________

Rev.: 0

Date: 02-11-30

	SERVOMOTORS STROKE	QCR 1903
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1508

Measurement Instruments	Ambient Temperature
Tape	Before: ______ After: ______

SM#2: Final.

PTS	SM #1	SM #2
A (mm)		1924
B (mm)		2620
STROKE B - A		696

Reference Nominal Stroke - uncoupled: 698 mm

Reference Nominal Stroke - coupled: 682 mm ± 3

* These measurements have been taken with the rod end screwed all the way in. Nominal value of A: 1925

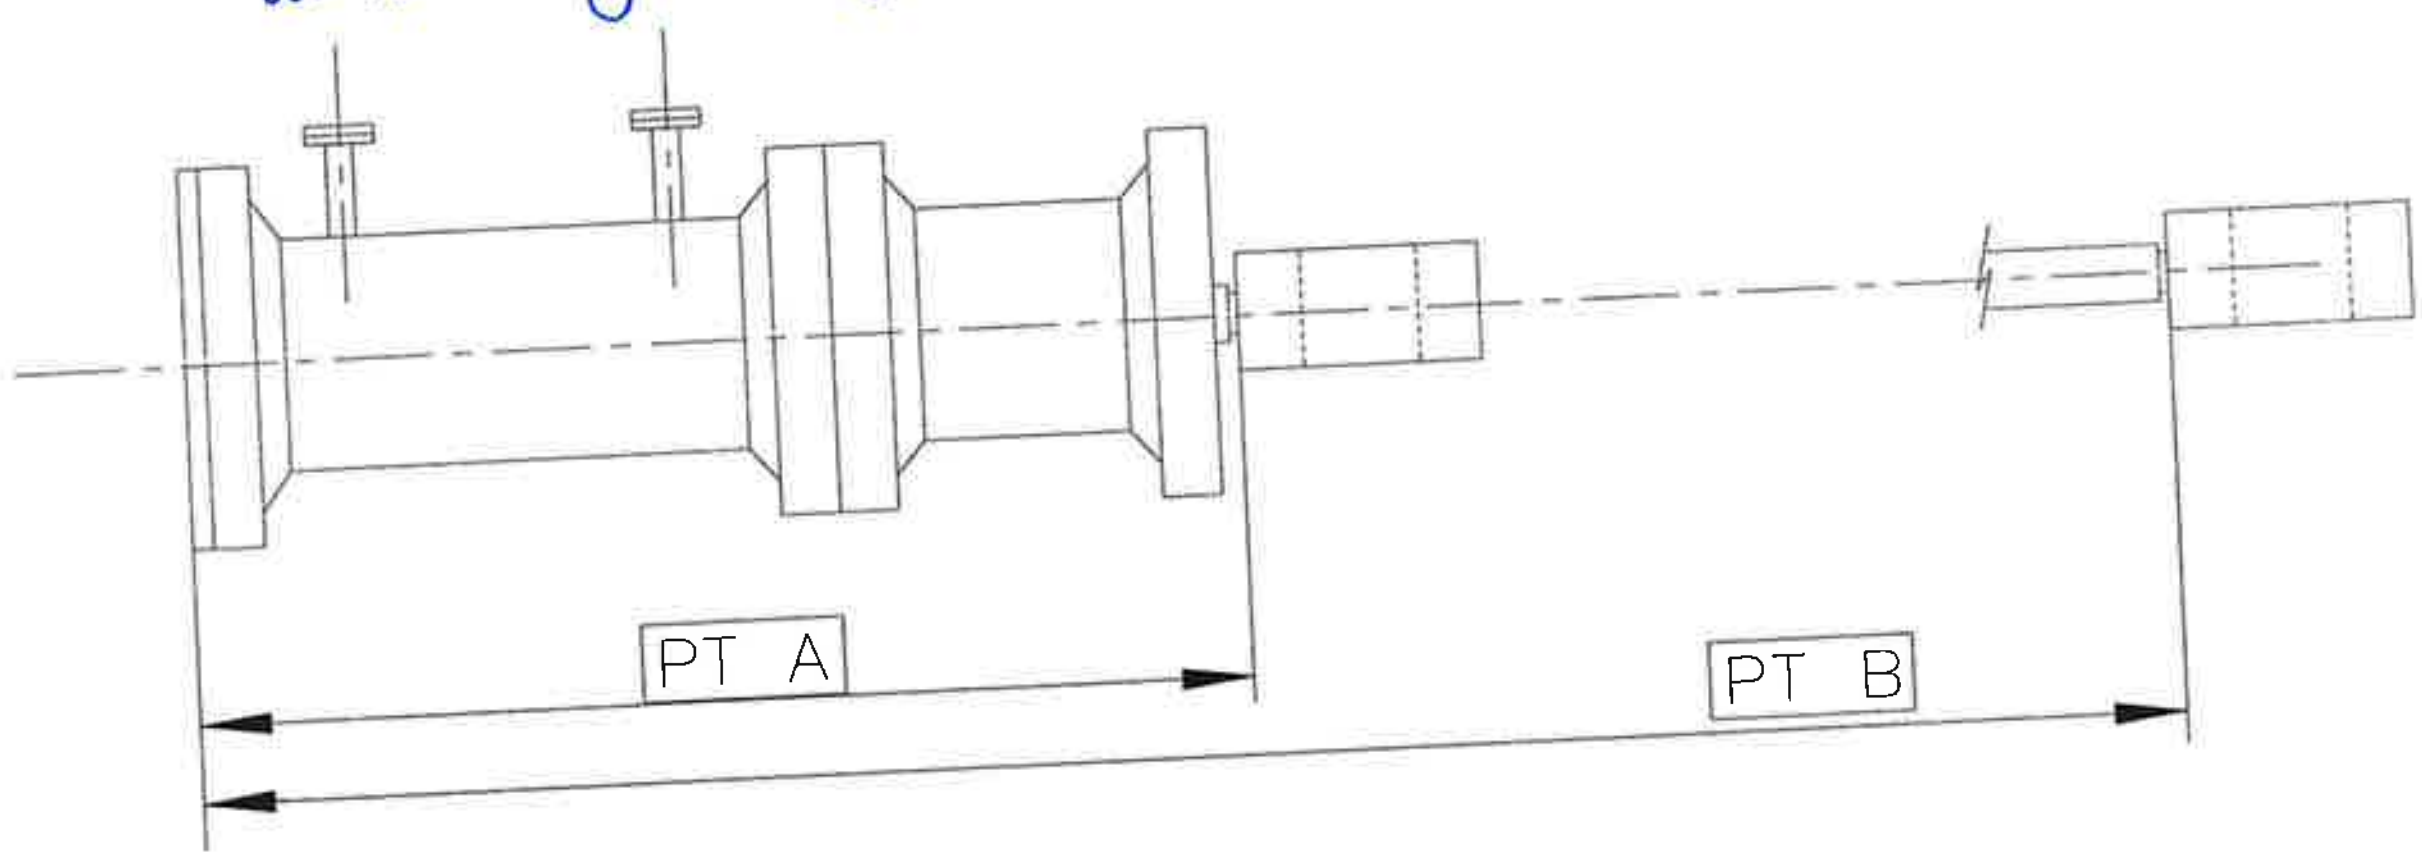

Measured by.:	J. Willman	(Jan/23rd/2003)
GE Repres.:	[signature]	(Jan/23rd/2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: ______ Comments: ______	Rev.: 0 Date: 02-12-09

	SERVOMOTORS ALIGNMENT		QCR 1905
	PROJECT: Seven Mile	Unit: 4	ITP step no.: 1508

SM#2: final

Measurement Instruments	Ambient Temperature
BC Hydro theodolite	Before: ______
Rulers	After: ______

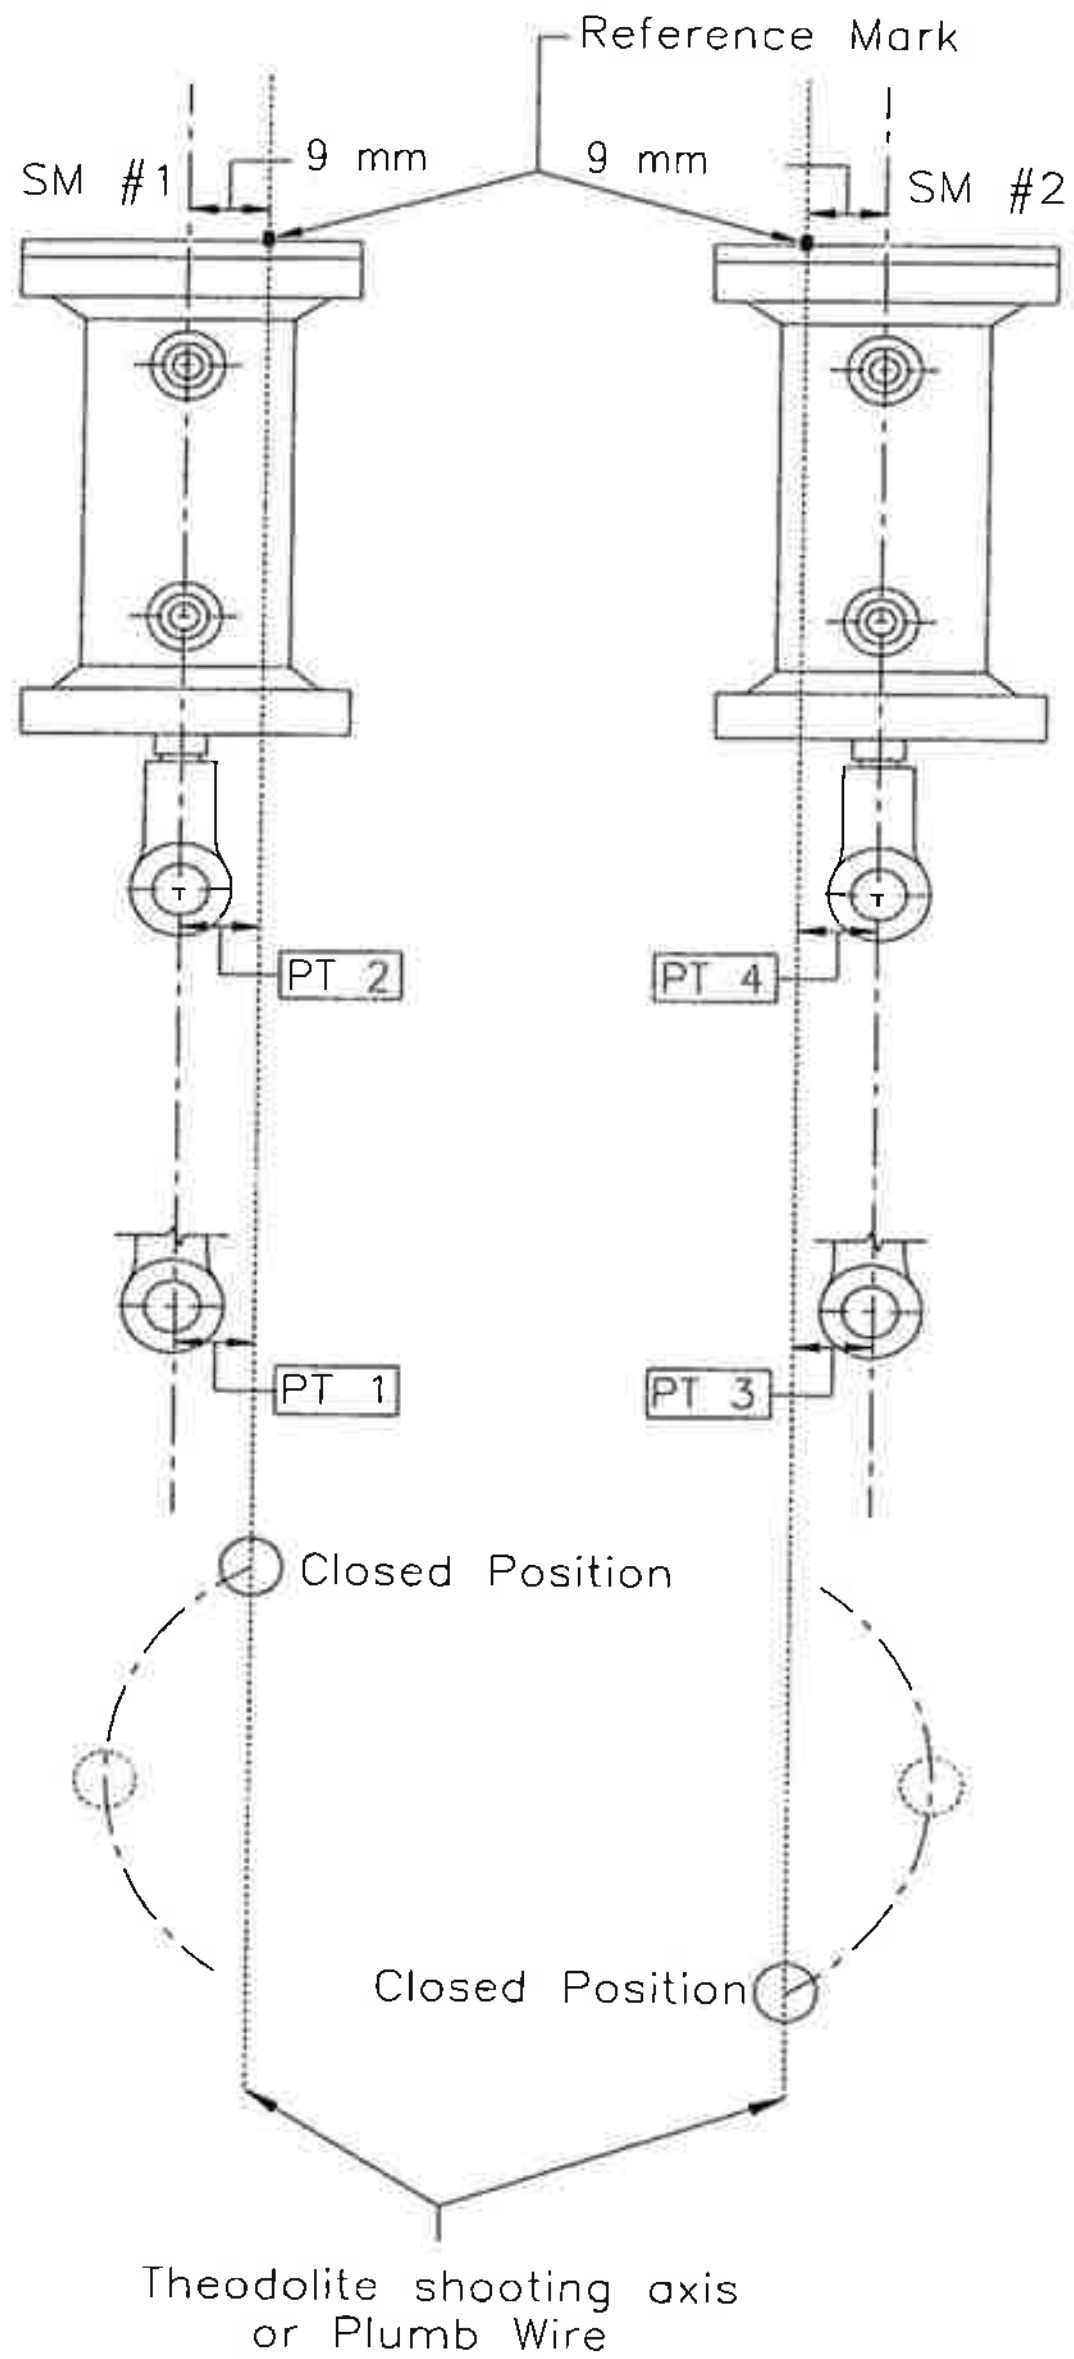

SERVOMOTOR #1		
	Point 1	Point 2
Distance (mm)		
Variation* (mm)		
Tolerance (mm)		+/- 3.00

SERVOMOTOR #2		
	Point 3	Point 4
Distance (mm)	7	7,5
Variation* (mm)	-2	-1,5
Tolerance (mm)		+/- 3.00

*Variation in relation to the theoretical value (9 mm)

RECEIVED JAN 23 2003

Measured by.:	Marc Kitchin	(Jan/23rd/03)
GE Repres.:	[signature]	(Jan/23rd/03)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: ______ Comments: ______	Rev.: 0 Date: 02-12-09

	GENERAL INSPECTION REPORT	QCR 004
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1509

EQUIPMENT : **Torquing of servomotors**

The studs and nuts holding both servomotors have been torqued at a value of 1520 N.m lubricated.

RECEIVED
FEB 12 2003

Measured by.:	Jake Zandervan	(Feb/9th/2003)
GE Repres.:	Doug Everitt	(Feb/9th/2003)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.:	Rev.: 0
	Comments:	Date: 07/23/01

	GAP BETWEEN WICKET GATE LEVERS AND STOPPING BLOCKS	QCR 1810
	PROJECT: Seven Mile — Unit: 4	ITP step no.: 1522

Measurement Instruments	Ambient Temperature	
Feeler gauge	Before:	15 °C
	After:	15 °C

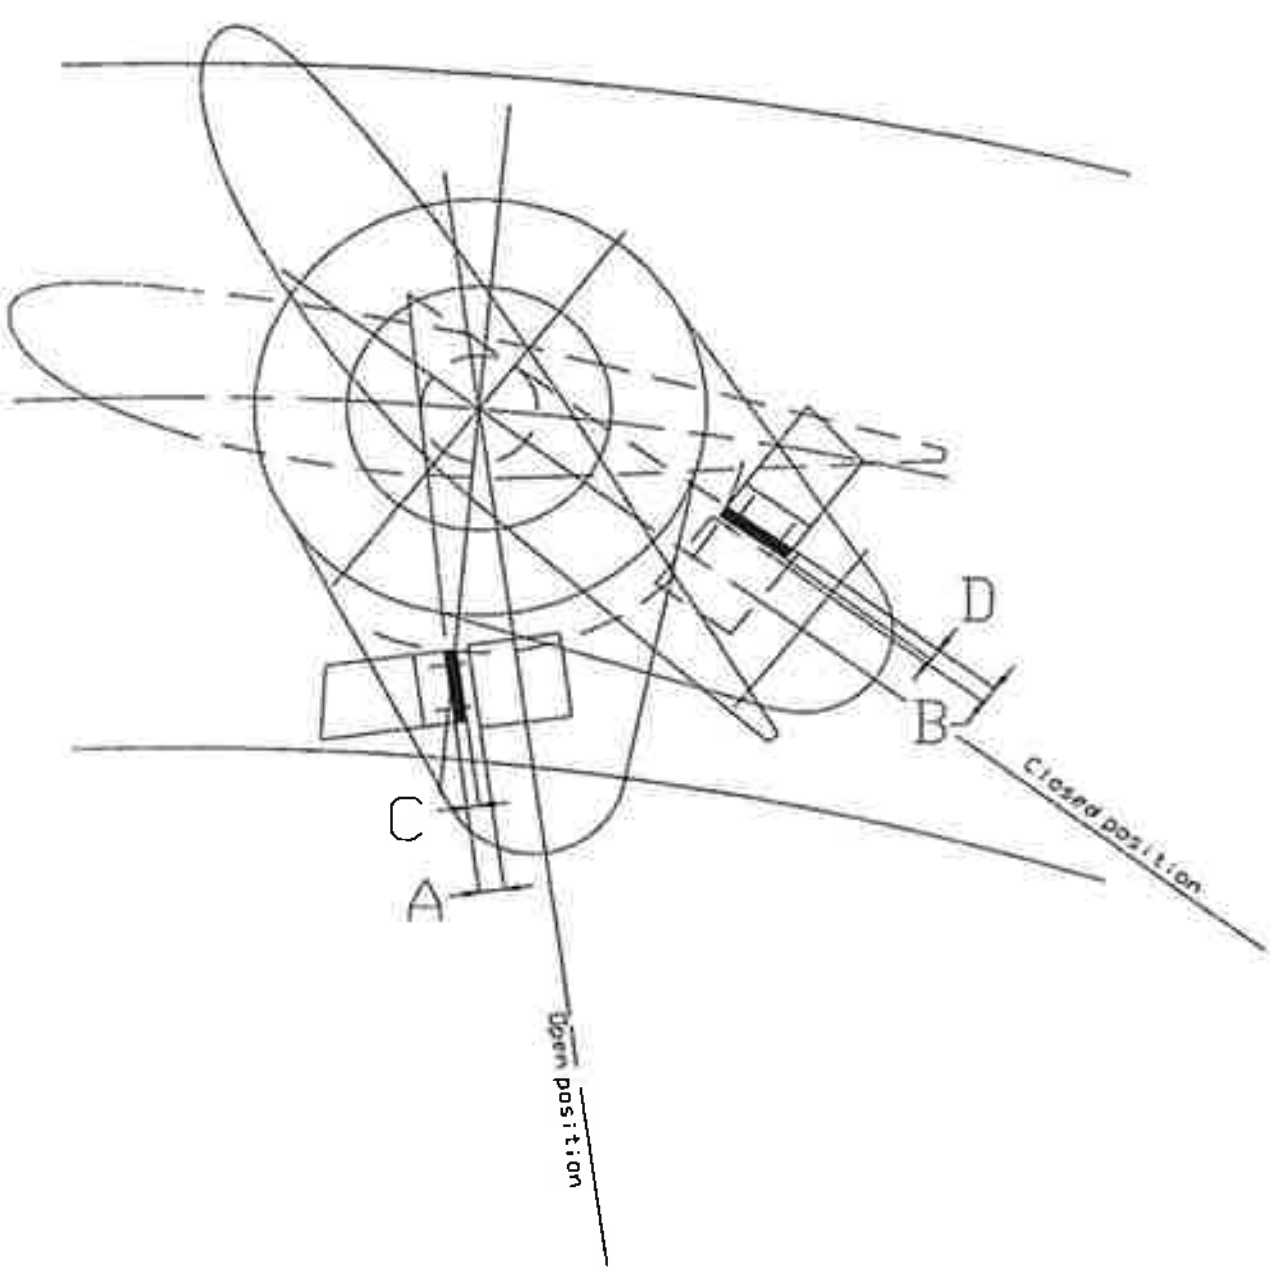

WICKET GATE #	OPENING SIDE GAP A mm	OPENING SIDE THICKNESS C mm	CLOSING SIDE GAP B mm	CLOSING SIDE THICKNESS D mm
1	8.85			
2	8.80			
3	9.10			
4	8.40			
5	9.20			
6	8.80			
7	8.50			
8	8.40			
9	9.30			
10	8.00			
11	8.40			
12	7.10			
13	8.75			
14	8.25			
15	8.25			
16	7.90			
17	9.50			
18	8.10			
19	8.10			
20	9.10			

C = A - 6mm

(The minimum distance between gate lever and stopping pad is 6mm)

Measured with FABREKA PADS GLUED

RECEIVED 21 March 03

Measured by.: [signature] (March 21/03)

GE Repres.: [signature] (03/21/03)

Cust. Repres.: (/ /)

GE Canada International Inc.	Reference NC no.:	Rev.: 0
	Comments:	Date: 03-01-07

GENERAL INSPECTION REPORT	QCR 004
PROJECT: Seven Mile Unit: 4	ITP step no.: 1523

EQUIPMENT : **Gate operating ring closing line to upstream line on head cover**

When the gates are closed and no pressure on the servomotors, the intake line on head cover lines-up with the closing line on operating ring.

Measured by.: Fred Beals (03/01/03)

GE Repres.: Fred Beals (03/01/03)

Cust. Repres.: (/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 07/23/01

GAP BETWEEN WICKET GATE LEVERS AND STOPPING BLOCKS

QCR 1810

PROJECT: Seven Mile　　Unit: 4

ITP step no.: ~~Around 1416~~ 1524

Measurement Instruments	Ambient Temperature
Feeler gauge	Before: ______
	After: ______

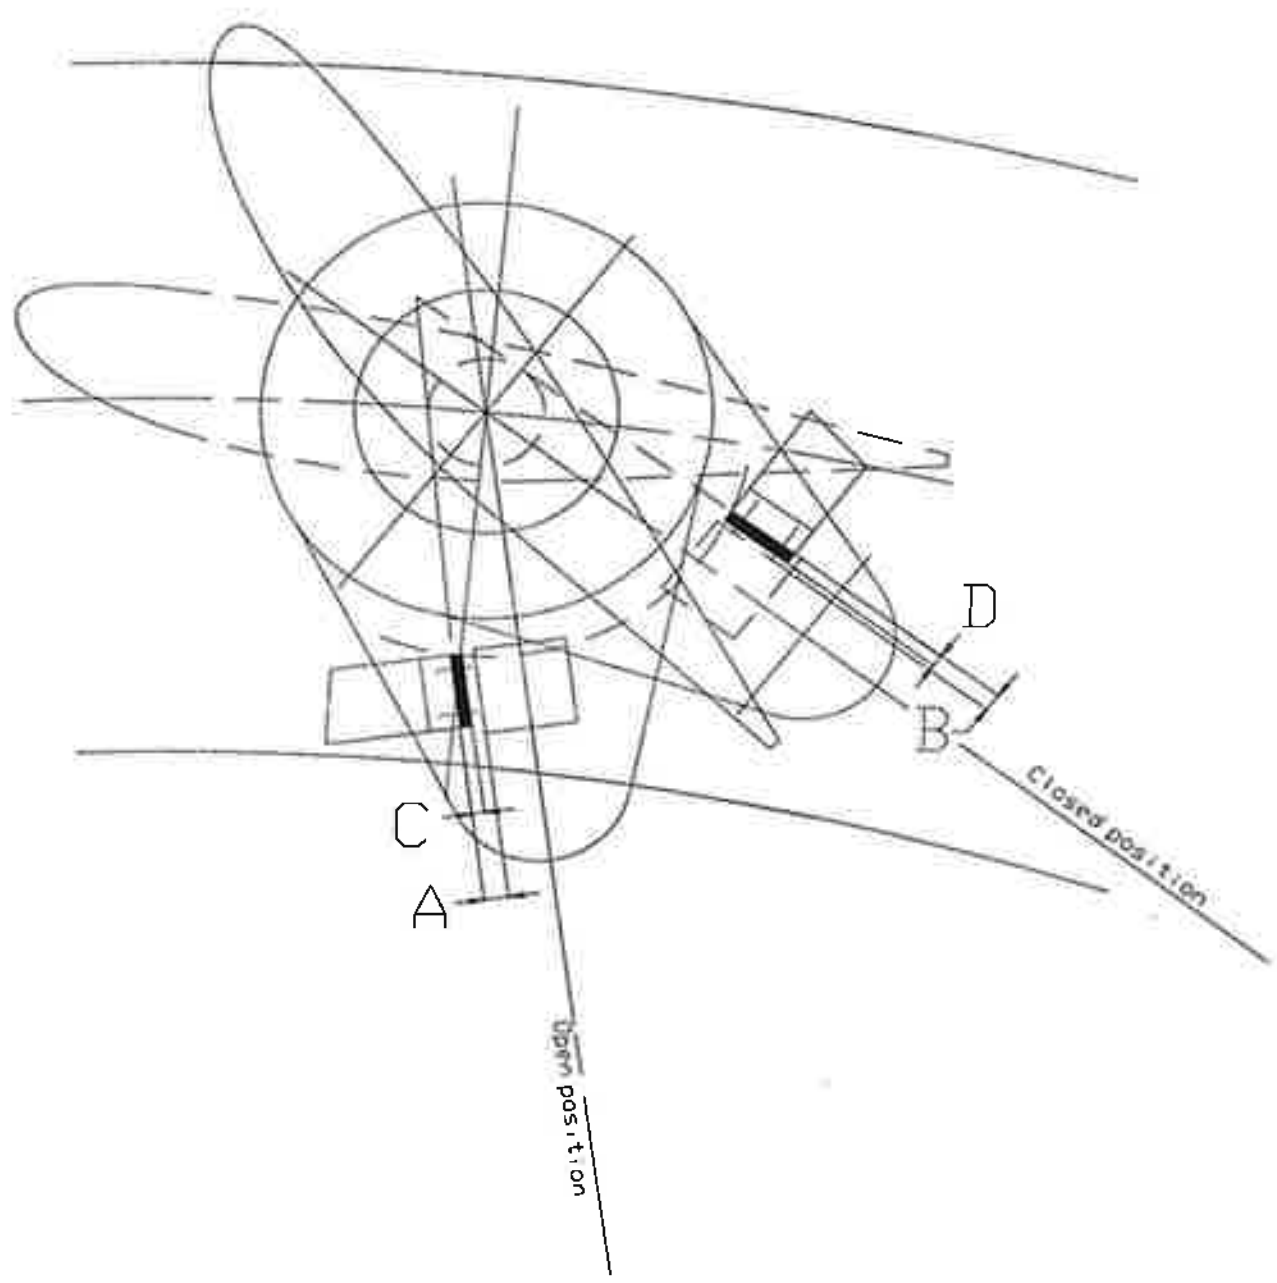

WICKET GATE #	OPENING SIDE GAP A mm	OPENING SIDE THICKNESS C mm	CLOSING SIDE GAP B mm	CLOSING SIDE THICKNESS D mm
1			13.37	7
2			14.85	8
3			13.04	7
4			15.08	9
5			13.00	7
6			14.00	8
7			14.00	8
8			14.00	8
9			12.00	6
10			14.00	8
11			12.00	6
12			17.05	9
13			11.00	5
14			17.00	9
15			11.00	5
16			15.00	9
17			13.02	7
18			14.00	8
19			12.05	6
20			14.00	8

C = A - 6mm

(The minimum distance between gate lever and stopping pad is 6mm)

maximum pad thickness 9mm

RECEIVED JAN 2 2 2003

Measured by.: Jake Zandervan (Jan/20th/2003)

GE Repres.: [signature] (Jan/20th/2003)

Cust. Repres.: ______ (/ /)

GE Canada International Inc.

Reference NC no.: ______

Comments: ______

Rev.: 0

Date: 03-01-07

GE	GAP BETWEEN WICKET GATE LEVERS AND STOPPING BLOCKS	QCR 1810
	PROJECT: Seven Mile Unit: 4	ITP step no.: Around ~~1416~~ 1524

Measurement Instruments	Ambient Temperature
Snap gauge	Before: ______
Feeler gauge	After: ______

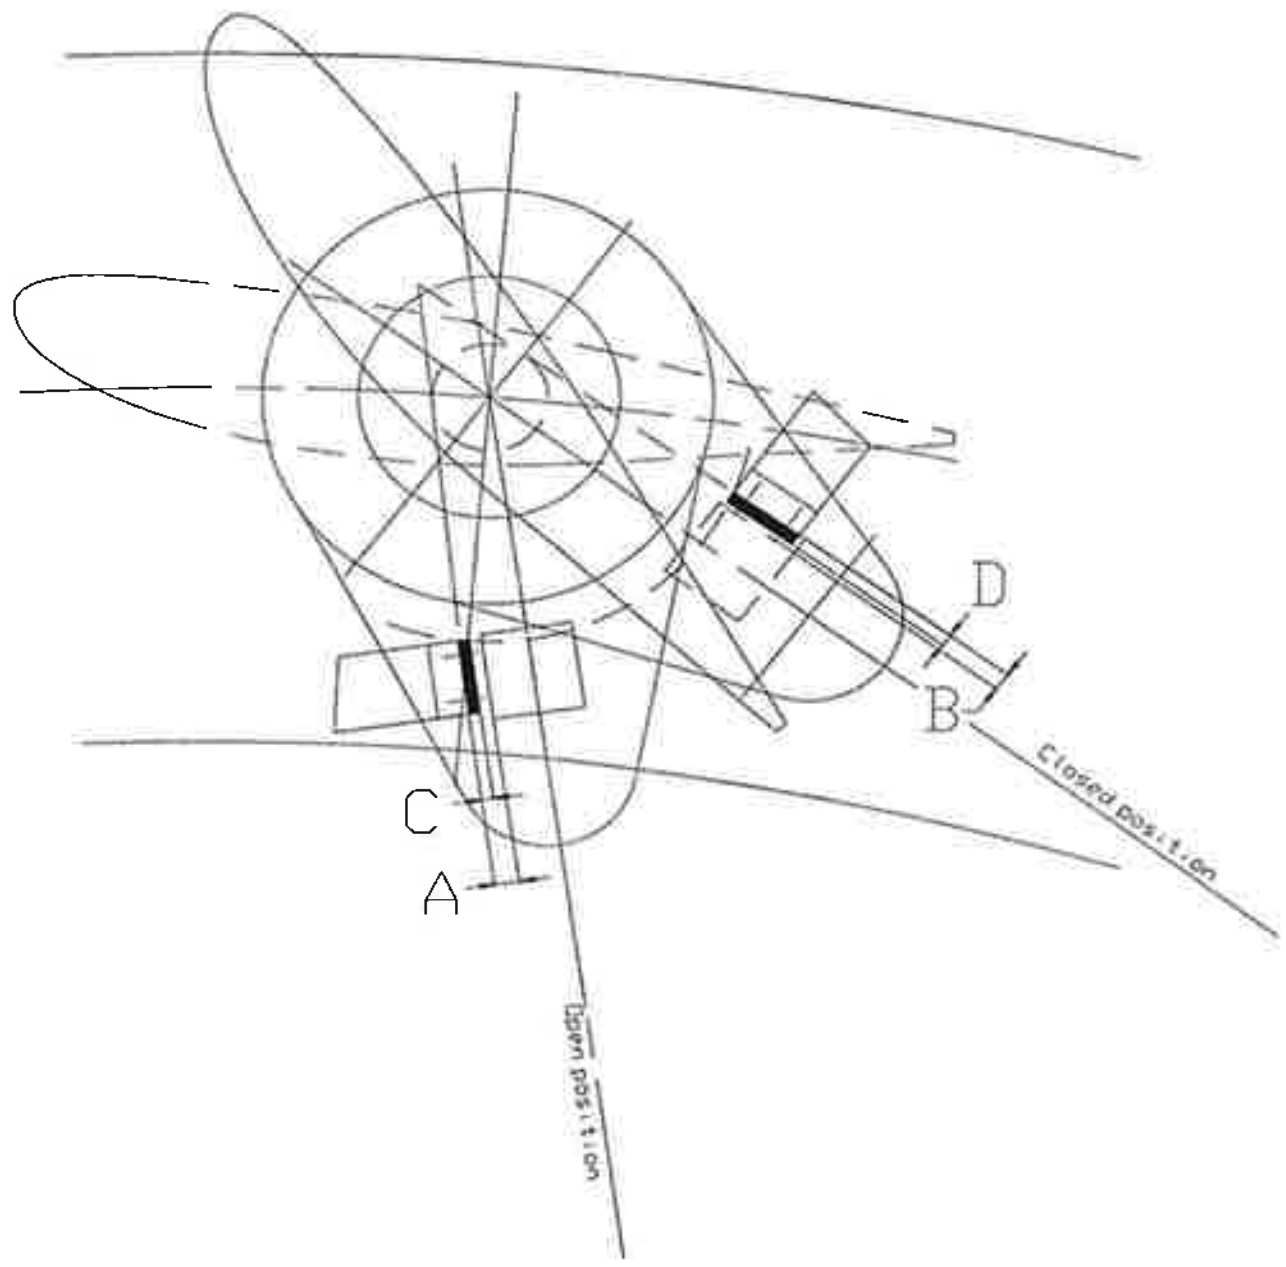

WICKET GATE #	OPENING SIDE GAP A mm	OPENING SIDE ~~THICKNESS~~ TOP GAP ~~C~~ mm	CLOSING SIDE GAP B mm	CLOSING SIDE THICKNESS D mm
1	19,23	1,58		
2	18,87	2,99		
3	19,76	2,53		
4	19,10	2,19		
5	19,81	2,85		
6	19,02	2,15		
7	18,88	2,4		
8	18,62	2,05		
9	18,92	1,61		
10	19,09	2,69		
11	18,60	1,59		
12	17,44	2,67		
13	19,05	2,99		
14	19,67	0,00		
15	18,65	2,43		
16	19,19	2,15		
17	19,39	2,40		
18	18,35	2,24		
19	19,54	2,13		
20	19,37	3,26		

C = A - 6mm

(The minimum distance between gate lever and stopping pad is 6mm)

Maximum pad thickness = 9mm

RECEIVED JAN 3 1 2003

Measured by.: Tom Roddy (Jan/28th/2003)

GE Repres.: [signature] (Jan/30th/2003)

Cust. Repres.: ______ (/ /)

GE Canada International Inc.	Reference NC no.: ______ Comments: ______	Rev.: 0 Date: 03-01-07

GAP BETWEEN WICKET GATE LEVERS AND STOPPING BLOCKS

QCR 1810

PROJECT: Seven Mile Unit: 4

ITP step no.: 1524

Measurement Instruments	Ambient Temperature
Feeler gauge	Before:
	After:

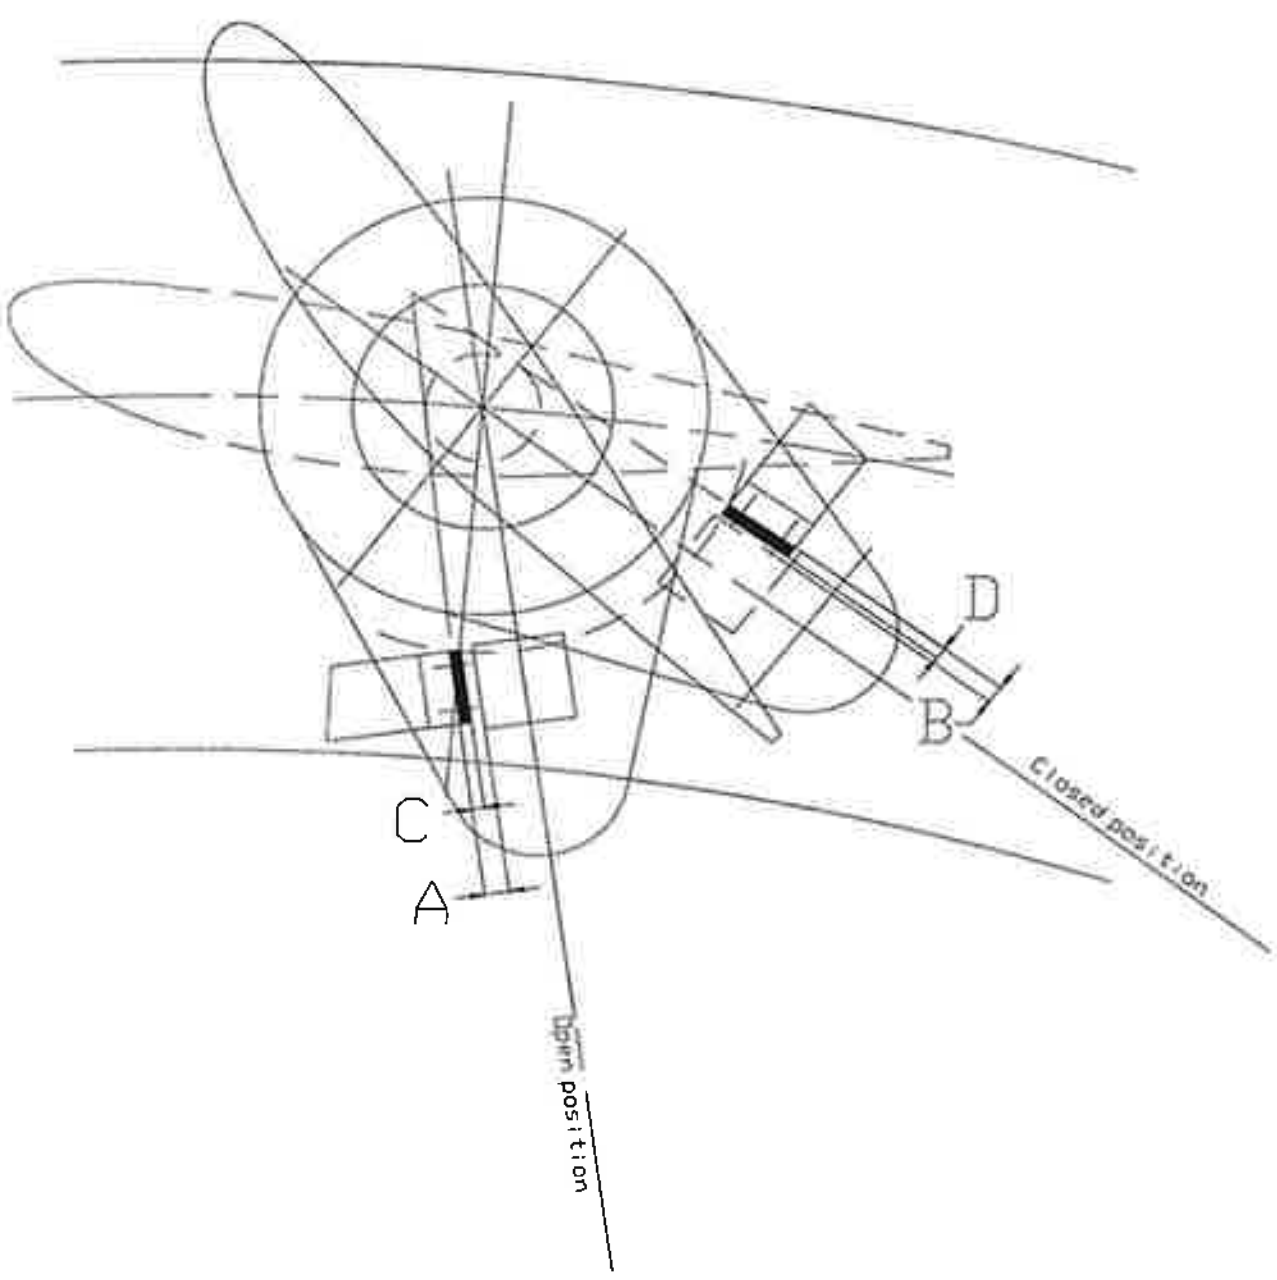

WICKET GATE #	OPENING SIDE GAP A mm	OPENING SIDE THICKNESS C mm	CLOSING SIDE GAP * B mm	CLOSING SIDE THICKNESS D mm
1			6,09	2,74
2			8,38	2,54
3			6,35	2,42
4			6,08	3,46
5			6,64	1,84
6			7,10	1,75
7			7,57	2,96
8			7,11	2,90
9			6,99	2,05
10			7,54	2,20
11			6,11	2,20
12			7,77	2,43
13			7,17	2,84
14			8,67	1,80
15			7,50	2,03
16			7,25	2,18
17			6,03	1,60
18			7,08	2,74
19			6,50	2,30
20			6,35	2,03

C = A - 6mm

(The minimum distance between gate lever and stopping pad is 6mm)

* Gap taken with the pad installed.

Measured by.: Tom Roddy (/ /)

GE Repres.: (Feb 7th, 2003)

Cust. Repres.: (/ /)

GE Canada International Inc.

Reference NC no.:

Comments:

Rev.: 0

Date: 03-01-07

	WICKET GATES CONTACT POINTS	QCR 1802
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1529

Measurement Instruments	Ambient Temperature
Feeler gauge	Before: —
	After: —

WITHOUT SM PRESSURE ☐
WITH SM PRESSURE ☒



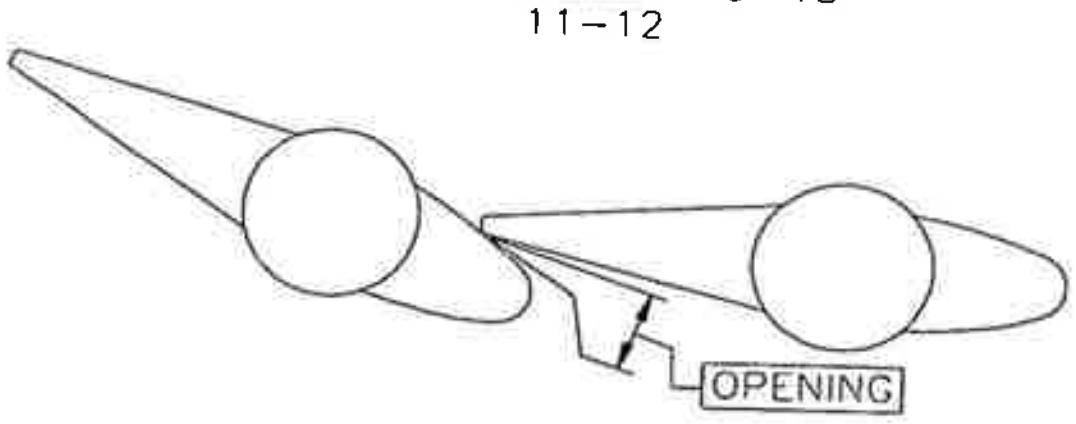

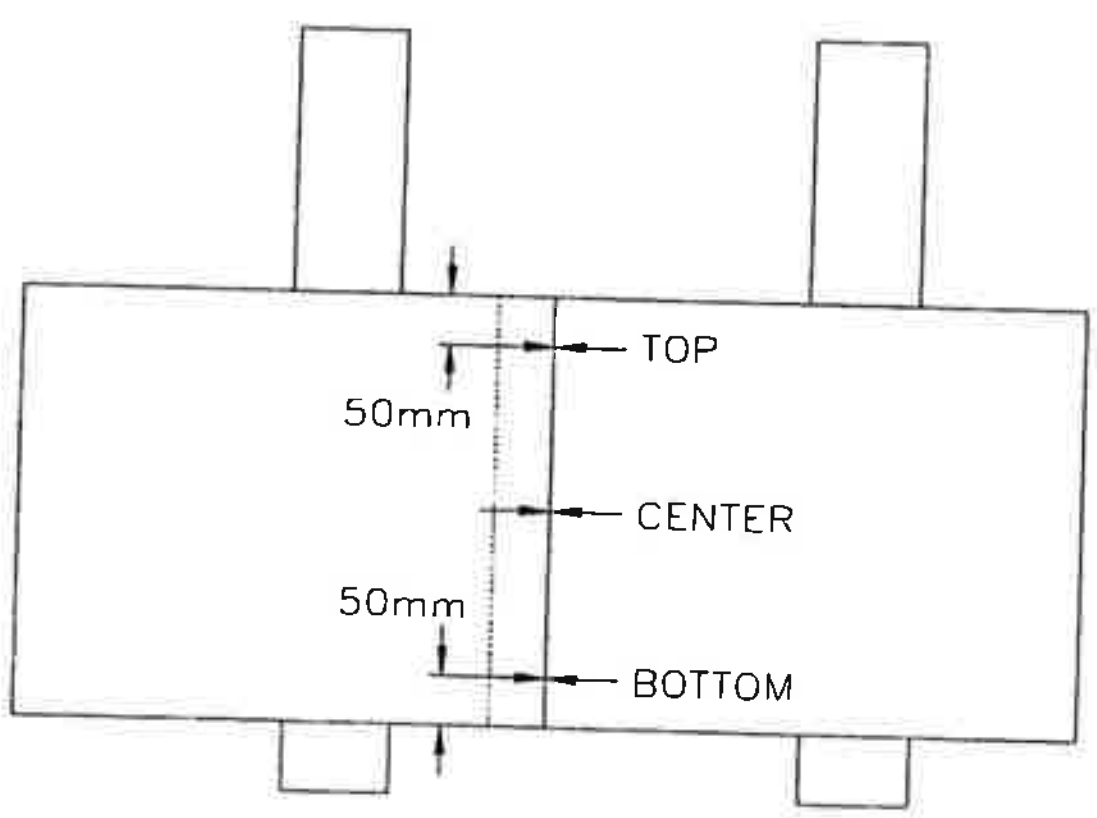

PTS	GAP (mm)			
	TOP	CENTER	BOTTOM	
1-2	0	0	0	
2-3	0	0	0.05	
3-4	0	0	0	
4-5	0	0	0	
5-6	0	0	0	
6-7	0	0	0,08	
7-8	0	0	0	
8-9	0	0	0	
9-10	0	0	0,05	
10-11	0	0,10	0	
11-12	0	0	0,10	
12-13	0	0	0	
13-14	0	0	0	
14-15	0	0	0,08	
15-16	0	0	0	
16-17	0	0	0,10	
17-18	0	0	0,05	
18-19	0	0	0,15	*
19-20	0	0	0,05	
20-1	0	0	0	

ADMISSIBLE MAX. OPENING = 0.13mm

* 0,15 mm on the lower 150mm

RECEIVED 22 Mar 2003

Measured by.:	MARC KITCHIN	(03/21/03)
GE Repres.:	Frank Benoit	(03/21/03)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: ____ Comments: ____	Rev.: 0 Date: 02-11-21

GENERAL INSPECTION REPORT	QCR 004
PROJECT: Seven Mile Unit: 4	ITP step no.: 1531

EQUIPMENT : **Torquing of servomotor # 1 supernut**

The servomotor # 1 supernut has been torqued at a value of 380 N.m.

Measured by.: F. Boulet (/ /)

GE Repres.: (Feb 26th 2003)

Cust. Repres.: (/ /)

GE Canada International Inc.	Reference NC no.: ____ Comments: ____	Rev.: 0 Date: 07/23/01

GE	SERVOMOTORS ADJUSTMENTS	QCR 1908
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1530,32

Measurement Instruments	Ambient Temperature
MICROMETER	Before: —
16326	After: —

ITP STEPS 1515, 1517, 1527, 1529, 1530, 1532

VARIABLE	STEP*	TYPE	INPUT	RESULT SM#1	RESULT SM#2
S1	2.17	Measured			
S2	2.18	Measured			
S	2.18	Calculated	S1, S2	12.36	13.48
d1	3.3	Measured			
d2	3.4	Measured			
Er	3.5	Calculated	d1, d2	15	15
e1	3.6	Measured		N/A	N/A
e	3.7	Calculated	e1, S, Er	N/A	N/A
e2	3.9	Measured		N/A	N/A

*From installation procedure SMI-U04-02056.

Some discrepencies were found while taking readings, so a different approach have been taken. On both Servomotors, the distance from SM Head to Rod End was measure, no pressure, Full pressure, 90% 80% ... down to 20%. then re-measured 0%, 40%, 50%, 60%. FROM these readings we got Er (15mm) so we limit the SQUEEZE to 80%, so 12mm

FOR MEASUREMENTS, SEE Joined

RECEIVED
MAR 03 2003

Measured by.:	Jake Zandervan / Doug Everitt	(Feb/ 11/03)
GE Repres.:	Frank Bo[illegible]	(Feb/ 11 /03)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 02-12-09

ITP 1532

APPENDIX FOR Q [illegible]R 1908 (Feb 11/03)

Seven Mile, Unit 4
Servomotor squeeze analysis
February 11th 2003

taken during lowering the pressure

Servomotor #1
Measurement taken between rod end and servomotor head

#	pressure (kpa)	% of nominal pressure	reading
1	0	0%	316.76
2	1400	20%	312.15
3	2150	31%	311.00
4	2820	41%	308.80
5	3300	47%	307.64
6	4100	59%	305.43
7	4830	69%	304.45
8	5520	79%	304.40
9	6255	90%	304.40
10	6950	100%	304.40
11	0	0%	316.52

from readings 4, 5, 6 compared to reading #2 :

Squeeze full pressure :	16.73
Squeeze 80% pressure :	**13.38**
Actual setting :	**12.36**

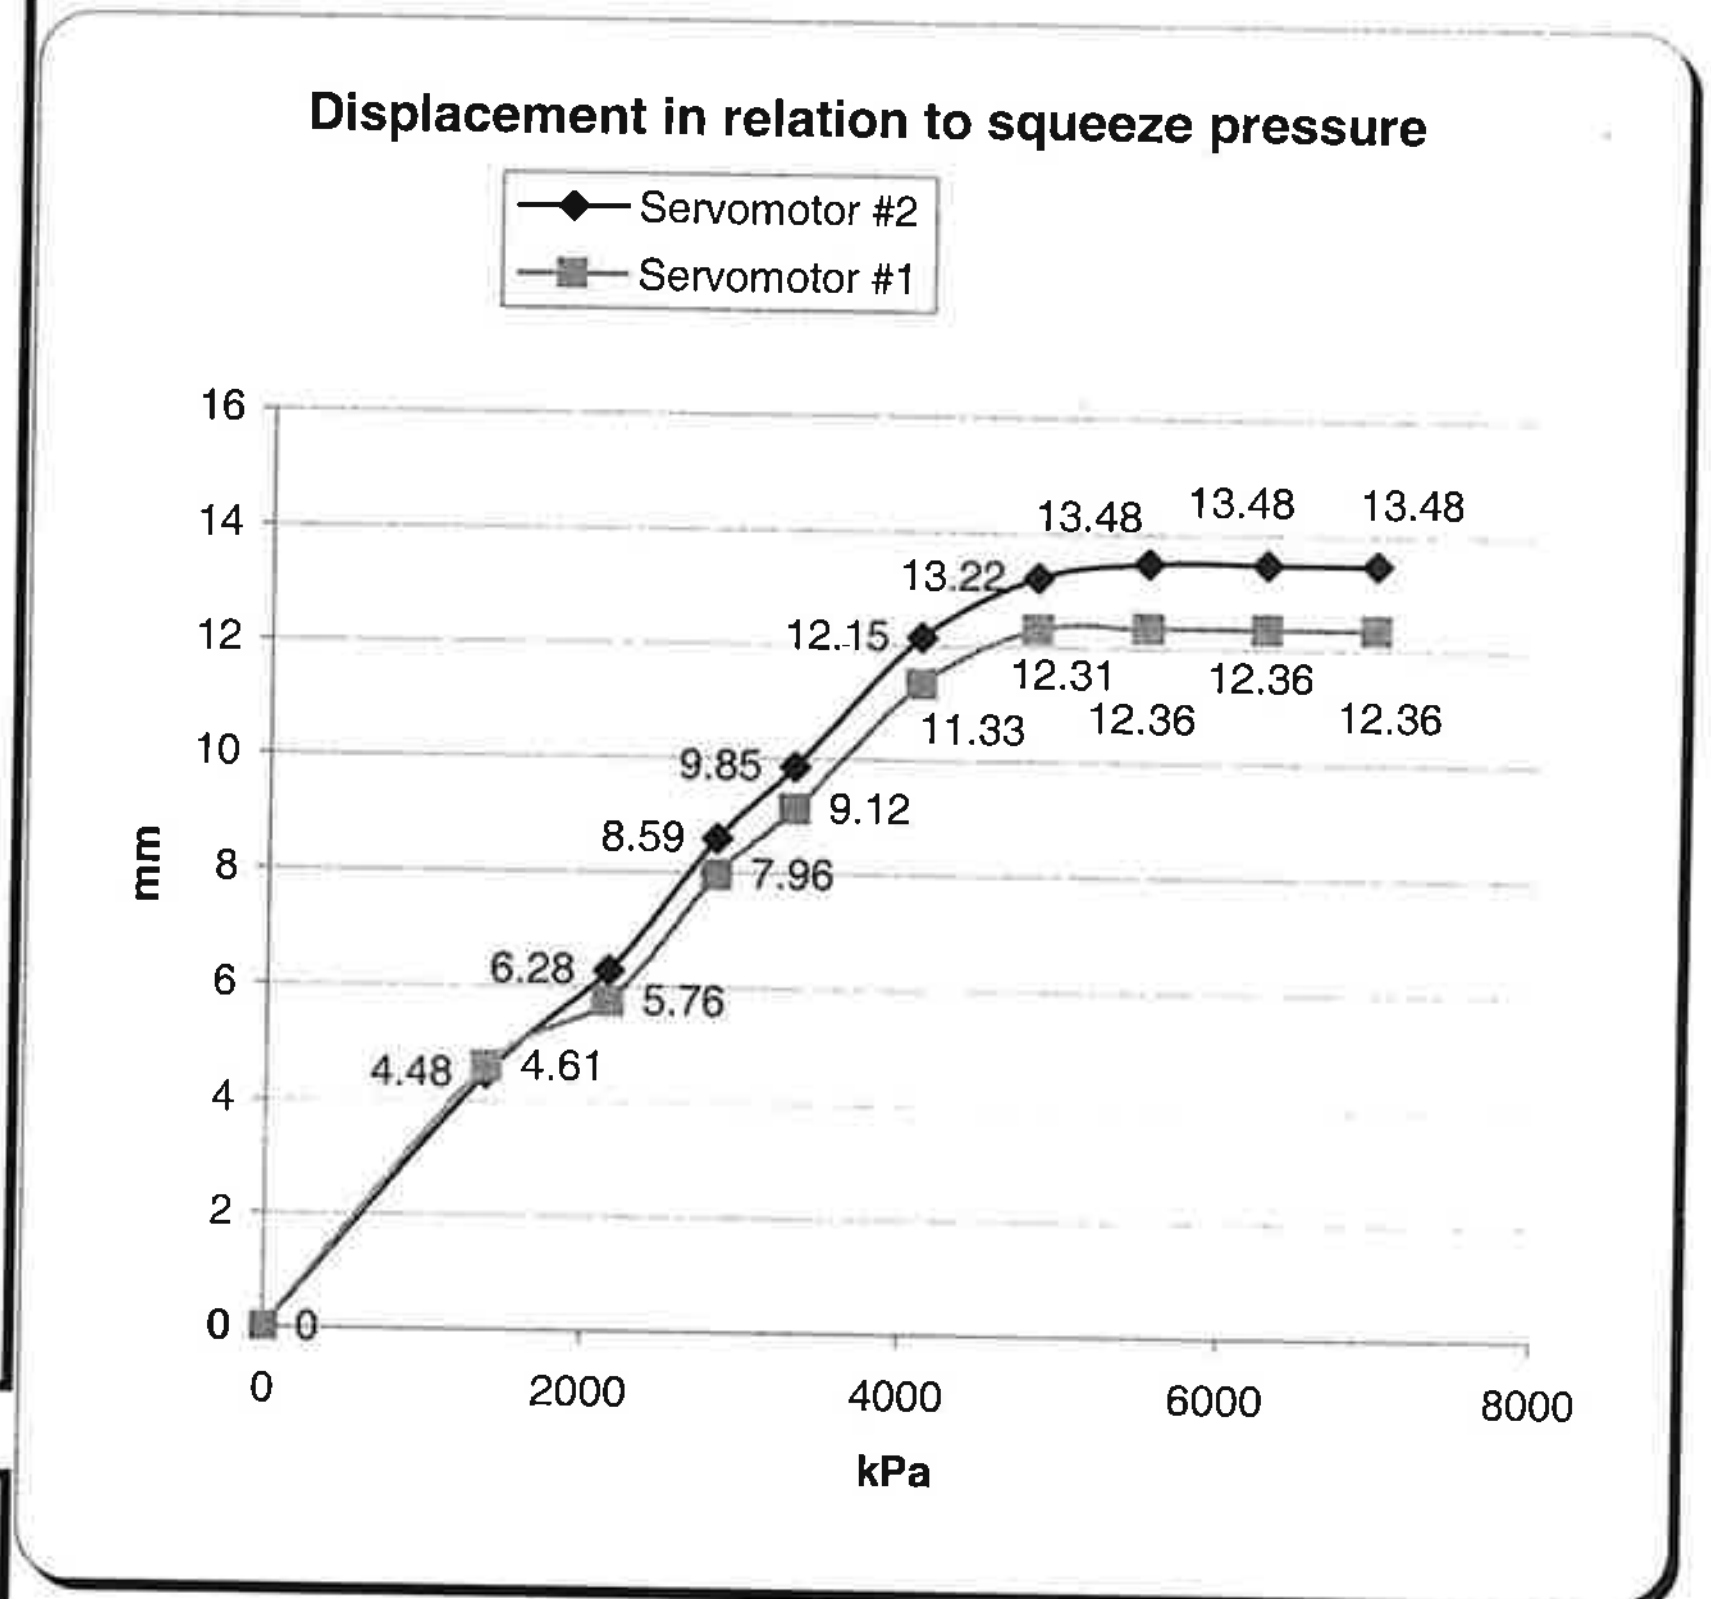

Servomotor #2
Measurement taken between rod end and servomotor head

#	pressure (kpa)	% of nominal pressure	reading	displacement
1	0	0%	999.42	0
2	1400	20%	1003.90	4.48
3	2150	31%	1005.70	6.28
4	2820	41%	1008.01	8.59
5	3300	47%	1009.27	9.85
6	4100	59%	1011.57	12.15
7	4830	69%	1012.64	13.22
8	5520	79%	1012.90	13.48
9	6255	90%	1012.90	13.48
10	6950	100%	1012.90	13.48
11	0	0%	999.60	

from readings 4, 5, 6 compared to reading #2 :

Squeeze full pressure :	19.83
Squeeze 80% pressure :	**15.23**
Actual setting :	**13.48**

taken during rising the pressure

servomotor #1

pressure (kPa)	reading	displacement
0	316.52	
2900	310.64	5.88
3300	309.74	6.78
4020	307.75	8.77

Servomotor #2

pressure (kPa)	reading	displacement
0	999.6	0
2900	1005.7	6.1

full squeeze:	14.5
80% squeeze:	11.6

RECEIVED
MAR 0 3 2003

	DISTANCE BETWEEN WICKET GATES	QCR 1816
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1534

Measurement Instruments	Ambient Temperature
Inside micrometer	Before:
	After:

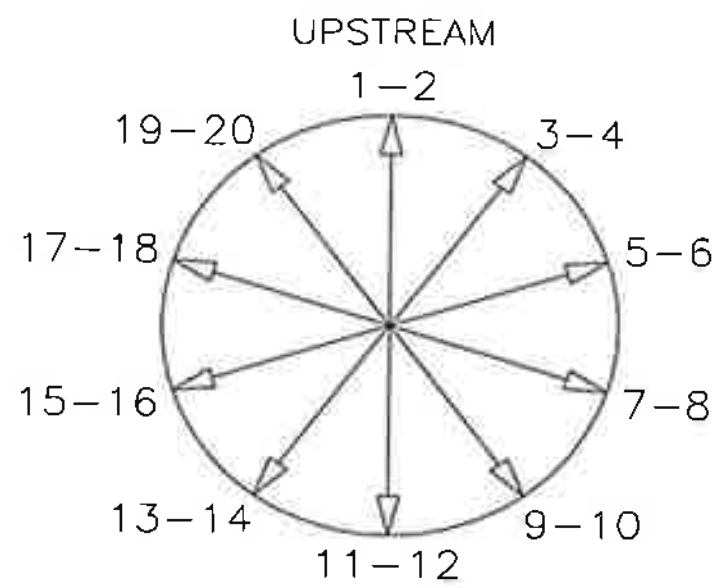

PTS	DISTANCE BETWEEN WG (mm)		
	TOP	CENTER	BOTTOM
1-2	603,40	603,52	603,78
5-6	603,48	603,64	603,60
9-10	604,25	604,20	604,14
13-14	604,87	604,85	604,75
17-18	604,75	604,41	604,15

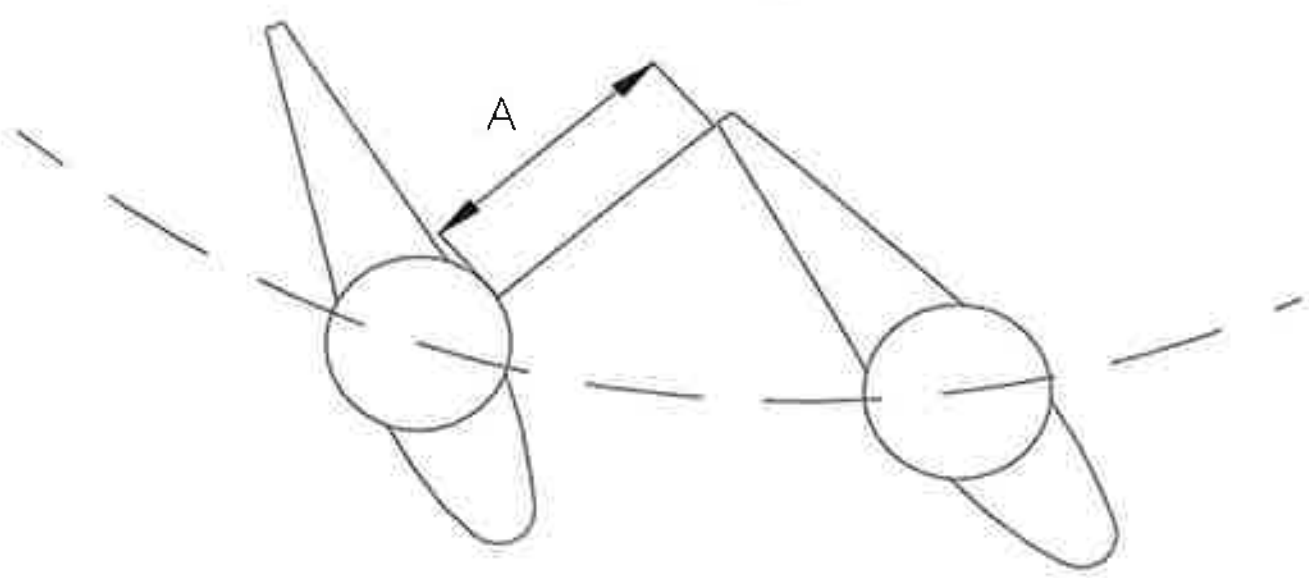

A is the smallest distance between the wicket gates (may be different from the sketch)

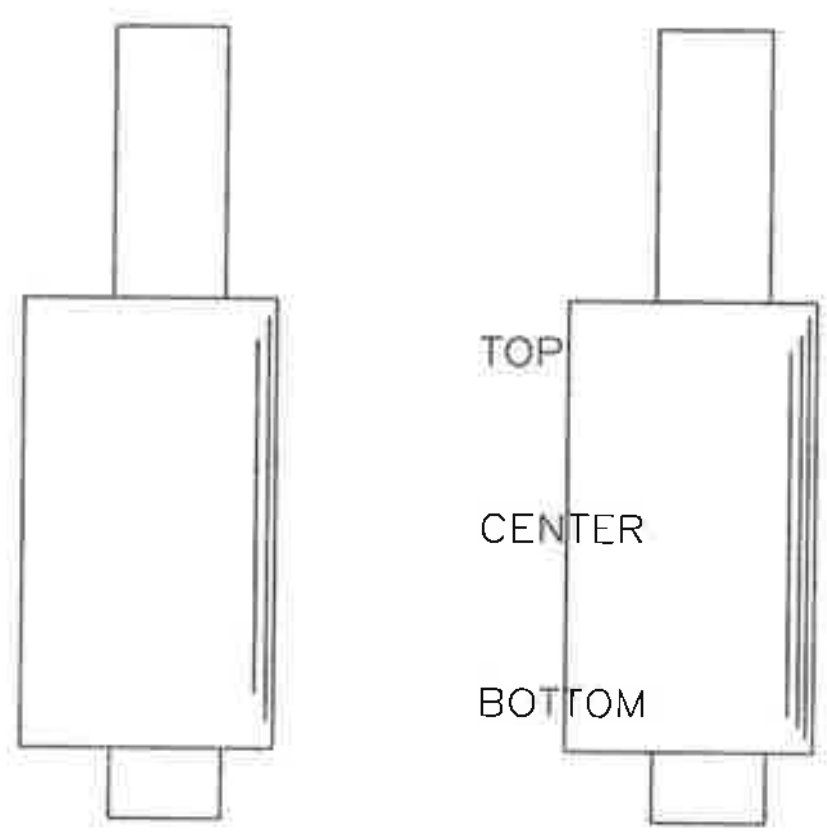

RECEIVED FEB 21 2003

CH

Measured by.: Jake Zandervan (Feb/18th/2003)

GE Repres.: [signature] (Feb/20th/2003)

Cust. Repres.: (/ /)

GE Canada International Inc.	Reference NC no.:	Rev.: 0
	Comments:	Date: 03-02-20

GE	SERVOMOTORS STROKE	QCR 1903
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1536

Measurement Instruments	Ambient Temperature
MICROMETER 16326	Before: — After: —

ITP: 1522, 1524, 1532, 1536, 1538

PTS	SM #1	SM #2
A (mm)	345.10	342.25
B (mm)	1030.35	1028,00
STROKE B - A	685.25	685.75

Reference Nominal Stroke - uncoupled: 698 mm

Reference Nominal Stroke - coupled: 682 mm ± 3

$A_{SQUEEZE}$	332.85	X
$B_{SQUEEZE}$	X	1039.80
$STROKE_{SQUEEZE}$	697.5	697.55

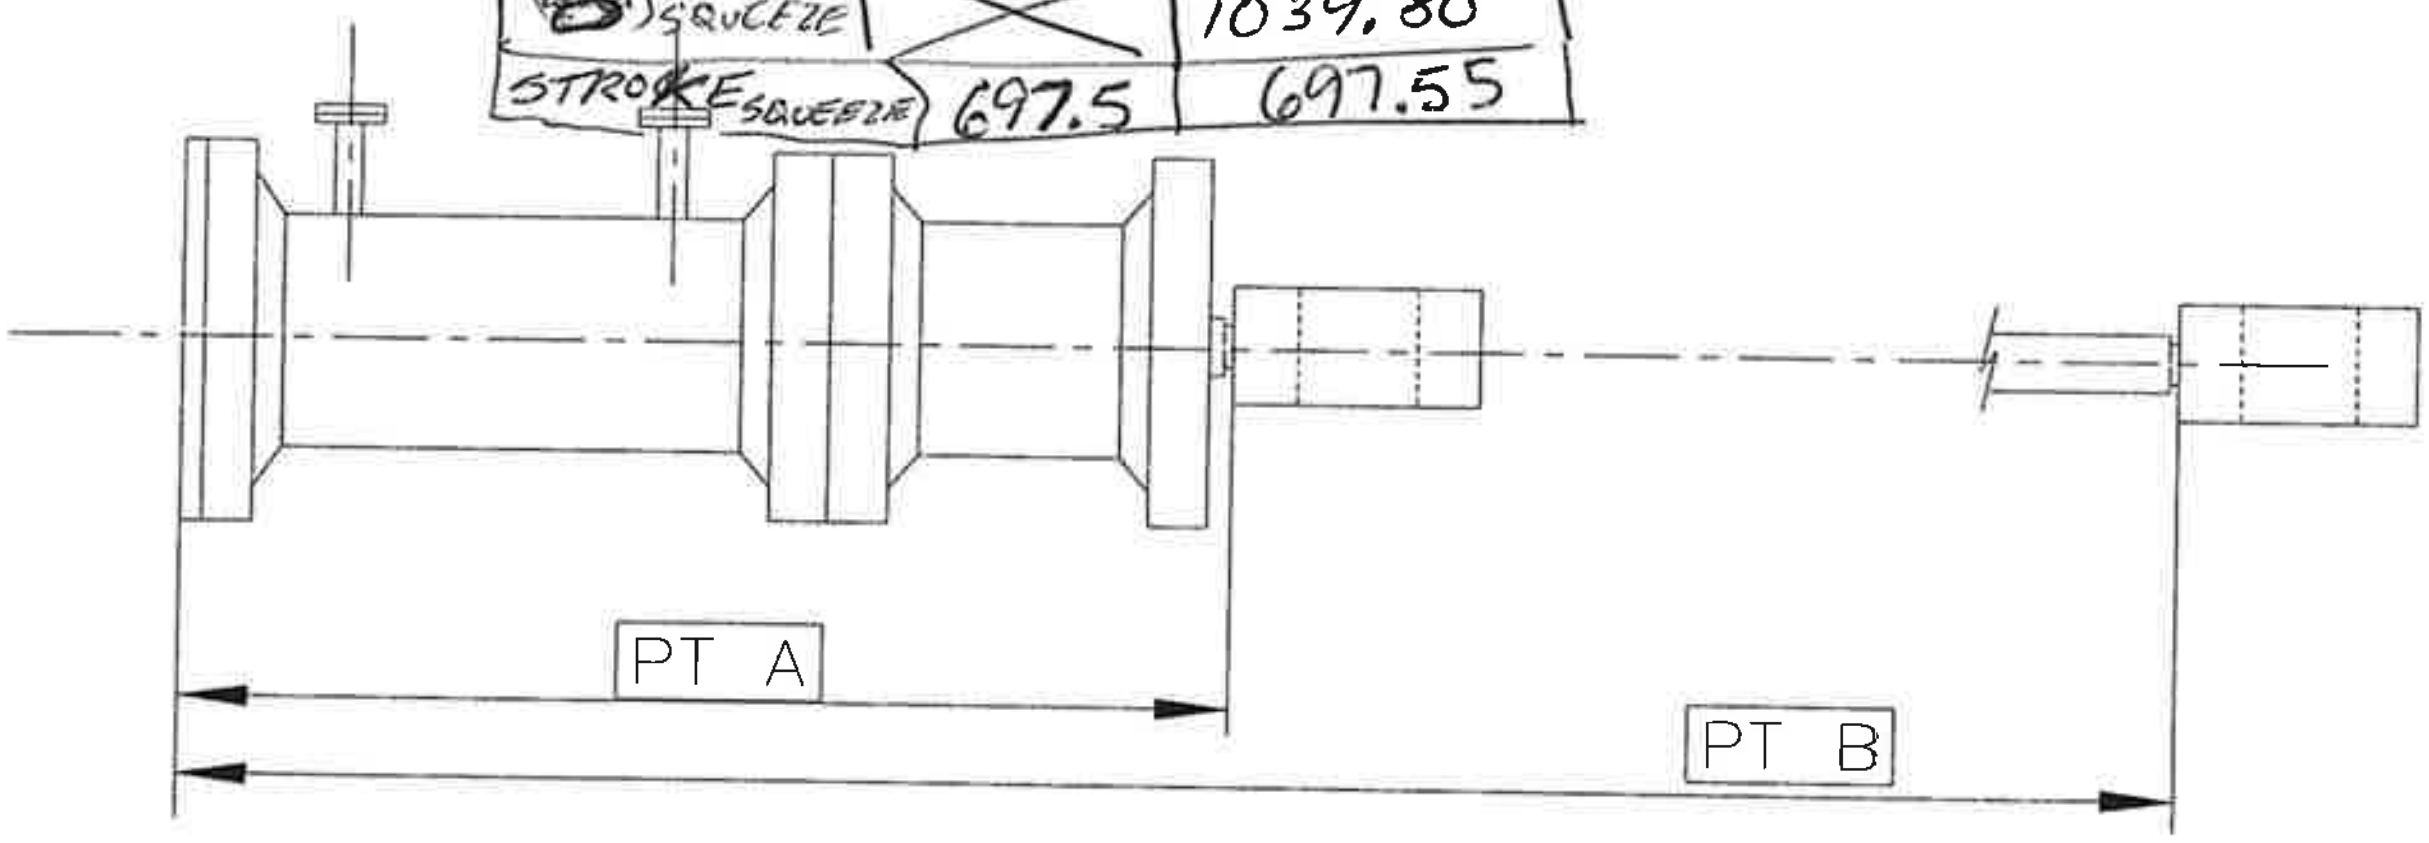

Actual SQUEEZE

SM#1 -> 12.25 mm

SM #2 -> 11.8 mm

Measured by.: [signature] Doug Everitt (Feb/11/03)

GE Repres.: [signature] (Feb/11/03)

Cust. Repres.: ____ (/ /)

GE Canada International Inc.	Reference NC no.: ____ Comments: ____	Rev.: 0 Date: 02-12-09

GE	SERVOMOTORS STROKE	QCR 1903
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1538

Final

Measurement Instruments	Ambient Temperature
Inside micrometer	Before: ______
______	After: ______

PTS	SM #1	SM #2
A (mm)	345,10	342,25
B (mm)	1030,35	1028,00
STROKE B - A	685,25	685,75

Reference Nominal Stroke - uncoupled: 698 mm

Reference Nominal Stroke - coupled: 682 mm ± 3

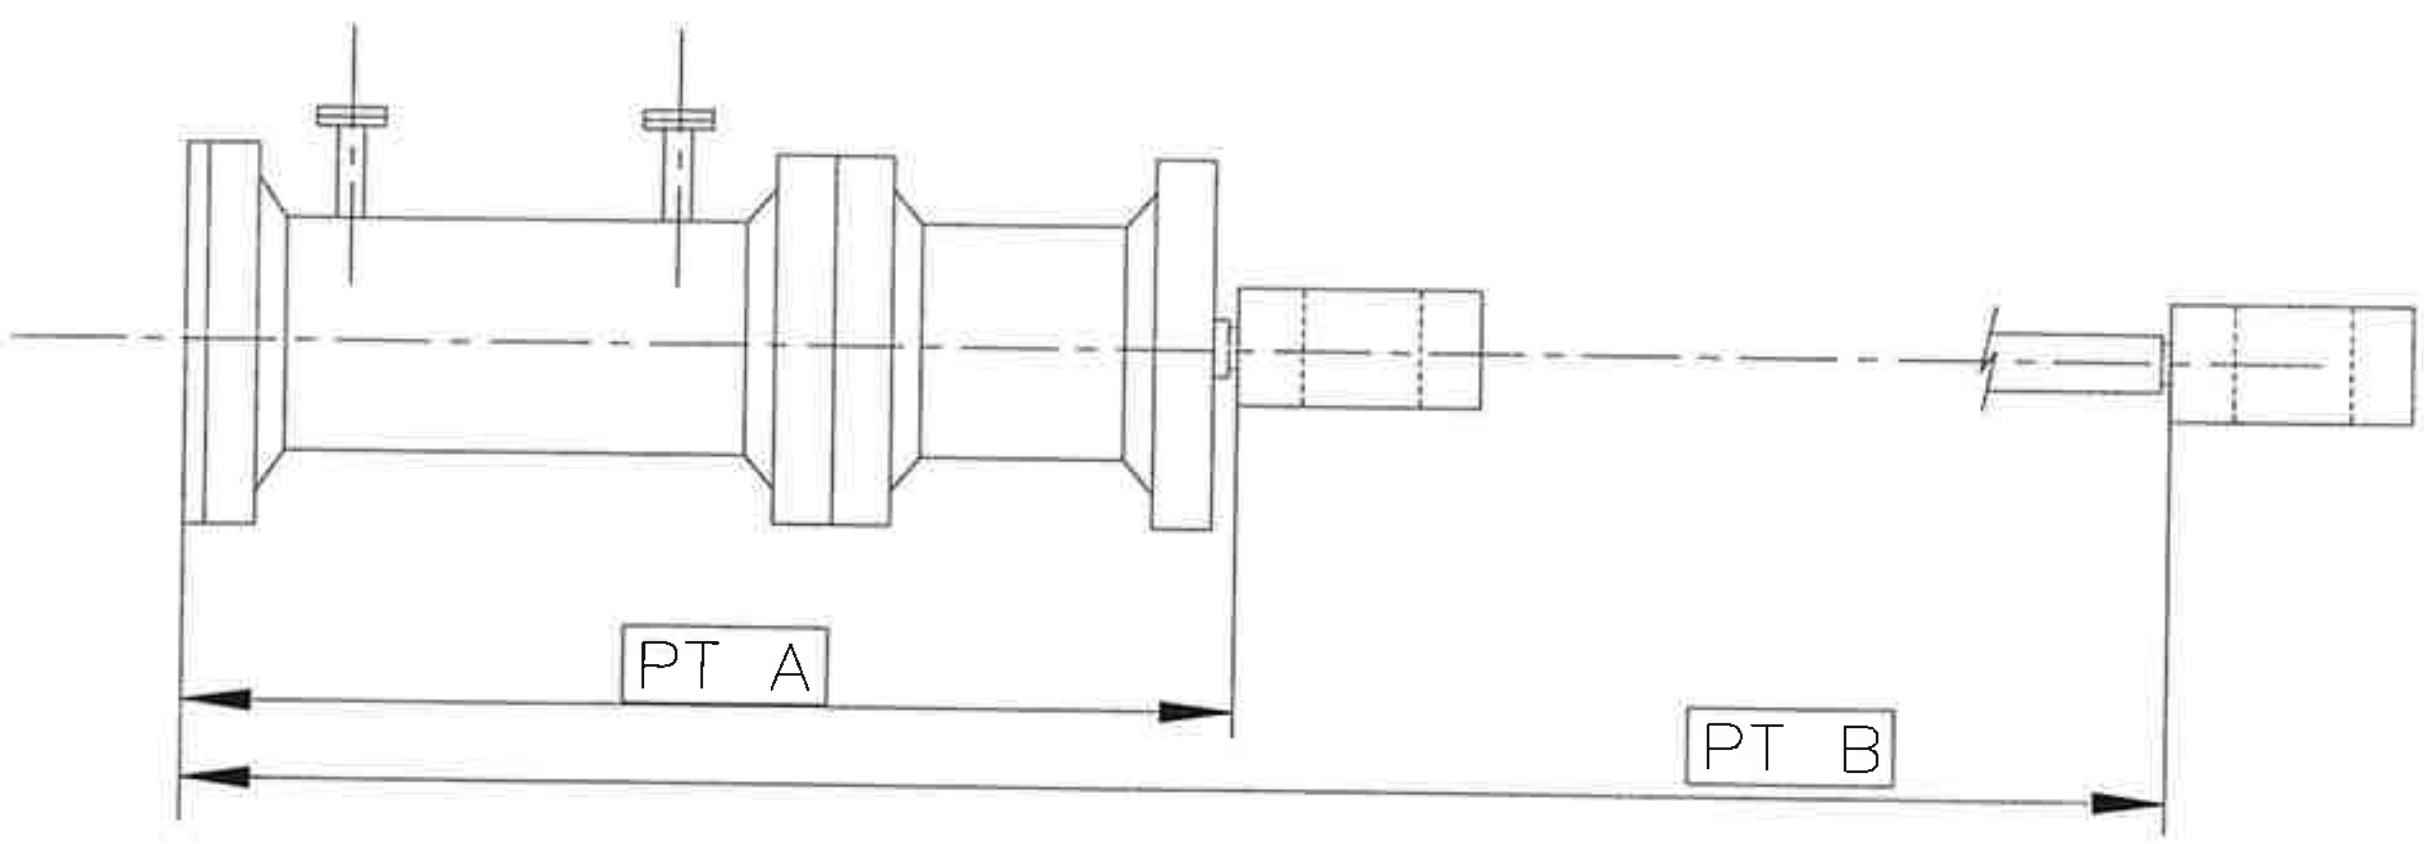

RECEIVED FEB 2 1 2003

Measured by.: Marc Kitchin (Feb/14th/03)

GE Repres.: [illegible] (Feb/18th/03)

Cust. Repres.: ______ (/ /)

GE Canada International Inc.	Reference NC no.: ______ Comments: ______	Rev.: 0 Date: 02-12-09

	GENERAL INSPECTION REPORT	QCR 004
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1539

EQUIPMENT : **Torquing of servomotor #2 supernut**

The servomotor # 2 supernut has been torqued at a value of 380 N.m.

RECEIVED
FEB 0 5 2003

Measured by.:	F. Boulet	(/ /)
GE Repres.:		(/ /)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 07/23/01

GENERAL INSPECTION REPORT	QCR 004
PROJECT: Seven Mile Unit: 4	ITP step no.: 1542

EQUIPMENT : **Servomotor #2 spacer machining**

The item #75 on servomotor 2 did not need machining. The spacer length is 318mm and the space is 342.5 mm. (See QCR 1903 of Feb 11th 2003 (step 1538)

RECEIVED
MAR 0 3 2003

Measured by.:	[signature]	(03/01/03)
GE Repres.:	[signature]	(03/01/03)
Cust. Repres.:		(/ /)

GE Canada International Inc.	Reference NC no.: ____ Comments: ____	Rev.: 0 Date: 07/23/01

	FINAL INSPECTION	QCR 003
	PROJECT: Seven Mile Unit: 4	ITP step no.: 1543

THIS FORM MUST BE COMPLETED BY THE TECHNICAL DIRECTOR, QUALITY ASSURANCE OR HIS REPRESENTATIVE.

THIS FORM MUST BE COMPLETED AT THE END OF WORK FOR EACH SECTION IN THE INSPECTION AND THE TEST PLAN.

ALL NON CONFORMANCES, DISCREPANCIES, ETC. MUST BE CORRECTED BEFORE COMPLETING THIS FORM.

ONLY THE SPECIFIED ITEMS IN CONTRACT ARE SUBMITTED TO THE FINAL INSPECTION.

	YES	NO	N/A
ALL WORK WAS COMPLETED IN CONFORMITY WITH INSTALLATION MANUAL AND DRAWINGS.	✓		
THE FINAL PRODUCT HAVE BEEN INSPECTED AT THE END OF WORK AND IS IN CONFORMITY WITH CONTRACT REQUIREMENTS.	✓		
ALL NON CONFORMANCES HAVE BEEN CORRECTED ACCORDING TO THE DISPOSITION INSTRUCTIONS.	✓		
ALL CORRECTIVE ACTION REQUESTS HAVE BEEN CORRECTED AT THE CUSTOMER SATISFACTION.	✓		
ALL QUALITY ASSURANCE REPORTS HAVE BEEN COMPLETED ACCORDING TO I.T.P.	✓		
ALL FORMS HAVE BEEN REVISED AND APPROVED BY THE QUALITY ASSURANCE REPRESENTATIVE.	✓		
APPROVAL OF ENGINEERING HAVE BEEN OBTAINED WHEN NECESSARY.	✓		
APPROVAL OF CUSTOMER OR HIS REPRESENTATIVE HAVE BEEN OBTAINED WHEN NECESSARY.	✓		

REF. N.C. AND C.A.R. NB.: NC-SM1-U04-21, 40, 41.

COMMENTS :

RECEIVED
5 Apr 03

Measured by.: [signature] (03/30/03)

GE Repres.: [signature] (03/30/03)

Cust. Repres.: [signature] (28/Apr/03)

GE Canada International Inc.	Reference NC no.: Comments:	Rev.: 0 Date: 07/23/01