

RemCam 2

User manual

by redsh

2010

Quick description


RemCam 2 is small utility for connecting remote video and audio devices.

Server command line parameters

cam2sv [port=N] [host=M] [pass=X]

parameter	description	type	range	default
port	Server port	Integer	1-65535	57011
host	Server interface	IP	-	0.0.0.0
pass	Server password	String	0-63 chars	not set

Phonebook window

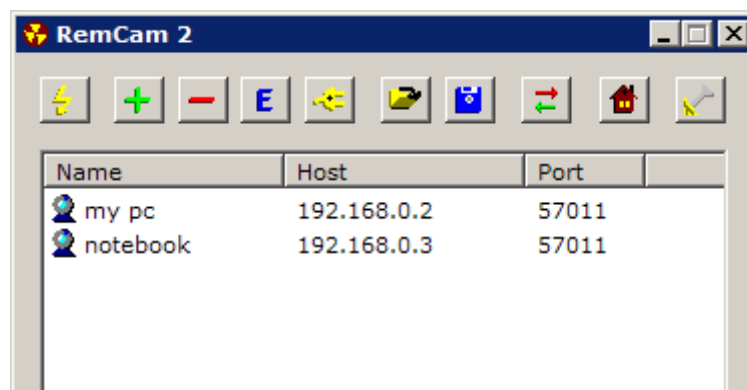

- Quick connect



- Add contact



- Delete selected contact(s)



- Edit selected contact



- Connect to selected contact



- Import phonebook



- Export phonebook



- Ping phonebook records





- About program




- Place window on top

Connection window

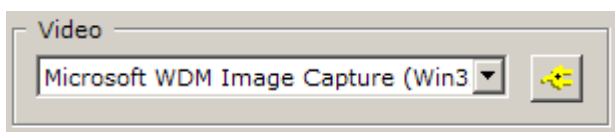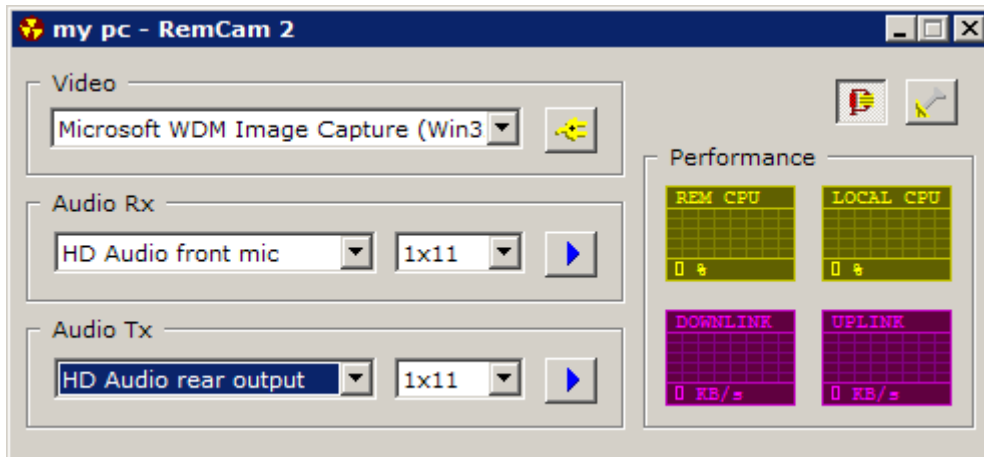

- Video capture menu




- Video capture device




- Open capture window



- Audio capture menu



- Audio capture device




- Audio capture mode (mono/stereo) and samplerate (kHz)



- Start capture




- Audio translation menu




- Audio translation mode (mono/stereo) and samplerate (kHz)




- Start translation




- Remote computer CPU load



- CPU load



- Incoming traffic, kbytes/sec



- Outgoing traffic, kbytes/sec





- Traffic compression on/off



- Place window on top


Video capture window

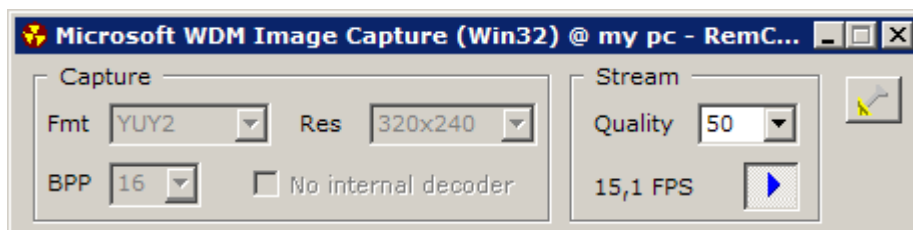

Raw video capture format (not available when capture started)




- Raw video capture bits per pixel (not available when capture started)




- Video resolution (not available when capture started)



- Don't use built-in decoders while decompressing captured stream, only system codecs will be used.



- Stream compression quality



- Frames per second



- Start capture



- Place window on top