

# Warmup Project

---

Jonas Kazlauskas | Sam Kaplan

Quantitative Engineering Analysis 2 | Fall 2020

This is the first project of QEA2 at Olin College of Engineering.

In order to solidify our understanding of differential equations and heat transfer, we are designing a passive solar house for Vermont. A passive solar house combines interior features, exterior landscaping, and architectural design choices to ultimately heat the house with minimal electricity and fossil fuels.

The basic principles of a passive solar house are an aperture (window) to let solar radiation in, an absorber and thermal mass to absorb and store the heat from the sun, and some components of heat transfer to evenly distribute the heat throughout the house. Additionally, there are often some control elements to adjust the amount of solar radiation coming in throughout the changing seasons, and thermal insulation can be useful to retain heat in colder climates.

For our house, we plan on starting with a simple house design to get a feel for how heat moves throughout the building. We plan on utilizing a south facing window with an overhang roof to let the sun in when we need it during the winter and block it out during the summer when it is naturally warmer. This is because in the northeast the sun takes a lower southern path during the winter, and a higher path during the summer. To absorb and store all of this solar radiation, we plan on using a large slab of tile as our floor. Additionally, Vermont can get quite cold during the winter, so we will be insulating all of our walls and our floor.

Some sections for the future:

- [Minimum Viable Project](#)
- [Some Math \(and MATLAB\)](#)
- [Moonshot](#)
- [Lessons Learned](#)



## Minimum Viable Project

Ideal orientation is true north but orientations of up to 20° west of north and 30° east of north still allow good passive sun control

Some assumptions that we make with our model are:

- The house is on stilts and therefore the heat loss from all sides of the house are equal
- Heat capacity of our tile floor is much greater than the rest of the house, therefore we can ignore the rest.
- Our tile floor is suspended above our insulation (no conduction of heat)
- Air flow in and out of the house is negligible
- All solar radiation hitting the windows is absorbed, and solar radiation on other parts of the house is negligible
- Heat storage unit is at a spatially uniform temperature

## Some Math (and MATLAB)

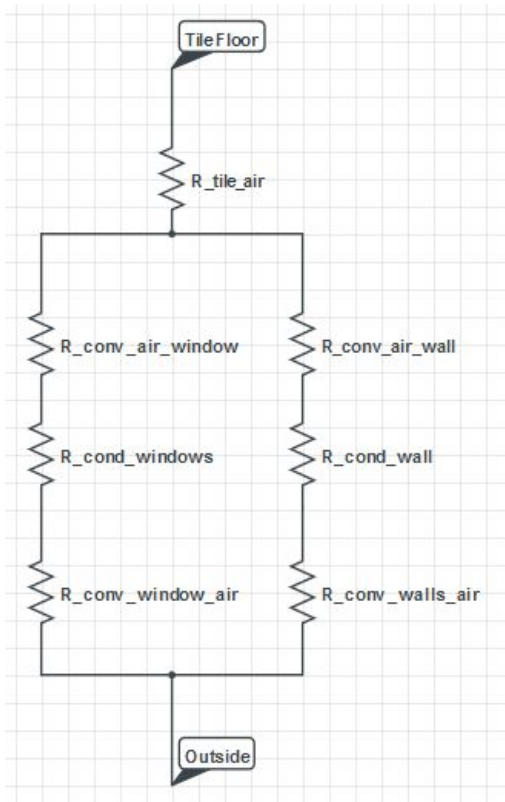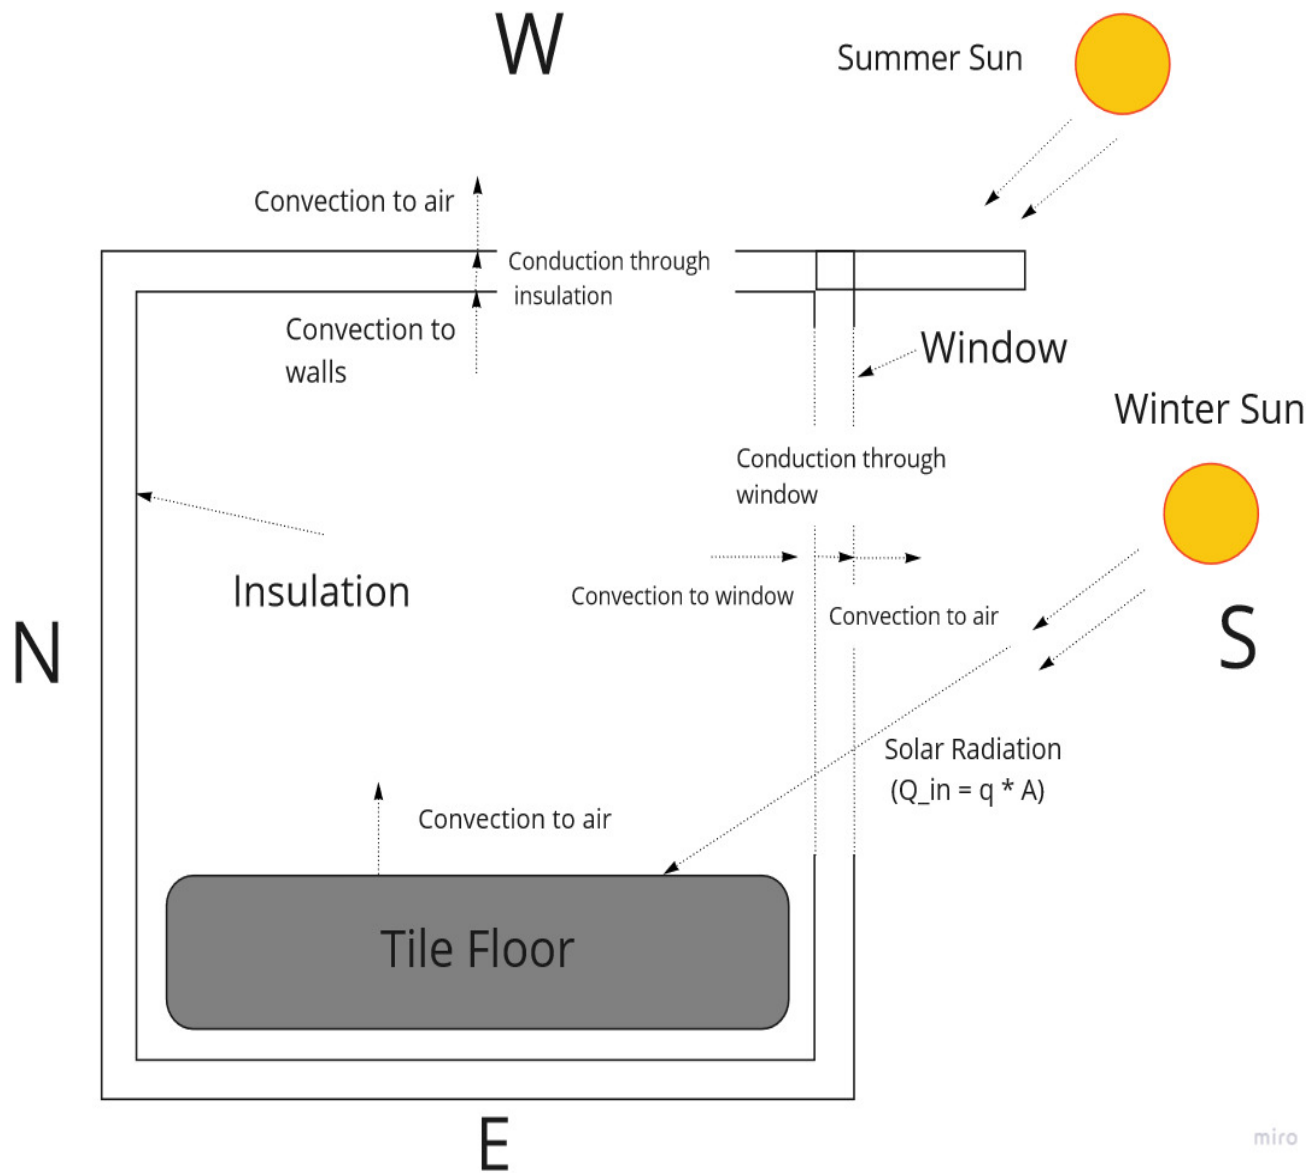

## Heat Transfer Equations

ODE for temperature inside the house:

$$q \cdot A - \frac{(T_{in} - T_{out})}{(R_{tot})} = m \cdot c \cdot \frac{dT_{in}}{dt}$$

where

$$R_{tot} = \frac{1}{h_{tile-air} \cdot A_{tile}} \left( \frac{1}{h_{air-wall} \cdot A_{wall}} \frac{L_{wall}}{K_{wall} \cdot A_{wall}} \frac{1}{h_{wall-air} \cdot A_{wall}} \right)^{-1} \left( \frac{1}{h_{air-window} \cdot A_{window}} \frac{L_{window}}{K_{window} \cdot A_{window}} \frac{1}{h_{window-air} \cdot A_{window}} \right)^{-1}$$

This equation tells us that given a set of house material properties, sizes, and solar radiation we can determine the temperature over time of the house. Some major assumptions are that solar radiation and the outside temperature are constant.

## Moonshot

Stretch goal of weird offset house?

## Lessons Learned