


CX1020-N0xx

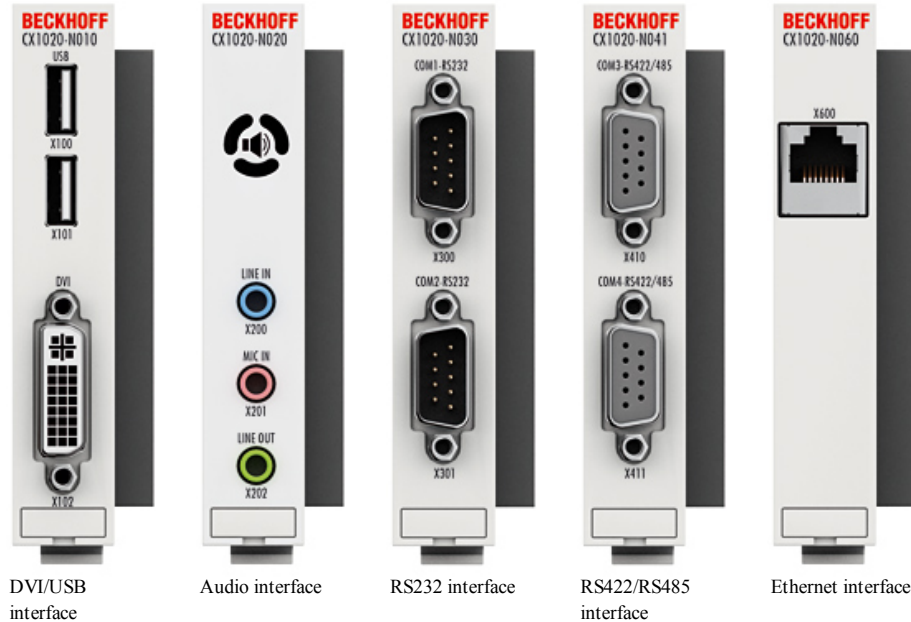

CX1020-N0xx | System interfaces

A number of optional interface modules are available for the basic CX1020 CPU module that can be installed ex factory. The CX1020-N010 option connects Beckhoff Control Panels or standard monitors with DVI or VGA input via the DVI or USB interfaces. Devices such as printer, scanner, mouse, keyboard, mass storage, CR-RW, etc. can be connected via the USB 2.0 interfaces. Multimedia capability is realised via the CX1020-N020 audio interface. The modules CX1020-N030 and CX1020-N040 offer a total of four serial RS232 interfaces with a maximum transfer speed of 115 kbaud. These four interfaces can be implemented in pairs as RS422/RS485, in which case they are identified as CX1020-N031 and CX1020-N041 respectively. The system interfaces cannot be retrofitted or expanded in the field. They are supplied ex factory in the specified configuration and cannot be separated from the CPU module. The internal PC/104 bus runs through the system interfaces, so that further CX components can be connected. The power supply of the system interface modules is ensured via the internal PC/104 bus.

Technical data	CX1020-N010	CX1020-N020	CX1020-N030 CX1020-N040
Interfaces	1 x DVI + 2 x USB 2.0 (max. 500 mA per port)	Line IN, Line Mic IN, Line OUT	1 x COM1+2, RS232, 1 x COM3+4, RS232
Type of connection	DVI-I 29-pin socket + 2 USB ports type A	3.5 mm socket for jack plug	2 x D-sub plug, 9-pin
Properties	DVI-I interface also carries out VGA signals (DVI-A)	built-in PC beeper, Line OUT output, max. 200 mW, suitable for earphones	max. baud rate 115 kbaud, cannot be used simultaneously with N031/N041
Power supply	via system bus (through CX1100-xxxx power supply modules)		
Dimensions (W x H x D)	19 mm x 100 mm x 51 mm		
Weight	approx. 95 g		
Operating/storage temperature	0...+55 °C/-25...+85 °C		
Relative humidity	95 %, no condensation		
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27		
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4		
Protection class	IP 20		

Technical data	CX1020-N031 CX1020-N041	CX1020-N060
Interfaces	1 x COM1+2, RS422/RS485, 1 x COM3+4, RS422/RS485	1 x Ethernet, 10/100 Mbit/s
Type of connection	2 x D-sub socket, 9-pin	1 x RJ 45
Properties	max. baud rate 115 kbaud, cannot be used simultaneously with N030/N040	max. baud rate 100 Mbit/s, max. 20 m cable length CAT5, cannot be used simultaneously

Power supply	via system bus (through CX1100-xxxx power supply modules)
Dimensions (W x H x D)	19 mm x 100 mm x 51 mm
Weight	approx. 95 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protection class	IP 20