


KiT88

Integrated Valve amplifier


Signal circuit (one channel)

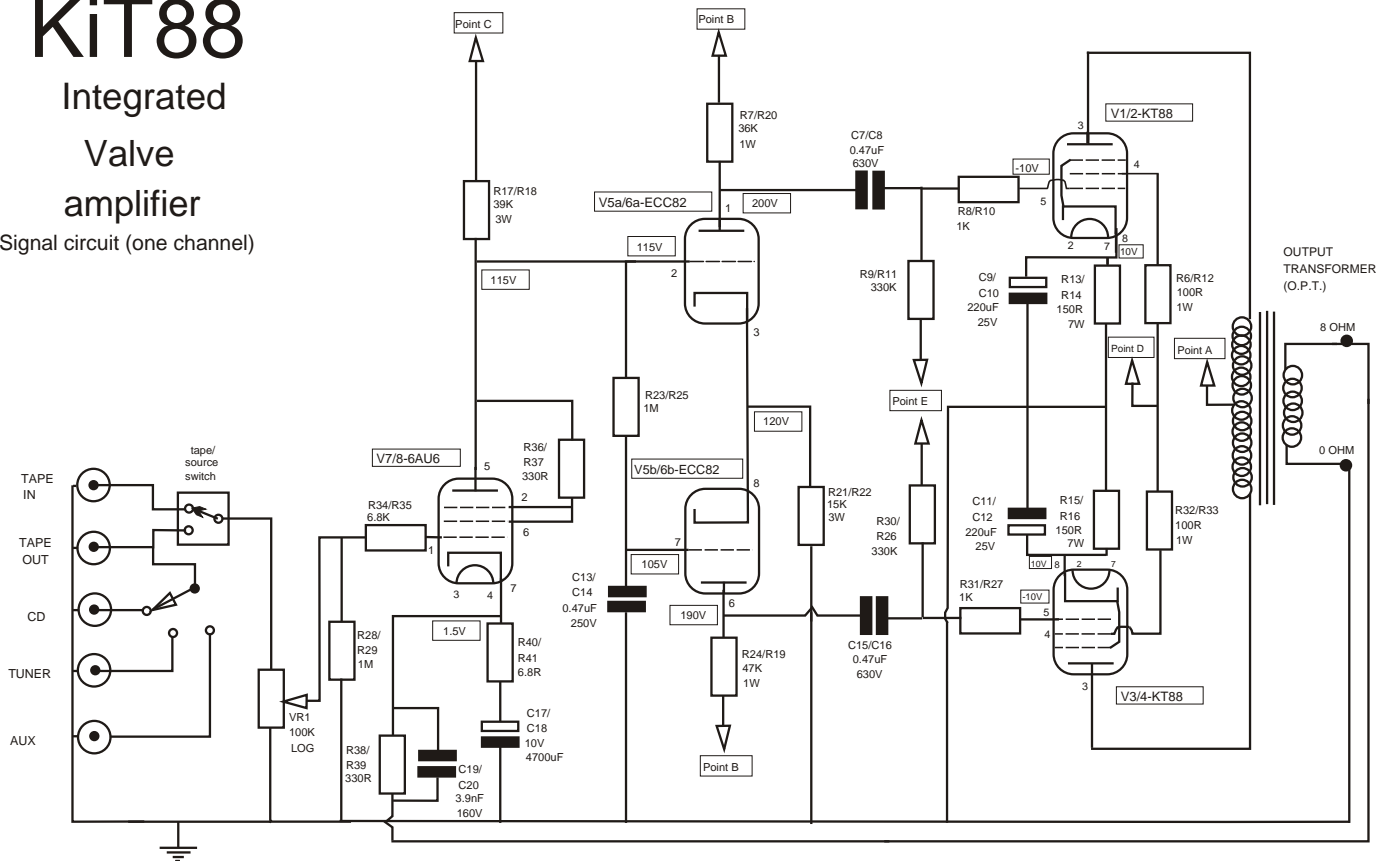


Power supply unit (both channels)

For 230V/240V operation: join windings in series, join violet & grey together and insulate. Brown is 230V/240V and blue is 0V.

For 110V/ 120V operation: join windings in parallel, join brown & grey together, becoming 110V/120V and join blue & violet together, becoming 0V.

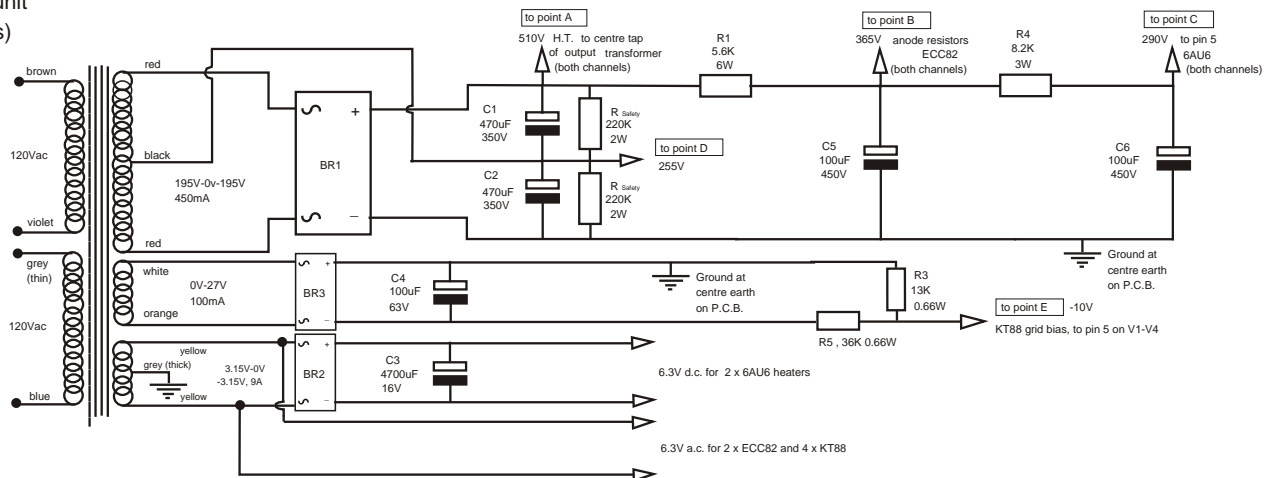

Valve pin layout

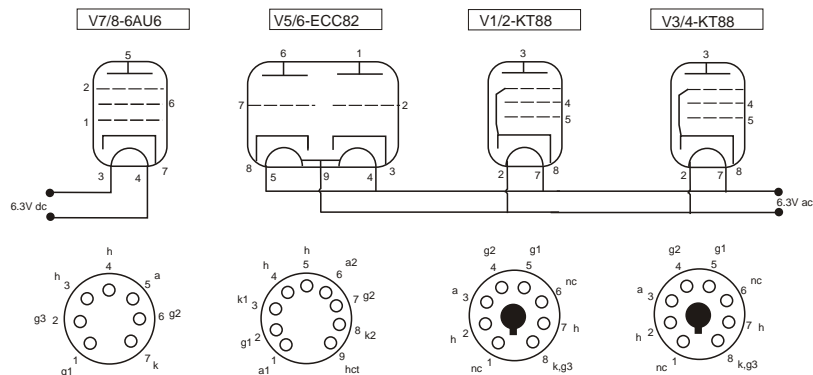

Views are from underneath valve or valve holder
G1=h= heater hct= heater centre tap k= cathode a= anode nc= no connection