


KEL 80 MONOBLOCK CIRCUIT DIAGRAM


SIGNAL CIRCUIT

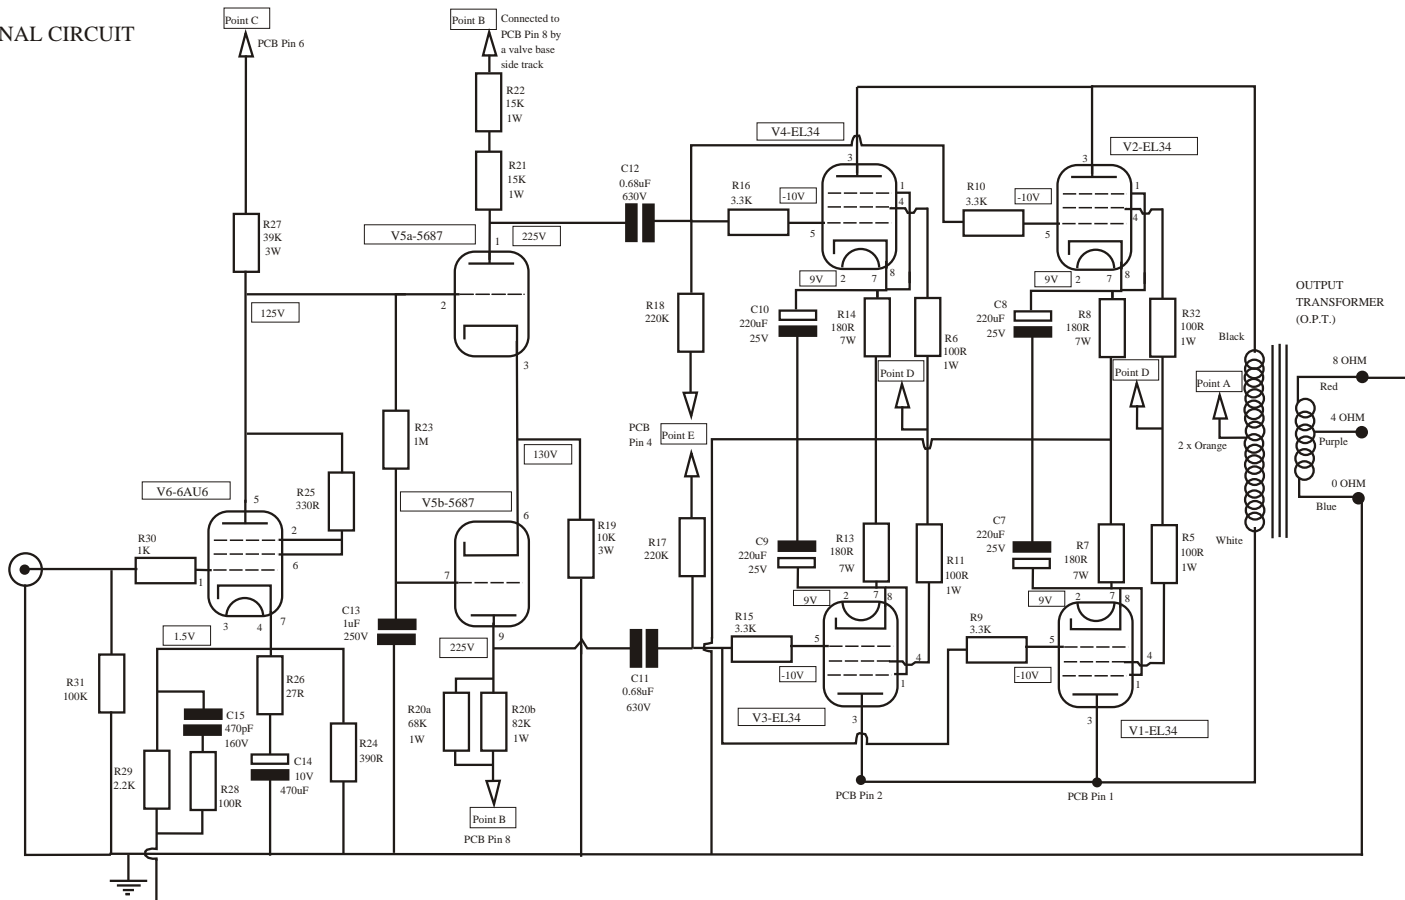


POWER SUPPLY UNIT

For 230V/240V operation:
join windings in series, join
violet & grey together and
insulate. Brown is
230V/240V and blue is 0V.

For 110V/120V operation:
join windings in parallel,
join brown & grey together,
becoming 110V/120V and
join blue & violet together,
becoming 0V.

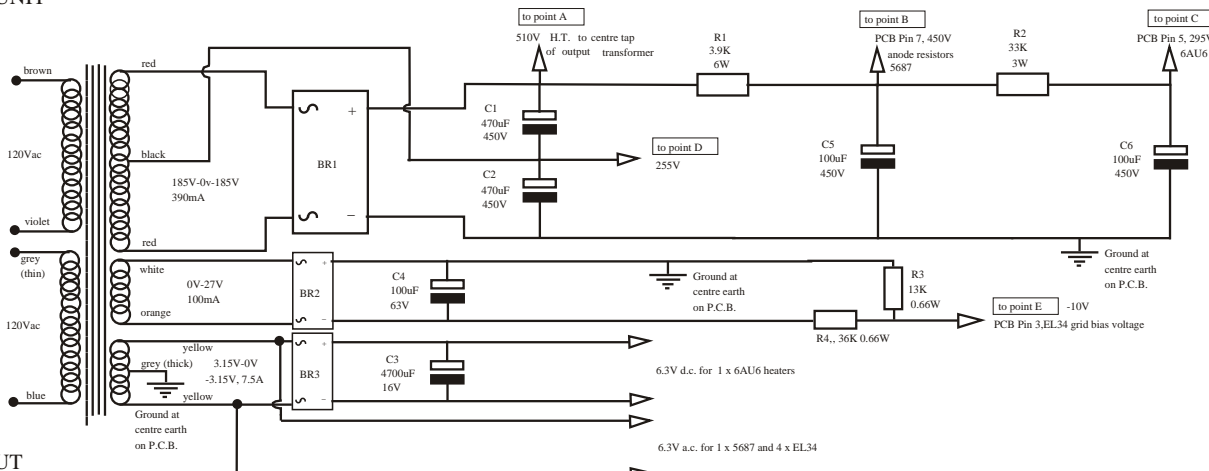

VALVE PIN LAYOUT

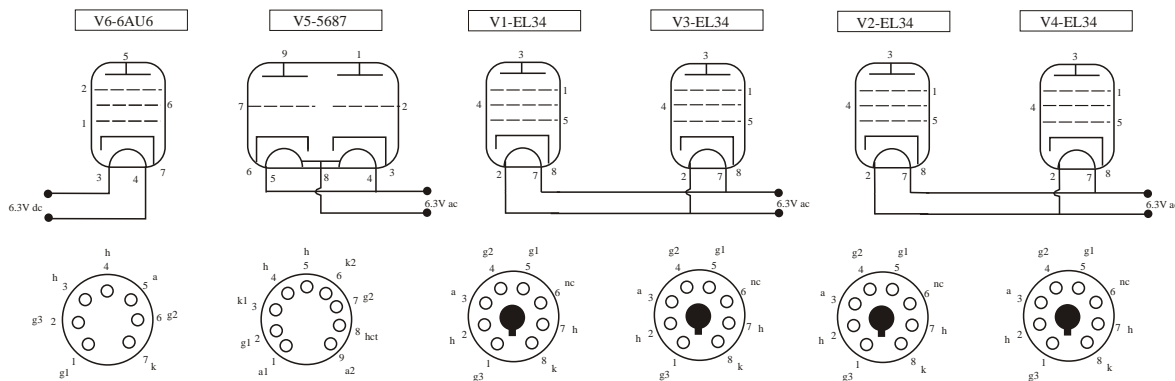

Views are from underneath valve or valve holder
h = heater hct = heater centre tap k = cathode a = anode nc = no connection