

# Concrete Resurfacing System


- √ Tentex<sup>™</sup> Spray on Paving
- √ Tentex<sup>™</sup> Spray on Color Thru
- √ Tentex<sup>™</sup> Spray on Graphic Design



Paving the Right Surface

## **Concrete Resurfacing System**

#### Tentex™ Spray on Paving

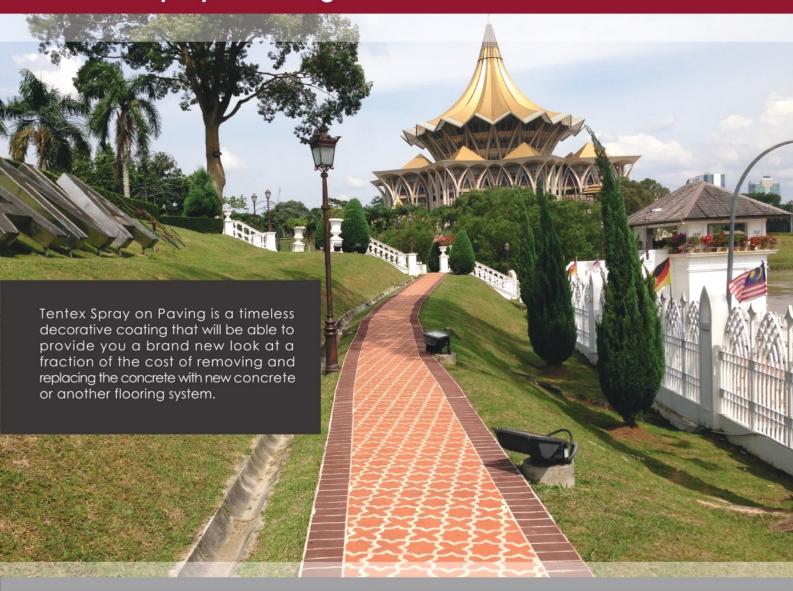


With a wide selection of colours, designs and patterns, this resurfacing method will help you to create a truly original surface that will invigorate your existing concrete and breathe new life to the place.

Whether you are renovating or building your dream home, our range of Tentex Spray on Paving will complement any style or custom graphics, allowing you to design the exact look you desire and bring your imagination to life.


By combining the most advances textured concrete coatings with the latest sealing technologies, our final results will definitely create a lasting impression that will keep us on top of your list.



## Concrete Resurfacing Pattern Range




Bushrock Av. Brick Size 340mm




Classic Herringbone Av. Brick Size 90 x 195mm




Cobblestone Av. Brick Size 150 x 250mm




Convict Brick
Av. Brick Size 300mm




Diamond Tile Tile Size 225 x 225mm




European Fan




Large Tile Tile Size 265 x 265mm




Random Stone
Av. Brick Size 115 x 250mm




Running Bond Av. Brick Size 100 x 197mm




Cobble Rosette Diameter 1.6m



Diamond Diagonal 1.6m



Star Compass Diameter 1.6m (N,S,E,W Letters Available)



Brick Header



Cobble Header Brick Size 195mm



Convict Header Brick Size 200mm

## **Concrete Resurfacing Colour Range**



## Concrete Resurfacing System

#### Tentex™ Spray on Color Thru

Like an artist working on a blank canvas, coloured concrete teases the imagination and truly captures a designer's individuality and flair; and with that Tentex Spray on Colour Thru does the magic.

Despite being able to assume nearly any shape, design, pattern or texture but the one characteristic that truly distinguishes decorative concrete is color.

Adding the Flair in Concrete

Whether used subtly to blend with nature or boldly to make a dramatic design statement, this line of concrete would enable to draw out the picture that was in your imagination and apply it to your driveway, pathway and patios.

### Tentex™ Spray on Graphic Design



First impressions are everything and by being able to create visually dramatic graphics on concrete floors will take people's breath away.

When graphics are executed property, with a dynamic design and the appropriate blend of colours, it makes for a rather difficult situation to forget and that is what we do with Tentex Spray On Graphic Design, we'll make sure that impression stays.

Be it on public places, residential or industrial, this technology is a proven concept within the precast concrete industry and is implemented an extensive number of projects globally, demonstrating the versatility of this artist's tool.

#### Like a Stroke of an Artist's Brush



The unique characteristic of Spray On Graphic Design allows it to form to the grooves and crevasses of the applied surface, giving the appearance of a painted image.





### Tentex (Malaysia) Sdn Bhd

No.23, Jalan Batu Kawa, 93250 Kuching, Sarawak, Malaysia.

Phone : +6082 682 333 Fax : +6082 682 211

Email: tentexmsia@gmail.com Website: www.tentex.com.my



#### **Your Decorative Concrete Applicator**

#### PRECAUTIONS AND LIMITATIONS

The aggregates and other raw materials used to make our decorative concrete are products by nature and therefore are subject to variation in colour, size and shape. The photos in the brochure are for illustration purpose only, and variations in colour and shading may also occur depending on the job conditions, chosen texture and finishing practices employed by your contractor. Tentex is a decorative product and is not intended for purely structural applications. It is not a repair material and all necessary works (including epoxy, crack fill with limitations) should be carried out by a professional in a suitable manner before applications. It is advised to confirm your required colour and texture with your contractor before proceeding with the application works. Colours may vary between resurfacing (spray on) and throw on (dry shake) products due to the variation in formula and application techniques. The printed colors shown in this brochure may vary not fully represent the applied case due to vary printer characteristics.