

TM

Ten tex

Sports Flooring

Tentex™ Acrylic Sports Court Coating

- Concrete Surface
- Bitumen Surface



Sporting a Touch of Class

WHY TENTEX?

Tentex Acrylic Sports Court Coating is 100% premium acrylic all-weather surfaces be it for indoor or outdoor application.

These technologically advanced, acrylic, water-based products are widely appreciated as the benchmark for high quality sports floor coatings, which the surface texture can also be controlled by using various amounts of fine graded sand.




An ideal for:

- BADMINTON • BASKETBALL • FUTSAL
- NETBALL • TENNIS • ATHLETIC TRACKS
- OTHER MULTIPURPOSE SPORTS SURFACE

A coating system is only as good as its preparation and in the Tentex system there is a full series of preparation compounds to ensure that the surface is correctly prepared.

Whether rejuvenating an existing court or creating a new one from the ground up, at Tentex, we will always provide you with the best products at the best value.

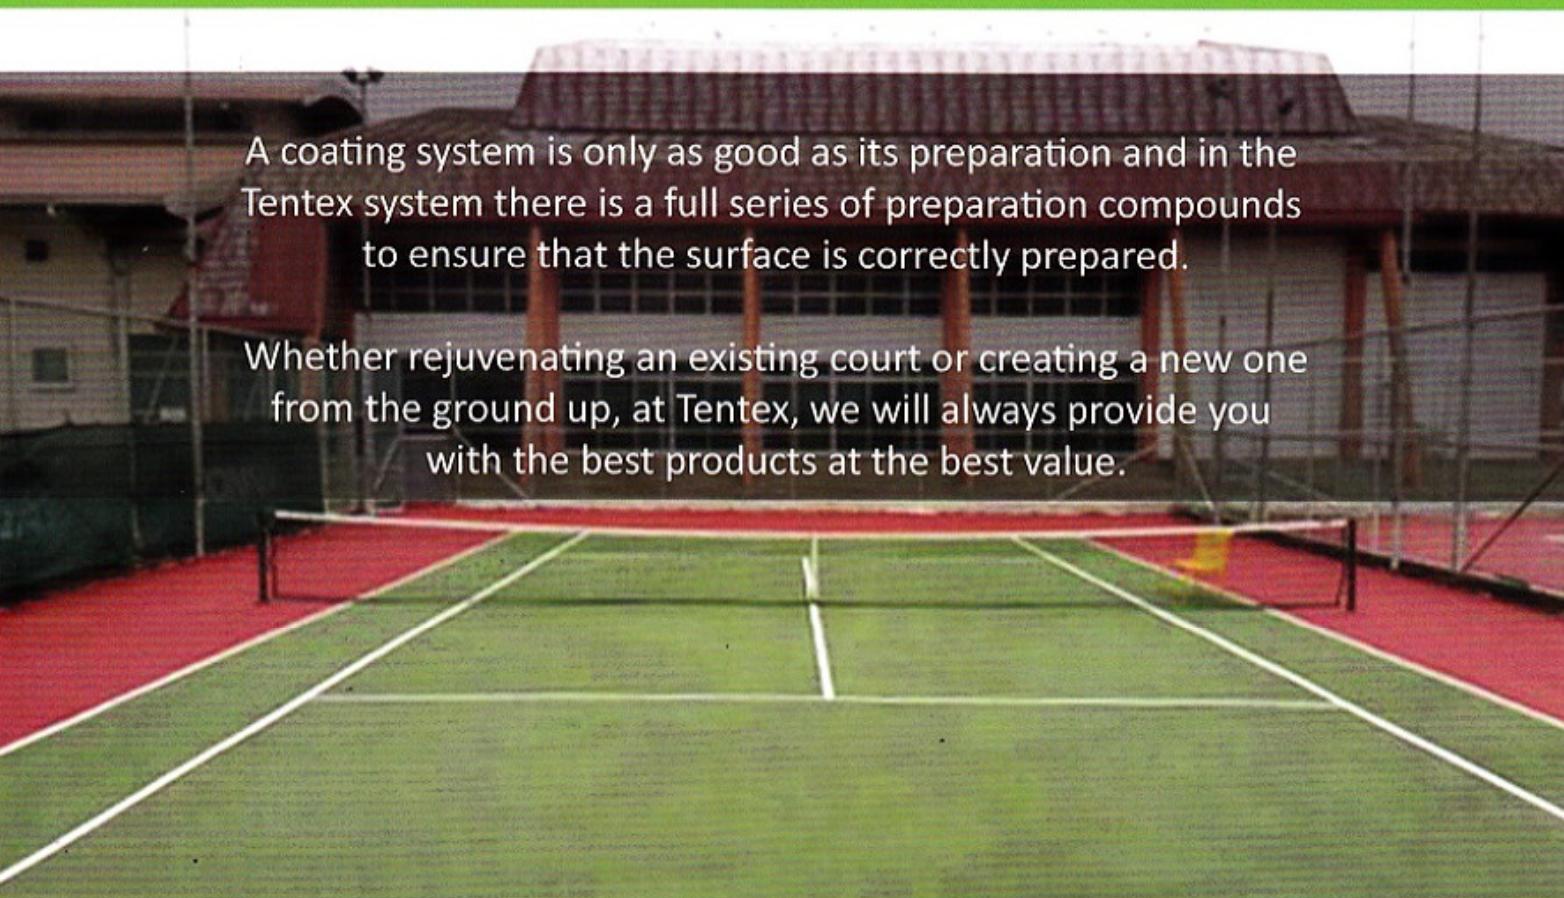



SPORTS FLOORING COLOUR RANGE



Beige



Fawn



Yellow



Blue



Green



Red

*Also available in White.

*Colours shown are used as guide only. The printed colours shown in this chart may vary not fully represent the applied case due to vary printer characteristics.



Manufacturer :

Tentex (Malaysia) Sdn Bhd

No.23, Jalan Batu Kawa,
93250 Kuching, Sarawak, Malaysia.

Phone +6082 682 333

Fax +6082 682 211

Email tentexmsia@gmail.com



Website : www.tentex.com.my

Your Decorative Concrete Applicator

PRECAUTIONS AND LIMITATIONS

The aggregates and other raw materials used to make our decorative concrete are products by nature and therefore are subject to variation in colour, size and shape. The photos in the brochure are for illustration purpose only, and variations in colour and shading may also occur depending on the job conditions, chosen texture and finishing practices employed by your contractor. Tentex is a decorative product and is not intended for purely structural applications. It is not a repair material and all necessary works (including epoxy, crack fill with limitations) should be carried out by a professional in a suitable manner before applications. It is advised to confirm your required colour and texture with your contractor before proceeding with the application works. Colours may vary due to the variation in formula and application techniques. The printed colors shown in this brochure may vary not fully represent the applied case due to vary printer characteristics.

For more information, phone your Decorative Concrete Specialists +6082 682 333