

Concealed Hinges

Premium hinge systems
for cabinet doors



www.blum.com

 **blum**[®]

Think outside the toolbox

Our services support you throughout your entire process – from planning, to design, all the way through to manufacturing. Take advantage of our tried-and-tested and user-friendly services for your projects with Blum hinges. Our services are tailored to assist you every step of the way. Scan the QR code below to learn more and sign-up for Blum's E-SERVICES.



Find out more about our
E-SERVICES:
blum.com/e-services



Sign up now for a free
E-SERVICES account.
e-services.blum.com

Information on-demand



Download now:
blum.com/easy-assembly-app


Available for iOS
and Android

Download our EASY ASSEMBLY App for quick access to assembly and installation instruction sheets and videos. Whether you are in the cabinet shop or on the jobsite, the EASY ASSEMBLY App is at your fingertips whenever you need it.

NOTE: See page 99 to learn more about our services.

Quick reference


Hinge cup centerpoint

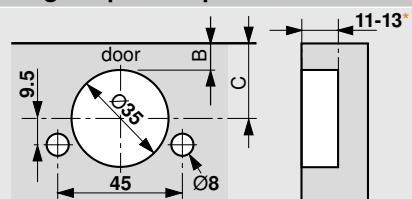

*Cup Depth varies depending on hinge being used.

C = cup centerpoint					
20.5	21.5	22.5	23.5	24.5	25.5
13/16"	27/32"	7/8"	15/16"	31/32"	1"
3	4	5	6	7	8
B = Boring distance					


Hinges per door

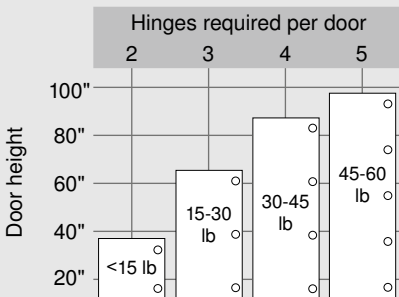

This chart can serve as a guide for determining the number of hinges per door. Note that door weight can also determine the number of hinges required.

NOTE: The distance between the top and bottom hinges must be greater than the width of the door

Hinge abbreviation key

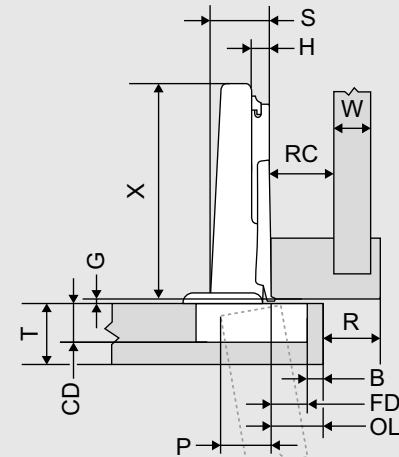

B = Boring distance CD = Cup depth
FD = Fixed distance G = Gap H = Plate height
OL = Front overlay P = Door protrusion
RC = Recess R = Reveal S = Side arm protrusion
T = Door thickness W = Side panel thickness
X = Depth arm protrusion

Fixed distance (FD)

The distance that the cup overlays the cabinet side panel when a hinge is attached to a 0 mm mounting plate.
This is used to calculate hinge overlay with the formula **FD+B-H = OL**
(Fixed distance + boring distance minus plate height = overlay)

Conversion chart

mm	inch	
1	1/32	.031
1.5	1/16	.063
2	3/32	.094
3	1/8	.125
4	5/32	.156
5	3/16	.188
5.5	7/32	.219
6	1/4	.25
7	9/32	.281
8	5/16	.313
9	11/32	.344
9.5	3/8	.375
10	13/32	.406
11	7/16	.438
12	15/32	.469
13	1/2	.5
13.5	17/32	.531
14	9/16	.563
15	19/32	.594
16	5/8	.625
17	21/32	.656
17.5	11/16	.688
18	23/32	.719
19	3/4	.75
20	25/32	.781
20.5	13/16	.813
21	27/32	.844
22	7/8	.875
23	29/32	.906
24	15/16	.938
24.5	31/32	.969
25.4	1	1

Elegant design, superior function

Every Blum hinge is built for the long run—tested to 200,000 opening and closing cycles to guarantee lasting quality and dependable performance. These hinges combine precision engineering with the confidence cabinetmakers, designers and homeowners expect.



Concealed Hinges

4	Product overview	77	BLUMOTION for COMPACT hinges
7	Hinge program overview	78	Inward opening door
8	Onyx black	80	Machines
10	CLIP top BLUMOTION	84	Assembly aids
23	CLIP top	87	Dowel cross reference
36	CLIP	88	General specifications & adjustments
37	Angled	94	Quality & testing standards
48	CLIP mounting plates	96	CLIP top door path closing specifications
54	CLIP accessories	98	Services
56	TIP-ON for doors	100	Part number index
60	BLUMOTION for doors	104	moving ideas
64	COMPACT overview		
66	COMPACT CLIP		
68	COMPACT BLUMOTION		
73	COMPACT accessories		
74	COMPACT		



CLIP top BLUMOTION

Soft-close BLUMOTION is seamlessly integrated into the hinge, eliminating the need for additional assembly after adjustment, and is available in both nickel and onyx black finishes.



CLIP top

Like other CLIP hinges, CLIP top enables easy three-dimensional adjustment with Blum's spiral tech depth adjustment.



CLIP

The tried and tested CLIP mechanism offers simple, tool-free hinge assembly. It is the industry standard for tool-free attachment since 1985.



Angled hinges

Angled hinges provide a tremendous array of possibilities for the professional cabinet designer. Specifically designed for frameless constructed cabinets, the system accommodates cabinet front angles from -45° to $+45^{\circ}$, in 5° increments.



CLIP accessories

Blum offers a wide range of accessories from spacers to restriction clips that support a variety of applications. A selection of customizable cover caps enables the customer to enhance and personalize each hinge.



CLIP mounting plates

CLIP top BLUMOTION works with all current CLIP mounting plates, so you can start using this new hinge right away with little change to production.



Enhance functionality with added motion technologies

Upgrade CLIP top, CLIP and COMPACT hinges with the soft-close BLUMOTION add-on for smooth, high-quality motion. TIP-ON offers touch-to-open functionality for handleless cabinets and is compatible with CLIP top BLUMOTION, CLIP top and CLIP free swing/self-close hinges. Suitable for frameless or face frame (blocked out) applications.






COMPACT CLIP

Tool-free door removal meets soft-close precision—COMPACT CLIP hinges clip on fast, adjust easily and protect against slams with built-in BLUMOTION.



COMPACT BLUMOTION

A sleek, soft-close hinge built for face frame cabinets—compact, tough and easy to install with smooth, quiet close every time.

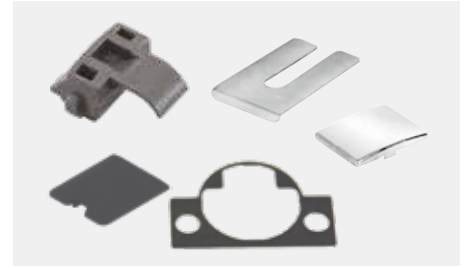

COMPACT accessories


Blum's COMPACT hinge program has proven itself as the high quality solution for face frame cabinets for over 30 years and continue to provide the quality of motion you have come to expect from Blum hardware.



Machines, assembly aids and accessories

Blum assembly aids support the assembly of all Blum products. They have proven to be the trusted solutions for day-to-day assembly. Their combination of high precision are valued both in workshops and on the jobsite. The wide range of drilling and insertion machines available from Blum ensures just the right solution no matter what the assembly requirement. Quick setup and easy operation ensure efficient assembly and a high-quality end result.




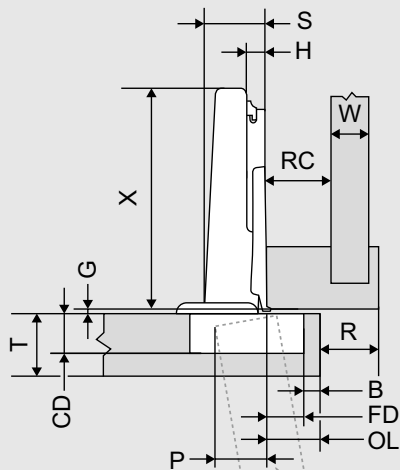


B = Boring distance **CD** = Cup depth **FD** = Fixed distance **G** = Gap **H** = Plate height
OL = Front overlay **P** = Door protrusion **RC** = Recess **R** = Reveal **S** = Side arm protrusion **T** = Door thickness **W** = Side pane thickness **X** = Depth arm protrusion

Step 1 – Determine cabinet construction

Face frame




Frameless




Step 2 – Determine the overlay or reveal


Overlay



Partial/twin overlay




Inset



Step 3 – Find boring distance and mounting plate height

Based on your overlay use the table to determine the mounting plate height and boring distance needed.

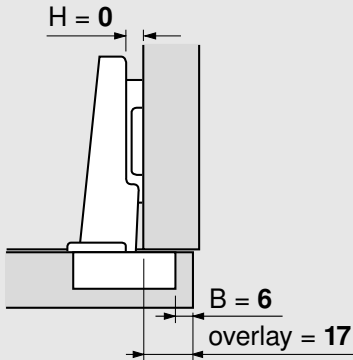


Boring distance B

		Door overlay OL (mm)																
H		5	6	7	8	9	10	11	12	13	14	15	16	17	18			
0													3	4	5	6	7	
3									3	4	5	6	7					
6					3	4	5	6	7									
9	3	4	5	6	7													

Step 4 – Check minimum reveal table

All minimum reveal tables are based on square edge door with a 1 mm radius. A larger radius or profile door will change the minimum reveal required.

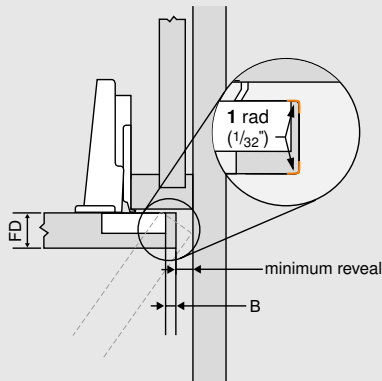

Minimum reveal

B	Door thickness T (mm)											
	16	18	19	20	21	22	23	24	25	26	28	30
3	0.5	0.8	1.0	1.2	1.5	1.8	2.2	2.7	3.5	4.3	Δ	Δ
4	0.5	0.8	1.0	1.2	1.4	1.7	2.0	2.5	3.1	3.8	Δ	Δ
5	0.5	0.8	0.9	1.2	1.4	1.7	2.0	2.4	2.9	3.4	Δ	Δ
6	0.5	0.8	0.9	1.2	1.3	1.6	1.9	2.3	2.7	3.2	Δ	Δ
7	0.5	0.8	0.9	1.1	1.3	1.6	1.9	2.2	2.6	3.0	Δ	Δ
Additional for +2 mm side adjustment												
	+0.2	+0.4	+0.4	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5		
Δ	In these cases a trial is recommended											

CLIP top BLUMOTION	Available in Onyx Black	Page
110°	✓	10
110° +	✓	11
95° thick door	✓	12
155° zero protrusion	✓	13
155° special applications	✓	14
125° zero protrusion	✓	16
125° special applications	✓	17
110° diagonal 45°	✓	18
95° inset blind corner	✓	19
95° overlay blind corner		20
95° narrow aluminum		21
110° thin door	✓	22

CLIP top	Available in Onyx Black	Page
107°		23
110°	✓	24
110° +		25
120°		26
120° +		27
95° thick door		28
170°		29
155° zero protrusion		30
60° bi-fold	✓	32
95° narrow aluminum	✓	33
94° mini		34
94° glass door		35

CLIP	Page
100°	36

CLIP accessories	Page
Angle restriction clips	47
Mounting plates	48
Cover caps	54
TIP-ON for doors	56
BLUMOTION for doors	60

COMPACT CLIP	Page
30C2 for partial overlay	66
31C3 for full overlay	67
31C1 for full overlay (shallow cup)	68

COMPACT BLUMOTION	Page
38N for partial overlay	69
39C for full overlay	70
38C for full overlay (shallow cup)	71
38B for face mount	72

COMPACT accessories	Page
Cover Caps	73
Angle restriction clips	73

COMPACT	Page
38N for partial overlay	74
39C for full overlay	75
38C for full overlay (shallow cup)	76
BLUMOTION for COMPACT	77

Cabinet Applications	Page
Inward opening door	78

Assembly aids and Machines	Page
Machines	80
Machine accessories	81
Assembly aids	84

Part number index	Page
Part numbers	100

Motion in stylish black

Dark cabinetry radiates sleek elegance – inside and out. Hinges in onyx black discreetly complement cabinets or create a visual impact. Both give you greater scope for designing cabinets without compromising on form.



CLIP top BLUMOTION 110° standard applications

Our wide range of hinges in onyx black offers the right solution for almost every application. It allows you to turn your design ideas into reality – be it elegant sideboards with thin doors or stylish display cabinets.

Our range at a glance



CLIP top BLUMOTION applications for thin doors



CLIP top BLUMOTION inset blind corner applications



CLIP top BLUMOTION angled applications



CLIP top BLUMOTION applications for thick doors



CLIP top BLUMOTION 155° wide angled applications




CLIP top 95° aluminum frame door applications



- For door thicknesses up to 26 (1")
- 86° angle restriction clip available (70T3553)
- 110° opening angle
- 3-dimensional front adjustment


Application

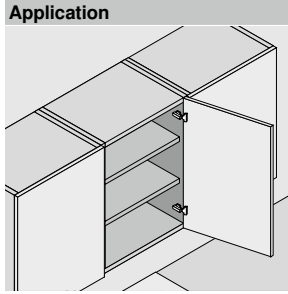


Minimum reveal

B	Door thickness T (mm)									
	16	18	19	20	21	22	23	24	25	26
3	0.5	0.8	1.0	1.2	1.5	1.8	2.2	2.7	3.5	4.3
4	0.5	0.8	1.0	1.2	1.4	1.7	2.0	2.5	3.1	3.8
5	0.5	0.8	0.9	1.2	1.4	1.7	2.0	2.4	2.9	3.4
6	0.5	0.8	0.9	1.2	1.3	1.6	1.9	2.3	2.7	3.2
7	0.5	0.8	0.9	1.1	1.3	1.6	1.9	2.2	2.6	3.0
Additional for +2 mm side adjustment										
	+0.2	+0.4	+0.4	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5
Δ In these cases a trial is recommended										


Overlay




Frame




Frameless




Partial/twin overlay




Frame

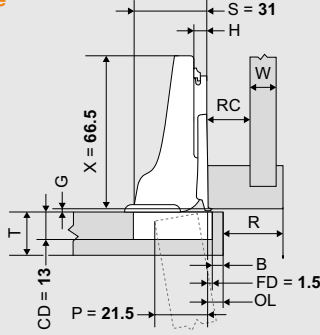


Frameless




Inset



Frame



Frameless



* move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																		
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
0												3	4	5	6	7		
3								3	4	5	6	7						
6				3	4	5	6	7										
9	3	4	5	6	7													

Door overlay OL (mm)																		
H				0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5						
0													3	4	5	6	7	
3														3	4	5	6	7
6															5	6	7	
9																		

Door reveal R (mm)																		
H																		
0																		

NOTE: See page 51 for frame applications.

NOTE: See page 53 for inset adapter application.

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B3550
Press-in	NI / ONS	71B3580
INSERTA	NI / ONS	71B3590
EXPANDO	NI	71B358E

Half-cranked	Finish	Soft close
Screw-on	NI / ONS	71B3650
Press-in	NI	71B3680
INSERTA	NI / ONS	71B3690

Full-cranked	Finish	Soft close
Screw-on	NI / ONS	71B3750
Press-in	NI	71B3780
INSERTA	NI / ONS	71B3790

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 26 (1")
- For door overlays up to 22 mm
- 110° opening angle
- 3-dimensional front adjustment


Application




Minimum reveal

B	Door thickness T (mm)											
	16	18	19	20	21	22	23	24	25	26	28	30
3	0.5	0.8	1.0	1.2	1.5	1.8	2.2	2.7	3.5	4.3	Δ	Δ
4	0.5	0.8	1.0	1.2	1.4	1.7	2.0	2.5	3.1	3.8	Δ	Δ
5	0.5	0.8	0.9	1.2	1.4	1.7	2.0	2.4	2.9	3.4	Δ	Δ
6	0.5	0.8	0.9	1.2	1.3	1.6	1.9	2.3	2.7	3.2	Δ	Δ
7	0.5	0.8	0.9	1.1	1.3	1.6	1.9	2.2	2.6	3.0	Δ	Δ
Additional for +2 mm side adjustment												
	+0.2	+0.4	+0.4	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5		
Δ	In these cases a trial is recommended											


Overlay



Frame




Frameless




Building both frame and panel cabinets

Frame

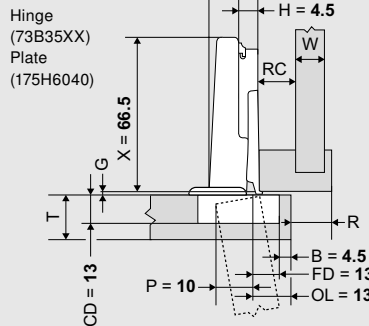

Frameless

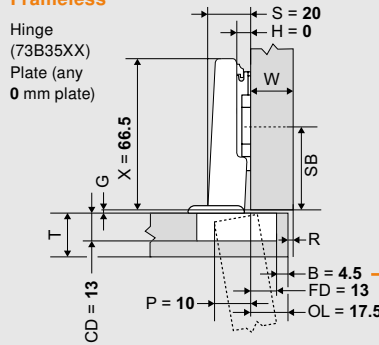

The most common overlays for frame and panel cabinets can be achieved by using the same machine setting for hinge cup boring.

Bore all doors at 4.5 mm to achieve:

- 13 (1/2") overlay on frame cabinets
- 17.5 (11/16") overlay on panel cabinets

Advantages:

- One machine setting for boring all doors
- Same hinge used for both applications

same
boring
distance

Boring distance B

Door overlay OL (mm)															
H	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
0										3	4	5	6	7	
3							3	4	5	6	7				
6				3	4	5	6	7							
9	3	4	5	6	7										

Door overlay OL (mm)																						
H	7	8	8.5	9	10	11	11.5	12	12.5	13	13.5	14	14.5	15	15.5	16	17	17.5	18	19	20	
0																	3	4	4.5	5	6	7
3										3		4	4.5	5		6	7					
4.5							3		4	4.5	5		6		7							
6					3	4	4.5	5		6		7										
9	3	4	4.5	5	6	7																

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	73B3550
Press-in	NI / ONS	73B3580
INSERTA	NI / ONS	73B3590
EXPANDO	NI	73B358E

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 36 (1-7/16")
- 95° opening angle
- 3-dimensional front adjustment


Application




Minimum reveal

B	Door thickness T (mm)															
	16	18	19	20	21	22	24	26	28	30	32	33	34	35	36	
3	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.5	1.9	3.6	5.4	6.2	7.1	8.1	9.0	
4	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	3.1	4.8	5.6	6.5	7.4	8.4	
5	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	2.7	4.3	5.0	5.9	6.8	7.7	
6	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	2.5	3.8	4.5	5.2	6.3	7.2	
7	0.2	0.3	0.4	0.5	0.6	0.7	0.9	1.4	1.7	2.4	3.5	4.2	4.9	5.7	6.6	
Additional for +2 mm side adjustment																
	+0.1	+0.2	+0.2	+0.2	+0.2	+0.3	+0.4	+0.4	+0.5	+0.4	+0.3	+0.3	+0.3	+0.3	+0.3	


Overlay




Frame




Frameless




Partial/twin overlay




Frame




Frameless




Inset



Frame

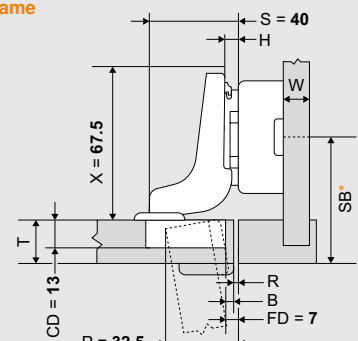

Frameless

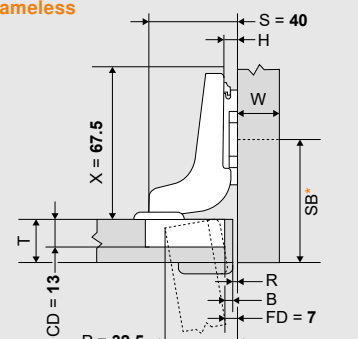

*move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																	
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18			
0										3	4	5	6	7			
3							3	4	5	6	7						
6				3	4	5	6	7									
9	3	4	5	6	7												

Door overlay OL (mm)																		
H																		
0																		
3																		
6																		
9																		

Door reveal R (mm)																		
H																		
0																		
3																		
6																		
9																		

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B9550
Press-in	NI / ONS	71B9580
INSERTA	NI / ONS	71B9590

Half-cranked	Finish	Soft close
Screw-on	NI / ONS	71B9650
Press-in	NI	71B9680
INSERTA	NI / ONS	71B9690

Full-cranked	Finish	Soft close
Screw-on	NI / ONS	71B9750
Press-in	NI	71B9780
INSERTA	NI / ONS	71B9790

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- Zero protrusion for overlay application (for cabinets with inner drawers or pull-out shelves)
- 155° opening angle
- Max. door thickness up to **31** (1-3/16")
- 3-dimensional front adjustment

Application



Minimum reveal


B	Door thickness T (mm)											
	20	21	22	23	24	25	26	27	28	29	30	31
3	0	0	0	0	0	0.5	0.5	1.0	2.0	2.0	3.0	4.5
4	0	0	0	0	0	0.5	1.0	2.0	2.0	2.5	4.0	
5	0	0	0	0	0	0.5	1.0	2.0	2.0	3.5		
6	0	0	0	0	0	1.0	1.5	2.0	3.0			
7	0	0	0	0	0	1.0	1.5	2.5				
8	0	0	0	0	0	1.0	1.5					

We recommend a trial application for an overlay application against a wall


110° Angle restriction clip

92° Angle restriction clip


Overlay




Frame




Frameless

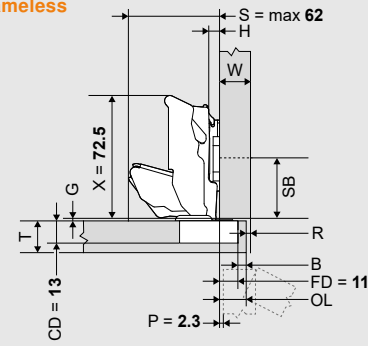


Partial/twin overlay




Frame

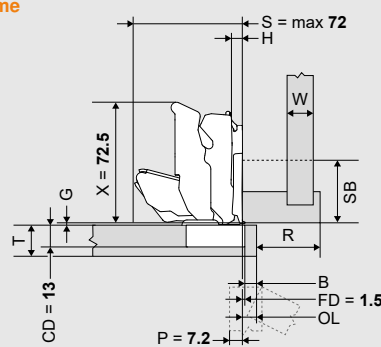

Frameless

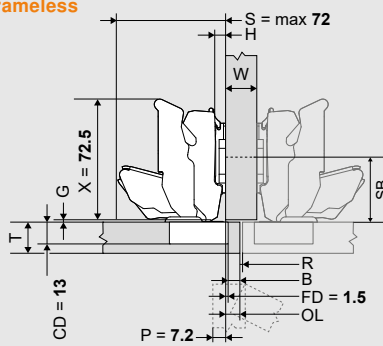


Inset



Frame

For face frame application, use illustration below and block out.

Frameless

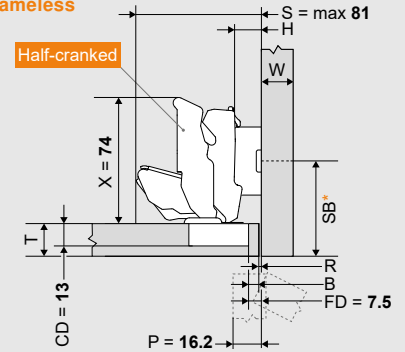

* move back plate position by door thickness (T) +1.5 mm

Boring Distance B

Door overlay OL (mm)																		
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19			
0																3	4	5
3																3	4	5
6																3	4	5
9	3	4	5	6	7	8												

Door overlay OL (mm)																		
H																		
0																		
3																		
6																		
9																		

Door reveal R (mm)																		
H	4.5	3.5	2.5	1.5	0.5													
0																		
3																		
6																		
9	3	4	5	6	7													


NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B7550
Press-in	NI / ONS	71B7580
INSERTA	NI / ONS	71B7590

Half-credited	Finish	Soft close
Screw-on	NI / ONS	71B7650
INSERTA	NI / ONS	71B7690

Door protrusion

At a 90° opening, using 0 mm plate, the door will have -2.3 mm protrusion regardless of boring distance. Use side adjustment to increase or decrease door protrusion.



NOTE: Use of 0 mm or 3 mm is recommended for zero protrusion
NOTE: 32 mm (at standard factory gaps with B = 5 mm)
+/- B will change this distance

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Maximum door overlay



34 mm

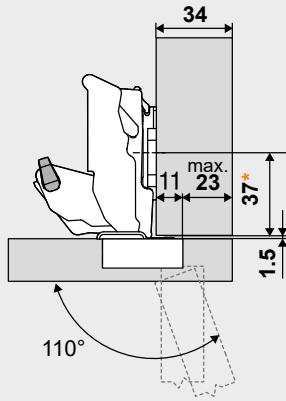

Trial application recommended

Description	Opening angle OW	Part no.
Angle restriction clip	110°	70T7553

Boring distance B


	Door overlay OL (mm)														
H	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
0	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B7550
Press-in	NI / ONS	71B7580
INSERTA	NI / ONS	71B7590

Mitered door application



19/19 mm

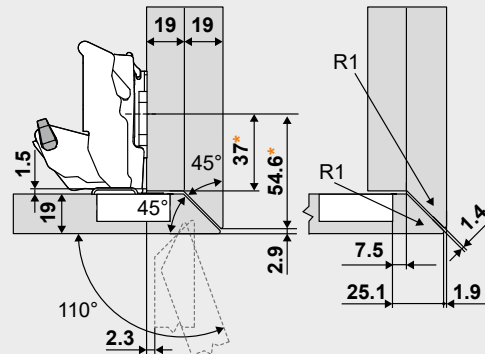

Trial application recommended

Hinge for overlay applications

Standard mounting plates with 0 mm spacing

*Dimension for mounting plate with dimension SB = 37 mm

Description	Opening angle OW	Part no.
Angle restriction clip	110°	70T7553




Lip door applications



CLIP top
BLUMOTION

9.5 mm

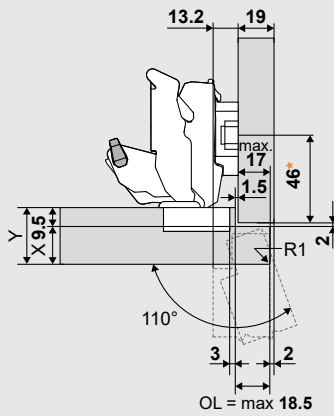

Trial application recommended

Hinge for dual applications

Description	Spacing (mm)	Part no.
Mounting plate	6	173H9100.04

* Dimension for mounting plate with dimension SB = 37 mm

Description	Opening angle OW	Part no.
Angle restriction clip	110°	70T7553


NOTE: Angle restriction clip not needed for door thickness below 19 mm

Cabinet situation	X max. (mm)	Y max. (mm)
	18	28
	20	30
	25	35

NOTE: Special applications can be achieved in face frame cabinets by blocking out behind the frame

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B7650
INSERTA	NI / ONS	71B7690

13 mm

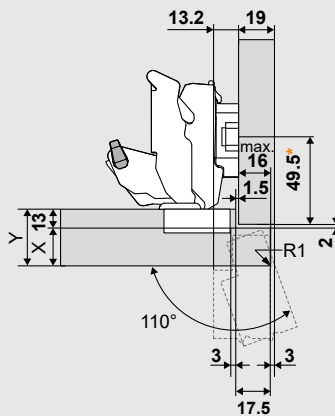

Trial application recommended

Hinge for dual applications


Description	Spacing (mm)	Part no.
Mounting plate	6	173H9100.04

* Dimension for mounting plate with dimension SB = 37 mm

Description	Opening angle OW	Part no.
Angle restriction clip	110°	70T7553

Cabinet situation	X max. (mm)	Y max. (mm)
	16	29
	17	30
	17	30

16 mm

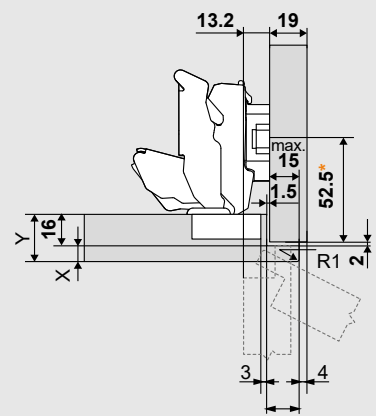

Trial application recommended

Hinge for dual applications

Description	Spacing (mm)	Part no.
Mounting plate	6	173H9100.04

* Dimension for mounting plate with dimension SB = 37 mm

Description	Opening angle OW	Part no.
Angle restriction clip	110°	70T7553


Cabinet situation	X max. (mm)	Y max. (mm)
	8	24
	8	24
	8	24





- Zero protrusion for overlay application (for cabinets with inner drawers or pull-out shelves)
- Hinge for thick doors up to **39 mm** (1-9/16")
- 125° opening angle
- 3-dimensional front adjustment

Application




Minimum reveal

B	Door thickness T (mm)										
	29	30	31	32	33	34	35	36	37	38	39
3	0	0	0	0.1	0.3	0.7	1.2	2.0	2.8	4.1	5.7
4	0	0	0	0.1	0.4	0.8	1.5	2.3	3.4	4.9	
5	0	0	0	0.1	0.4	1.0	1.7	2.8	4.2		
6	0	0	0	0.1	0.6	1.2	2.1	3.5			
7	0	0	0	0.2	0.7	1.6	2.8				
8	0	0	0	0.3	1.0	2.0					


We recommend a trial application for an overlay application against a wall

92° Angle restriction clip


Overlay



Frame

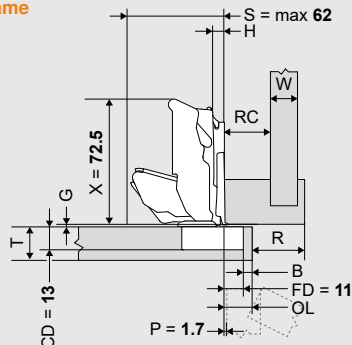


Frameless

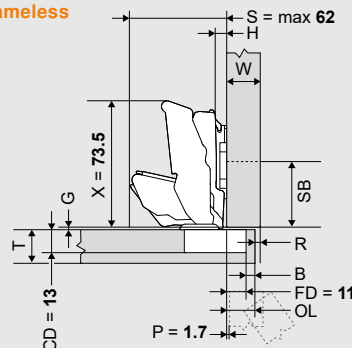

Door protrusion


At 90° opening, using **0 mm** plate, the door will have **-1.7 mm** protrusion regardless of boring distance. Use side adjustment to increase or decrease door protrusion.

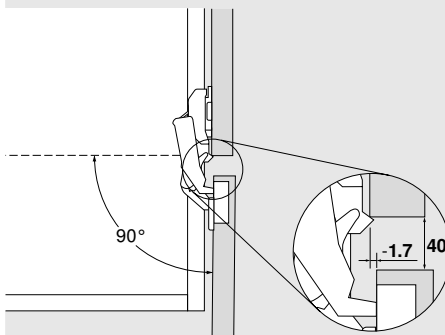

NOTE: Use of **0 mm** or **3 mm** is recommended for zero protrusion


NOTE: **40 mm** (at standard factory gaps with **B = 5 mm**) +/- B will change this distance

Inset



For face frame application, use illustration below and block out.

Frameless

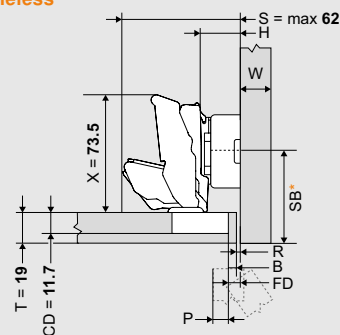

* move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)										
H	5.5	4.5	3.5	2.5	1.5	0.5				
19	3	4	5	6	7	8				

Boring distance B


Door overlay OL (mm)										
H	5	6	7	8	9	10	11	12	13	14
0										3
3										4
6										5
9										6

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Soft close
Screw-on	NI / ONS	71B7550D
Press-in	NI	71B7580D




Maximum door overlay

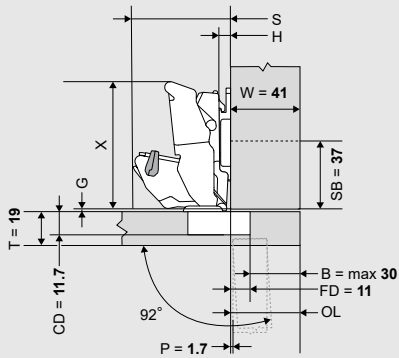


Trial application recommended

Thin facing added to door

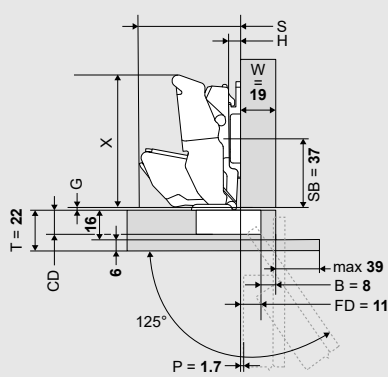

Trial application recommended

Mitered door application

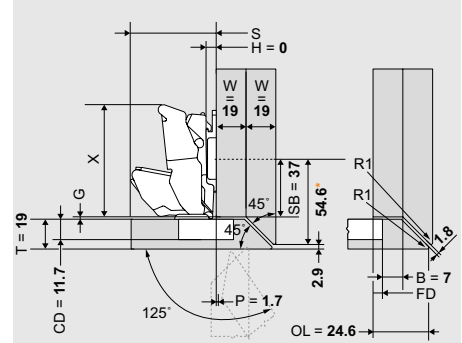

Trial application recommended

Door overlay OL (mm)

H	35	36	37	38	39	40	41												
19	24	25	26	27	28	29	30												

Description	Opening angle	
Screw-on	92°	70T7553

You can select any door thickness T for a free-standing cabinet.

We recommend a trial application for a neighboring door or an overlay application on the wall.

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

B = Boring distance **CD** = Cup depth **FD** = Fixed distance **G** = Gap **H** = Plate height **NI** = Nickel
OL = Door overlay **ONS** = Onyx black **P** = Door protrusion **RC** = Recess **R** = Reveal **S** = Side arm protrusion
SB = Mounting plate setback **T** = Door thickness **W** = Side panel thickness **X** = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.





- For door thicknesses up to 19 (3/4")
- 45° II angled hinge
- 110° opening angle

Application





Inside Corner

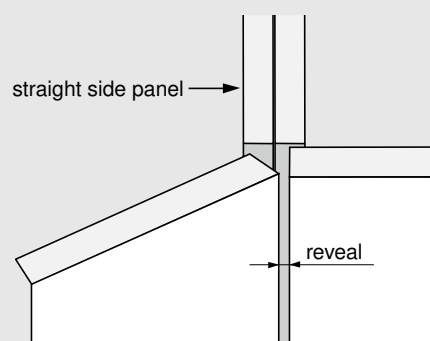

Planning

Corner cabinet

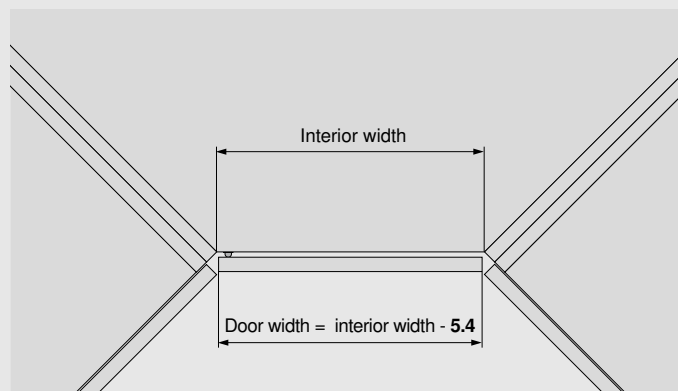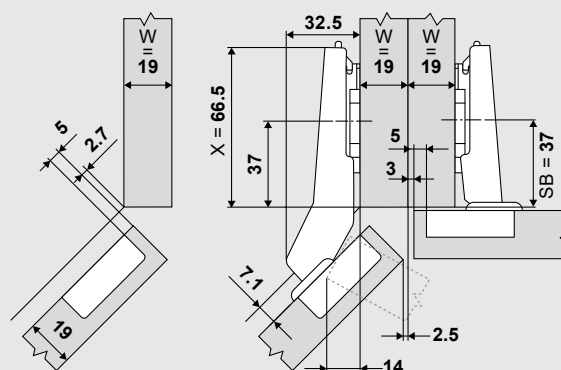

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.


Diagonal 45° hinge	Finish	Soft close
INSERTA	NI / ONS	79B3598

NOTE: See angled hinge applications for other applications using this hinge (see page 37)





- For door thicknesses up to **28 (1-1/8")**
- 95° opening angle
- 3-dimensional front adjustment




Minimum reveal

B	Door thickness T (mm)											
	16	18	19	20	22	24	26	28	29	30	31	32
3	0.2	0.3	0.4	0.5	0.8	1.0	1.5	1.9	Δ	Δ	Δ	Δ
4	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
5	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
6	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
7	0.2	0.3	0.4	0.5	0.7	0.9	1.4	1.7	Δ	Δ	Δ	Δ



Δ In these cases a trial is recommended

CLIP top
BLUMOTION

Flush door applications

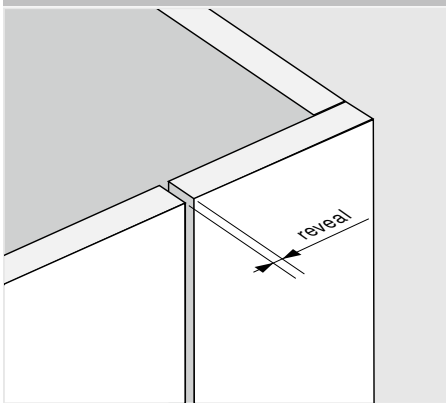

Adjustments and clearance

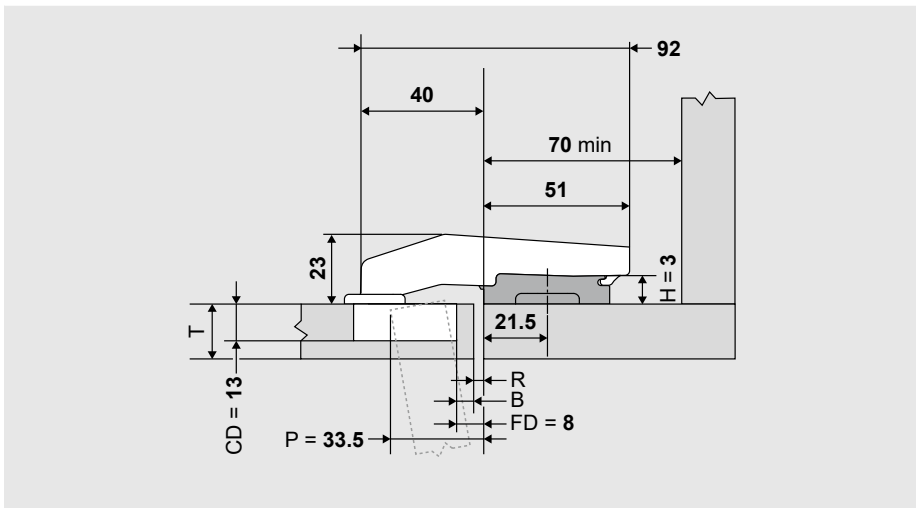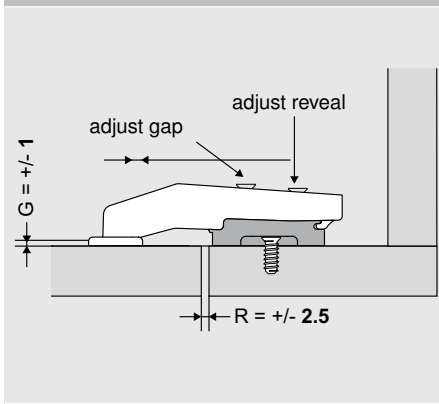

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 3 mm). Hinge and door protrusion at full opening angle.

Boring distance B

H	Door overlay OL (mm)				
	5	4	3	2	1
3	3	4	5	6	7

Inset blind corner	Finish	Soft close
Screw-on	NI / ONS	79B9550
Press-in	NI / ONS	79B9580
INSERTA	NI / ONS	79B9590

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 28 (1-1/8")
- 95° opening angle
- 3-dimensional front adjustment

Application




Minimum reveal

B	Door thickness T (mm)											
	16	18	19	20	22	24	26	28	29	30	31	32
3	0.2	0.3	0.4	0.5	0.8	1.0	1.5	1.9	Δ	Δ	Δ	Δ
4	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
5	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
6	0.2	0.3	0.4	0.5	0.7	1.0	1.4	1.8	Δ	Δ	Δ	Δ
7	0.2	0.3	0.4	0.5	0.7	0.9	1.4	1.7	Δ	Δ	Δ	Δ

Δ In these cases a trial is recommended

Overlay application

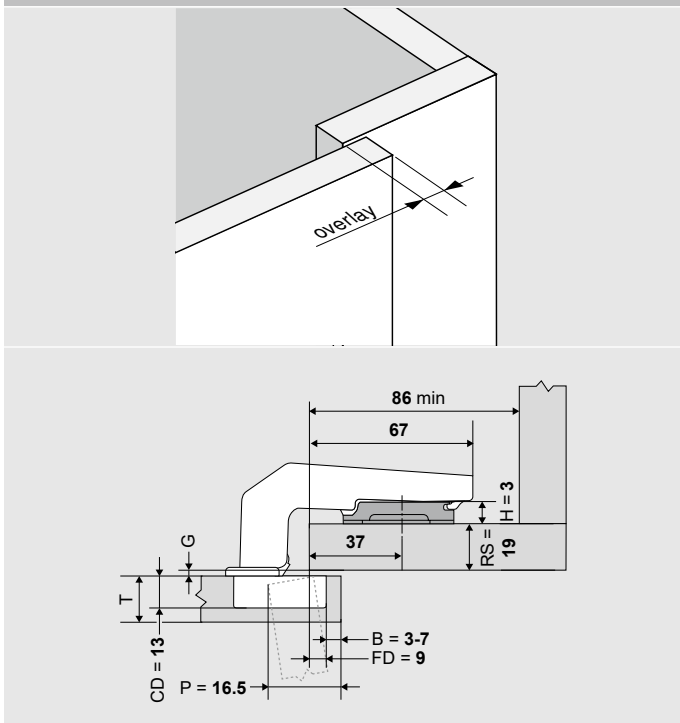

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 3 mm). Hinge and door protrusion at full opening angle.

Boring distance B

Door overlay OL (mm)															
SB	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
27	3	4	5	6	7										
32						3	4	5	6	7					
37											3	4	5	6	7


Overlay blind corner	Finish	Soft close
Press-in	NI	79B9980





- For door thicknesses up to 24 (15/16")
- 95° opening angle
- 3-dimensional front adjustment
- Range of frame width 18 mm to 22 mm

Application




Minimum reveal

Door frame width	Door frame thickness							
	18	19	20	21	22	24	25	26
18	0.2	0.3	0.4	0.6	0.7	1.2	Δ	Δ
19	0.2	0.3	0.4	0.6	0.7	1.2	Δ	Δ
20	0.2	0.3	0.4	0.5	0.7	1.1	Δ	Δ
21	0.2	0.3	0.4	0.5	0.7	1.0	Δ	Δ
22	0.2	0.3	0.4	0.5	0.7	1.1	Δ	Δ
Additional for +2 mm side adjustment								
	+0.1	+0.2	+0.3	+0.3	+0.3	+0.4		


Δ In these cases a trial is recommended

CLIP top
BLUMOTION


Overlay




Frameless




Partial/twin overlay




Frameless



Inset




Frameless



NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.


*move back plate position by door thickness (T) +1.5 mm

Aluminum door preparation

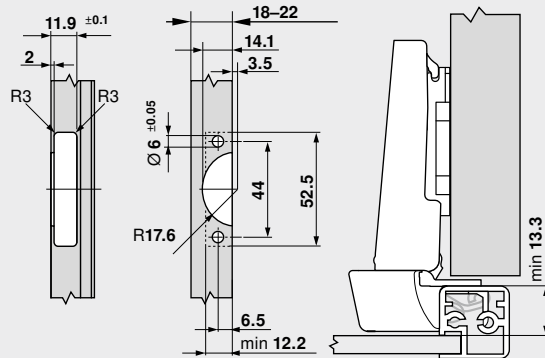


Installation

Attach cup adapter to the hinge and insert into machined openings.



Attach using aluminum screws provided with hinges (693.120).



Straight-arm	Finish	Soft close	Half-cranked	Finish	Soft close	Full-cranked	Finish	Soft close
Screw-on	NI	71B950A	Screw-on	NI	71B960A	Screw-on	NI	71B970A

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- Zero protrusion (for cabinets with inner drawers or pull-out shelves)
- Thin fronts from 8-14 mm
- 110° opening angle
- 3-dimensional front adjustment


Application




Overlay




Frameless

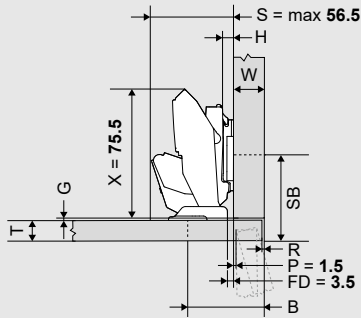


Partial/twin overlay




Frameless

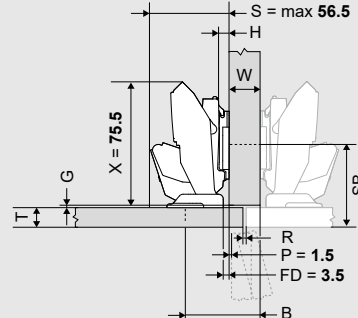

Inset



Frameless

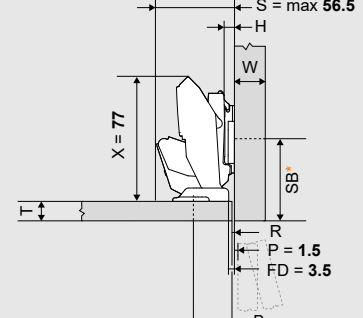



* move back plate position by door thickness (T) +1.5 mm

Attachment position/boring pattern


H	Door reveal (R) / Door overlay (OL) (mm)																	
	-3.5	-3	-2.5	-2	-1.5	-1	2.5	4	5.5	7	8.5	10	11.5	13	14.5	16	17.5	19
0	23.5	24	24.5	25	25.5	26	29.5	31	32.5	34	35.5	37	38.5	40	41.5	43	44.5	46
3	26.5	27	27.5	28	28.5	29	32.5	34	35.5	37	38.5	40	41.5	43	44.5	46		
6	29.5	30	30.5	31	31.5	32	35.5	37	38.5	40	41.5	43	44.5	46				
9	32.5	33	33.5	34	34.5	35	38.5	40	41.5	43	44.5	46						

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.


Attachment pattern/boring pattern

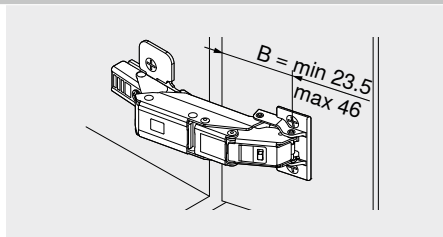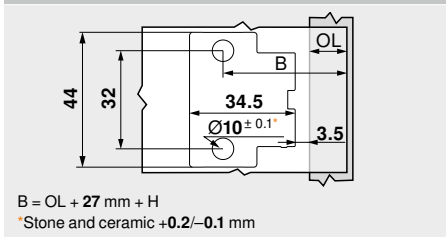


Adjustment



Max. ±3.0 mm
See mounting plates




±2.0 mm



+3.0 mm
-2.0 mm

Boring depth

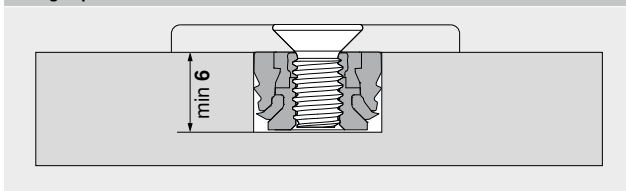

EXPANDO T	Finish	Soft close	Self close	Free-swing
CLIP top BLUMOTION	NI / ONS	71B453T		
	NI		71T453T	
CLIP top	NI			70T453T.TL

Mounting plate height (H)

W (mm)	Door thickness T (mm)						
	8	9	10	11	12	13	14
12							
13							
14							
15							
16							
17							
18							
19							
20							


Mounting plate height (H) 0 mm possible
 Mounting plate height (H) 3 mm required
 Mounting plate height (H) 6 mm required

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

- For door thicknesses between 15 (19/32") - 19 (3/4")
- 107° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available



Minimum reveal											
B	Door thickness T (mm)										
	15	16	18	19	20	21	22	24	26	28	30
3	0.4	0.5	1.0	1.3	Δ	Δ	Δ	Δ	Δ	Δ	Δ
4	0.4	0.5	0.9	1.2	Δ	Δ	Δ	Δ	Δ	Δ	Δ
5	0.3	0.5	0.9	1.2	Δ	Δ	Δ	Δ	Δ	Δ	Δ
6	0.3	0.5	0.8	1.1	Δ	Δ	Δ	Δ	Δ	Δ	Δ
Additional for +2 mm side adjustment											
	+0.1	+0.1	+0.2	+0.2							
Δ In these cases a trial is recommended											

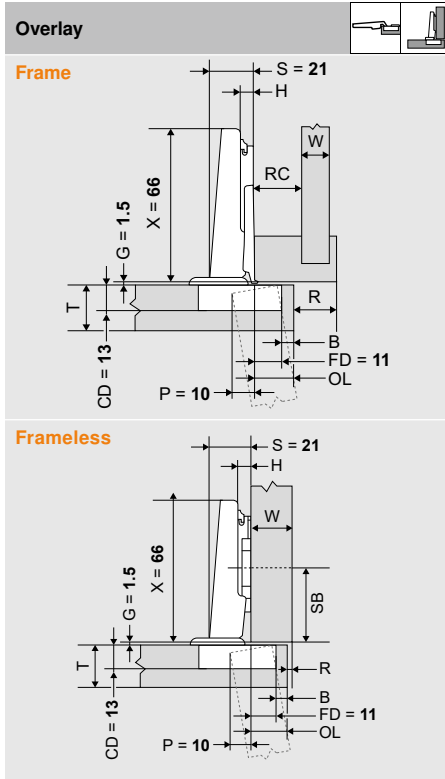

Boring distance B																	
Door overlay OL (mm)																	
H	5	6	7	8	9	10	11	12	13	14	15	16	17				
0										3	4	5	6				
3								3	4	5	6						
6				3	4	5	6										
9	3	4	5	6													

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	75T1550
Press-in	NI	75T1580
INSERTA	NI	75T1590B

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 26 (1")
- 86° angle restriction clip available (70T3553)
- 110° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available


Application




Minimum reveal

B	Door thickness T (mm)									
	16	18	19	20	21	22	23	24	25	26
3	0.5	0.8	1.0	1.2	1.5	1.8	2.2	2.7	3.5	4.3
4	0.5	0.8	1.0	1.2	1.4	1.7	2.0	2.5	3.1	3.8
5	0.5	0.8	0.9	1.2	1.4	1.7	2.0	2.4	2.9	3.4
6	0.5	0.8	0.9	1.2	1.3	1.6	1.9	2.3	2.7	3.2
7	0.5	0.8	0.9	1.1	1.3	1.6	1.9	2.2	2.6	3.0
Additional for +2 mm side adjustment										
	+0.2	+0.4	+0.4	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5
Δ In these cases a trial is recommended										


Overlay




Frame




Frameless




Partial/twin overlay




Frame




Frameless




Inset



Frame



Frameless



*move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																		
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
0												3	4	5	6	7		
3								3	4	5	6	7						
6				3	4	5	6	7										
9	3	4	5	6	7													

Door overlay OL (mm)												
H												
0				0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5
3												
6												
9												

Door reveal R (mm)									
H									
0									
3									
6									
9									

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T3550
Press-in	NI	71T3580
INSERTA	NI	71T3590
EXPANDO	NI	71T358E

Half-cranked	Finish	Self close
Screw-on	NI	71T3650
Press-in	NI	71T3680
INSERTA	NI	71T3690

Full-cranked	Finish	Self close
Screw-on	NI	71T3750
Press-in	NI	71T3780
INSERTA	NI	71T3790

Straight-arm	Finish	Free swing
Press-in	NI / ONS	70T3580.TL
INSERTA	NI / ONS	70T3590.TL

Half-cranked	Finish	Free swing
Press-in	NI	70T3650.TL

Full-cranked	Finish	Free swing
Press-in	NI	70T3750.TL

NOTE: See page 51 for frame applications.

NOTE: See page 53 for inset adapter application.

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to **26 (1")**
- For door overlays up to **22 (7/8")**
- 110° opening angle**
- 3-dimensional front adjustment**
- Add-on **BLUMOTION** soft close available


Application




Minimum reveal

B	Door thickness T (mm)										
	16	18	19	20	22	23	24	25	26	28	30
3	0.5	0.8	1.0	1.2	1.8	2.2	2.7	3.5	4.3	Δ	Δ
4	0.5	0.8	1.0	1.2	1.7	2.0	2.5	3.1	3.8	Δ	Δ
5	0.5	0.8	0.9	1.2	1.7	2.0	2.4	2.9	3.4	Δ	Δ
6	0.5	0.8	0.9	1.2	1.6	1.9	2.3	2.7	3.2	Δ	Δ
7	0.5	0.8	0.9	1.1	1.6	1.9	2.2	2.6	3.0	Δ	Δ
Additional for +2 mm side adjustment											
	+0.2	+0.4	+0.4	+0.5	+0.5	+0.5	+0.5	+0.5	+0.5		
Δ In these cases a trial is recommended											


Overlay



Frame




Frameless



Building both frame and panel cabinets


Frame

Hinge (73B35XX)
Plate (175H6040)



Frameless

Hinge (73B35XX)
Plate (any 0 mm plate)



The most common overlays for frame and frameless cabinets can be achieved by using the same machine setting for hinge cup boring.

Bore all doors at 4.5 mm to achieve:

- 13 (1/2")** overlay on frame cabinets
- 17.5 (11/16")** overlay on panel cabinets

Advantages:

- One machine setting for boring all doors
- Same hinge used for both applications

same boring distance

Boring distance B

	Door overlay OL (mm)																				
H	7	8	8.5	9	10	11	11.5	12	12.5	13	13.5	14	14.5	15	15.5	16	17	17.5	18	19	20
0																3	4	4.5	5	6	7
3										3		4	4.5	5		6	7				
4.5							3	4	4.5	5		6		7							
6					3	4	4.5	5		6		7									
9	3	4	4.5	5	6	7															

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	73T3550
Press-in	NI	73T3580
INSERTA	NI	73T3590
EXPANDO	NI	73T358E

Straight-arm	Finish	Self close
Press-in	NI	72T3580.TL
INSERTA	NI / ONS	72T3590.TL

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 22 (7/8")
- 120° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available

Application




Minimum reveal


B	Door thickness T (mm)									
	16	18	19	20	22	23	24	25	26	30
3	1.2	1.7	2.0	2.4	3.3	Δ	Δ	Δ	Δ	Δ
4	1.2	1.7	2.0	2.3	3.1	Δ	Δ	Δ	Δ	Δ
5	1.1	1.6	1.9	2.2	3.0	Δ	Δ	Δ	Δ	Δ
6	1.1	1.6	1.9	2.2	2.9	Δ	Δ	Δ	Δ	Δ

Δ In these cases a trial is recommended


Overlay




Frame

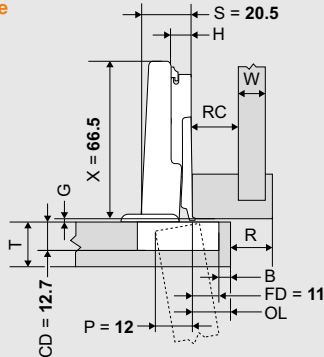


Frameless




Partial/twin overlay




Frame

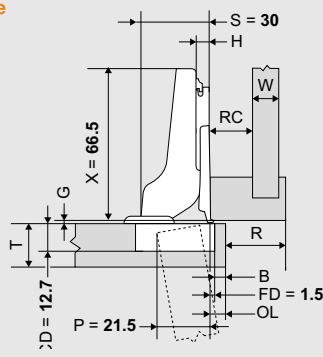

Frameless

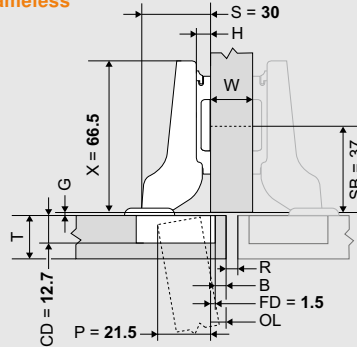


Inset



For face frame application, use illustration below and block out.

Frameless



*move back plate position by door thickness (T) +1.5 mm

Boring distance B

H	Door overlay OL (mm)																
	5	6	7	8	9	10	11	12	13	14	15	16	17				
0														3	4	5	6
3								3	4	5	6						
6				3	4	5	6										
9	3	4	5	6													

H	Door overlay OL (mm)																
0					0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5					
3							3	4	5	6							
6								5	6	7							
9																	

H	Door reveal R (mm)																
	4.5	3.5	2.5	1.5													
0																	
3																	
6																	
9	3	4	5	6													

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T5550
Press-in	NI	71T5580
INSERTA	NI	71T5590B
EXPANDO	NI	71T558E

Half-cranked	Finish	Self close
Screw-on	NI	71T5650
Press-in	NI	71T5680
INSERTA	NI	71T5690B

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For larger overlays (21 mm maximum) with use of side adjustment
- 120° opening angle
- 3-dimensional front adjustment
- For door thicknesses up to 22 (7/8")
- Add-on BLUMOTION soft close available

Application



Minimum reveal


B	Door thickness T (mm)										
	16	18	19	20	22	23	24	25	26	28	30
3	1.2	1.7	2.0	2.4	3.3	Δ	Δ	Δ	Δ	Δ	Δ
4	1.2	1.7	2.0	2.3	3.1	Δ	Δ	Δ	Δ	Δ	Δ
4.5	1.1	1.6	1.9	2.2	3.0	Δ	Δ	Δ	Δ	Δ	Δ
5	1.1	1.6	1.9	2.2	3.0	Δ	Δ	Δ	Δ	Δ	Δ
6	1.1	1.6	1.9	2.2	2.9	Δ	Δ	Δ	Δ	Δ	Δ

Δ In these cases a trial is recommended


CLIP top

Overlay

Frame

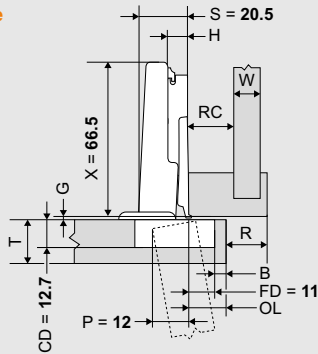


Frameless




Building both frame and panel cabinets

Frame

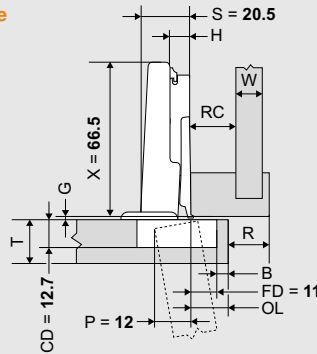

Frameless



The most common overlays for frame and frameless cabinets can be achieved by using the same machine setting for hinge cup boring.

Bore all doors at 4.5 mm to achieve:

- 13 (1/2") overlay on frame cabinets
- 17.5 (11/16") overlay on panel cabinets

Advantages:

- One machine setting for boring all doors
- Same hinge used for both applications

same boring distance

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Boring distance B

Door overlay OL (mm)																				
H	7	8	8.5	9	10	11	11.5	12	12.5	13	13.5	14	14.5	15	15.5	16	17	17.5	18	19
0																3	4	4.5	5	6
3										3		4	4.5	5		6				
4.5							3		4	4.5	5		6							
6					3	4	4.5	5		6										
9	3	4	4.5	5	6															

Straight-arm	Finish	Self close
Screw-on	NI	73T5550
Press-in	NI	73T5580
INSERTA	NI	73T5590B
EXPANDO	NI	73T558E

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to **36** (1-7/16")
- 95° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available


Application




Minimum reveal

B	Door thickness T (mm)															
	16	18	19	20	21	22	24	26	28	30	32	33	34	35	36	
3	0.2	0.3	0.4	0.5	0.7	0.8	1.0	1.5	1.9	3.6	5.4	6.2	7.1	8.1	9.0	
4	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	3.1	4.8	5.6	6.5	7.4	8.4	
5	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	2.7	4.3	5.0	5.9	6.8	7.7	
6	0.2	0.3	0.4	0.5	0.6	0.7	1.0	1.4	1.8	2.5	3.8	4.5	5.2	6.3	7.2	
7	0.2	0.3	0.4	0.5	0.6	0.7	0.9	1.4	1.7	2.4	3.5	4.2	4.9	5.7	6.6	
Additional for +2 mm side adjustment																
	+0.1	+0.2	+0.2	+0.2	+0.2	+0.3	+0.4	+0.4	+0.5	+0.4	+0.3	+0.3	+0.3	+0.3	+0.3	


Overlay




Frame




Frameless




Partial/twin overlay




Frame




Frameless

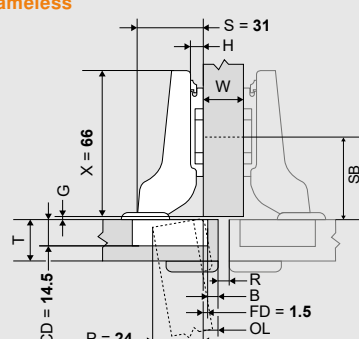


Inset



Frame

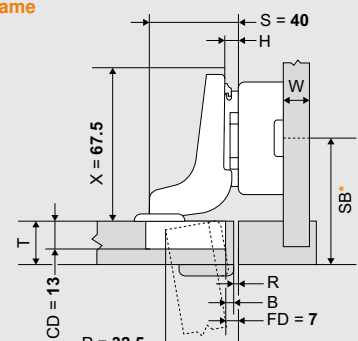

Frameless

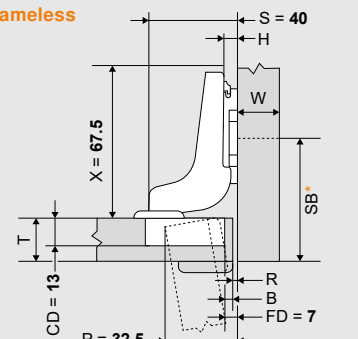

*move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																		
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18				
0												3	4	5	6	7		
3								3	4	5	6	7						
6				3	4	5	6	7										
9	3	4	5	6	7													

Door overlay OL (mm)												
H				0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5
0								3	4	5	6	7
3					3	4	5	6	7			
6				5	6	7						
9												

Door reveal R (mm)														
H						7	6	5	4	3	2	1	0	
0										3	4	5	6	7
3														
6						3	4	5	6	7				
9														

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T9550
Press-in	NI	71T9580
INSERTA	NI	71T9590B

Half-cranked	Finish	Self close
Screw-on	NI	71T9650
Press-in	NI	71T9680
INSERTA	NI	71T9690B

Full-cranked	Finish	Self close
Screw-on	NI	71T9750
Press-in	NI	71T9780
INSERTA	NI	71T9790B

Straight-arm	Finish	Free swing
Screw-on	NI	70T9550.TL
Press-in	NI	70T9580.TL

Half-cranked	Finish	Free swing
Screw-on	NI	70T9650.TL

Full-cranked	Finish	Free swing
Screw-on	NI	70T9750.TL

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 24 (15/16")
- 170° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available

Application




Minimum reveal

Door thickness T (mm)


B	16	18	19	20	22	24
3	0	0	0	0	0.2	2.2
4	0	0	0	0	0	1.4
5	0	0	0	0	0	0.9
6	0	0	0	0	0	0
7	0	0	0	0	0	0
8	0	0	0	0	0	0

For door thickness (T) in excess of 22 mm, a trial application is recommended


Overlay




Frame

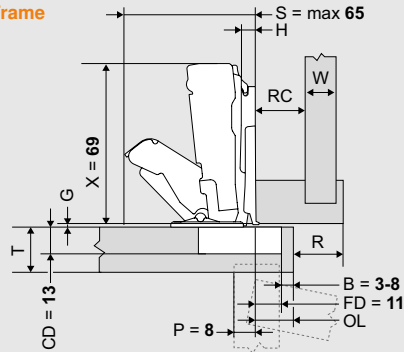


Frameless

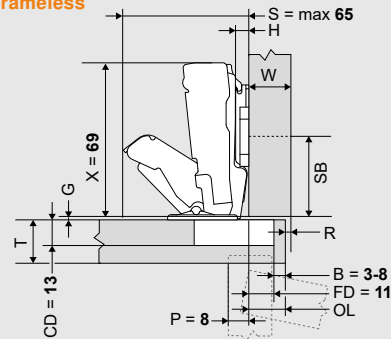


Partial/twin overlay




Frame

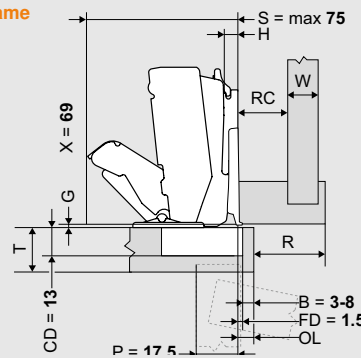

Frameless

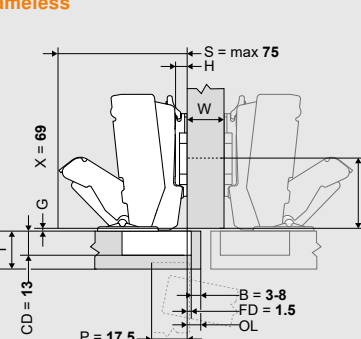


Inset



For face frame application, use illustration below and block out.

Inset application not recommended with 170° hinges and the inset face frame adapter (175H5030.21)

Frameless

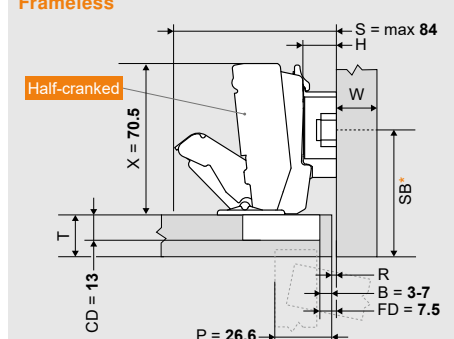

* move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																		
H	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19			
0										3	4	5	6	7	8			
3								3	4	5	6	7	8					
6					3	4	5	6	7	8								
9	3	4	5	6	7	8												

Door overlay OL (mm)																
H					0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5		
0										3	4	5	6	7	8	
3							3	4	5	6	7	8				
6						5	6	7	8							
9						8										

Door reveal R (mm)		H	4.5	3.5	2.5	1.5	0.5
0							
3							
6							
9		3	4	5	6	7	

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T6550
Press-in	NI	71T6580
INSERTA	NI	71T6540B

Half-credited	Finish	Self close
Screw-on	NI	71T6650
Press-in	NI	71T6680
INSERTA	NI	71T6640B

Straight-arm	Finish	Free swing
Screw-on	NI	70T6550.TL
INSERTA	NI	70T6540BTL

Half-credited	Finish	Free swing
Screw-on	NI	70T6650.TL
INSERTA	NI	70T6640BTL


B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
 OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
 SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Straight-Arm Applications


Thick door application

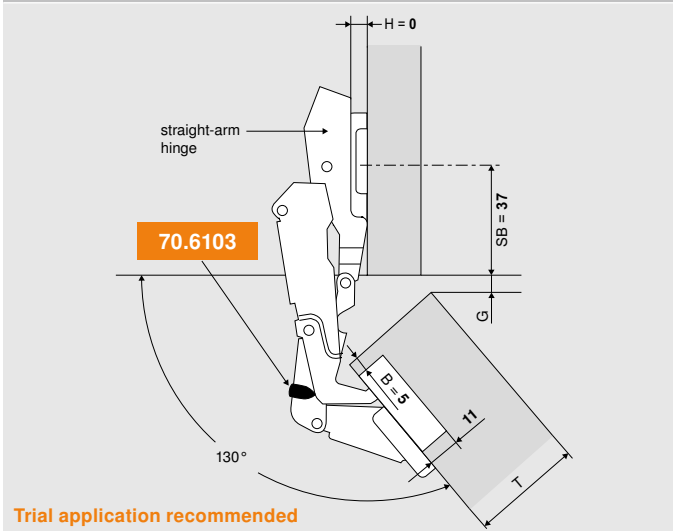

G = gap				
15.5	13	11	9.5	7.5
25	29	32	35	38

T = door thickness

Thick door – twin application

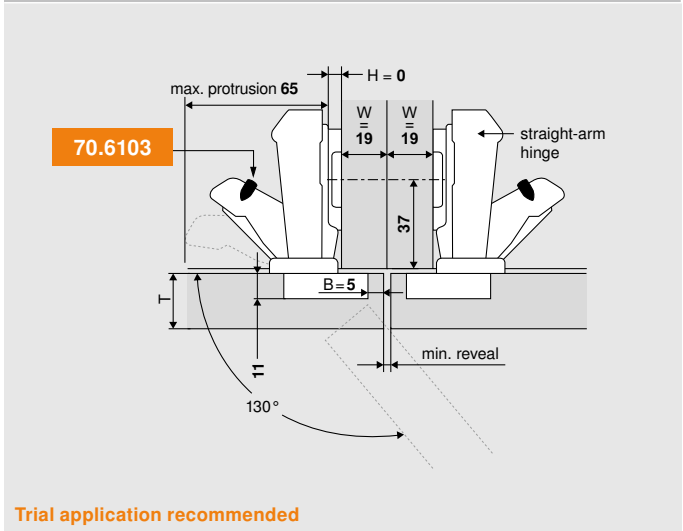


Minimum reveal table			
0	6.5	14.5	21
22	25	29	32


T = door thickness

Half-Cranked Applications

Lip door application

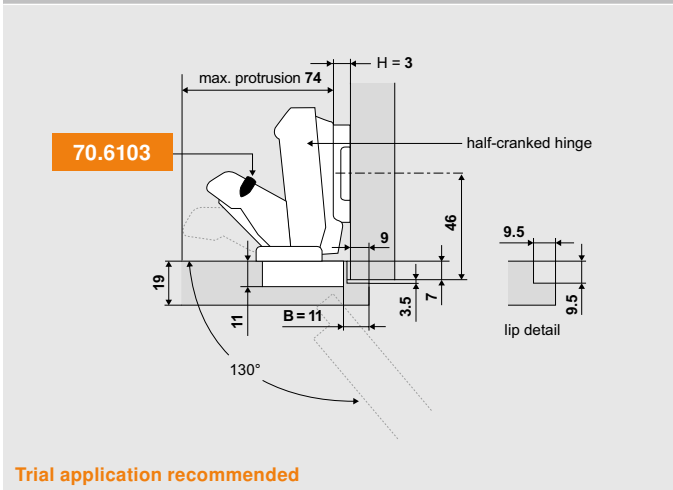

Mitered corner door application

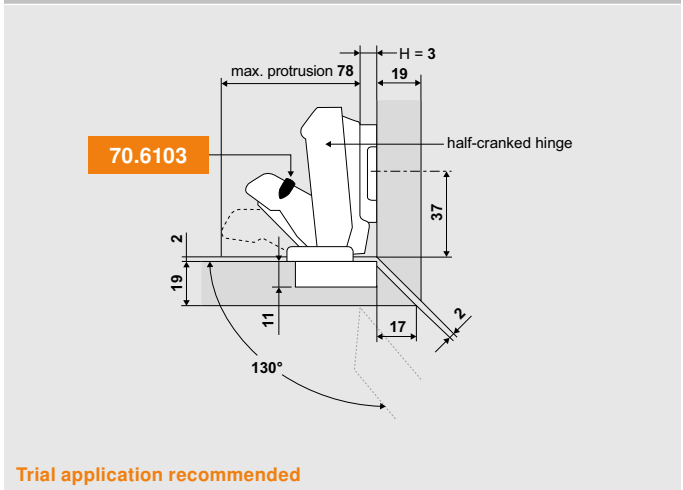


NOTE: Special applications can be achieved in face frame cabinets by blocking out behind the frame or use of the new CLIP wing plates (see page 52)





- Zero protrusion for overlay application (for cabinets with inner drawers or pull-out shelves)
- 155° opening angle
- Max. door thickness up to **31** (1-3/16")
- 3-dimensional front adjustment

Application



Minimum reveal


B	Door thickness T (mm)											
	20	21	22	23	24	25	26	27	28	29	30	31
3	0	0	0	0	0	0.5	0.5	1.0	2.0	2.0	3.0	4.5
4	0	0	0	0	0	0.5	1.0	2.0	2.0	2.5	4.0	
5	0	0	0	0	0	0.5	1.0	2.0	2.0	3.5		
6	0	0	0	0	0	0	1.0	1.5	2.0	3.0		
7	0	0	0	0	0	0	1.0	1.5	2.5			
8	0	0	0	0	0	0	1.0	1.5				

We recommend a trial application for an overlay application against a wall


110° Angle restriction clip

92° Angle restriction clip


Overlay




Frame




Frameless

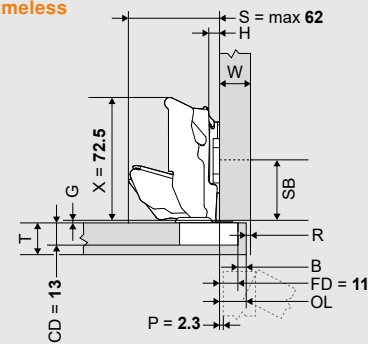


Partial/twin overlay




Frame

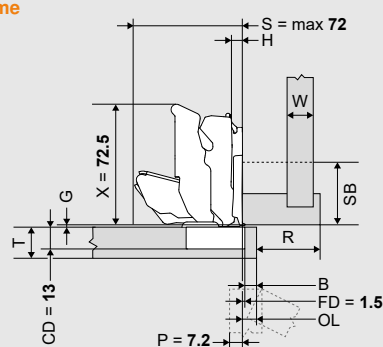

Frameless

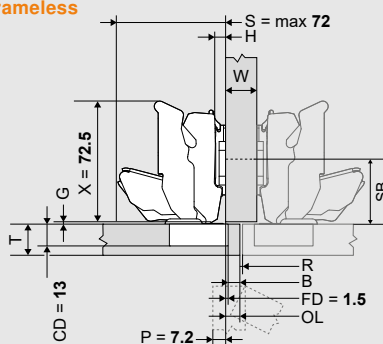


Inset



Frame

For face frame application, use illustration below and block out.

Frameless

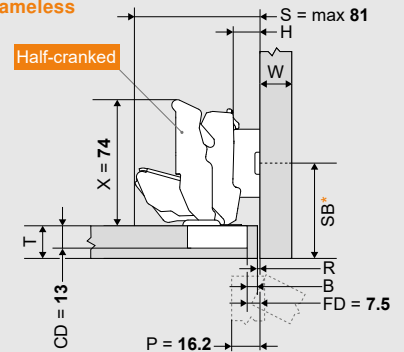

* move back plate position by door thickness (T) +1.5 mm

Boring Distance B

H	Door overlay OL (mm)																
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19		
0																3	4
3																4	5
6																5	6
9																6	7

H	Door overlay OL (mm)																
	0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5							
0																	
3																	
6																	
9																	

H	Door reveal R (mm)										
	4.5	3.5	2.5	1.5	0.5						
0											
3											
6											
9											

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T7550
INSERTA	NI	71T7590


Half-cranked	Finish	Self close
Screw-on	NI	71T7650
INSERTA	NI	71T7690

Straight-arm	Finish	Free swing
INSERTA	NI / ONS	70T7590.TL

Half-cranked	Finish	Free swing
INSERTA	NI / ONS	70T7690.TL

Door protrusion

At a 90° opening, using 0 mm plate, the door will have -2.3 mm protrusion regardless of boring distance. Use side adjustment to increase or decrease door protrusion.



NOTE: Use of 0 mm or 3 mm is recommended for zero protrusion
NOTE: 32 mm (at standard factory gaps with B = 5 mm) +/- B will change this distance


B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses of 15-23
- 60° opening angle
- 3-dimensional front adjustment

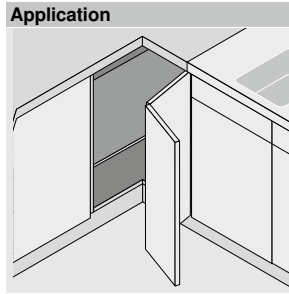


Inside corner application

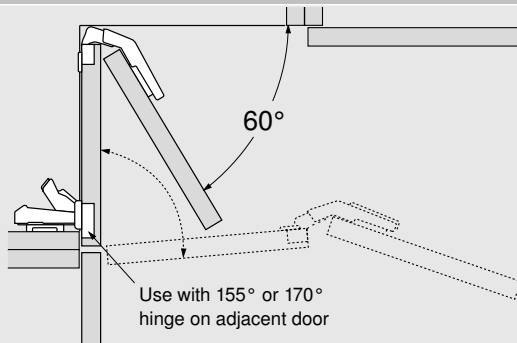

With flat panel doors

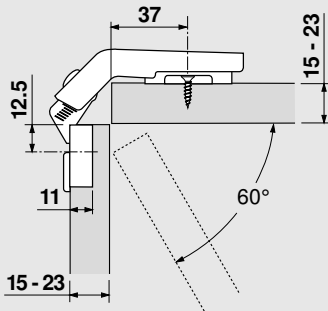


With profile doors

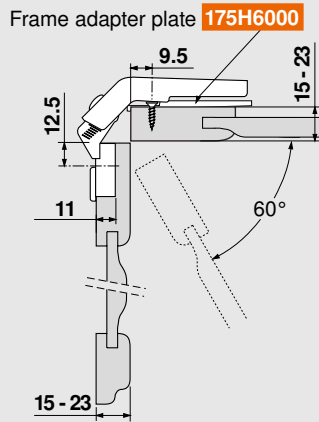


Adjustment

The spiral tech cam adjustment of the CLIP top bi-fold hinge allows +4/-7 mm adjustment

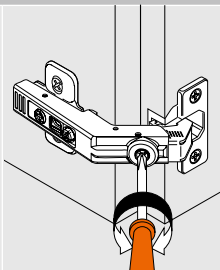

General specifications

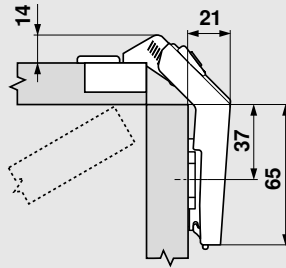

Calculating door sizes

The doors for a CLIP top bi-fold application can be of equal or unequal width. To calculate the door width (DW) of each door follow the step-by-step below.


Step 1. Add the interior width (IW) to the side panel width (W)

Step 2. Subtract door thickness (T) and reveal (R)

Step 3. Subtract gap (G) and bumper thickness behind adjacent door

Formula: $DW = (IW + W) \text{ minus } T \text{ minus } R \text{ minus } G$

Example: $DW = (362 + 19) - 19 - 3 - 1$
 $DW = 358 \text{ mm}$

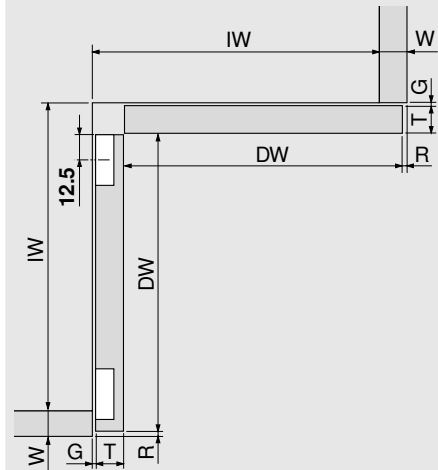

Bi-fold hinges	Finish	Self close
Screw-on	NI / ONS	79T8500
Press-in	NI / ONS	79T8530

B = Boring distance **CD** = Cup depth **FD** = Fixed distance **G** = Gap **H** = Plate height **NI** = Nickel
OL = Door overlay **ONS** = Onyx black **P** = Door protrusion **RC** = Recess **R** = Reveal **S** = Side arm protrusion
SB = Mounting plate setback **T** = Door thickness **W** = Side panel thickness **X** = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 24 (15/16)
- 95° opening angle
- 3-dimensional front adjustment


Application




Minimum reveal

Door frame thickness	Door frame thickness											
	18	19	20	21	22	24	25	26	27	28	30	32
19	0.2	0.3	0.4	0.6	0.7	1.2	Δ	Δ	Δ	Δ	Δ	Δ
20	0.2	0.3	0.4	0.5	0.7	1.1	Δ	Δ	Δ	Δ	Δ	Δ
21	0.2	0.3	0.4	0.5	0.7	1.0	Δ	Δ	Δ	Δ	Δ	Δ
22	0.2	0.3	0.4	0.5	0.7	1.1	Δ	Δ	Δ	Δ	Δ	Δ
Additional for +2 mm side adjustment												
	+0.1	+0.2	+0.3	+0.3	+0.3	+0.4						
Δ	In these cases a trial is recommended											


Overlay




Frameless




Partial/twin overlay




Frameless



Inset




Frameless



*Set mounting plate back by frame thickness +1.7 mm

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.


Aluminum door preparation

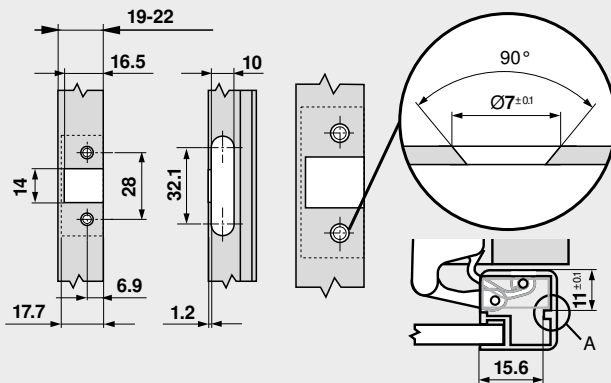


A The hinge cup should be able to support itself in the routing

Installation

Insert hinges into machined openings



Attach using aluminum screws provided with hinges (666.095)



Straight-arm	Finish	Self close	Half-cranked	Finish	Self close	Full-cranked	Finish	Self close
Screw-on	NI / ONS	71T950A	Screw-on	NI / ONS	71T960A	Screw-on	NI / ONS	71T970A

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For doors with small frames/stiles
- For door thicknesses up to 26 (1")
- 94° opening angle
- 3-dimensional front adjustment

Application




Minimum reveal


B	Door thickness T (mm)										
	16	18	19	20	22	24	26	28	30	31	32
3	1.1	2.2	3.0	3.8	5.5	7.3	9.1	Δ	Δ	Δ	Δ
4	1.1	2.0	2.7	3.5	5.0	6.8	8.6	Δ	Δ	Δ	Δ
5	1.1	1.8	2.4	3.0	4.6	6.3	8.0	Δ	Δ	Δ	Δ

Δ In these cases a trial is recommended


Overlay




Frame

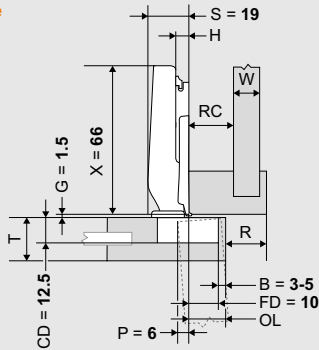


Frameless

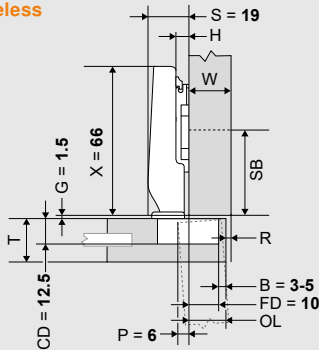


Partial/twin overlay




Frame

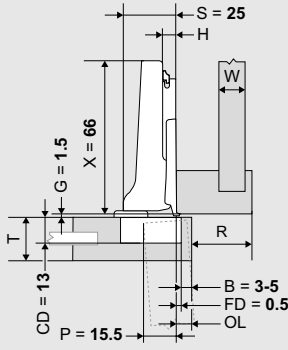


Frameless

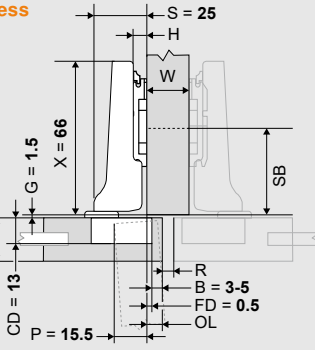


Inset



Frame

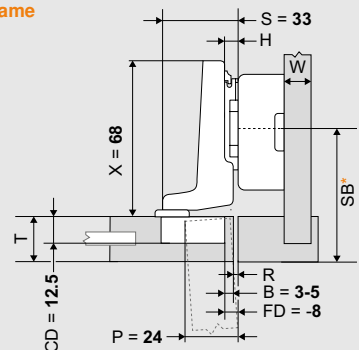

Frameless

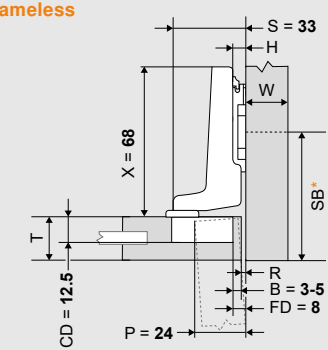

*move back plate position by door thickness (T) +1.5 mm

Boring distance B

H	Door overlay OL (mm)														
	4	5	6	7	8	9	10	11	12	13	14	15			
0													3	4	5
3									3	4	5				
6				3	4	5									
9	3	4	5												

H	Door overlay OL (mm)														
	-5.5	-4.5	-3.5	-2.5	-1.5	-0.5	0.5	1.5	2.5	3.5	4.5	5.5			
0													3	4	5
3													3	4	5
6				3	4	5									
9	3	4	5												

H	Door reveal R (mm)														
0															
3															
6															
9															


NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71T0550


Half-cranked	Finish	Self close
Screw-on	NI	71T0650

Full-cranked	Finish	Self close
Screw-on	NI	71T0750

Screw-on

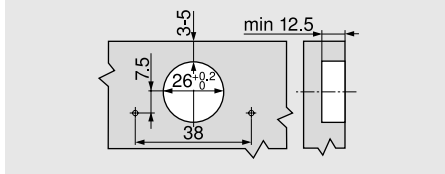

Hinge cup dimensions

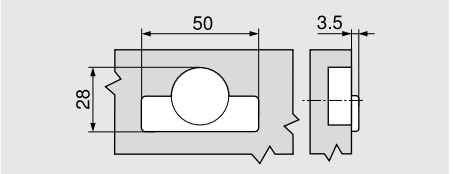

NOTE: 26 mm drill bit required (1" cannot be used)

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For glass thickness of 4.5 mm to 7 mm
- 94° opening angle
- 3-dimensional front adjustment
- 26 mm drill bit required (1" cannot be used)

Application




Minimum reveal


For door thicknesses T from 4.5 to 7 mm, no gap G is required.

CLIP top


Overlay




Frameless




Partial/twin overlay




Frameless



Inset




Frameless



Door thickness amount includes glass + height of cover cap

*move back plate position by door thickness (T) +1.5 mm


Hinge cup dimensions and boring pattern

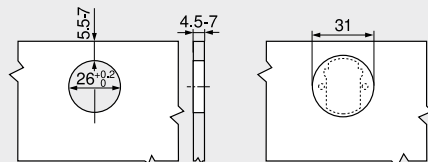


IMPORTANT: Must use tempered glass.
NOTE: Installation screws included (605.1100)
26 mm drill bit required (1" cannot be used)

Cover caps for door fronts

D-shape cap



Round cap



- D-shape available in polished chrome
- Round available in black and polished chrome

NOTE: Caps are necessary to secure the hinge cup using the included installation screws (605.1100).

Part no.

D-shape cover cap	84.4120
Round cover cap	84.4140

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Boring distance B

Door overlay OL (mm)																
H	7	8	9	10	11	12	13	14	15	16	17					
0											6	7				
3							6	7								
6				6	7											
9	6	7														

Door overlay OL (mm)																
H		0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5							
0									6	7						
3					6	7										
6			6	7												
9																

Door reveal R (mm)																
H	5.5	5	4.5	4	3.5	3	2.5	2	1.5	1						
0								5.5	6	6.5	7					
3	5.5	6	6.5	7												
6																
9																

Straight-arm	Finish	Self close
Screw-on	NI	75T4100

Half-cranked	Finish	Self close
Screw-on	NI	75T4200

Full-cranked	Finish	Self close
Screw-on	NI	75T4300

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 24 (15/16")
- 100° opening angle
- 3-dimensional front adjustment
- Add-on BLUMOTION soft close available

Application




Minimum reveal


B	Door thickness T (mm)											
	16	18	19	20	21	22	24	26	28	30	31	32
3	0.3	0.5	0.7	1.0	1.3	1.6	3.3	Δ	Δ	Δ	Δ	Δ
4	0.3	0.5	0.7	1.0	1.2	1.6	3.2	Δ	Δ	Δ	Δ	Δ
5	0.3	0.5	0.7	0.9	1.2	1.5	2.6	Δ	Δ	Δ	Δ	Δ
6	0.3	0.5	0.7	0.9	1.1	1.4	2.4	Δ	Δ	Δ	Δ	Δ
Additional for +2 mm side adjustment												
	+0.1	+0.3	+0.3	+0.4	+0.4	+0.5	+0.4					

Δ In these cases a trial is recommended


Overlay




Frame




Frameless




Partial/twin overlay




Frame




Frameless

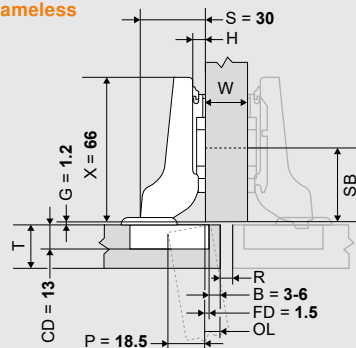


Inset



Frame

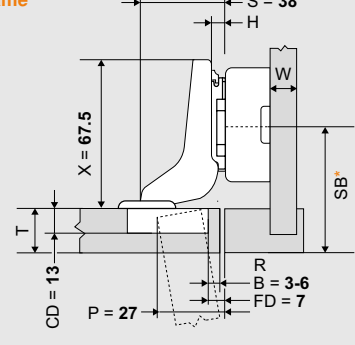

Frameless



*move back plate position by door thickness (T) +1.5 mm

Boring distance B

Door overlay OL (mm)																	
H	5	6	7	8	9	10	11	12	13	14	15	16	17				
0												3	4	5	6		
3													3	4	5	6	
6					3	4	5	6									
9	3	4	5	6													

Door overlay OL (mm)																	
H	-4.5	-3.5	-2.5	-1.5	-0.5	0.5	1.5	2.5	3.5	4.5	5.5	6.5	7.5				
0														3	4	5	6
3															3	4	5
6																3	4
9																	3

Door reveal R (mm)											
H											
0											
3											
6											
9											

NOTE: Hinge dimensions and reveal calculation based on factory setting (mounting plate height = 0 mm). Hinge and door protrusion at full opening angle.

Straight-arm	Finish	Self close
Screw-on	NI	71M2550
Press-in	NI	71M2580

Half-cranked	Finish	Self close
Screw-on	NI	71M2650
Press-in	NI	71M2680

Full-cranked	Finish	Self close
Screw-on	NI	71M2750
Press-in	NI	71M2780

Straight-arm	Finish	Free swing
Screw-on	NI	70M2550.TL
Press-in	NI	70M2580.TL


Half-cranked	Finish	Free swing
Screw-on	NI	70M2650.TL

Full-cranked	Finish	Free swing
Screw-on	NI	70M2750.TL
Press-in	NI	70M2780.TL

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

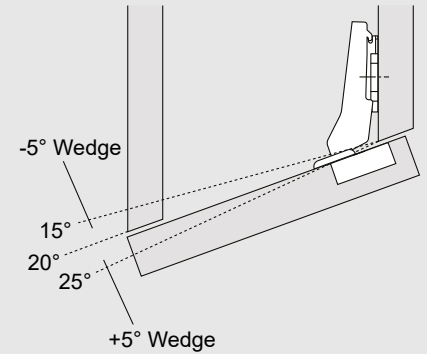
Applications from -45° to $+45^{\circ}$ are possible

Example: 20° hinge
Wedge $+5^{\circ}$ / -5°

Angled
hinges

Applications					
Maximum overlay application	Partial overlay application	Corner merge	Inset application	Mitred application	
					How to achieve the relevant application: - Angled hinges - Mounting plate setback - Wedges - Hinge adjustment - Mounting plate height
Dependent on hinge design	Outer edge of door and outer edge of cabinet are in a line	Inner edge of door and inner edge of cabinet are flush	Outer edge of door and inner edge of cabinet are flush	Inner and outer edges of door and cabinet are flush	

Angle and cranking stamped on angled hinge



Example: 30° II	
30°	Cabinet angle
II	Cranking partial overlay application
Cranking	
I	Corner merge application
II	Partial overlay application
III	Maximum overlay application



Positive angle hinges

	Part no.		Part no.		Part no.		Part no.
+15°	79B9494	+20°	79B9595	+30° II	79B9596	+30° III	79B9496
	Part no.		Part no.		Part no.		
+45° I	79B9698	+45° II	79B3598	+45° III	79B9498		

Negative angle hinges

	Part no.		Part no.		Part no.		
-15°	79B3493	-30°	79B3491	-45°	79B3490		

Standard thick door hinges used in angled applications

	Part no.		Part no.		Part no.		
95° straight-arm	71B9590	95° half-cranked	71B9690	95° full-cranked	71B9790		

Angled spacer wedges for positive and negative angled hinges


	Part no.		Part no.		Part no.		Part no.
2 mm thickness		4 mm thickness		5 mm thickness		7 mm thickness	
-5°	171A5500	+5°	171A5010	+5°	171A5040	+5°	171A5070



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Hinge	CLIP top BLUMOTION	Application number
Plate	Mounting plate	Part number
Wedge/spacer	May or may not be required	Part number

NOTE: All 35 mm and 8 mm holes must be a minimum of 13 mm deep

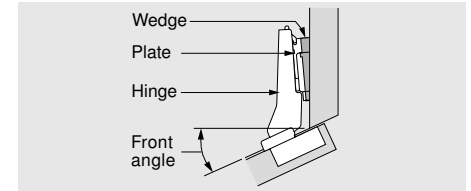

Positive angles

	Maximum overlay	Partial overlay	Corner merge	Inset door	Mitered corner
5°	1	10	19	27	
	71B9590	71B9590	71B9690	71B9790	
	173H7100	173H7100	173H7100	173H7100	
	171A5010	171A5010	171A5070	171A5010	
10°	2	11	20	28	
	79B9494	79B9494	79B9494	79B9494	
	173H7100	173H7100	175H9190.22	175H9190.22	
	171A5500	171A5500	171A5500	171A5500	
15°	3	12	21	29	36
	79B9494	79B9494	79B9595	79B9595	79B9595
	175H9160	175H9190	173H7130	175H9190	173H7100
			171A5500	171A5500	171A5500
20°	4	13	22	30	37
	79B9494	79B9595	79B9595	79B9595	79B9595
	173H7100	173H7100	175H9190	175H9190.22	175H9160
	171A5070				
25°	5	14	23	31	38
	79B9496	79B9595	79B9596	79B9596	79B9596
	173H7100	173H7100	173H7100	175H9190.22	173H7100
	171A5500	171A5010	171A5500		171A5500
30°	6	15	24	32	39
	79B9496	79B9596	79B9596	79B9596	79B9596
	175H9160	173H7100	175H9190	175H9190.22	173H7130
35°	7	16	25	33	40
	79B9496	79B9596	79B9596	79B9596	79B9596
	173H7100	173H7100	173H7100	175H9190.22	173H7100
	171A5070	171A5010	171A5070	171A5010	171A5040
40°	8	17		34	
	79B9498	79B9498	79B9498	79B9698	
	173H7100	175H9160	175H7190	175H9190	
	171A5500	171A5500	171A5040	171A5500	
45°	9	18	26	35	41
	79B9498	79B3598	79B9698	79B3598	79B9698
	175H9160	173H7100	173H7100	175H9190.22	173H7100

Negative angles










	Maximum overlay	Inset door
-5°	42	51
	71B9590	71B9690
	173H7100	173H7100
		171A5500
-10°	43	52
	79B3493	79B3493
	173H7100	175H7190
	171A5010	171A5010
-15°	44	53
	79B3493	79B3493
	173H7100	175H9190.22
-20°	45	54
	79B3493	79B3493
	173H7100	175H9160
	171A5500	171A5500
-25°	46	55
	79B3491	79B3491
	173H7100	175H7190
	171A5040	171A5070
-30°	47	
	79B3491	
	173H7130	
-35°	48	
	79B3491	
	173H7100	
	171A5500	
-40°	49	
	79B3490	
	173H7100	
	171A5040	
-45°	50	56
	79B3490	79B3490
	173H7130	175H7190
		181.6130

Angled hinges



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Positive angle applications

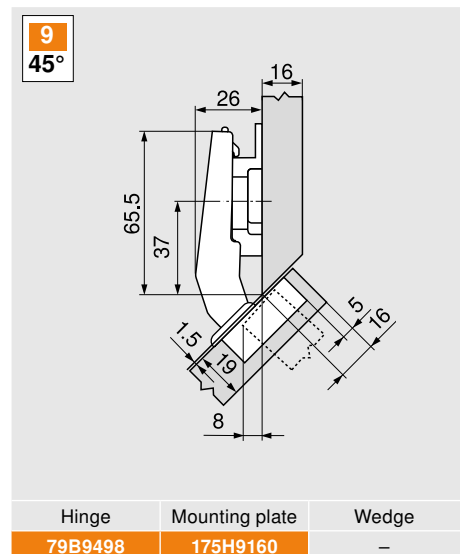
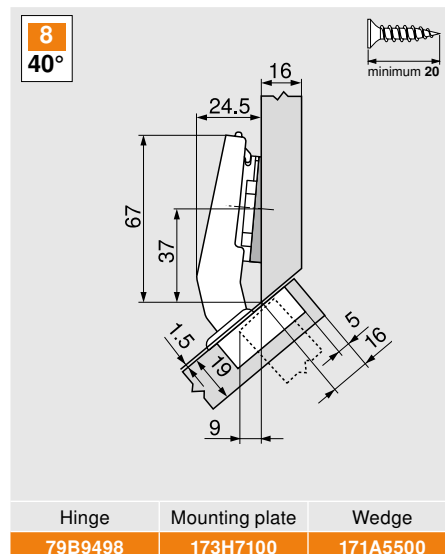
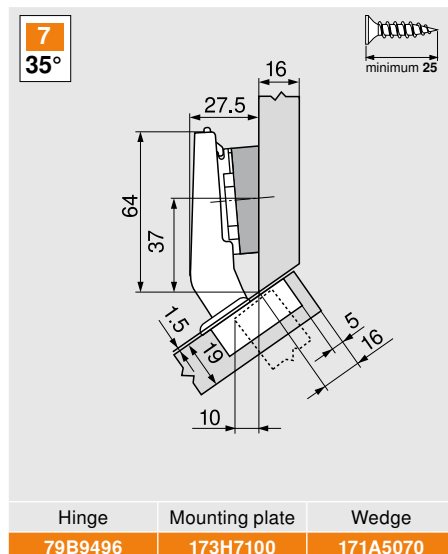
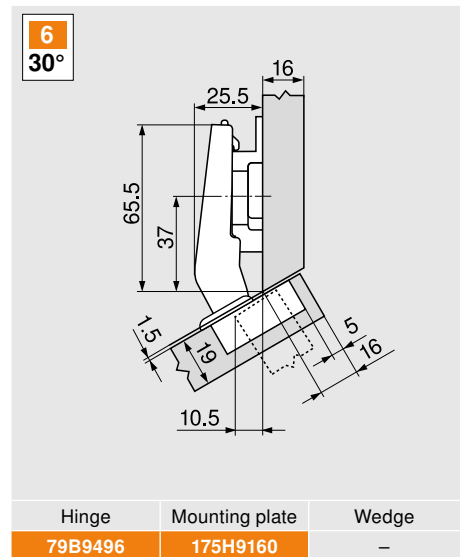
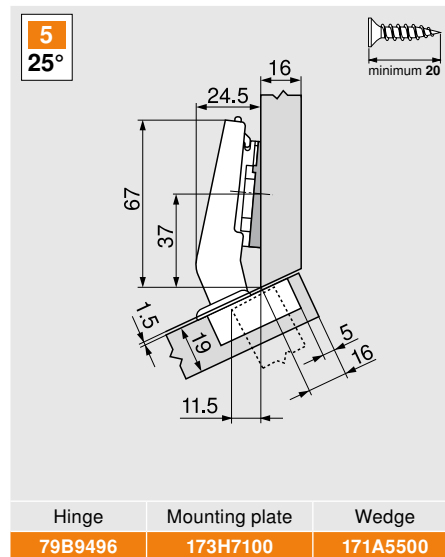
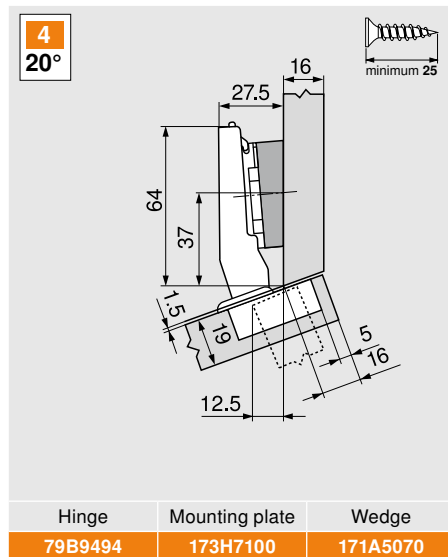
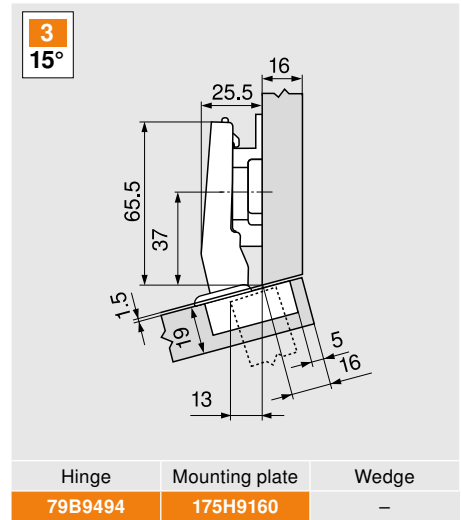
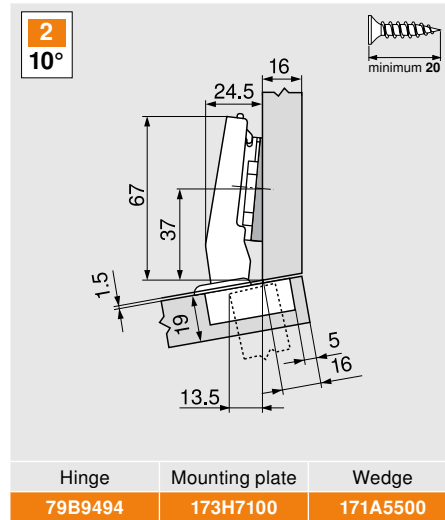
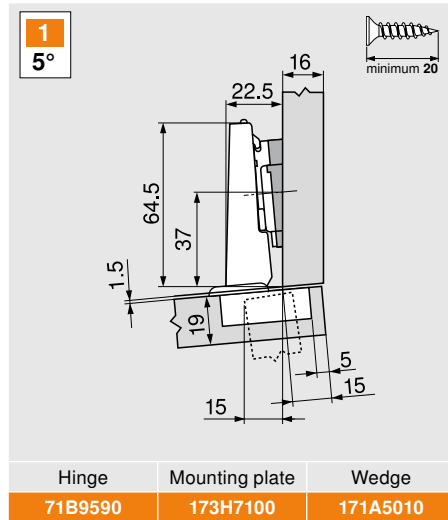


B = Boring distance **CD** = Cup depth **FD** = Fixed distance **G** = Gap **H** = Plate height **NI** = Nickel
OL = Door overlay **ONS** = Onyx black **P** = Door protrusion **RC** = Recess **R** = Reveal **S** = Side arm protrusion
SB = Mounting plate setback **T** = Door thickness **W** = Side panel thickness **X** = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Positive angle applications

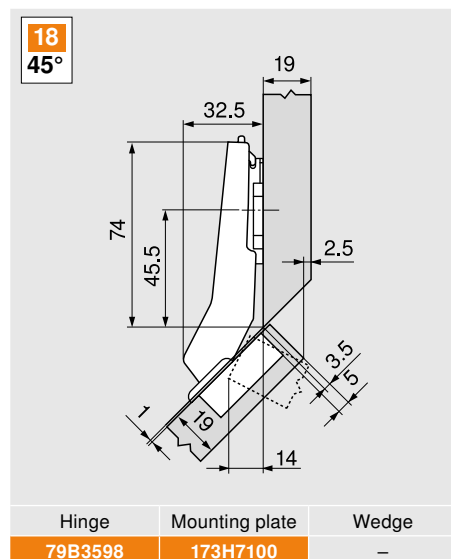
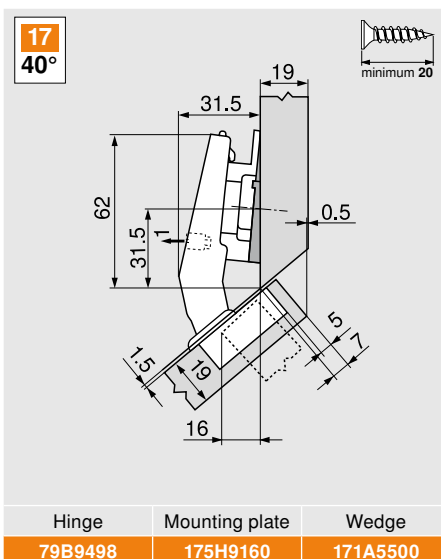
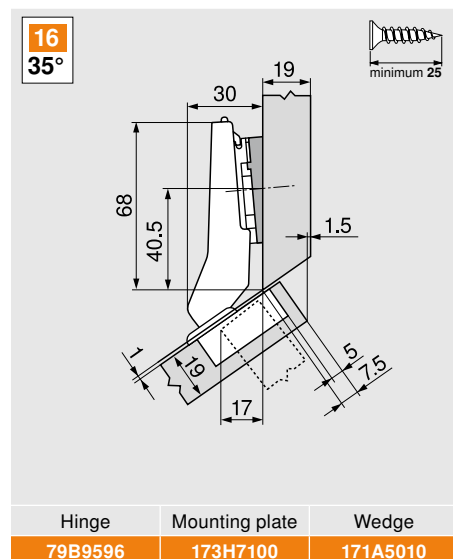
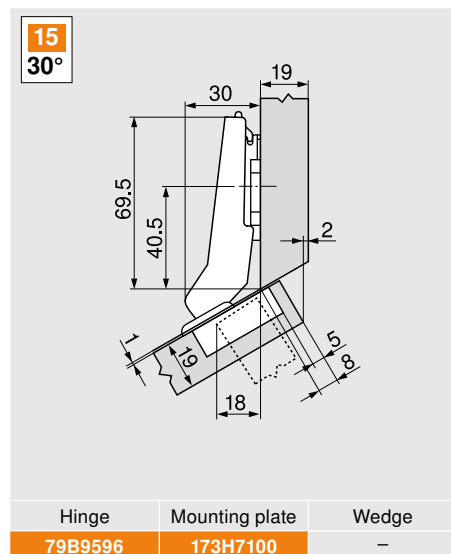
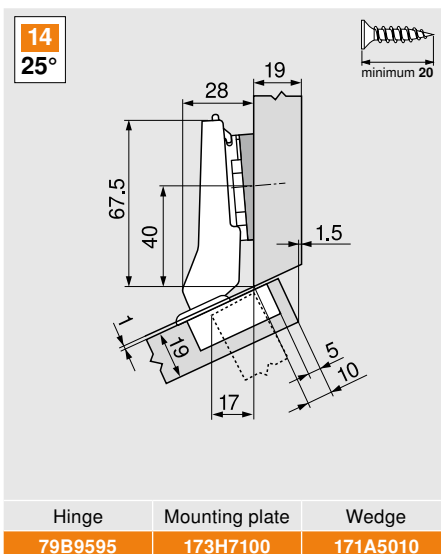
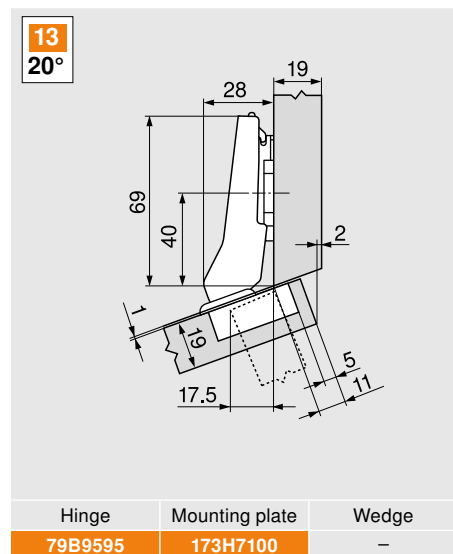
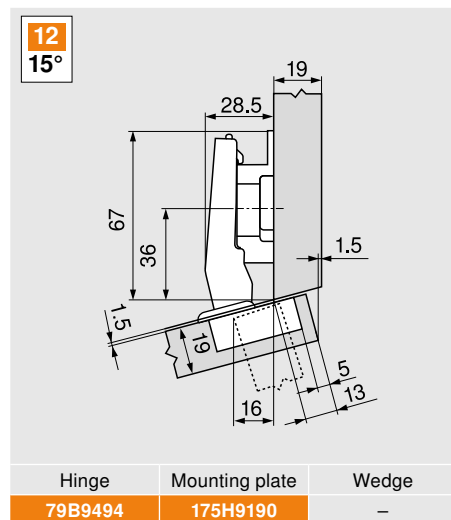
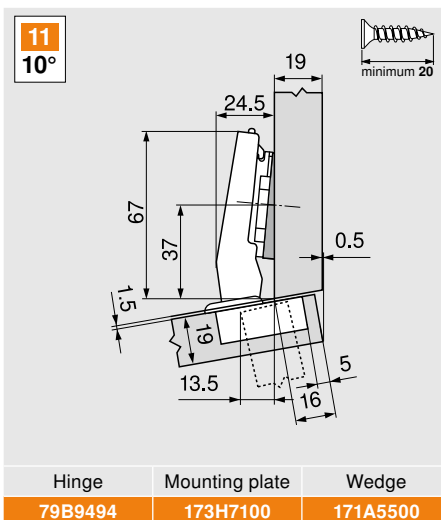
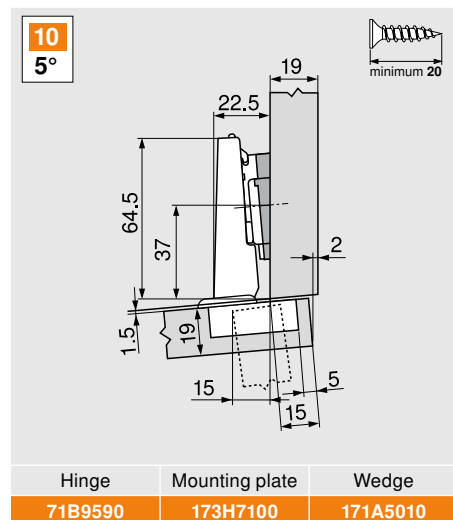


B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Positive angle applications

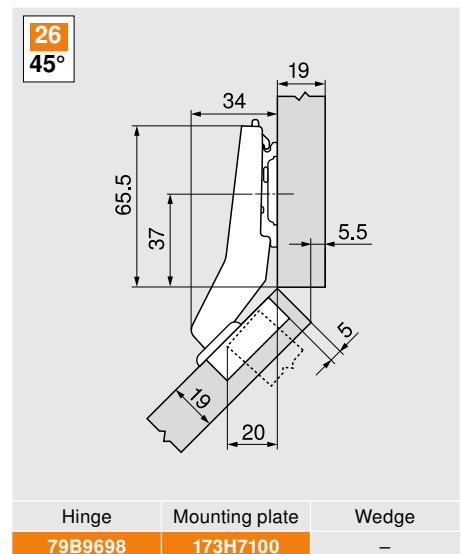
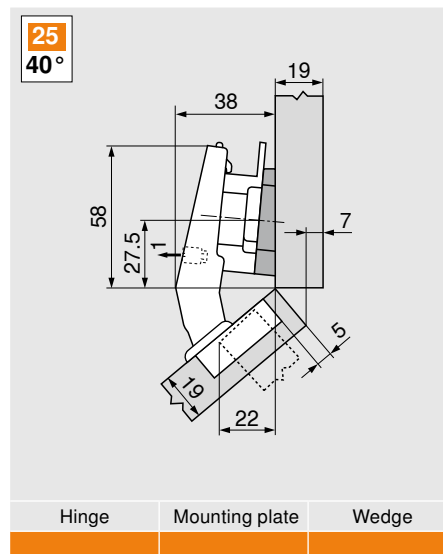
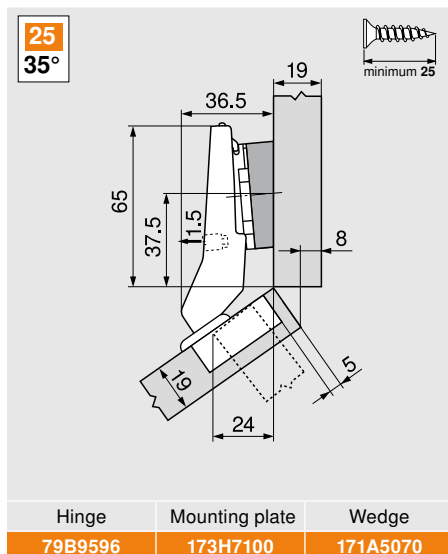
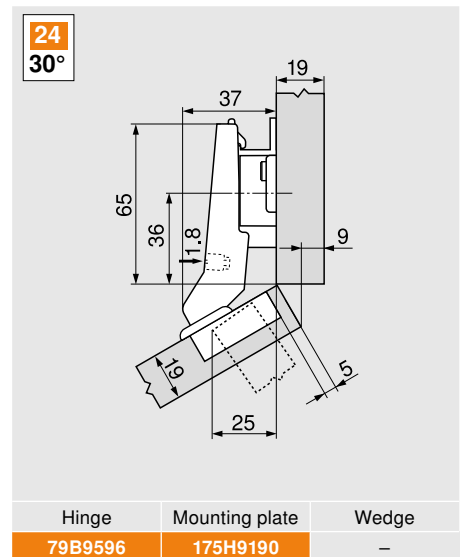
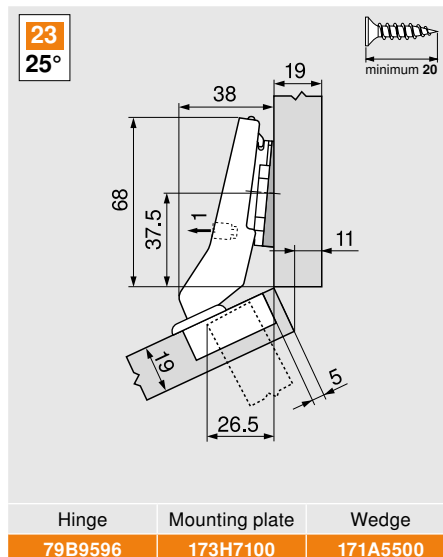
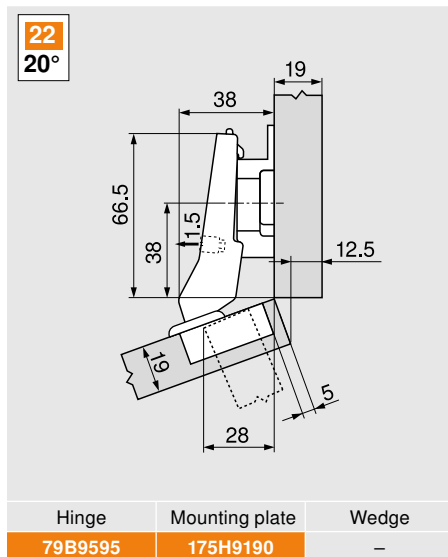
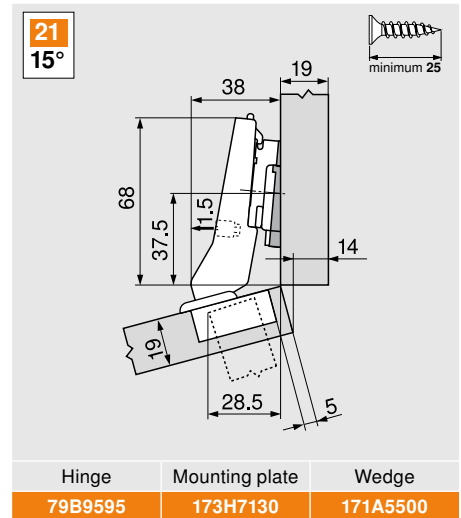
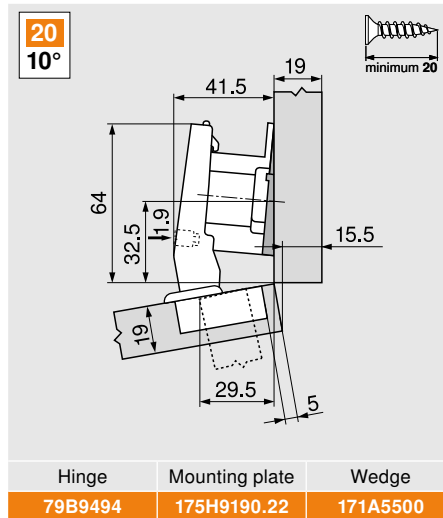
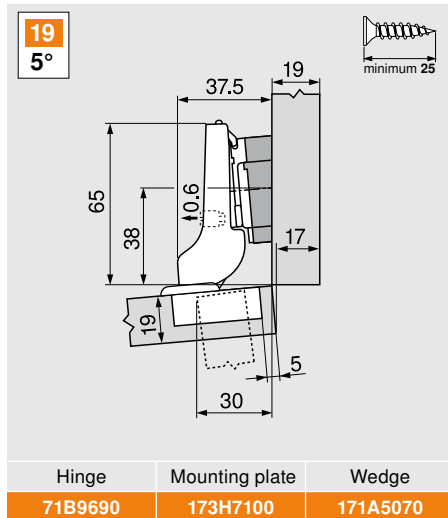


B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Positive angle applications

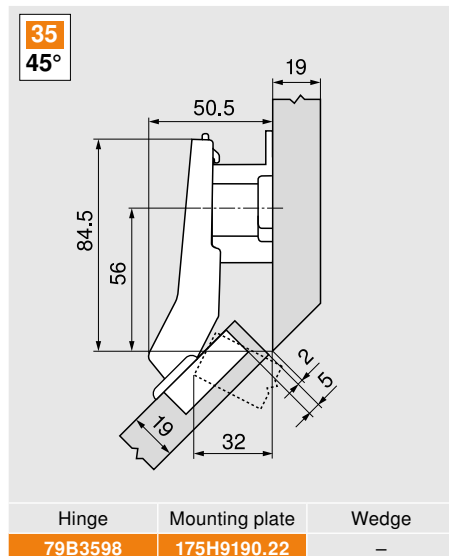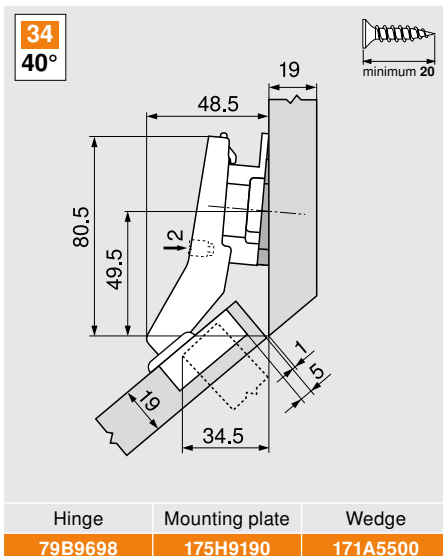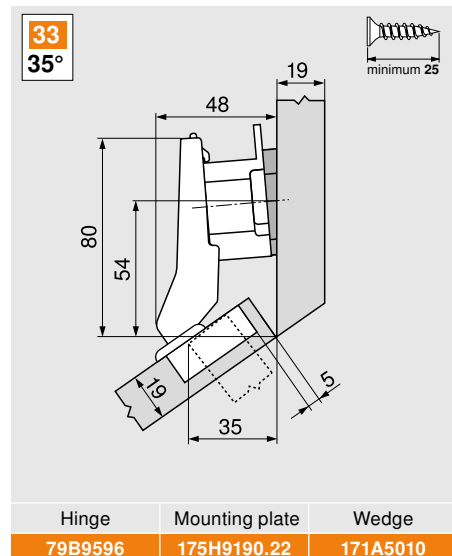
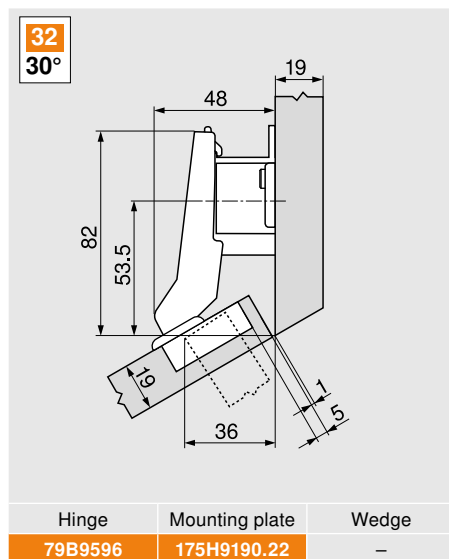
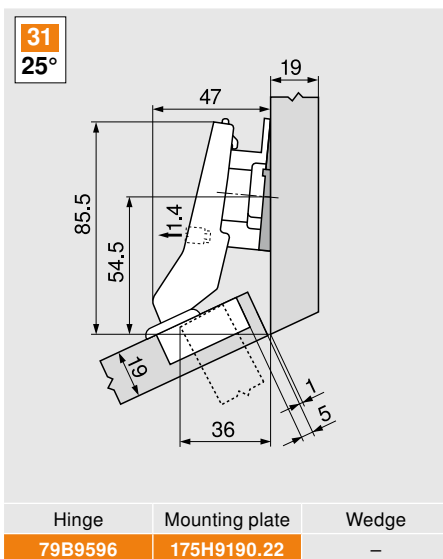
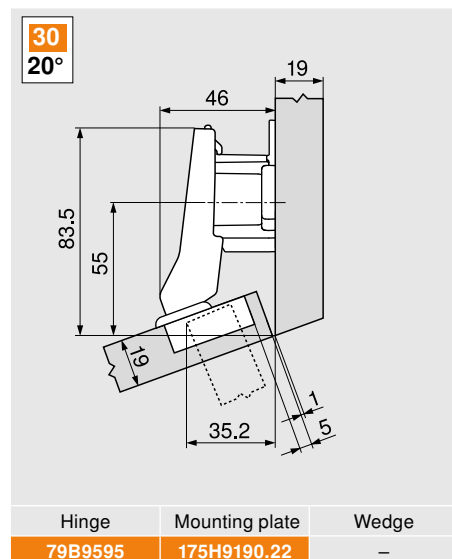
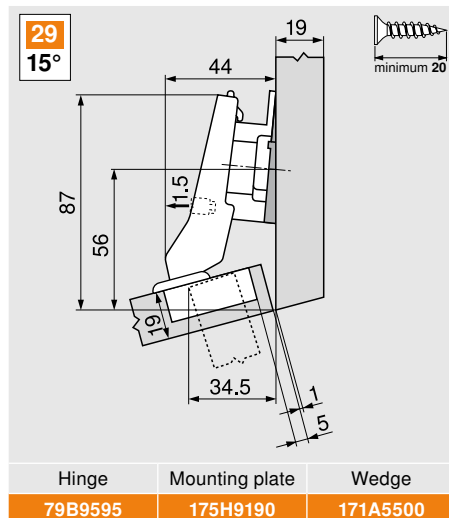
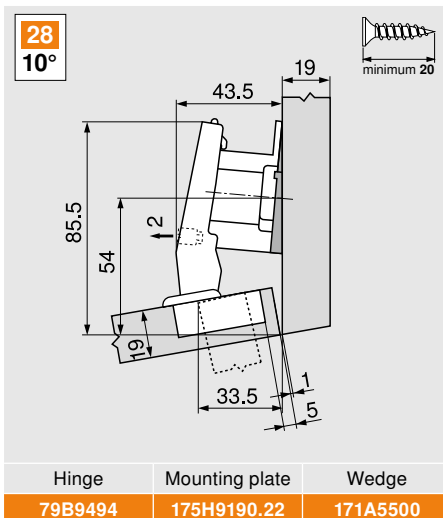
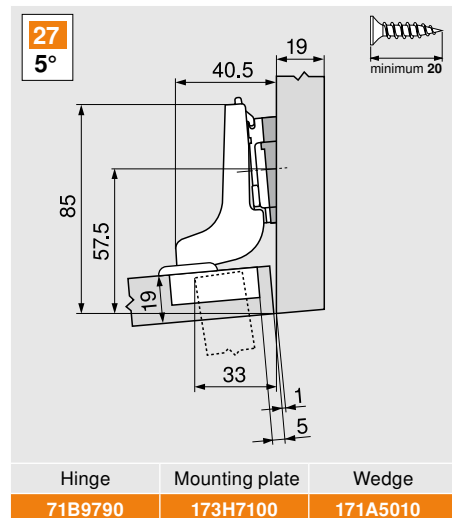


B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion












Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Positive angle applications

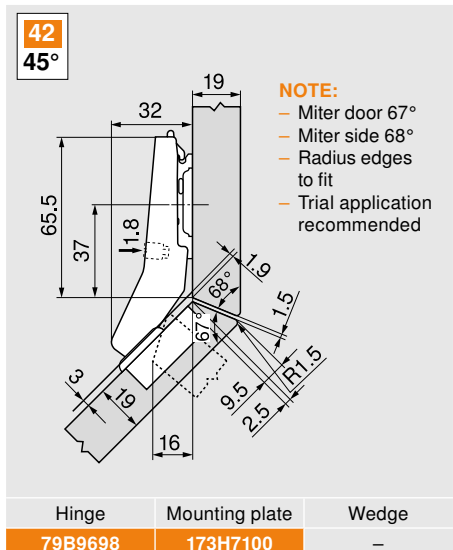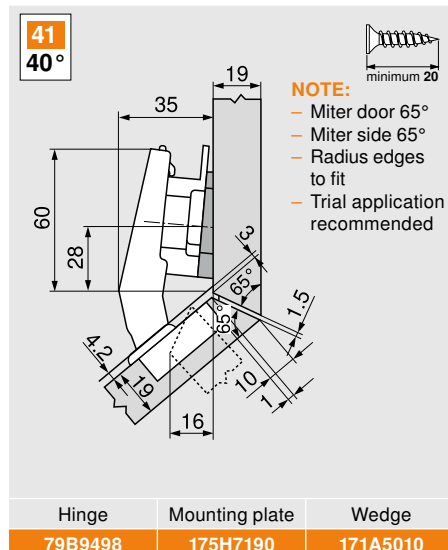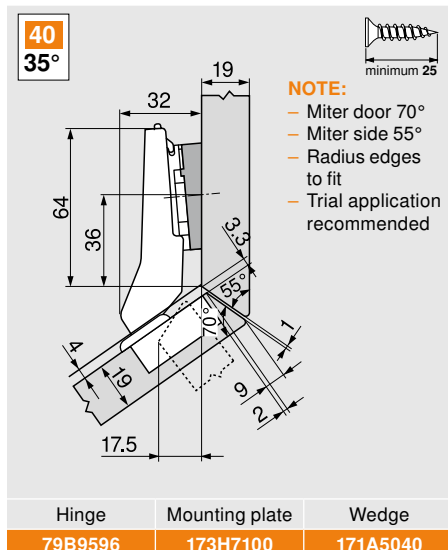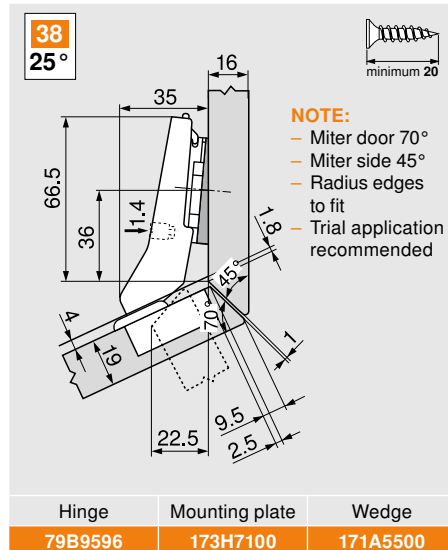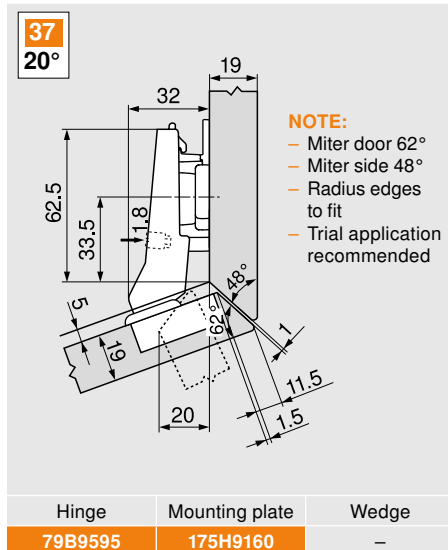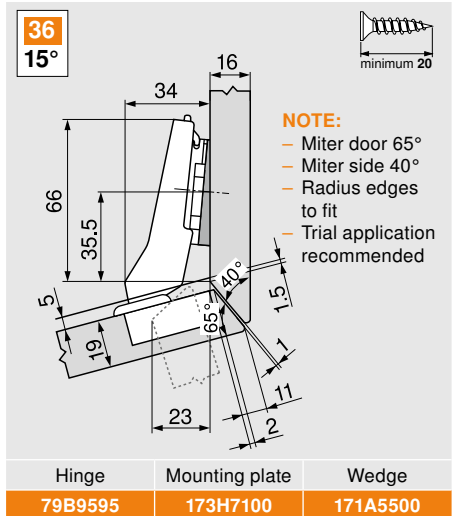










Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Negative angle applications

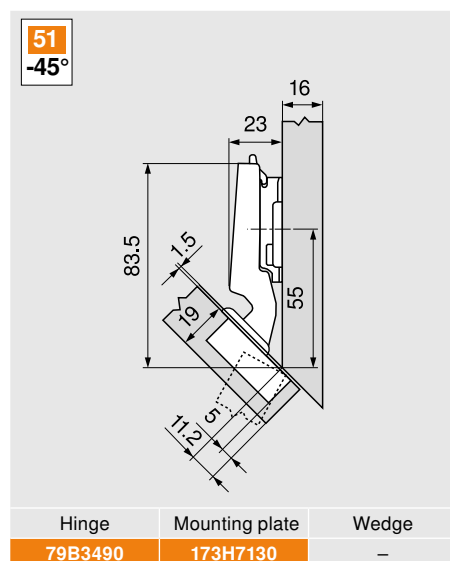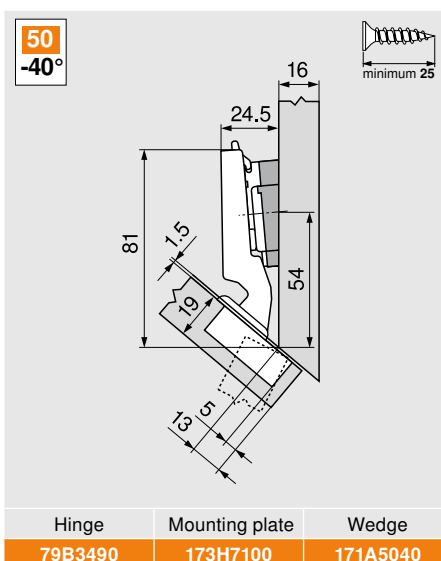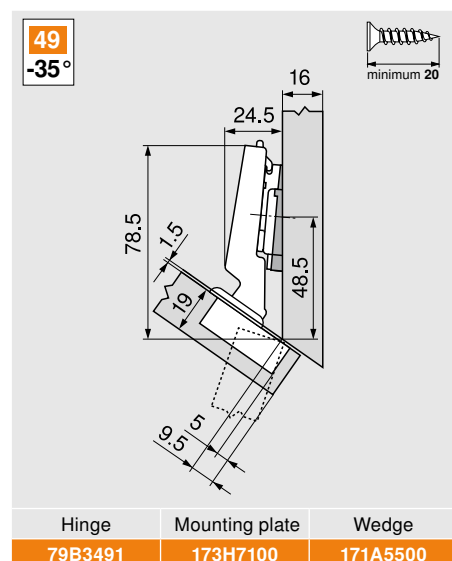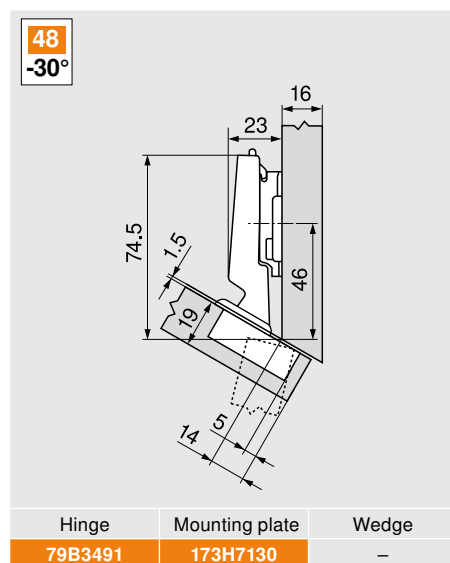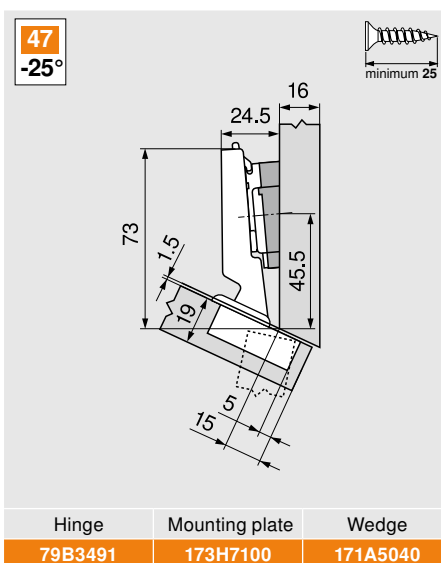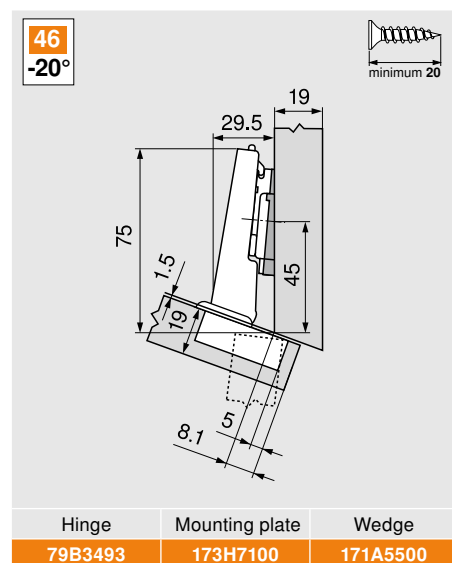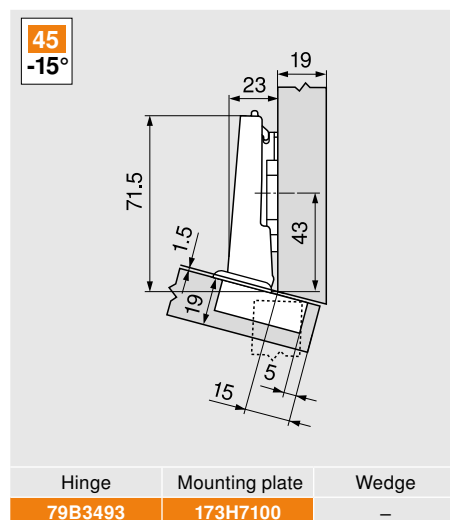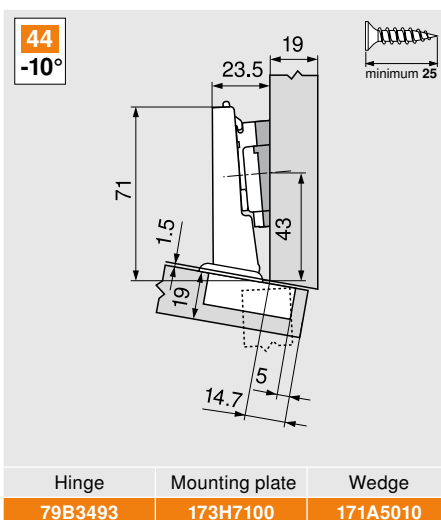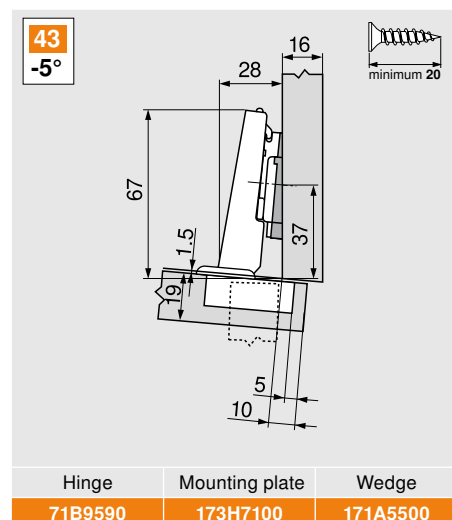


Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Negative angle applications

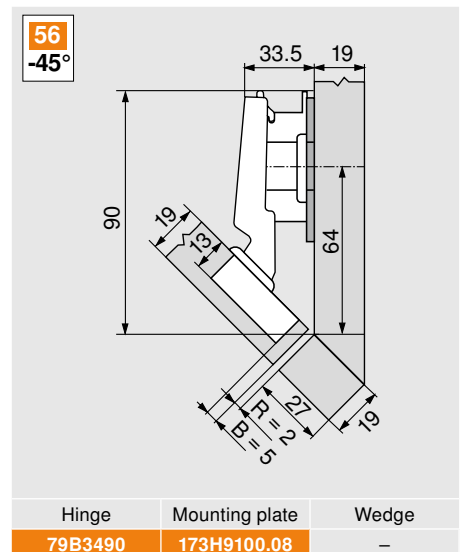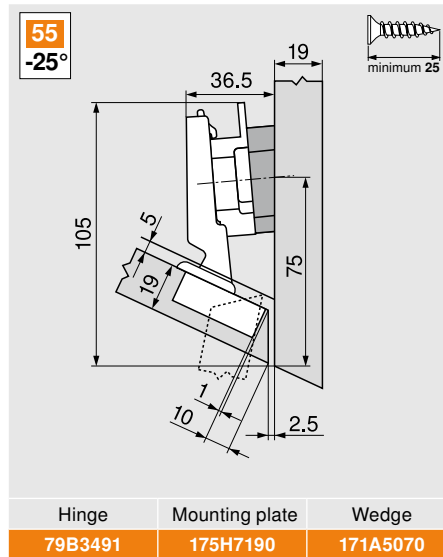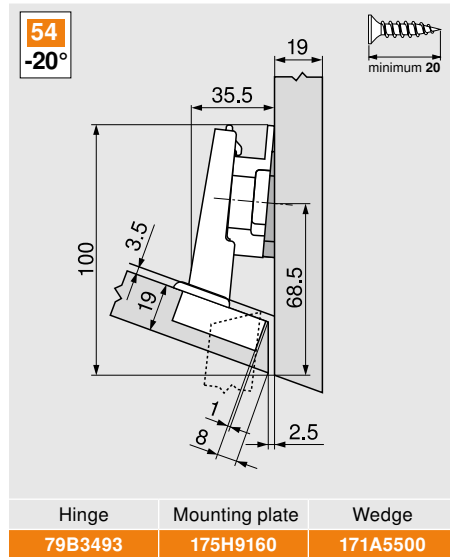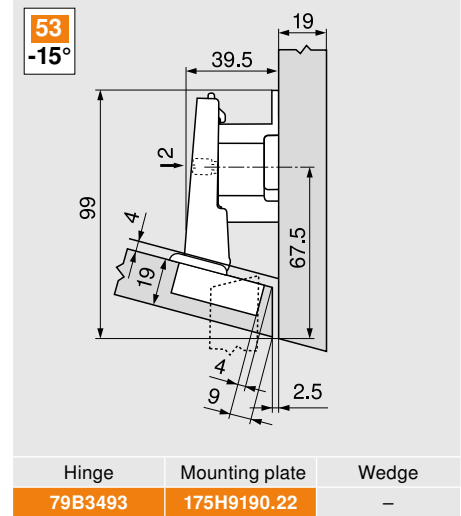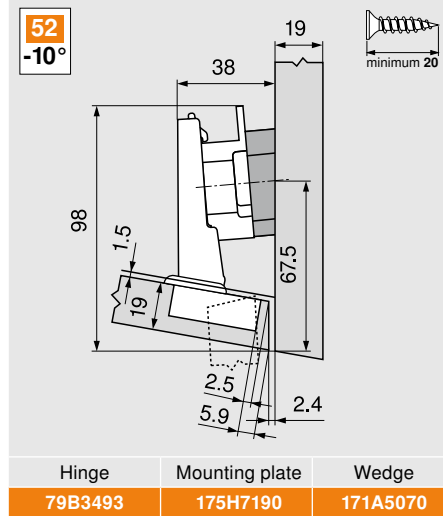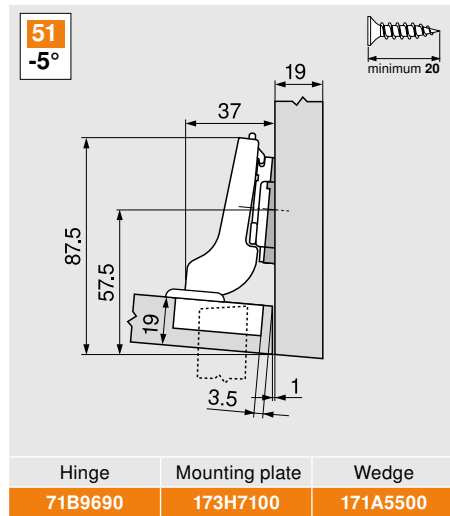

Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

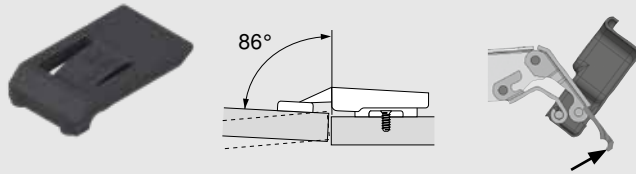
Angle restriction clip for 107° hinges


- Reduces opening angle of the CLIP top and CLIP 107° to 86°
- For use with CLIP top 107° hinges only
- Installs quickly, easily and tool-free
- Non-removable
- Black nylon

Part no.

86° Angle restriction clip

74.1103

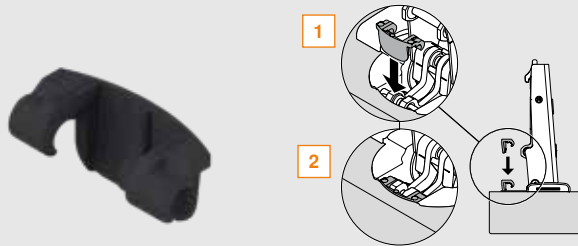
Angle restriction clip for 110° hinges


- Reduces opening angle of the CLIP top 110° and 110°+ to 86°
- For use with CLIP top 110° and 110°+ hinges only
- Installs quickly, easily and tool-free
- Black nylon

Part no.

86° Angle restriction clip

70T3553

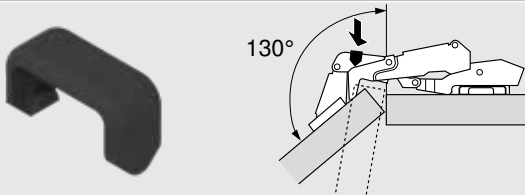
Angle restriction clip for 170° hinges


- Reduces opening angle of the CLIP top 170° to 130°
- Required for special applications of the 170° hinge
- Installs quickly, easily and tool-free
- Black nylon

Part no.

130° Angle restriction clip

70.6103

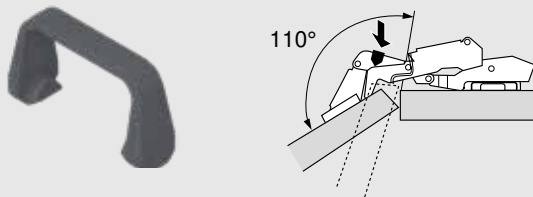
Angle restriction clips for 125° & 155° zero protrusion hinges


- Reduces opening angle of CLIP top 155° hinges to 110°/CLIP top 125° hinges to 92°
- For use with 155° and 125° hinges only
- Installs quickly, easily and tool-free
- Gray nylon

Part no.

110° Angle restriction clip

70T7553

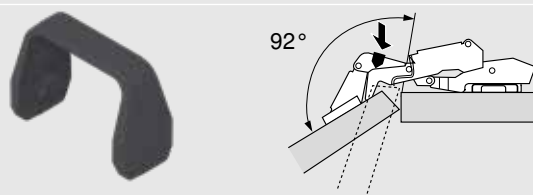

- Reduces opening angle of CLIP top 155° hinges to 92°
- For use with 155° hinges only
- Installs quickly, easily and tool-free
- Gray nylon

Part no.

92° Angle restriction clip

70T7553.09

Angle restriction clips for thin door hinges


- Reduces opening angle of thin door hinges to 85°
- For use with thin door hinges only
- Installs quickly, easily and tool-free
- Gray nylon

Part no.

85° Angle restriction clip

70T4503



- Reduces opening angle of thin door hinges to 92°
- For use with thin door hinges only
- Installs quickly, easily and tool-free
- Gray nylon

Part no.

92° Angle restriction clip



70T4503.09



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Standard one-piece wing mounting plates



Wood screw

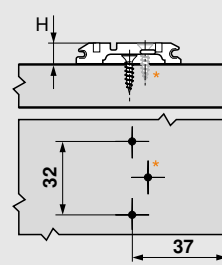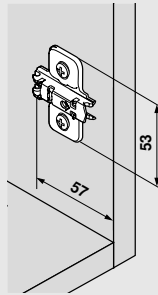

- Steel, nickel-plated
- Attached with #6 x 5/8" wood screws
- Height adjustment ± 3 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	173L6100
3 plate height (H)	11.5	NI / ONS	173L6130



System screw



- Steel, nickel-plated
- Attached with pre-mounted $\varnothing 5$ mm system screws (668.1450.EH)
- Height adjustment ± 3 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	173L8100
3 plate height (H)	11.5	NI / ONS	173L8130



EXPANDO



- Steel, nickel-plated
- Attached with pre-mounted screws with EXPANDO dowels
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	174E6100.01



EXPANDO (twin application)



- Steel, nickel-plated
- Attached with pre-mounted screws with EXPANDO dowels for twin application
- Height adjustment ± 2 mm
- Additional screw recommended

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	174E610Z

System screw



- Zinc die-cast, nickel-plated
- Attached with pre-mounted $\varnothing 5$ mm system screws (668.1450.EH)
- Height adjustment ± 3 mm

	Physical height	Finish	Part no.
9 plate height (H)	17.5	NI	175L8190



*Add additional wood screw if used with wide angled hinges



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Cam adjustable wing mounting plates



Wood screw



- Steel, nickel-plated
- Attached with #6 x 5/8" wood screws
- Cam height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height	8.5	NI / ONS	173H7100
3 plate height	11.5	NI / ONS	173H7130



System screw



- Steel, nickel-plated
- Attached with #7 x 5/8" wood screws or $\varnothing 5 \times 13$ mm system screws
- Cam height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	173H9100
3 plate height (H)	11.5	NI	173H9130



EXPANDO



- Steel, nickel-plated
- Attached with pre-mounted screws with EXPANDO dowels
- Cam height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	174H7100E
3 plate height (H)	11.5	NI / ONS	174H7130E



EXPANDO (twin application)



- Steel, nickel-plated
- Attached with pre-mounted screws with EXPANDO dowels for twin application
- Cam height adjustment ± 2 mm
- Additional screw recommended

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	174H710ZE

INSERTA



- Steel (closing lever – zinc die-cast, nickel-plated)
- Tool-free assembly with INSERTA self-anchoring feature
- Cam height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	174H7100I
3 plate height (H)	11.5	NI	174H7130I



*Add additional wood screw if used with wide angled hinges



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Standard two-piece wing mounting plates



Wood screw



- Zinc die-cast, nickel-plated
- Attached with #6 x 5/8" wood screws
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	175H7100
3 plate height (H)	11.5	NI	175H7130
9 plate height (H)	17.5	NI	175H7190

System screw





- Zinc die-cast, nickel-plated
- Attached with #7 x 5/8" wood screws or $\varnothing 5 \times 13$ mm system screws
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	175H9100
3 plate height (H)	11.5	NI	175H9130
6 plate height (H)	14.5	NI / ONS	175H9160
9 plate height (H)	17.5	NI / ONS	175H9190
18 plate height (H)	26.5	NI / ONS	175H9190.22

Cam adjustable in-line mounting plates



Wood screw



- Steel, nickel-plated
- Attached with #6 x 5/8" wood screws
- Cam height adjustment ± 2 mm
- Use of mounting plate template recommended

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	175H3100



Press-in

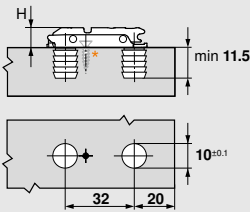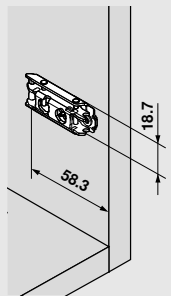

- Steel, nickel-plated
- Pre-attached with 10 mm dowels
- Cam height adjustment ± 2 mm
- Use of insertion ram MZM.0053 required

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	177H3100

EXPANDO

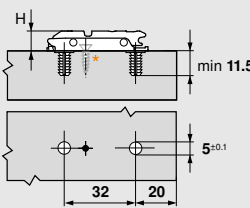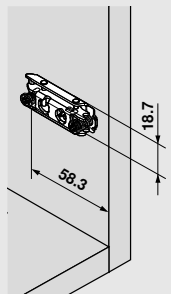

- Steel, nickel-plated
- Attached with pre-mounted screws with EXPANDO dowels
- Cam height adjustment ± 2 mm
- Use of mounting plate template recommended

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	177H3100E
3 plate height (H)	11.5	NI / ONS	177H3130E


*Add additional wood screw if used with wide angled hinges



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Face frame adapter plates

Cam adjustable center mount

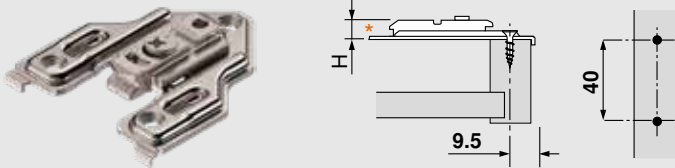


*Add additional wood screw if used with frameless application.

- Steel, zinc die-cast and nickel-plated
- Attached with #7 x minimum 3/4" wood screws
- Center mount **9.5** (3/8")
- Cam height adjustment ± 2 mm
- 175H6000 not for use with 95°, 107°, 120° and 120°+ INSERTA hinges

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	175H6000
3 plate height (H)	11.5	NI	175H6030
4.5 plate height (H)	13	NI	175H6040
6 plate height (H)	14.5	NI	175H6060


Center mount

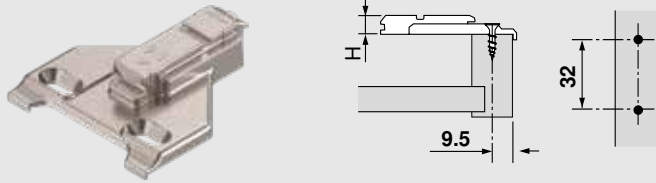

- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Center mount **9.5** (3/8")
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
3 plate height (H)	11.5	NI	175L6030.21

Off-center mount

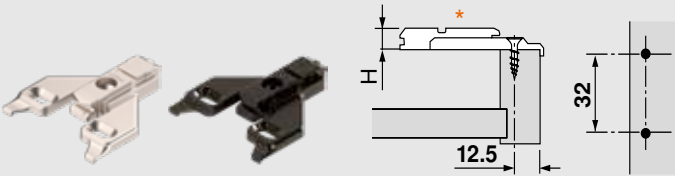


*Add additional wood screw if used with frameless application.

- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Off-center mount **12.5** (1/2")
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI / ONS	175L6600.22
3 plate height (H)	11.5	NI	175L6630.22
6 plate height (H)	14.5	NI	175L6660.22

With flange

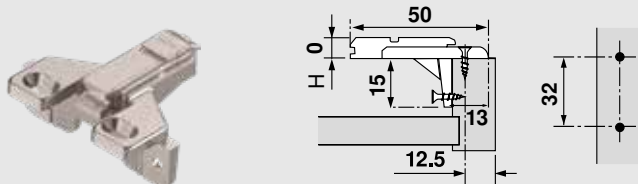


- Recommended when using 170°, 125° and 155° zero protrusion hinges on face frame cabinets
- Zinc die-cast, nickel-plated
- Attached with #7 x 3/4" wood screws
- Off-center mount **12.5** (1/2")
- Height adjustment ± 2 mm

	Physical height	Finish	Part no.
0 plate height (H)	8.5	NI	175L6600.24

Inset face frame adapter plate

Cam adjustable

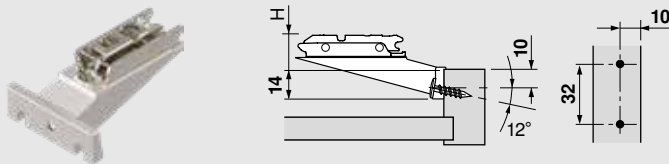

- **Use with half-cranked hinges only**
- Zinc die-cast, nickel-plated
- Attached with #8 x 3/4" truss head screws
- Can be used with applied bead molding
- Cam height adjustment ± 2 mm
- Wide angle hinges not recommended

	Physical height	Finish	Part no.
9 plate height (H)	17.5	NI	175H5030.21

NOTE: Use of PLATEMATE required with all face frame adapter plates. See page 85.


For inset with half-cranked hinges & face frame adapter plate see chart below:

Door reveal R (mm)					
H	4.5	3.5	2.5	1.5	0.5
9	3	4	5	6	7




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Cam adjustable wing mounting plates

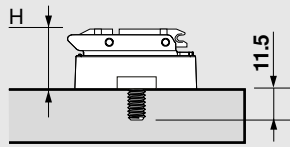


Boring pattern

wood screw



system screw



- Mounting plates with cam height adjustments to replace blocking out
- Steel, nickel-plated with zinc adapter
- Attached with #7 x 5/8" wood screws or Ø5 mm x 13 mm system screws
- Cam height adjustment ± 2 mm



- For 1/4" recess on an inset or overlay application
- Physical height: 14 mm (9/16")

Part no.

6 plate height (H)

173H9100.04



- For 3/8" recess on an inset or overlay application
- Physical height: 17 mm (11/16")

Part no.

9 plate height (H)

173H9130.06



- For 1/2" recess on an inset application
- Physical height: 21 mm (13/16")

Part no.

13 plate height (H)

173H9100.08



- For 5/8" recess on an inset application
- Physical height: 24 mm (15/16")

Part no.

16 plate height (H)

173H9130.10



- For 3/4" recess on an inset application
- Physical height: 27 mm (1-1/16")

Part no.

19 plate height (H)

173H9100.12



- For 7/8" recess on an inset application
- Physical height: 31 mm (1-1/4")

Part no.

22 plate height (H)

173H9130.14



- For 1" recess on an inset application
- Physical height: 34 mm (1-5/16")

Part no.

25 plate height (H)

173H9100.16



- For 1-1/8" recess on an inset application
- Physical height: 37 mm (1-7/16")

Part no.


29 plate height (H)

173H9130.18

Frameless applications


Overlay

0 mm plate




Partial/twin overlay

9 mm plate



Inset

19 mm plate












NOTE: With our CLIP wing mounting plate program, all three of the common frameless applications, (full overlay, half overlay and inset) can be achieved with a straight-arm hinge and cam height adjustment. An alternative inset application, includes the use of a half-cranked hinge and 9 mm cam height adjustment mounting plate.

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

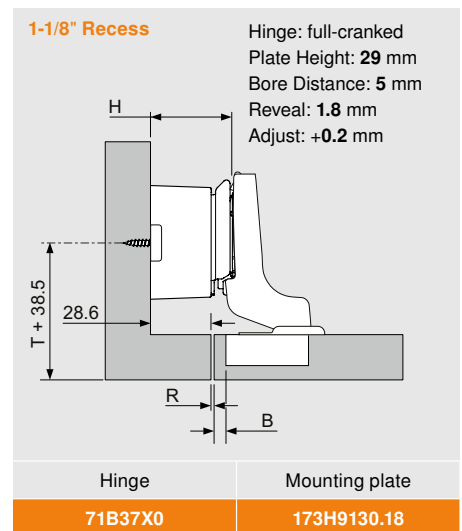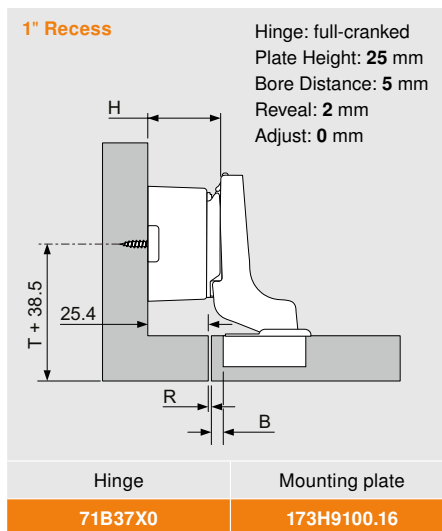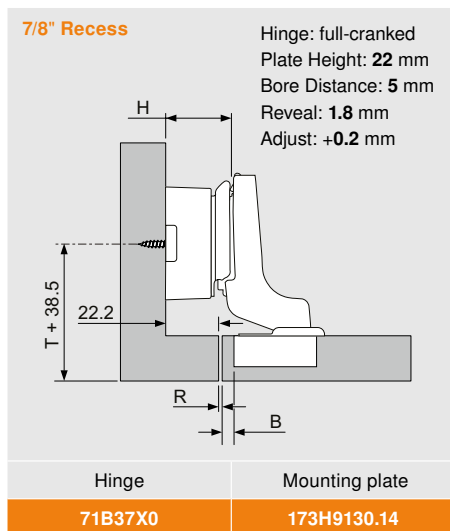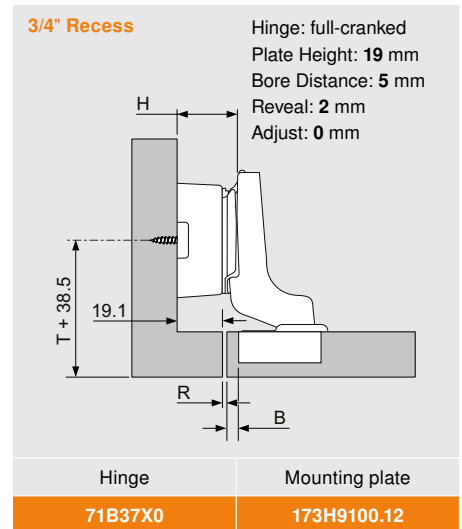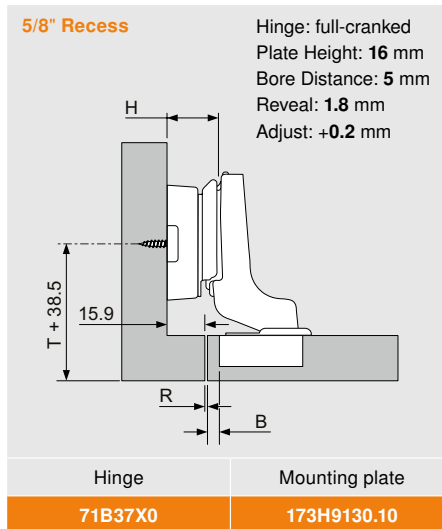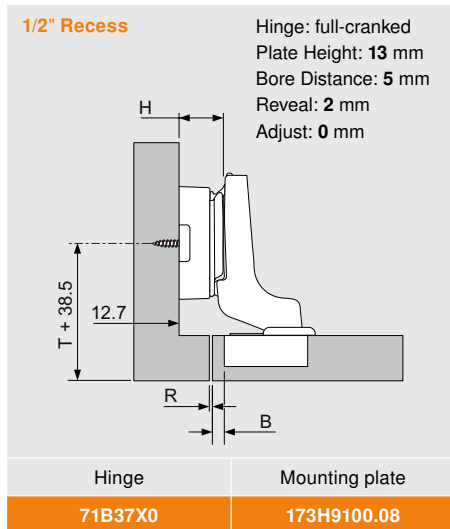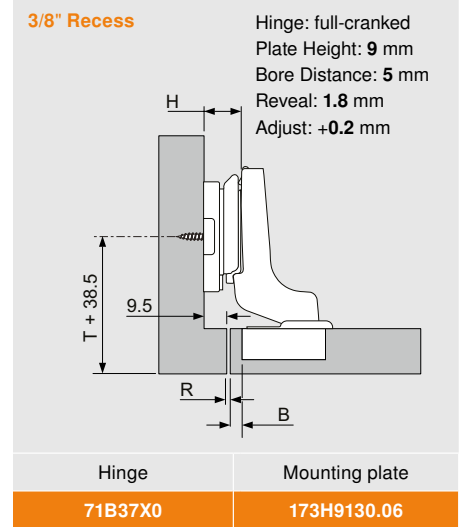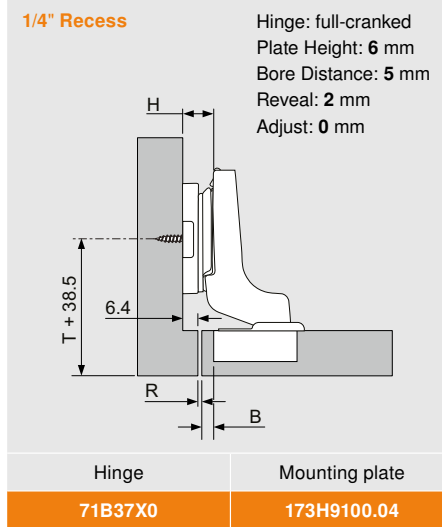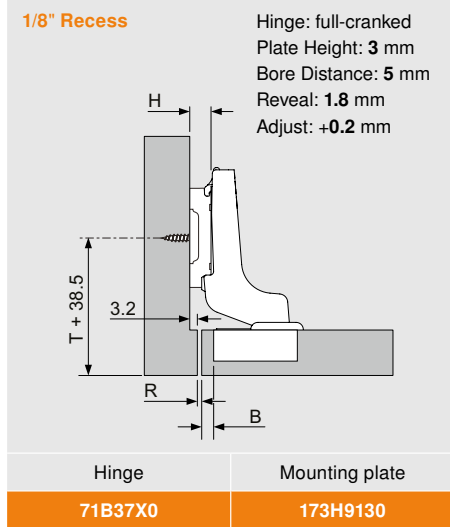

B = Boring distance CD = Cup depth FD = Fixed distance G = Gap H = Plate height NI = Nickel
OL = Door overlay ONS = Onyx black P = Door protrusion RC = Recess R = Reveal S = Side arm protrusion
SB = Mounting plate setback T = Door thickness W = Side panel thickness X = Depth arm protrusion



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Hinge arm cover cap					
Hinge applications		Straight hinge arm			Cranked hinge arm Double cranked arm
100°, 107°, 110°, 110°+, 120°, 120°+, thick door and bi-fold hinges					
	Color	NI / ONS	White / Gray	NI	NI / ONS
	Material	Steel	Nylon	Steel	Steel
	Print / stamp	Plain	Plain	Stamped	Plain
	Logo	Plain*	Plain*	Blum	Plain*
	Part no.	70.1503	90M2103.01	70.1503.BP	70.1663
Diagonal 45°, blind corner, narrow aluminum door hinges					
	Color	NI / ONS	White / Gray		
	Material	Steel	Nylon		
	Print / stamp	Plain	Plain		
	Logo	Plain*	Plain*		
	Part no.	70.1503	90M2103.01		
Angled, mini and glass door hinges with straight or cranked-arms					
	Color	NI / ONS			
	Material	Steel			
	Print / stamp	Plain			
	Logo	Plain*			
	Part no.	70.1553			
155°, 125°, and thin door hinges					
	Color	NI / ONS			
	Material	Steel			
	Print / stamp	Plain			
	Logo	Plain*			
	Part no.	70.4503			
170° hinges					
	Color	NI			
	Material	Steel			
	Print / stamp	Plain			
	Logo	Plain*			
	Part no.	80.6507			
*Custom logo cover caps available (minimums apply)					



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Hinge cup cover cap		
Hinge applications	CLIP top BLUMOTION, CLIP top – hinges	
- CLIP top BLUMOTION hinges - Screw-on, press-in and EXPANDO hinge cups - Can also be used with CLIP top 110° and 110°+ hinges		
	Color	NI / ONS
	Material	Steel
	Part no.	70T3504
- CLIP top BLUMOTION, CLIP top hinges 155° and 125° - Screw-on, press-in and EXPANDO hinge cups		
	Color	NI / ONS
	Material	Steel
	Part no.	70T7504
For use with CLIP top hinges only - Suitable for screw-on, press-in and EXPANDO hinge cups for CLIP top 107°, 120°, 120°+, thick door and blind corner hinges - Clip on attachment/removal		
	Color	NI
	Material	Steel
	Part no.	70T1504
3 mm spacer		
Hinge applications	CLIP top BLUMOTION, CLIP top – hinges	
- Reduces overlays by 3 mm - Mounts under CLIP wing mounting plates - Stackable (max. 3 recommended)		
	Color	Gray
	Material	Nylon
	Part no.	181.6130
Hinge cup spacer		
Hinge applications	CLIP top BLUMOTION, CLIP top – hinges	
- For use with 110° hinge 110°+ hinge 155° hinge 107° hinge 95° thick door hinge 125° hinge - Use to retrofit existing doors with a cup depth less than 13 mm - Non-stackable - Not for use with INSERTA hinges		
	Spacing (mm)	1.5
	Color	Gray
	Material	Nylon
	Part no.	70T3507.21



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

TIP-ON for doors

Opening comfort for doors without handles

Doors can be opened easily with TIP-ON – a light touch is all that's needed





Mounting

The TIP-ON unit can be either bored into the cabinet end panel or attached to the cabinet interior using adapter plates.



Catch plate

The catch plate is the counterpart to TIP-ON. It is available in self-adhesive or screw-on versions.



Hinges

Free swing hinges are used with TIP-ON for doors with magnet/self close hinges are used with TIP-ON for doors with bumper. Designed for frameless or face frame (blocked out) cabinet applications.



Adjustments

The adjustment feature (+4 mm, -1 mm) has been incorporated into the TIP-ON unit so even when TIP-ON is inserted into the cabinet, it has an integrated gap adjustment. To adjust gap, turn the ejector pin. The click-stop positions allow you to easily find the right setting.



TIP-ON
for doors




TIP-ON 956. – for standard doors (with magnet)




TIP-ON spring	Part no.
Standard spring	956.1004
Consisting of:	
1x TIP-ON 956. – for standard doors (with magnet)	
1x Self-adhesive catch plate Not suitable for powder-coated, waxed or oiled surfaces	
1x Screw-on catch plate	
1x Wood screws Ø 3.5 x 15 mm, part no. 609.1500	
Specify color when ordering:	
☐ White	☐ Gray ☐ Black

- For door overlays (up to approx. 1300 mm (52") height)
- For use with Blum free-swing hinges
- For drilling or in combination with adapter plates
- Output path approx. 17 mm (5/8")
- Adjustment range +4 mm to -1 mm
- Material: nylon

Planning

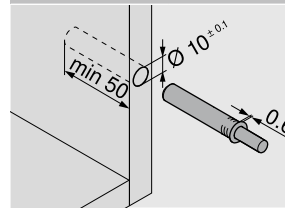


Door gap

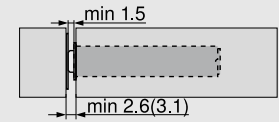


() Screw-on catch plate

Self-adhesive catch plate

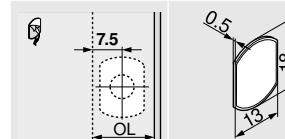

Screw-on catch plate

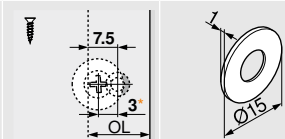

*3 mm offset installation


TIP-ON 956A – for large doors (with magnet)




TIP-ON spring	Part no.
Standard spring	956A1004
Consisting of:	
1x TIP-ON 956A – for large doors (with magnet)	
1x Self-adhesive catch plate Not suitable for powder-coated, waxed or oiled surfaces	
1x Screw-on catch plate	
1x Wood screws Ø 3.5 x 15 mm, part no. 609.1500	
Specify color when ordering:	
☐ White	☐ Gray ☐ Black

- For door overlays (starting at approx. 1300 mm (52") height) and all inset applications
- For use with Blum free-swing hinges
- For drilling or in combination with adapter plates
- Output path approx. 38 mm (1-1/2")
- Adjustment range +4 mm to -1 mm
- Material: nylon

Planning

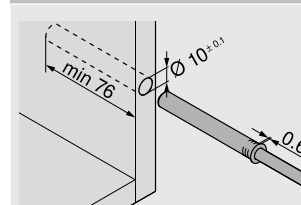


Door gap

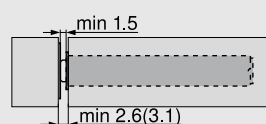


() Screw-on catch plate

Self-adhesive catch plate



Screw-on catch plate



*3 mm offset installation


TIP-ON 956A – for large doors (with bumper)




TIP-ON spring	Part no.
Standard spring	956A1006
Strong spring*	956A1006F
Consisting of:	
1x TIP-ON 956A – for large doors (with bumper) No catch plate needed (we recommend using a catch plate for very soft surfaces)	
*Recommended for applications that require high ejection forces, e.g. narrow doors with large number of hinges	
Specify color when ordering:	
☐ White	☐ Gray ☐ Black

- For use with Blum self/soft close hinges
- For drilling or in combination with adapter plates
- Output path approx. 38 mm (1-1/2")
- Adjustment range +4 mm to -1 mm
- Material: nylon

Planning



Door gap





TIP-ON in-line adapter plate for standard doors




- Attach with wood screws $\varnothing 3.5$ or $\varnothing 4$ mm
- Alternative assembly with system screws
- 20 mm setback, 17 mm apart
- Door gap factory setting 2 mm
- **TIP-ON** must be ordered separately


Planning



Door gap



Catch plate





*3 mm offset installation

TIP-ON in-line adapter plate for large doors




- Attach with wood screws $\varnothing 3.5$ or $\varnothing 4$ mm
- Alternative assembly with system screws
- 20 mm setback, 32 mm apart
- Door gap factory setting 2 mm
- **TIP-ON** must be ordered separately


Planning



Door gap



Catch plate





*3 mm offset installation

TIP-ON wing adapter plate for large doors



- Attach with wood screws $\varnothing 3.5$ or $\varnothing 4$ mm
- Alternative assembly with system screws
- 37 mm setback, 32 mm apart
- Door gap factory setting 2 mm
- **TIP-ON** must be ordered separately


Planning



Door gap



Catch plate



*3 mm offset installation

OL = Door overlay




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Hinge applications	Opening Angle	Hinge page	Application		Part no. Page	Partial/twin overlay	Part no. Page	Inset	Part no. Page
			Overlay						
Standard application									
 CLIP top 110° hinge	110°	24	 	973A0500.01 61	 	973A0600 61	 	973A0700 61	
 CLIP top 110°+ hinge	110°	25	 	973A0500.01 61					
 CLIP top 107° hinge	107°	23	 	973A0500.01 61	 	973A0600 61	 	973A0700 61	
 CLIP top 120° hinge	120°	26	 	973A0500.01 61	 	973A0600 61			
 CLIP top 120°+ hinge	120°	27	 	973A0500.01 61					
 CLIP 100° hinge	100°	36	 	973A0500.01 61	 	973A0600 61	 	973A0700 61	
Wide angled application									
 170° hinge	170°	29	 	973A6000 61	 	973A6000 61			
Thick door application									
 Thick door hinge	95°	28	 	973A0500.01 61	 	973A0600 61	 	973A0700 61	
Aluminium frame application									
 95° aluminium frame door hinge CLIP top	95°	33	 	970A1002 63	 	970A1002 63	 	970A1002 63	
Glass door application									
 Glass door hinge	94°	35	 	971Axxxx 62	 	970A1002 63	 	970A1002 63	
Narrow Frame door application									
 Mini-hinge	94°	34	 	971Axxxx 62	 	970A1002 63	 	970A1002 63	

Attachment


Attach to the square hole in the hinge arm

1 Pull forward and down on the front

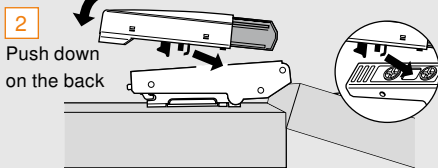

Removal


Pull forward and up simultaneously

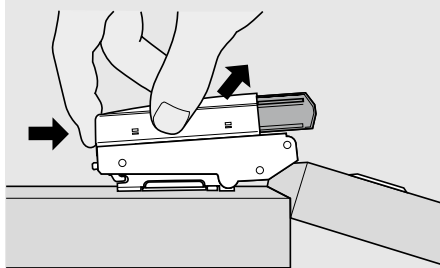

BLUMOTION per door

- BLUMOTION 973A is designed for one BLUMOTION per self closing hinge, however, quantities may vary depending on door size and weight
- Small or light doors may only require one BLUMOTION
- Trial application recommended

BLUMOTION 973A
● Hinges




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

BLUMOTION 973A – for straight arm hinges

	CLIP top – Steel, nickel plated – 110° hinge – 110°+ hinge – CLIP top 120° – CLIP top 120°+ – 107° hinge – Thick door hinge CLIP – 100° hinge	Part no.	Straight-arm	973A0500.01


BLUMOTION 973A – for half-cranked hinges

	CLIP top – Steel, nickel plated – 110° hinge – 120° hinge – Thick door hinge CLIP – 100° hinge	Part no.	Half-cranked arm	973A0600

BLUMOTION 973A – for full-cranked hinges

	CLIP top – Steel, nickel plated – 110° hinge – Thick door hinge CLIP – 100° hinge	Part no.	Full-cranked arm	973A0700

BLUMOTION 973A – 170° hinges

	CLIP top – Zinc, nickel plated – 170° hinge		Part no.	973A6000


Hinge	X	S
CLIP top 170° straight-arm	49	65
CLIP top 170° half-cranked	68	75



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- Soft-closing feature for CLIP top and CLIP straight-arm hinges
- Offers the same quality of motion as drawer systems with BLUMOTION
- Adjustable to various door sizes and weights (+3 mm, -7 mm range)
- Installed onto hinge-side panel
- For use with straight-arm hinge and either 0 mm or 3 mm mounting plate only

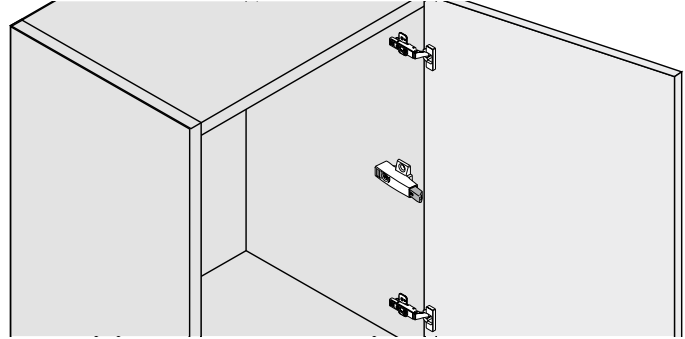


Adjustment

- Use a Phillips or POZI screwdriver to adjust the contact point in or out (+3 mm, -7 mm)
- Adjust out for larger, heavier doors or adjust in for smaller, lighter doors

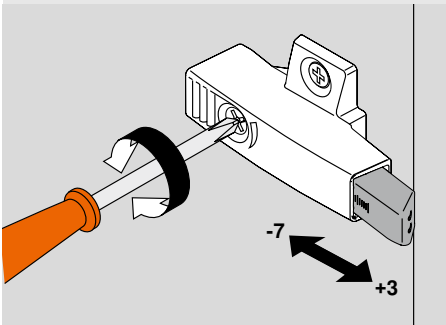

0 mm BLUMOTION application

- For all hinges with a straight-arm and a 0 mm mounting plate (except 95° thick door hinge)

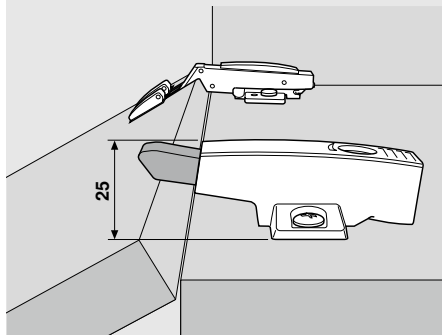


BLUMOTION per door


- For optimum BLUMOTION effect, BLUMOTION 971A should be installed onto the hinge-side panel centered between the two hinges
- Tall or heavy doors may require an additional BLUMOTION 971A between the hinges
- Trial application recommended

BLUMOTION 971A

● Hinges

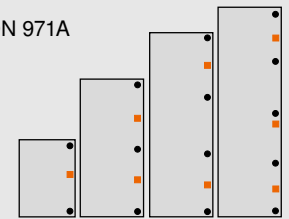

BLUMOTION 971A - Wing plate (screw-on)

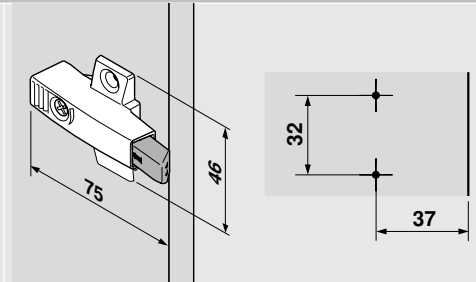


- 37 mm setback, 32 mm apart
- Attach with #6 x 5/8" wood screws
- Nickel-plated steel and gray nylon
- For face frame applications

Part no.

0 mm	971A0500
Installation screw	606N or 606P

BLUMOTION 971A - Wing plate (screw-on)

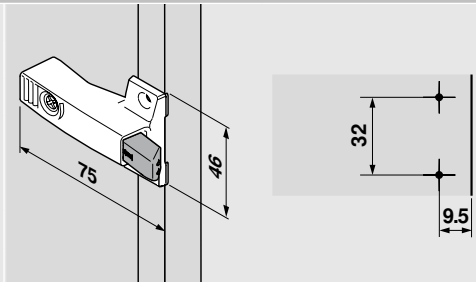

- 9.5 mm setback, 32 mm apart
- Attach with #6 x 5/8" wood screws
- Nickel-plated steel and gray nylon

Part no.

0 mm	971A0700
Installation screw	606N or 606P



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

BLUMOTION 970A



Part no.

BLUMOTION 970A

970A1002

BLUMOTION per door




- BLUMOTION 970A is designed for two BLUMOTION per door, however, one may be enough depending on door size and weight
- Small or light doors may only require one BLUMOTION
- Trial application recommended

■ BLUMOTION 970A

● Hinges



Face frame adapter (screw-on)



- 9.5 mm setback, 32 mm apart
- Can also be used in panel cabinets
- Attach with #6 x 5/8" wood screws
- Zinc, nickel-plated

Part no.




Screw-on

970.5701

Installation screw

606N or 606P

Wing adapter (EXPANDO)






- 37 mm setback, 32 mm apart
- EXPANDO version installs with pre-attached screws
- Zinc, nickel-plated

Part no.

EXPANDO

970.55E1

In-line adapter (screw-on)



- 20 mm setback, 32 mm apart
- Two-piece design
- Attach with #6 x 5/8" wood screws
- Zinc, nickel-plated and gray nylon

Part no.

Screw-on

970.5201

Installation screw


606N or 606P

BLUMOTION
for doors

BLUMOTION 970A

Standard applications

The charts below provide the boring distance based on the application and mounting plate height

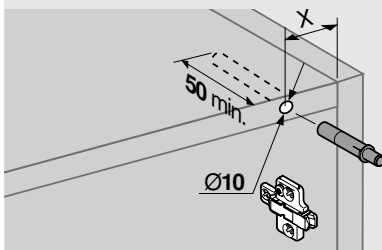

mounting plate height ← 3 mm 35 → boring distance (X) in mm

		 Overlay boring distance	 Twin boring distance	 Inset boring distance	 Inset with straight-arm boring distance			
Mounting plate height	0 mm	32	0 mm	41	0 mm	50	18 mm	50
	3 mm	35	3 mm	44	3 mm	53		
	6 mm	38	6 mm	47				
	9 mm	41	9 mm	50				



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

COMPACT CLIP, COMPACT BLUMOTION and COMPACT hinges A complete face frame program

The COMPACT CLIP hinge combines more than 50 years of innovations into a single hinge. Featuring Blum's proven CLIP technology, doors can be removed and reattached quickly and tool free. The hinge comes pre-attached to the plate. Designed with soft-close BLUMOTION and three-dimensional cam adjustments, COMPACT CLIP is user-friendly for cabinetmakers and installers alike.

COMPACT BLUMOTION hinges have the soft closing mechanism integrated directly in the hinge cup. They are available for most overlay face frame applications or door styles.

Blum's COMPACT hinges program has proven itself as the high quality solution for face frame cabinets and continue to provide the quality of motion you have come to expect from Blum hardware.

COMPACT CLIP features



CLIP Technology

The CLIP technology reduces the risk of damage to cabinet frames because doors can be removed and reattached without removing any screws.



Cam height adjustment

This new feature allows doors to be adjusted up and down, without removing screws and repositioning the door.

All COMPACT hinges features



Deactivation option

The BLUMOTION function can be easily deactivated on one of the hinges, allowing small or light doors to close with the same high quality of motion.



Interchangeability

COMPACT CLIP, COMPACT BLUMOTION and COMPACT hinges are interchangeable so there is no need to change existing setups or workflows.



Overload safety feature

This feature protects the hinge from damage if the door is slammed and maintains the BLUMOTION soft closing for the life of the hinge.



COMPACT CLIP hinges for partial overlay

30C2: Partial overlay hinges with a 105° opening angle and 7/16" cup depth



COMPACT CLIP hinges for full overlay

31C3: Full overlay hinges with a 110° opening angle and 1/2" cup depth

31C1: Full overlay hinges with a 107° opening angle and 7/16" cup depth



COMPACT BLUMOTION 38N hinges for partial overlay

Partial overlay hinges with a 105° opening angle and 7/16" cup depth



COMPACT BLUMOTION 39C/38C hinges for full overlay

39C: Full overlay hinges with a 110° opening angle and 1/2" cup depth

38C: Full overlay hinges with a 107° opening angle and 7/16" cup depth



COMPACT BLUMOTION 38B face mount hinges for full overlay

Full overlay face mount hinges with a 107° opening angle and 7/16" cup depth



COMPACT 38N hinges for partial overlay

Partial overlay hinges with a 105° opening angle and 7/16" cup depth



COMPACT 39C/38C hinges for full overlay


39C: Full overlay hinges with a 110° opening angle and 1/2" cup depth

38C: Full overlay hinges with a 107° opening angle and 7/16" cup depth




- For door thicknesses up to 3/4" (19 mm)
- 105° opening angle
- 3-dimensional cam adjustment (with directional arrows for faster adjustability)
- Cup depth: 7/16" (11 mm)
- Edge mount available in 1/2" (13 mm) overlay
- Two-piece hinge with CLIP mechanism


Application

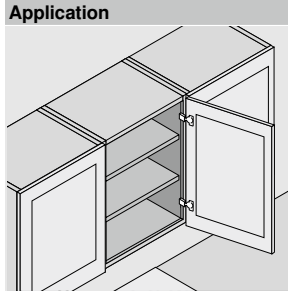


Minimum reveal

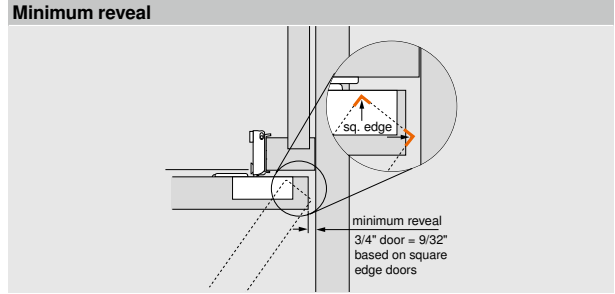


Boring pattern

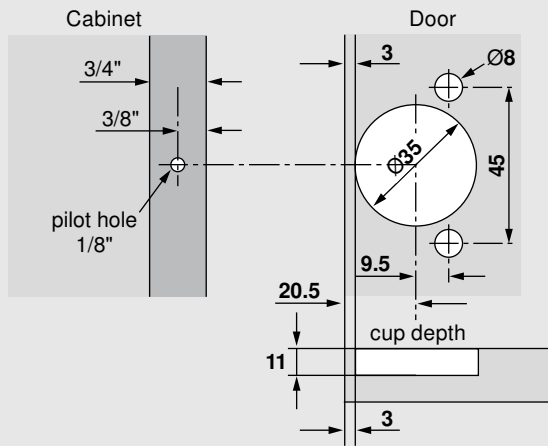

Dimensions

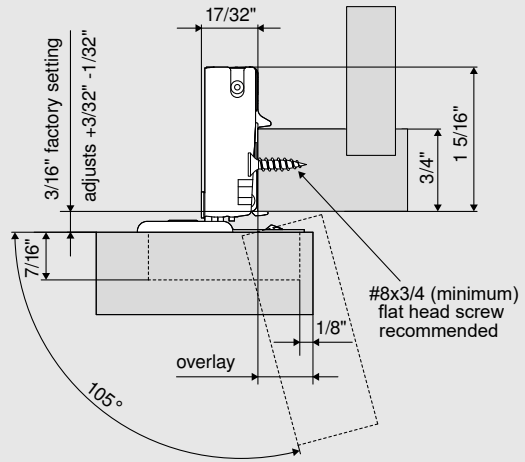


Adjustments

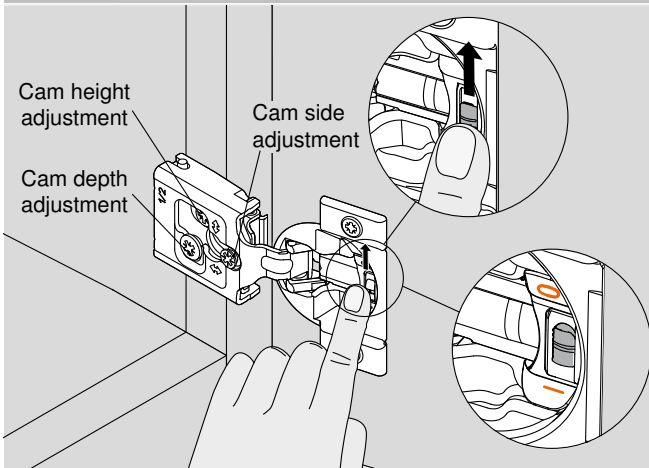

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound and edge mount hinges

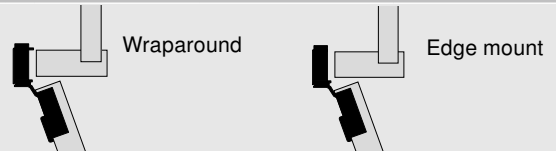

Overlay	Door protrusion	Screw-on	Press-in
Wraparound			
5/16"	5/16"		30C258B.05
3/8"	1/4"	30C255B.06	30C258B.06
1/2"	1/8"	30C255B.08	30C258B.08
5/8"	0	30C255B.10	30C258B.10
3/4"	0	30C255B.12	30C258B.12
Edge mount			
1/2"		30C255B.E8	30C258B.E8

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
*Blank cover cap	30C2508



*See page 73 for additional cover cap options




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 110° opening angle
- 3-dimensional cam adjustment (with directional arrows for faster adjustability)
- Cup depth: 1/2" (13 mm)
- Smaller minimum reveal
- Two-piece hinge with CLIP mechanism

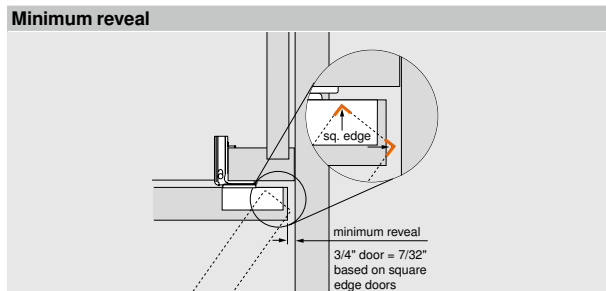


Boring pattern

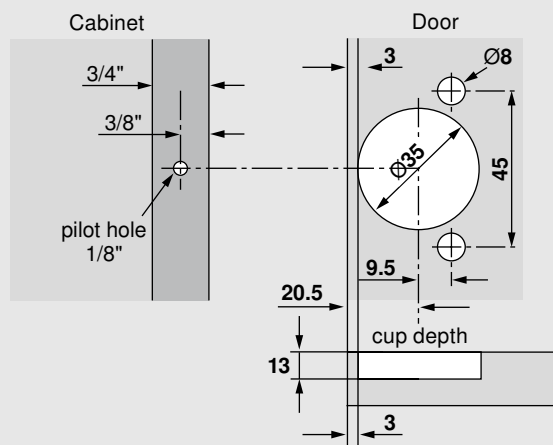

Dimensions

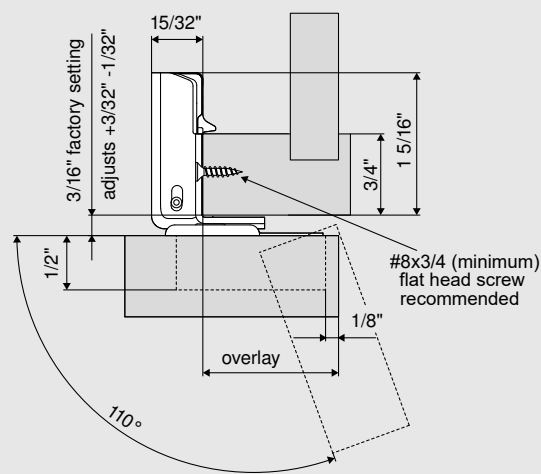

Adjustments

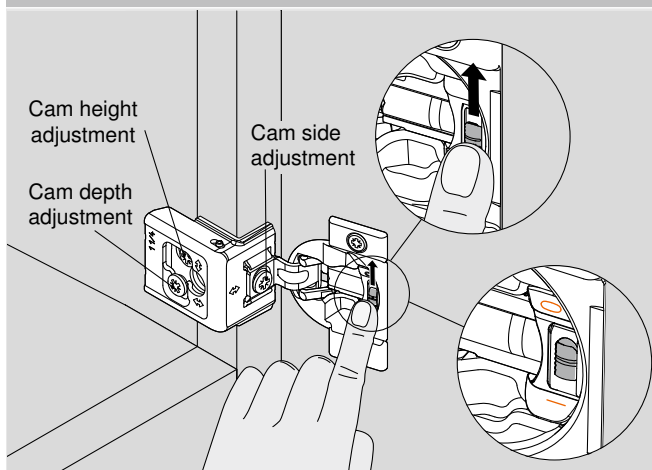

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound hinges



Overlay	Screw-on	Press-in
1"	31C355B.16	31C358B.16
1-1/4"	31C355B.20	31C358B.20
1-5/16"	31C355B.21	31C358B.21
1-3/8"	31C355B.22	31C358B.22
1-1/2"	31C355B.24	31C358B.24
1-9/16"		31C358B.25

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
*Blank cover cap	31C1508

*See page 73 for additional cover cap options




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 107° opening angle
- 3-dimensional cam adjustment (with directional arrows for faster adjustability)
- Cup depth: 7/16" (11 mm)
- Ideal for profiled doors
- Two-piece hinge with CLIP mechanism


Application




Minimum reveal

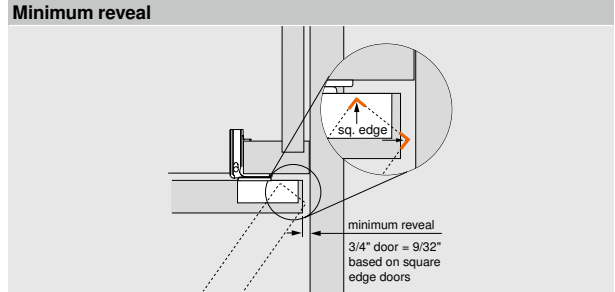


Boring pattern

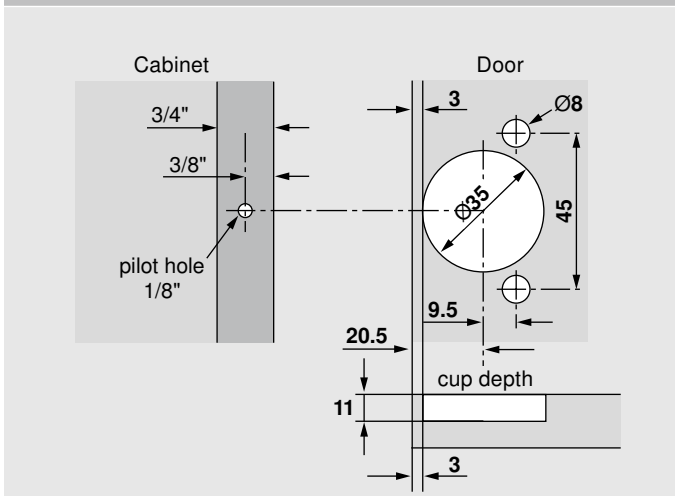

Dimensions

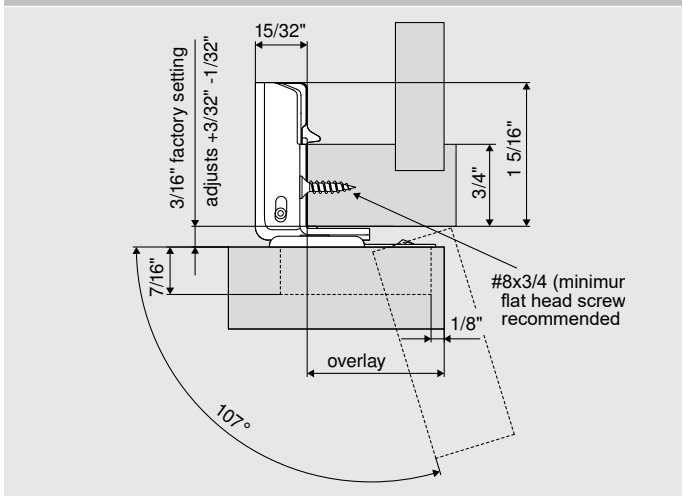

Adjustments

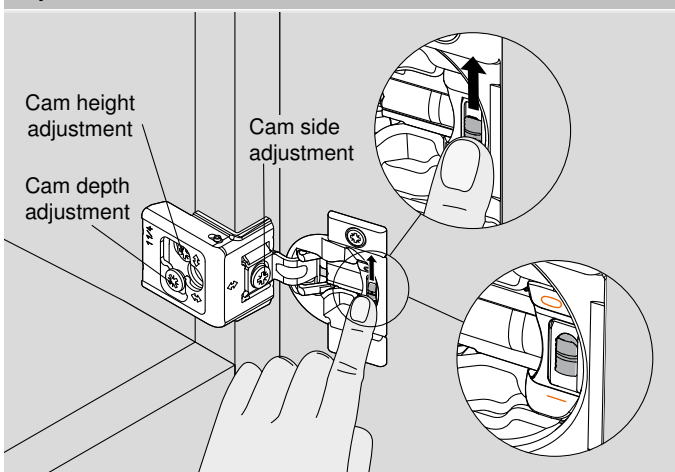

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound hinges

Overlay		Press-in
1-1/4"		31C158B.20

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
*Blank cover cap	31C1508

*See page 73 for additional cover cap options




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 105° opening angle
- 3-dimensional adjustment
- Cup depth: 7/16" (11 mm)
- Edge mount available in 1/2" (13 mm) overlay
- One piece wraparound or edge mount hinge
- Can be used with BLUMOTION 971A9700


Application




Minimum reveal

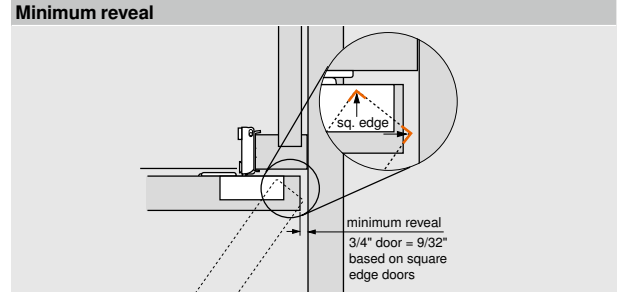


Boring pattern

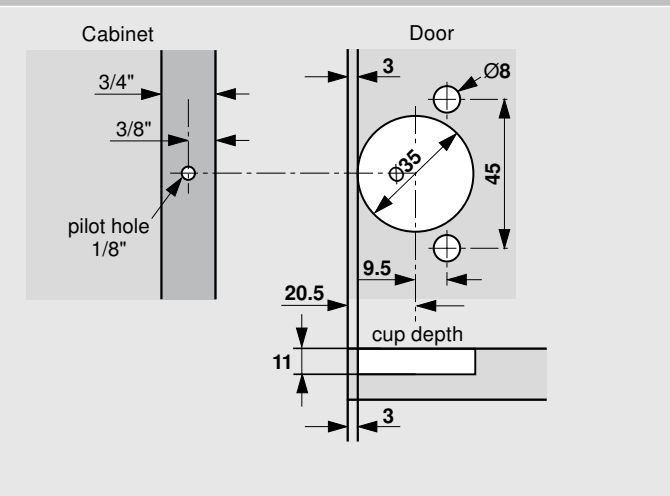

Dimensions

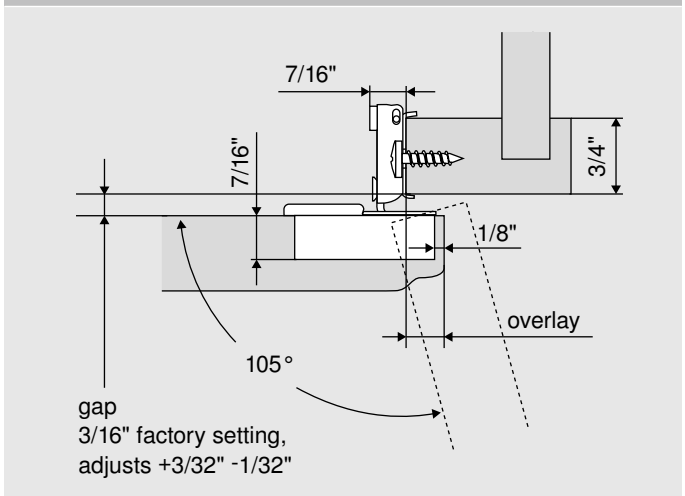

Adjustments

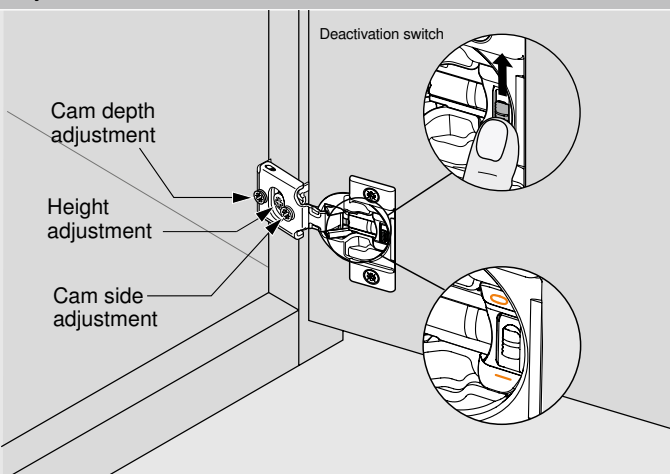

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound and edge mount hinges

		Wraparound		Edge mount	
Overlay	Door protrusion	Screw-on		Press-in	
5/16"	5/16"			38N358B.05	
3/8"	1/4"	38N355B.06		38N358B.06	
1/2"	1/8"	38N355B.08		38N358B.08	
*1/2"	1/8"	38N355BE08		38N358BE08	
5/8"	0	38N355B.10		38N358B.10	
3/4"	0	38N355B.12		38N358B.12	

*Available as edge mount hinge

Installation screw

Truss head screw	834TH
------------------	-------

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
*Blank cover cap	38N3508B

*See page 73 for additional cover cap options




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 110° opening angle
- 3-dimensional adjustment
- Cup depth: 1/2" (13 mm)
- Smaller minimum reveal
- One piece wraparound hinge


Application




Minimum reveal

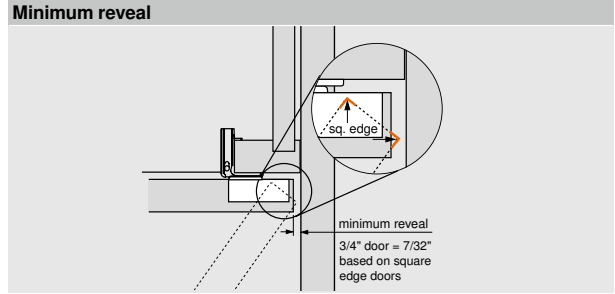


Boring pattern

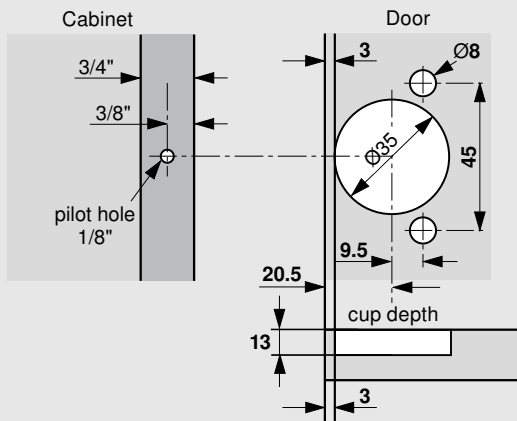

Dimensions

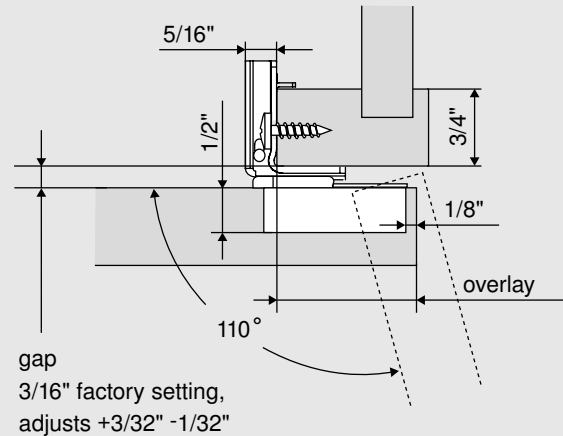

Adjustments

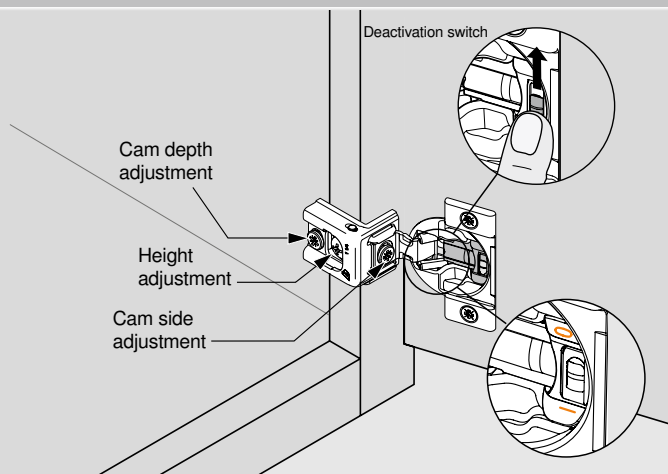

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound hinges



Overlay	Screw-on	Press-in
1"	39C355B.16	39C358B.16
1-1/4"	39C355B.20	39C358B.20
1-5/16"	39C355B.21	39C358B.21
1-3/8"	39C355B.22	39C358B.22
1-1/2"	39C355B.24	39C358B.24
1-9/16"	39C355B.25	39C358B.25

Installation screw

Truss head screw	834TH
------------------	-------

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
*Blank cover cap	38C3508

*See page 73 for additional cover cap options




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 107° opening angle
- 3-dimensional adjustment
- Cup depth: 7/16" (11 mm)
- Ideal for profiled doors
- One piece wraparound hinge


Application




Minimum reveal

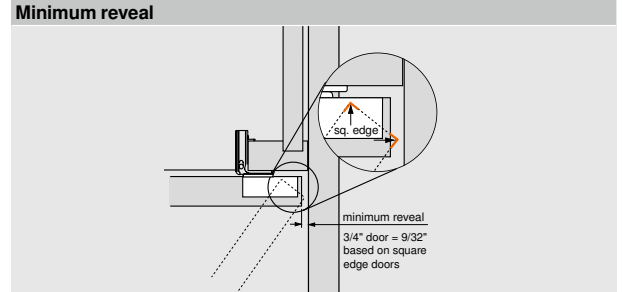


Boring pattern

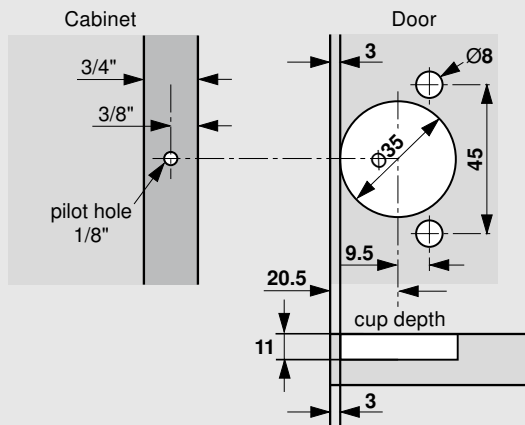

Dimensions

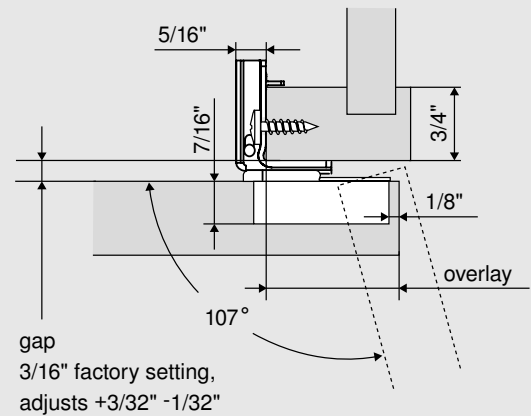

Adjustments

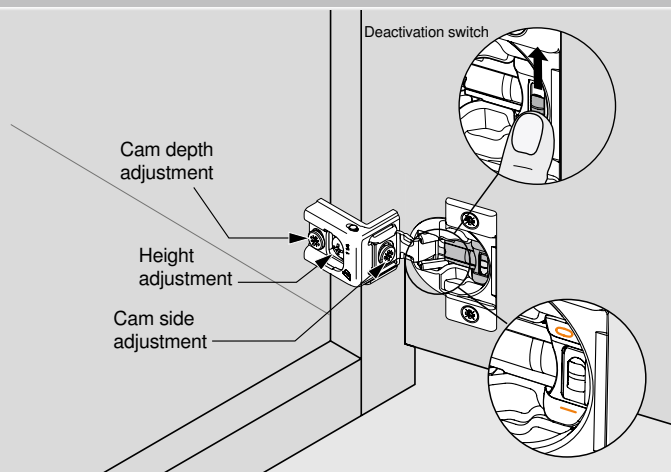

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Wraparound hinges



Overlay	Screw-on	Press-in
1-1/4"	38C355B.20	38C358B.20

Installation screw

Truss head screw	834TH
------------------	-------

Accessories

Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9
Blank cover cap	38C3508




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 107° opening angle
- 3-dimensional adjustment
- Cup depth: 7/16" (11 mm)
- Ideal for large overlays or refacing of cabinets
- One piece face mount hinge


Application




Minimum reveal




Boring pattern

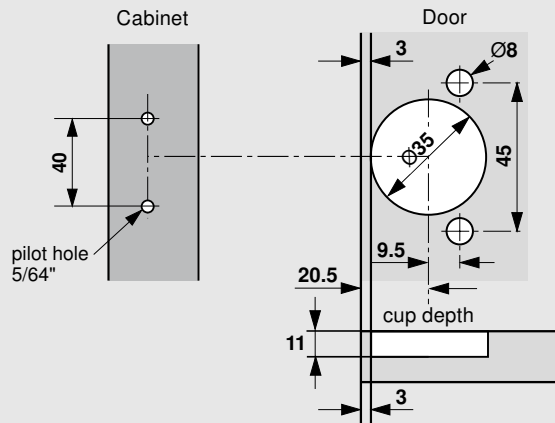

Dimensions

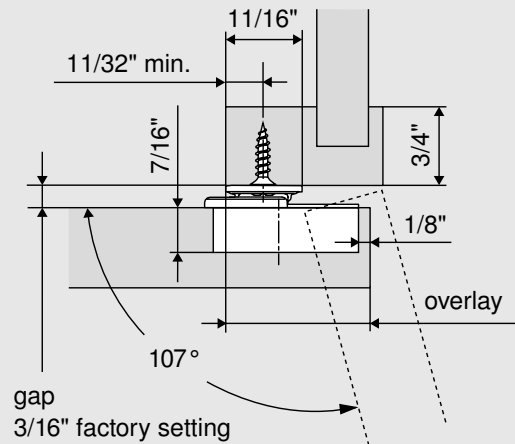

Adjustments

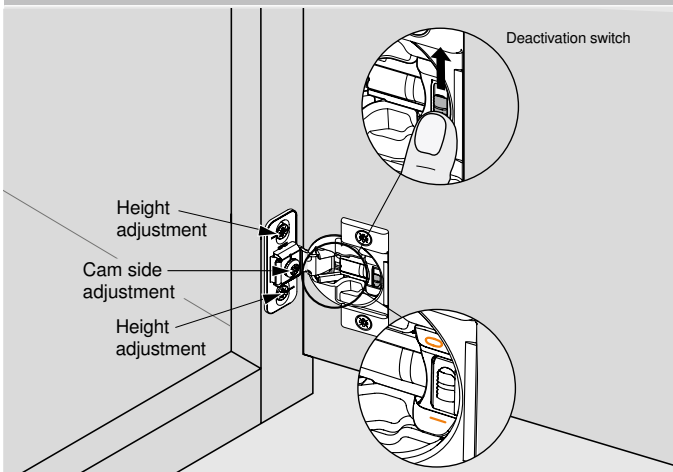

NOTE: COMPACT BLUMOTION comes in the activated position, marked with an "I" – the deactivated position is marked with a "0"

Face mount hinges



Overlay	Screw-on	Press-in
1-3/8" or greater	38B355BF22	38B358BF22

Installation screw

Flat head wood screw	606N or 606P
----------------------	--------------

Accessories


Angle restriction clip	38C315B3.1
Hinge cup spacer	38C355B9





Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

COMPACT CLIP hinge arm cover caps			
	30C blank cover cap	— Nylon, deep gray cap Available options — Blank Cap — Blum Logo Cap (printed) — Custom Logo Cap (printed) minimum order quantity applies 	
	30C Blum logo printed cover cap		
	31C blank cover cap		
	31C Blum logo printed cover cap		
			Part no.
30C blank cover cap		30C2508	
30C Blum logo printed cover cap		30C2508.BL	
31C blank cover cap		31C1508	
31C Blum logo printed cover cap		31C1508.BL	

COMPACT BLUMOTION hinge arm cover caps				
 	39C/38C blank cover cap	— Steel, nickel-plated cap Available options — Blank Cap or embossed (Blum logo) — Custom Logo Cap (printed) minimum order quantity applies 		
	38N blank cover cap			
				Part no.
	39C/38C blank cover cap			38C3508
	38N blank cover cap			38N3508B

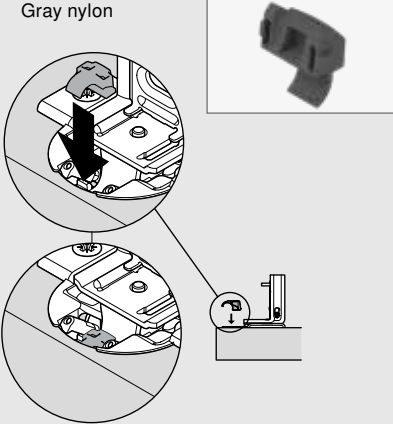Angle restriction clip	
- Restricts opening angle of the COMPACT CLIP & COMPACT BLUMOTION to 86° - Angle restriction clip must be inserted before the hinge has been attached to the face frame - Gray nylon 	
Part no.	
Angle restriction clip	38C315B3.1

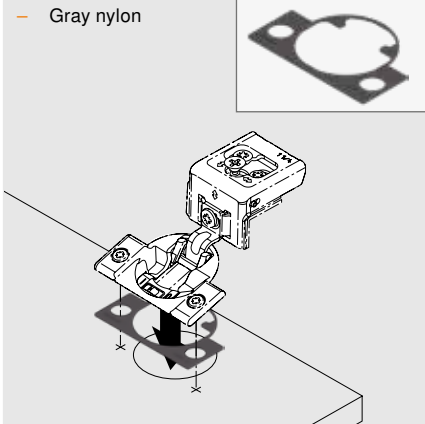
Hinge cup spacer	
1/16" spacer for use under the hinge cup for thin or profile doors - For use with BLUMOTION only Non-stackable - Gray nylon 	
Part no.	
Hinge cup spacer	38C355B9

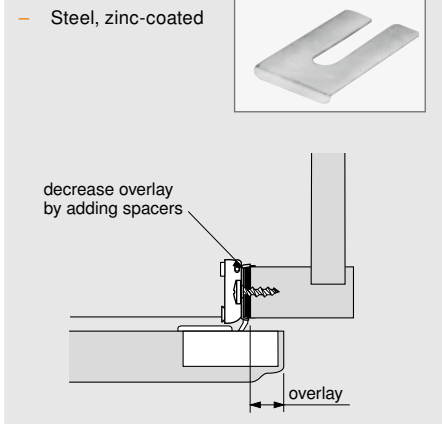Distance spacer	
- Steel spacer decreases door overlay in 1/32" increments - Can be stacked to achieve desired overlay reduction - Steel, zinc-coated 	
Part no.	
Distance spacer	36.3515




- For door thicknesses up to 3/4" (19 mm)
- 105° opening angle
- 3-dimensional adjustment
- Cup depth: 7/16" (11 mm)
- Edge mount available in 1/2" (13 mm) overlay
- One piece wraparound or edge mount hinge


Application



Minimum reveal

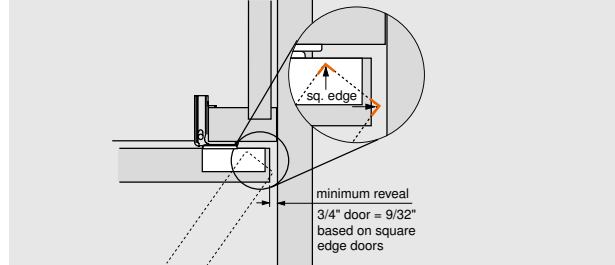


Boring pattern

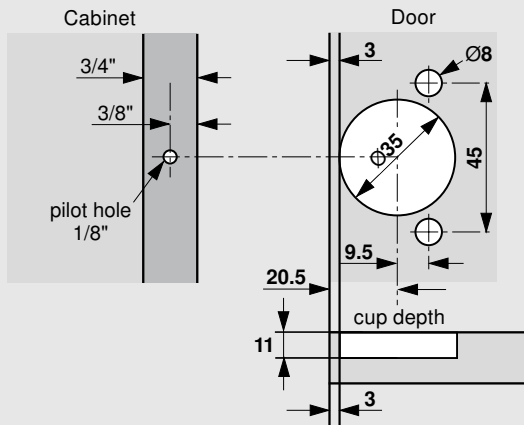


NOTE: Maximum door thickness 3/4"

Adjustments

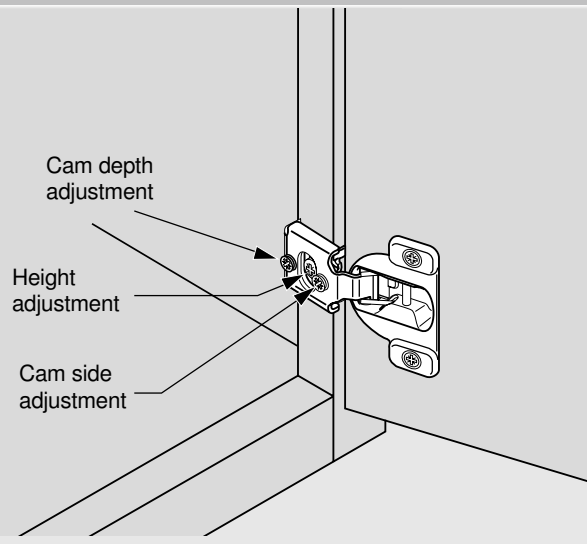

Dimensions

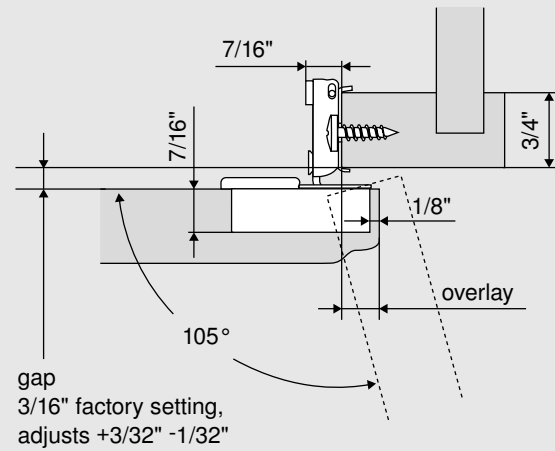

Wraparound hinges



Overlay	Screw-on	Press-in
3/8"	38N355C.06	38N358C.06
1/2"	38N355C.08	38N358C.08
5/8"	38N355A.10	38N358A.10
3/4"	38N355C.12	38N358C.12

Edge mount hinges



Overlay	Screw-on	Press-in
1/2"	38N355CE08	38N358CE08

Installation screw



Truss head installation screw	834TH
-------------------------------	-------




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.



- For door thicknesses up to 3/4" (19 mm)
- 110° opening angle
- 3-dimensional adjustment
- Cup depth: 1/2" (13 mm)
- Smaller minimum reveal
- One piece wraparound hinge
- Can be used with BLUMOTION 971A9700

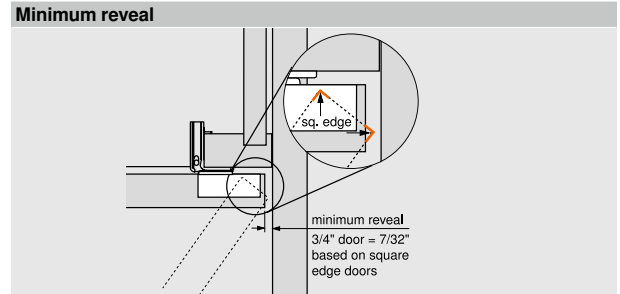


Boring pattern

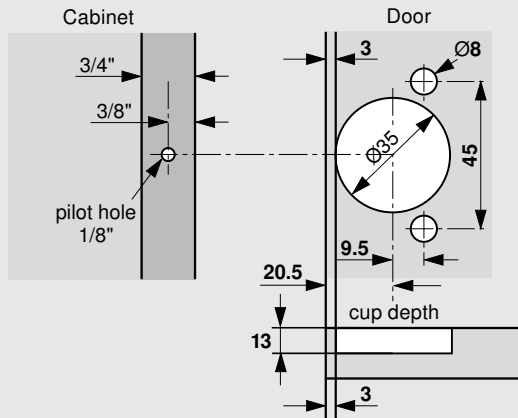


NOTE: Maximum door thickness 3/4"

Adjustments

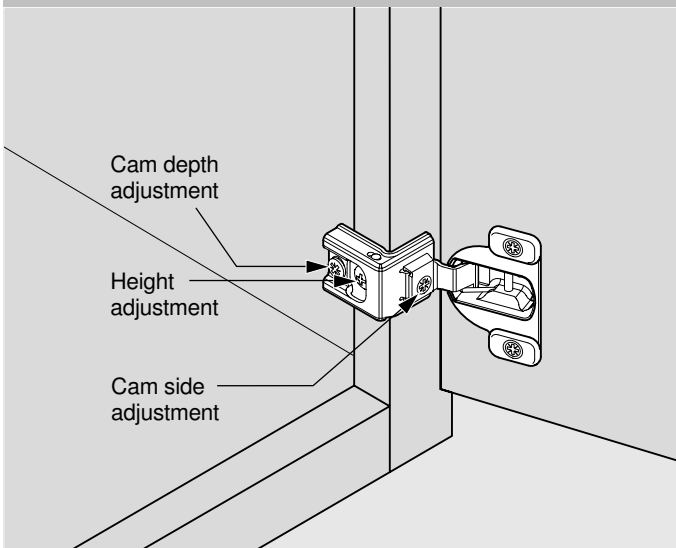

Dimensions

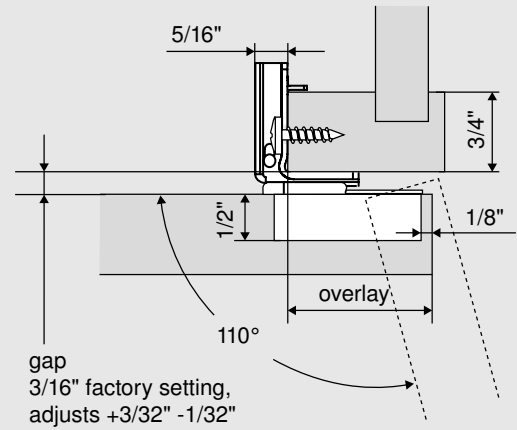

Wraparound hinges



Overlay	Screw-on	
1"	39C355C.16	39C358C.16
1-1/4"	39C355C.20	39C358C.20
1-3/8"	39C355C.22	39C358C.22
1-1/2"	39C355C.24	39C358C.24
1-9/16"		39C358C.25

Installation screw

Truss head installation screw	834TH
-------------------------------	-------




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.




- For door thicknesses up to 3/4" (19 mm)
- 107° opening angle
- 3-dimensional adjustment
- Cup depth: 7/16" (11mm)
- Ideal for large overlays or refacing of cabinets
- One piece wraparound hinge
- Can be used with BLUMOTION 971A9700


Application




Minimum reveal

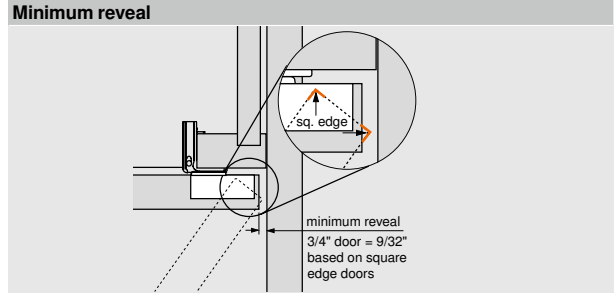

Boring pattern

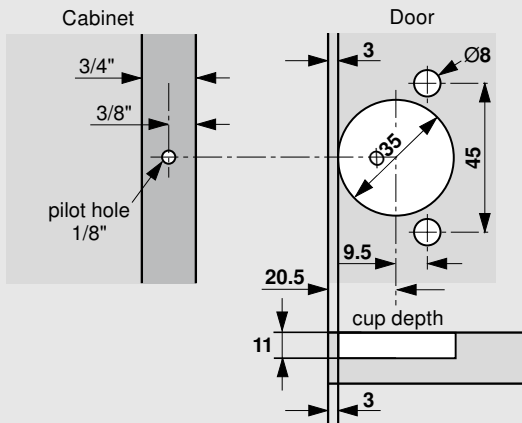


Dimensions

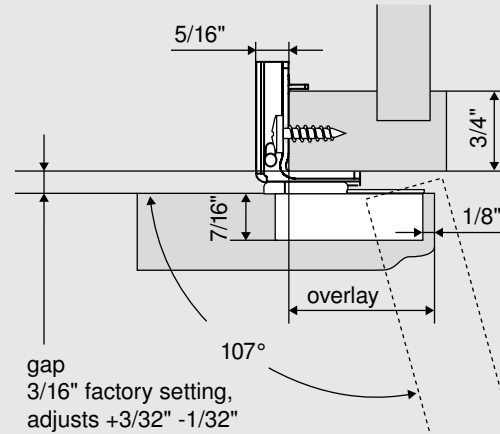

NOTE: Maximum door thickness 3/4"

Adjustments

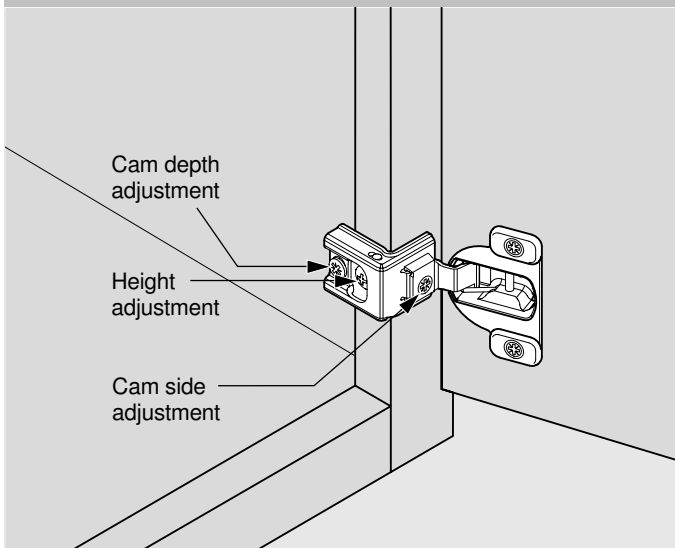

Wraparound hinges



Overlay	Screw-on	Press-in
1-1/4"	38C355C.20	38C358C.20
1-3/8"		38C358C.22
1-1/2"		38C358C.24

Installation screw

Truss head installation screw	834TH
-------------------------------	-------



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

BLUMOTION 971A poly-bag set



Can be used for all COMPACT hinges

Set includes:

- BLUMOTION mechanism (971A9700)
- Spacer (971A9709)
- #8 x 1-1/4" type 17 wood screw
- #8 x 2" type 17 wood screw


Part no.

Poly-bag set

971A9700.22

Full overlay

- Full overlay – 1" or greater overlay




Part no.

BLUMOTION	971A9700
Installation screw (1-1/4")	8114Z

Partial overlay

- Partial overlay – less than 1" overlay




Part no.

BLUMOTION	971A9700
Spacer	971A9709
Installation screw (2")	8200Z

Specifications


Mounting

BLUMOTION for doors mounts anywhere on the hinge-side stile of the cabinet using a 1-1/4" screw or 2" screw when using spacer.




Attachment of partial overlay spacer

The partial overlay spacer snaps onto the side of the BLUMOTION for easier mounting.

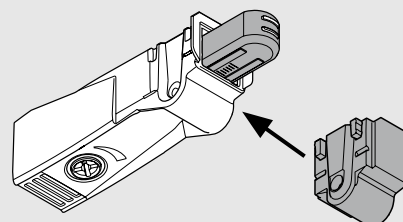

Adjustment

Use a Phillips or POZI screwdriver to adjust the contact point in or out (± 5 mm). Adjust out for larger, heavier doors or in for smaller, lighter doors.

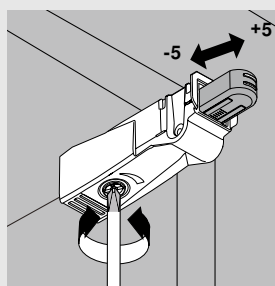


BLUMOTION per door

For optimum BLUMOTION effect, one BLUMOTION 971A should be installed for most applications.

Tall or heavy doors may require an additional BLUMOTION 971A
Trial application recommended.


- BLUMOTION 971A
- Hinges



COMPACT



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

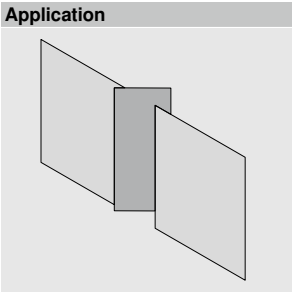

- CLIP top BLUMOTION with integrated soft close mechanism
- Suitable for the construction of cabinets with inward-opening doors
- For door widths up to **900 mm (35")**
- 3-dimensional front adjustment
- Convenient cam screw side adjustment
- Tool-free assembly and removal of the front
- Tool-free hinge to door assembly with INSERTA
- Hinge cup mounts to the side panel instead of door

Planning

Inward-opening cabinet door

Hinge dimensions based on factory setting (mounting plate spacing = 0)

R Due to the size of the door, we recommend a min **2 mm** reveal on all four sides.

******We recommend attaching a door stop to the side opposite the hinges when implementing an inward door. This ensures that the door cannot be misused and opened outwards.

Mounting position for in-line mounting plates

$X = DO - 53.5$
 $DP = DW - DO - 3$

Mounting position for wing mounting plates

$X = DO - 38.5$

Number of hinges

- Door weight up to 50 lbs: 5 hinges
- Door weight up to 60 lbs: 6 hinges
- Door weight up to 70 lbs: 7 hinges

Application is tested with 80,000 opening and closing cycles.


Adjustment

	max. ± 3 mm See mounting plates		+ 3 mm - 2 mm		± 2 mm
--	--	--	------------------	--	------------

CLIP top BLUMOTION			
	Full-cranked	Finish	Soft close
	Screw-on	NI / ONS	71B3750
	Press-in	NI	71B3780
	INSERTA	NI / ONS	71B3790



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

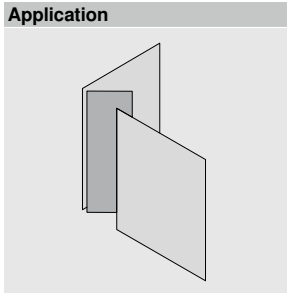

- COMPACT BLUMOTION with soft closing mechanism
- Suitable for the construction of cabinets with inward-opening doors
- One-piece hinge including mounting plate
- For door widths up to **800 mm (31")**
- Two-dimensional front adjustment

Planning

Inward-opening cabinet door

Hinge dimensions and gap calculation based on factory setting
 * prevent collision

R Due to the size of the door, we recommend a min 2 mm reveal on all four sides.

** A door stop will be needed for this application. Attach a door stop to the side opposite the hinges when implementing an inward door. This ensures that the door cannot be misused and opened outwards.

Inward-opening cabinet door

$DP = DW - 48$

DW Door width
 DP Door protrusion
 R Reveal

Number of hinges

- Door weight up to 50 lbs: 5 hinges
- Door weight up to 60 lbs: 6 hinges
- Door weight up to 70 lbs: 7 hinges

Application is tested with 80,000 opening and closing cycles.

Adjustment

	max. ± 3 mm See mounting plates		$+ 3$ mm $- 2$ mm		± 2 mm
--	--	--	----------------------	--	------------

COMPACT BLUMOTION			
		Finish	Soft close
	Screw-on	NI	38B355BF22
	Press-in	NI	38B358BF22

NOTE: If a **COMPACT 107° hinge—38B** is used in an application that can be accessed or reached by small children, we recommend an inward-opening furniture door with CLIP top BLUMOTION | CLIP top 110° hinge.



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

MINIPRESS P – Deluxe boring and insertion machine



- Front adjustable boring distance with digital counter
- Pneumatic hold-down clamps
- Boring depth adjustment
- Ruler stops (qty 4)
- Tool kit included
- Dust collection attachment
- Optional laser center line set
- Accepts **8** or **9** spindle heads

Part no.

Single phase – 220V power

M53.2053*US

Three-phase – 220V power

M53.2004*US

MINIPRESS top – title



- Automatic x/y axis stop positioning with integrated EASYSTICK
- Quick, tool-free drill head changes
- Supports both vertical and horizontal drilling
- Digital setup for precise, repeatable results
- EASYSICK computer and EASYSTICK ruler are required

Part no.

Base machine - Single phase - 220V power

M75E2000*US

EASYSICK computer (required)

MZD.5700.01

EASYSTICK ruler (required)

MZD.2700

EASYSTICK


* Maximum position **953** mm from center

** **1700** mm each side

- Automatically moves stops for exact drilling locations for all Blum products
- Built-in cabinet configurator for cabinet design with integrated Blum hardware
- Available as an upgrade for MINIPRESS P (models 2007 and newer)

Part no.

Computer

MZD.5000

Fence - overall **1700** mm*

MZD.2000

Fence extensions - additional **1700** mm**

MZD.2V00

Support for extension ruler

M2V.2E00

Computer power cord

Z10M200U


Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

9 spindle head



NOTE: Requires 5 each left hand and 4 each right hand drill bits. Recommended drill bit size for quick disconnect chucks: overall length is 57 mm and shank is 10 mm in diameter and 27 mm in length.

- 9 spindle head for use with MINIPRESS/MINIDRILL M53
- Bores nine holes spaced 32 mm apart, parallel to the fence
- Quick-disconnect chucks
- Once aligned, does not require additional adjustment
- Bores cabinet side panel for 32 mm system boring for Blum mounting plates and runners
- Requires retrofit set for use with machines produced in 2009 or prior

Includes:

- Ø3 mm allen wrench
- Distance spacer
- Drive pin
- Air hose

Part no.

9 spindle head	MZK.190S
Chuck cover cap	M30.1329

8 spindle head



NOTE: Requires 4 each left hand and 4 each right hand drill bits. Recommended drill bit size for quick disconnect chucks: overall length is 57 mm and shank is 10 mm in diameter and 27 mm in length.

- 8 spindle head for use with MINIPRESS/MINIDRILL M53
- Bores eight holes spaced 32 mm apart, perpendicular to the fence
- Quick-disconnect chucks
- Once aligned, does not require additional adjustment
- Bores all Box systems front fixing brackets/galleries
- Bores cabinet side panels for all Blum runner systems
- Requires retrofit set for use with machines produced in 2009 or prior

Includes:

- Ø3 mm allen wrench
- Distance spacer
- Drive pin
- Air hose

Part no.

8 spindle head	MZK.880S
Chuck cover cap	M30.1329

Spindle head retrofit set



- Required for attachment of 9 and 8 spindle heads to MINIPRESS/MINIDRILL produced in 2009 and prior
- Previous boring heads MZK.1000.US and MZK.8000.US cannot be used with the retrofit set

Set includes:

- 1** Adapter ring and shield
- 2** Ø5 mm allen wrench
- 3** Mounting bolts (qty 4)
- 4** Alignment pins (qty 2)
- 5** Alignment template
- 6** 13 mm fixed depth stop (qty 2)


Part no.

Spindle head retrofit set	M30.1313.UM
---------------------------	--------------------



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Work table for M53 machine

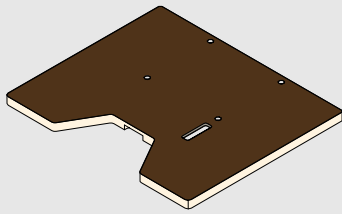

Part no.

Work table

MZA.5300

Protective shield

- For use with MINIPRESS and MINIDRILL machines



Part no.

Protective shield

M30.1316

Center ruler



Part no.

Center ruler, 600 (2')

M30.0212

Extension ruler



Part no.

Extension ruler, 1250 (4')

MZL.1250.US

Extension ruler support



Part no.

Extension ruler support

MZV.2E00

Ruler stop

- Left or right ruler stop



Part no.

Ruler stop

MZS.3000

Small ruler stop

- Left or right ruler stop



Part no.

Small ruler stop

MZS.2000

Large ruler stop

- Symmetrical ruler stop



Part no.

Large ruler stop

MZS.1000

Fixed depth stop

- 13 (1/2") fixed depth stop for use with M51N and M51P machines (T-shaped)



Part no.

Fixed depth stop

M30.1304.01

Fixed depth stop

- 13 (1/2") fixed depth stop for use with M53. machines



Part no.

Fixed depth stop

M30.1304.02

Digital counter set

- For MINIPRESS P, M53



Part no.

Digital counter set

MZE.2110

Quick-connect chuck set

- For use with MINIPRESS and MINIDRILL models



Part no.

Quick-connect chuck set

MZF.1000.01

Laser center point set



Part no.

Laser center point set

MZR.5300.02

Breakaway clutch

- For use with M51P and M53. machines



Part no.

Breakaway clutch

MZK.2009


Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Euro hinge insertion ram

- Can be used for inserting CLIP top BLUMOTION, CLIP top and CLIP press-in hinges
- Not for use with wide angled or specialty hinges



NOTE: Can be used with CLIP top BLUMOTION 95°, CLIP top 95° and CLIP 100° by adjusting the ball plungers

Part no.

#10 insertion ram

MZM.0010.01**Euro hinge insertion ram**

- Can be used for inserting most Blum press-in Euro hinges



Part no.

#40 insertion ram

MZM.0040**COMPACT hinge insertion ram**

- Can be used for inserting all Blum COMPACT press-in hinges



Part no.

#47 insertion ram


MZM.0047**Mounting plate insertion Ram**

- MINIPRESS insertion ram for press-in, in-line mounting plate 177H3100



Part no.

#53 insertion ram

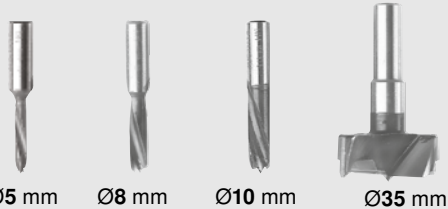MZM.0053**Machine drill bits**

Ø5 mm

Ø8 mm

Ø10 mm

Ø35 mm

Part no.

Ø5 mm drill bit (right handed)

M01.ZB05.D2 R

Ø5 mm drill bit (left handed)

M01.ZB05.D3 L

Ø8 mm drill bit (left handed)

M01.ZB08.03 L

Ø10 mm drill bit (right handed)

M01.ZB10.02 R

Ø10 mm drill bit (left handed)

M01.ZB10.03 L

Ø10 mm drill bit for mineral composites/HPL (right handed)

M01.ZB10.T2 R

Ø10 mm drill bit for mineral composites/HPL (left handed)

M01.ZB10.T3 L

Ø20 mm drill bit (right handed)

M01.ZB20.02 R

Ø35 mm drill bit (right handed)

M01.ZB35.02 R

NOTE: Machine drill bits need to be set to 57 mm in length to achieve proper bore depth.

Twist drill bits – high speed steel

VPB-5



Twist drill bit



*Chuck for DB-2 mm

Part no.

VPB-5 centering bit

VPB-5

Ø2 mm left

DB-2mm

Ø2.5 mm right

DB-2.5mm

Ø5 mm right

DB-5mm

Ø8 mm right

DB-8mm

Ø10 mm right

DB-10mm

Ø10 mm chuck for DB-2 mm

DB-10 x 2mm

*Used to pilot bore for screw-on hinges with MINIPRESS or MINIDRILL



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Knock-in tool




- Can be used to insert all Blum press-in hinges

Part no.

Knock-in tool

ZME.0710

ECODRILL



- Simple device for boring Blum hinge pattern
- Driven by electric/cordless drill (18v or higher)
- Boring distance adjusts from 2 mm to 8 mm
- Clamps to various door thicknesses up to 40 mm
- Includes drill bits (pre-installed) and two Torx bits

Part no.

ECODRILL

M31.1000.01

Accessories

Replacement Ø35 mm bit

M31.ZB35.02

Replacement Ø8 mm bit

M31.ZB08.02

Tool set

MZW.1300

ECOJIG



holes are:
32 mm apart,
37 mm setback




- Used to bore Ø5 mm holes for mounting plates that are mounted with system screws, EXPANDO dowels or INSERTA
- Also can be used to pre-bore Ø5 mm holes for EXPANDO BLUMOTION adapters
- Ø5 mm stop collar included

Part no.

ECOJIG

65.5070

Universal individual template

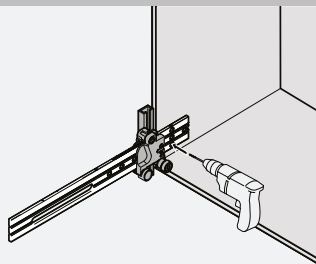


- For pre-boring mounting plates
- Also used for marking and pre-boring cabinet profiles, BLUMOTION, TIP-ON adapter plates and AVENTOS locating pins
- Calibrated scale for accurate setting

Part no.

Universal individual template

65.1051.02

Mounting plate template

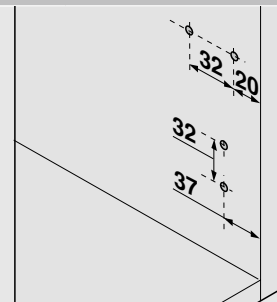

- For pre-boring TIP-ON for doors wing and in-line adapters
- Can also be used to bore for wing (37 mm) and in-line (20 mm) mounting plates
- Additional hole location added (37 mm) for in-line adapter for standard doors
- Simple location of adapter and mounting plate screw positions
- Pilot bore Ø2.5 mm holes for wood screws

Part no.

Mounting plate template

65.5300*


Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

QUICKFIX




- Drilling sleeve dimensions changed from 2.5 mm to 5 mm for drilling for in-line mounting plates
- Locates/matches positions of hinges and plates on cabinets and doors
- Transfers positions from door-to-cabinet and cabinet-to-door
- Adjustable stop for various door overlays
- For use with wing or in-line mounting plates

Part no.

QUICKFIX	65.7500.03
Accessories	
Additional CLIP template	65.7510.03
2.2 meter rail	65.7590
Ø5 mm drill bit	DB-5mm

PLATEMATE

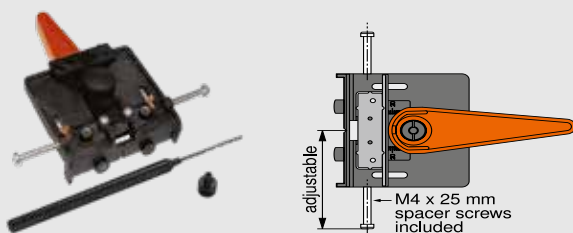

- Boring template for all Blum face frame adapter plates
- Clamps to the frame with cam lever
- Adjustment knob accommodates frame thickness of 5/8" to 1"
- Spacer screws permit quick use without measuring
- Includes 2.5 mm pilot bit and drill bit extension

Part no.

PLATEMATE	65.5030.01
-----------	------------

INSERTA boring template




- For boring Ø8 mm dowel holes after Ø35 mm hole is bored
- Boring distance adjusts from 2 mm to 8 mm
- Also bores Ø5 mm holes for system screw mounting plates
- Includes drill stop collar to pilot bore Ø2.5 mm for screw-on plates

Part no.

INSERTA boring template	65.059A
-------------------------	---------

BLUMOTION and TIP-ON for doors boring template

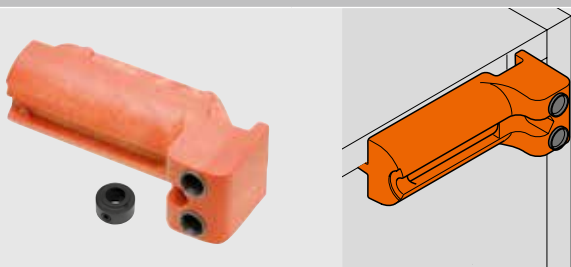

- For pre-boring BLUMOTION and TIP-ON units
- Ø10 mm drill bushing for edge boring
- Bores left and right side of cabinet
- Includes Ø10 mm stop collar

Part no.

BLUMOTION and TIP-ON for doors boring template	65.5010
--	---------



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Deep thread wood screws

- For attaching hinges and mounting plates




Part no.

#6 x 1/2", #2 Phillips	6062N
#6 x 5/8", #2 Phillips	606N
#6 x 5/8", #2 POZI	606P
#6 x 3/4", #2 Phillips	6064N
#7 x 5/8", #2 Phillips	707N
#7 x 3/4", #2 Phillips	7074N

Deep thread system screws

- Pilot bore Ø5 (3/16") hole




Part no.

#7 x 10 mm, #2 POZI	661.1000.HG
#7 x 11.5 mm, #2 POZI	661.1150.HG
#7 x 13 mm, #2 POZI	661.1300.HG
#7 x 14.5 mm, #2 POZI	661.1450.HG
#7 x 20 mm, #2 POZI	661.2000.HG
#7 x 25 mm, #2 POZI	661.2500.HG

Pan head system screw

- Pilot bore Ø5 (3/16") hole




Part no.

#7 x 14.5 mm, #2 POZI	668.1450.EH
-----------------------	-------------

Truss head screw

- For attaching COMPACT hinges to face frame
- Type 17




Part no.

#8 x 3/4", #2 Phillips	834TH
------------------------	-------

POZI DRIVER and bits



A POZI screwdriver (different from Phillips) is the most crucial tool you can use to assure that full torque is applied to all Blum mounting screws. POZI screws can be identified by the distinctive "tick" marks located in the center of the screw head recess.



Part no.

#2 POZI DRIVER	POZI DRIVER
1/4" Magnetic bit holder	BIT HOLDER
#2 x 1" POZI bit insert	POZI BIT #2X1
#2 x 2" POZI bit insert	POZI BIT #2X2

Twin application screw

- Pre-bored Ø5 (3/16") hole



Part no.

14 (9/16") screw	612.2010
16 (5/8") sleeve For panel thickness 16 - 20 mm	612.2020



Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Dowel Cross-Reference Chart

Blum press-in dowels simplify installation
Use the charts below to find the proper hinge-to-dowel combination



NOTE: All dowels for Ø8 mm holes require a #6 x 1/2" dowel screw (608.1200)

Part number		70.0532	70T5582.01	30C2582	34.3582.01	608.1200	60A.1220
Hinge Type	Series	Universal dowel (no flange)	Square head dowel (with flange)	COMPACT CLIP dowel	COMPACT BLUMOTION & COMPACT Dowel	Installation Screw	Installation Screw
CLIP top BLUMOTION	95°		✓				✓
	110°		✓				✓
	125° - 0-protrusion		✓				✓
	155° - 0-protrusion		✓				✓
CLIP top & CLIP	95°		✓			✓	
	100°	✓				✓	
	107°		✓			✓	
	110°		✓				✓
	120°		✓				✓
	125° - 0-protrusion	✓				✓	
	155° - 0-protrusion	✓				✓	
	170°	✓				✓	
	60° - bi-fold	✓				✓	
COMPACT CLIP	31C1/31C3			✓			✓
	30C2			✓			✓
COMPACT BLUMOTION	38N				✓	✓	
	39C/38C				✓	✓	
	38B				✓	✓	
COMPACT	38N				✓	✓	
	39C/38C/38B				✓	✓	

Dowel Cross-Reference




Note: Some catalog items are special order items and could have extended lead times or larger minimum order quantities. Availability is subject to change.

Hinge-to-Door Attachment


Screw-on

Use #6 wood screws

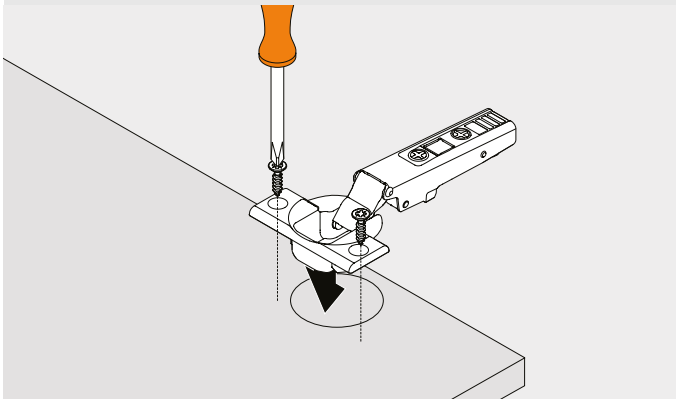


Press-in

Pre-attached Ø8 mm dowels installed with Blum knock-in tool or MINIPRESS with an insertion ram

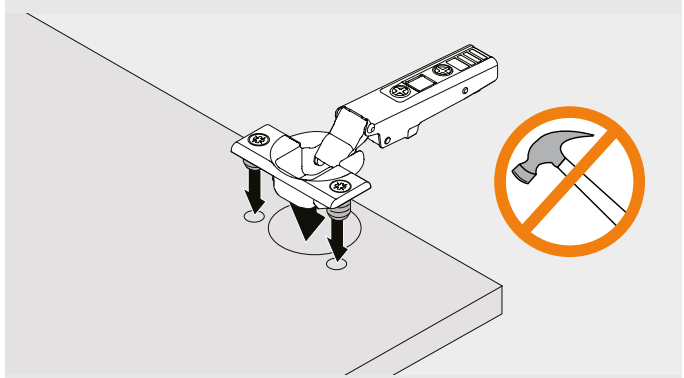


EXPANDO

Pre-attached expanding Ø8 mm dowels

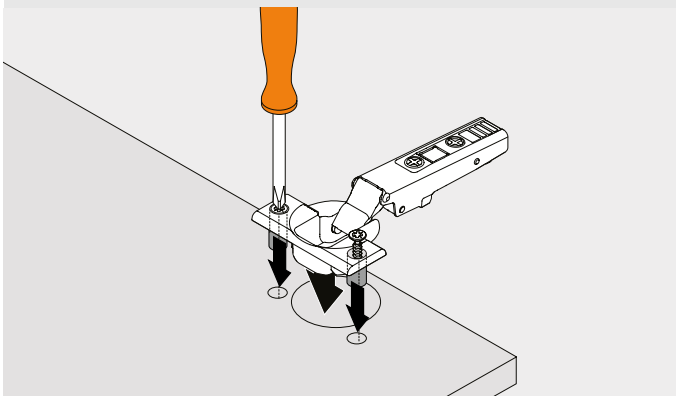


INSERTA

Tool-free attachment with INSERTA expanding Ø8 mm dowels

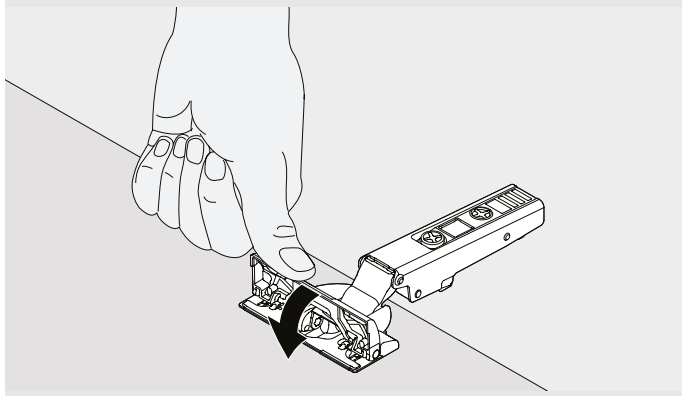


Mounting Plate-to-Cabinet

Screw-on

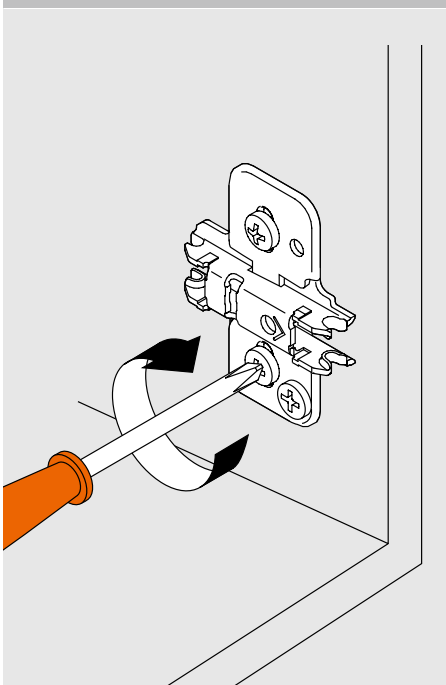


EXPANDO

Pre-attached expanding Ø5 mm dowels

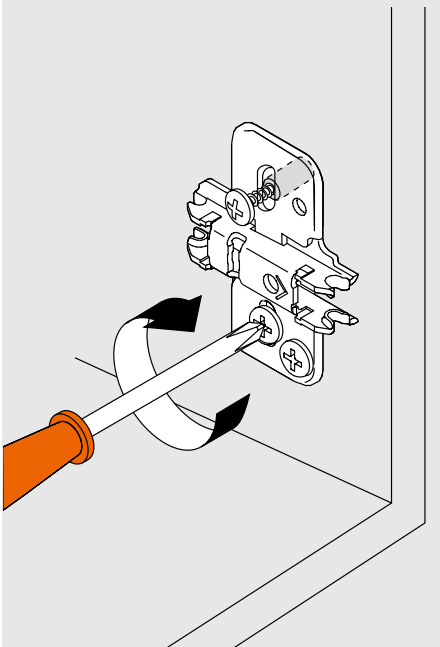

INSERTA


Tool-free attachment with INSERTA expanding Ø5 mm dowels

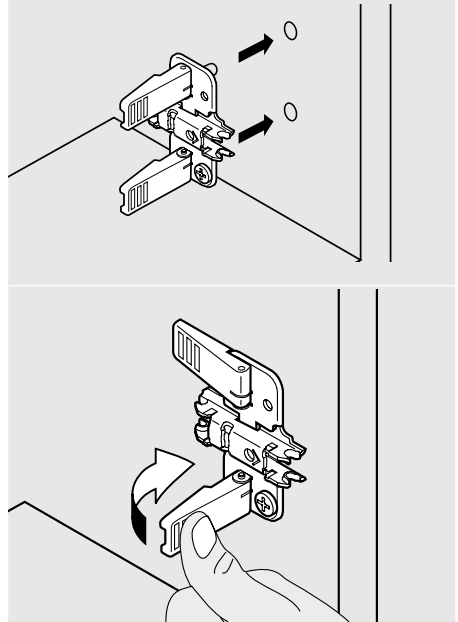

Three-dimensional cam adjustment


Height adjustment

Rotate cam screw on mounting plate to adjust door position (± 2 mm to ± 3 mm depending on mounting plate)

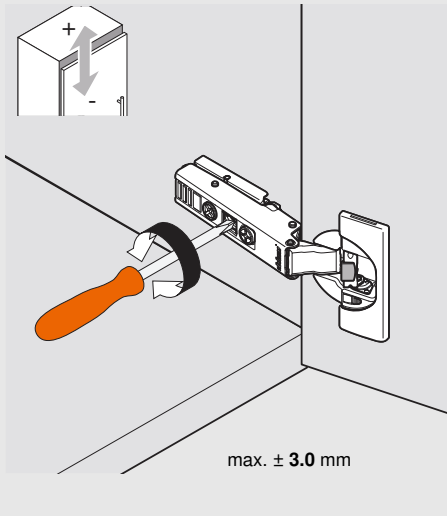


Side adjustment

Rotate front screw to increase or decrease door overlay (± 2 mm)

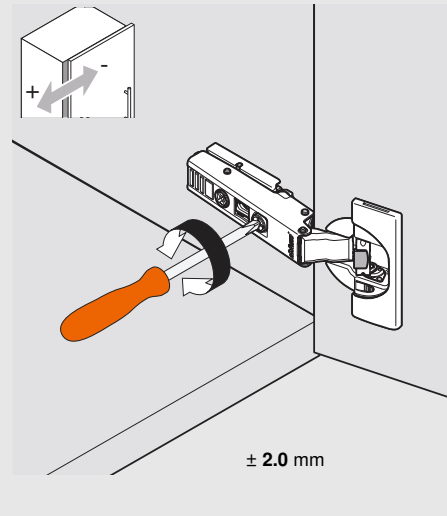


Depth adjustment

Rotate rear spiral tech cam screw to adjust door gap (+3 mm, -2 mm)

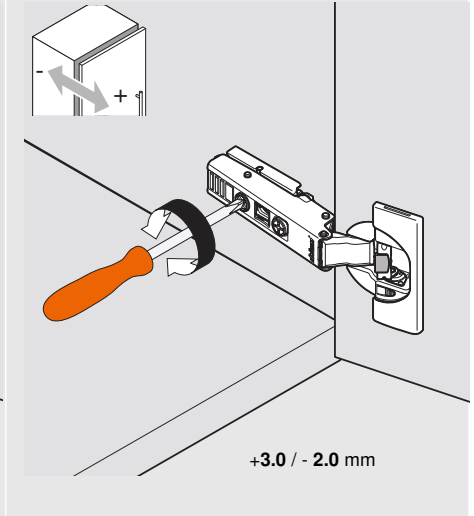


BLUMOTION Deactivation switch on hinge cup

For small or light doors, the BLUMOTION can be deactivated on one of the hinges

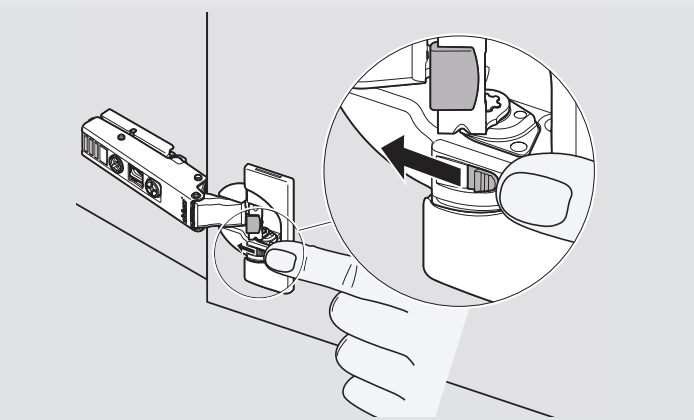

Door must be closed once for the deactivation to be complete. To reactivate, move switch back to original position.

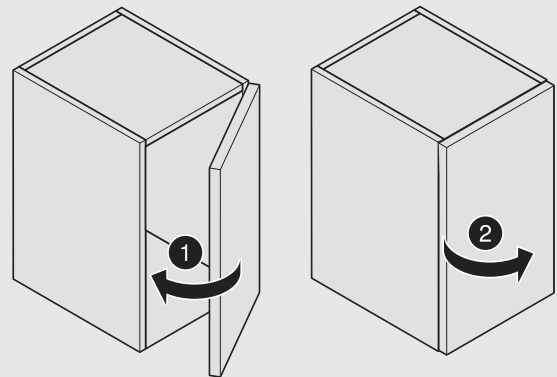


Assembly, removal and adjustment

www.blum.com




Screw-on

Use #6 wood screws.

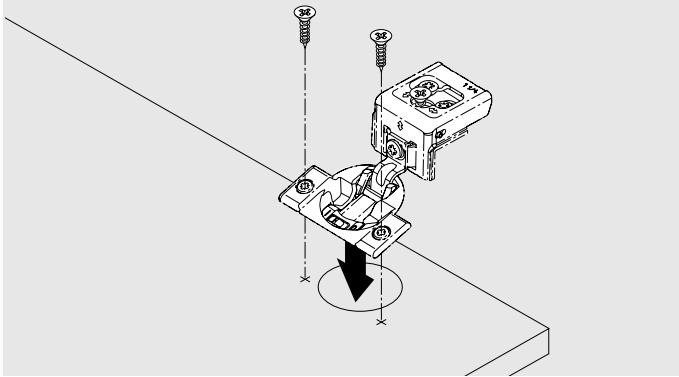


Press-in

Pre-attached Ø8 mm dowels installed with Blum knock-in tool or MINIPRESS with COMPACT insertion ram.

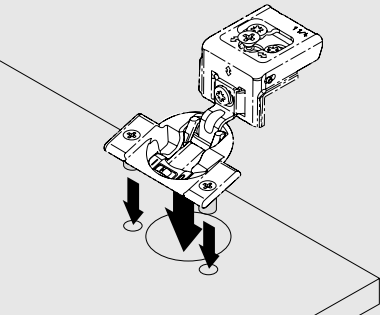


Mounting plate attachment


**30C series – wraparound/
edge mount**

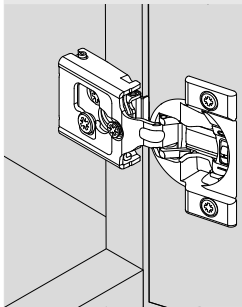


31C series – wraparound

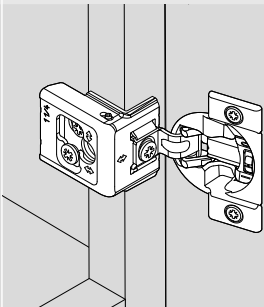


**38N series – wraparound/
edge mount**

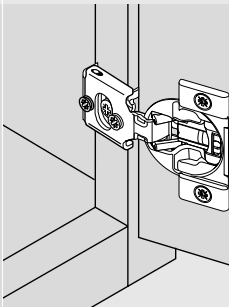

**39C/38C series –
wraparound**

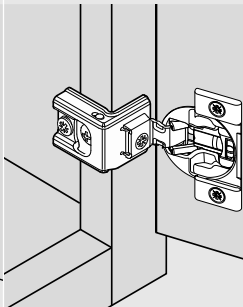


38B series – face mount

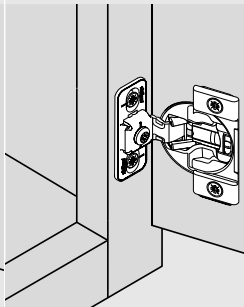

Minimum reveal


A minimum reveal per door is required to keep the door from binding and varies depending on door thickness.

See minimum reveal table for each hinge.

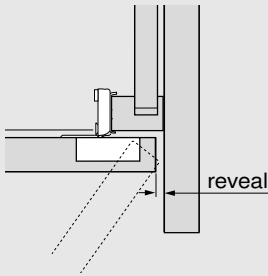

Hinge cup centerpoint


Hinge cup centerpoint and MINIPRESS setback position is 20.5 (13/16") for COMPACT BLUMOTION and COMPACT CLIP hinges.

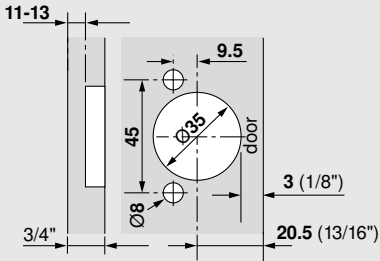

NOTE: Maximum door thickness 3/4"

Hinges per door

This chart can serve as a guide for determining the number of hinges per door. Note that door weight can also determine the number of hinges required.

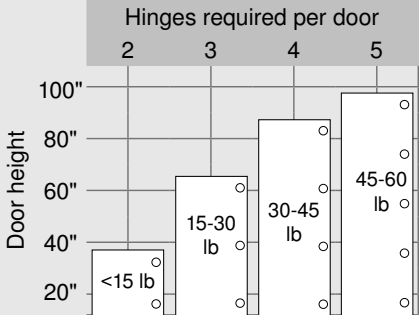


NOTE: The distance between the top and bottom hinges must be greater than the width of the door

Three-dimensional cam adjustment


Height adjustment

Rotate this cam screw to increase or decrease the height ($\pm 5/64"$)

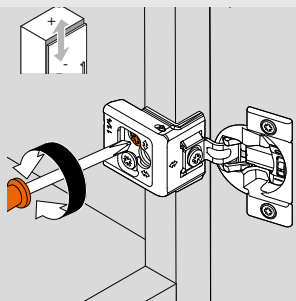


Cam height adjustment

Maintain the set height when doors are attached or removed, offers maximum range without requiring centering in an elongated hole, and includes stamped markings near each adjustment screw for easy reference.

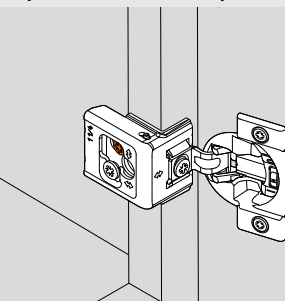


Side adjustment

Rotate the front cam screw to increase or decrease door overlay ($\pm 1/16"$)

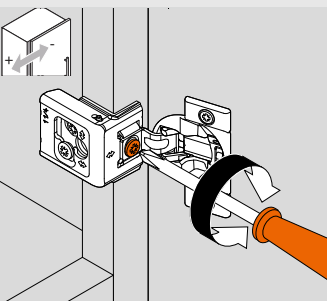

Depth adjustment



Rotate this cam screw to adjust door gap ($+ 3/32"$, $- 1/32"$)

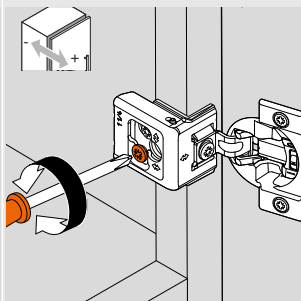

BLUMOTION Deactivation switch on hinge cup

For small or light doors, the BLUMOTION can be deactivated on one of the hinges. COMPACT BLUMOTION and COMPACT CLIP comes in the activated position, marked with a "1". The deactivated position is marked with a "0".

Door must be closed once for the deactivation to be complete. To reactivate, move switch back to original position.

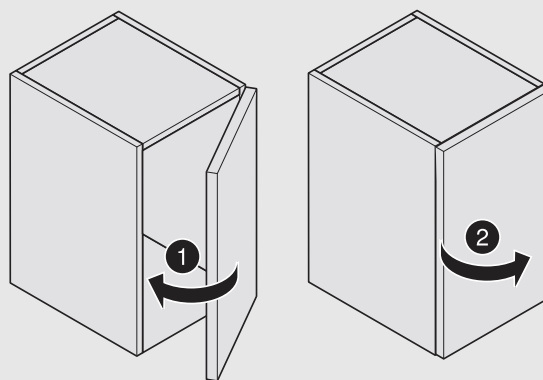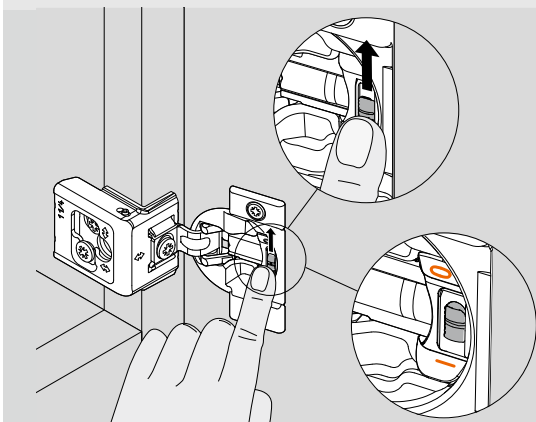


Clip features

With COMPACT CLIP, doors can be removed and reattached quickly and tool free. Not only does this save installers time on the jobsite, it also reduces the risk of damage to the cabinet frame.


Hinge attachment

Step 1: Slide hinge onto CLIP plate until hinge clips in place.

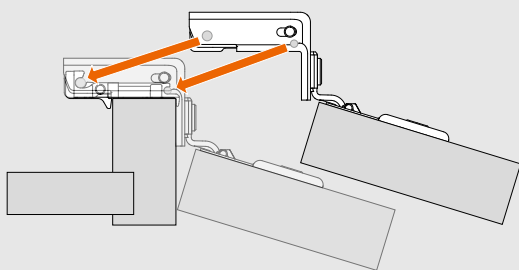


Hinge removal

Step 1: Locate CLIP release lever on back of hinge(A) and press down to release(B).

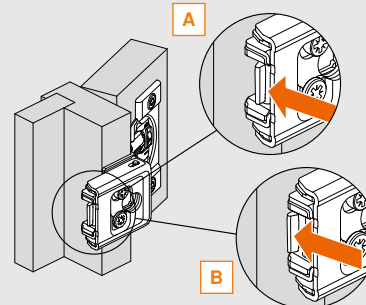


Step 2: While the CLIP lever is released, pull forward on hinge / door to remove from cabinet.



COMPACT BLUMOTION and COMPACT 38C/39C and 38N three-dimensional adjustments


Height adjustment

Loosen installation screws to adjust door position, and retighten.
Range = ± 3 (1/8")

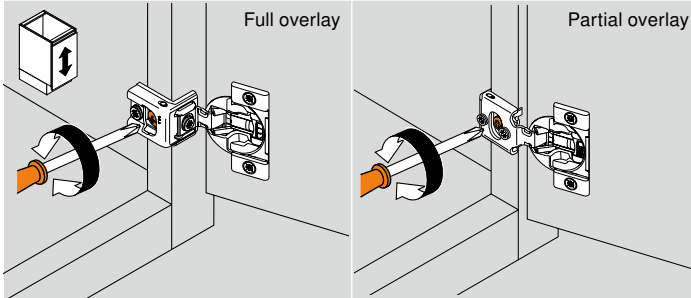


Cam side adjustment

Rotate the front cam screw to increase or decrease door overlay.
Range = ± 1.5 (1/16")

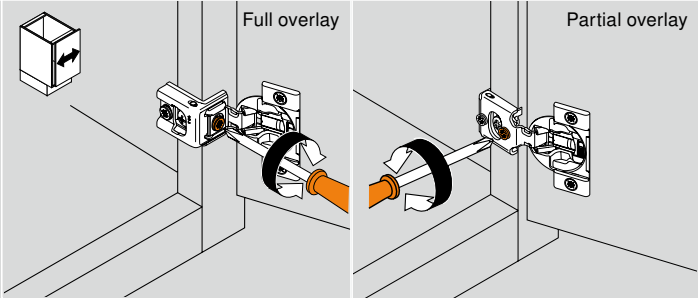


Cam depth adjustment

Rotate the rear cam screw to adjust door gap.
Range = ± 2 (1/32") - ± 1 (1/32")

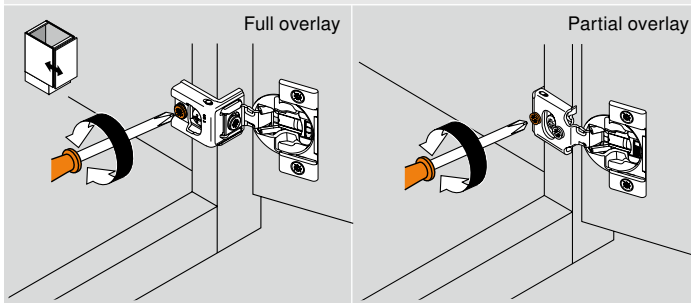

Door removal


Loosen installation screws to remove hinge from cabinet.

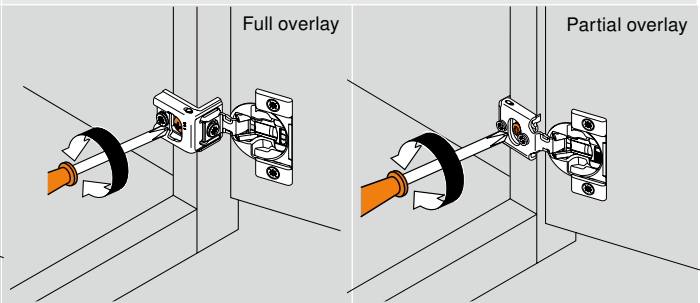

COMPACT BLUMOTION 38B three-dimensional adjustments


Height adjustment

Loosen installation screws to adjust door position, and retighten.
Range = ± 2 (3/32")

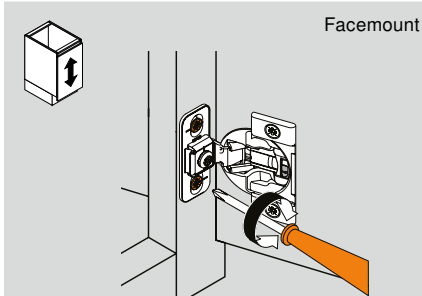


Cam side adjustment

Rotate the front cam screw to increase or decrease door overlay.
Range = ± 1.6 (1/16")

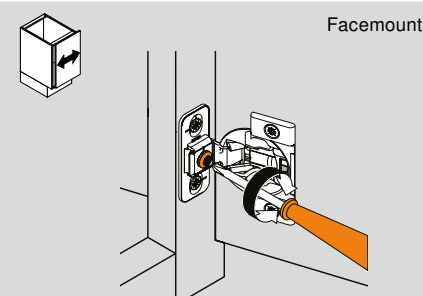

Door removal

Loosen installation screws to remove hinge from cabinet.

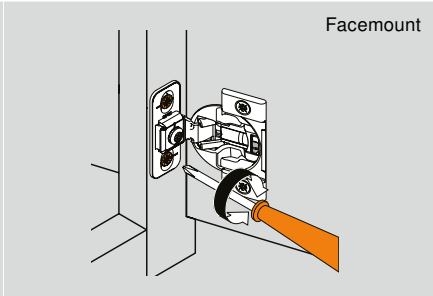



Assembled with purpose.

At our North Carolina facility, we assemble select hinges, like our COMPACT series and CLIP top BLUMOTION 110° hinge. It's more than putting parts together—it's where precision, quality assurance and innovation come to life.

Our team of experts in the hinge assembly department ensures every detail meets our high standards for smooth movement and long-lasting performance. By assembling locally, we're not only supporting American jobs—we're also building products we're proud to stand behind.

All Blum hardware undergoes strict quality assurance procedures through all stages of production. Blum hardware is designed for cabinets and cabinet components made from wood, melamine or MDF. Careful attention must be paid to installation and operating instructions when using Blum hardware (see catalogs and instruction sheets for all technical information). The manufacturer must decide on the screws or attachment methods to suit the material being used (i.e. wood, melamine, etc.). The hardware must not be exposed to acidic or corrosive materials (i.e. some household cleaning solutions). To ensure that Blum hardware functions correctly, it must be kept clean and undamaged. For any additional information please contact your Blum representative. Anyone selling Blum hardware must ensure that their customer is aware of any relevant information given in this catalog. Care and cleaning – use a clean damp cloth.

Conditions of sale and delivery

All deliveries and services are based on the "general conditions of sale" which are available upon request. The technical presentations and dimensions in illustrations are non-binding. We reserve the right to make changes to specifications at any time. We do not accept any responsibility for any errors which may occur in the production of this catalog.

Conditions for tests

Blum, Inc. does a great deal of testing to ensure that the quality of our hardware is consistent with the usual high standards that our customers have come to expect from Blum. For this reason we have rigorous testing procedures which are carried out from the development stage through production. Blum's internal testing standards are based on practical applications of our products and are more stringent than what is required by ANSI/BHMA.

Blum advises against mixing different types of hinges for the same application. For example, don't combine CLIP top hinges with CLIP top BLUMOTION hinges, or COMPACT hinges with COMPACT BLUMOTION or COMPACT CLIP hinges. These hinges have different components and designed geometry, which could lead to variations in how the doors open and close.

NOTE: All Blum hinges meet or exceed ANSI/BHMA A156.9 Grade 2 requirements. All concealed hinges are designed for indoor use.

ISO 9001

Blum, Inc. is ISO 9001 certified which means that you are assured of consistent quality in every Blum product.



ANSI/BHMA



All Blum hinges meet or exceed ANSI/BHMA A156.9 Grade 2 requirements. Contact your local Blum representative for more details.





ISO 9001
Certified Quality
System

Cycle test	
Specifications	- Door size – 23-5/8" height, 23-5/8" width, 3/4" thickness - Door weight – 14.3 lb for cycle tests - Door weight – 18.5 lb for load and over push tests - Boring distance – CLIP 5 mm / COMPACT 3 mm
Distance between hinges	16-15/16"
Hinge and mounting plate attachment	- Hinges are mounted to test blocks and attached to test door and stand with clamps - Test blocks for door: Hardwood - Test blocks for mounting plate: Particle board


Cycle test	
	Without load 200,000 opening and closing cycles for all CLIP hinges and COMPACT hinges with integrated BLUMOTION 100,000 opening and closing for all COMPACT hinges without BLUMOTION Positive test result  With load 11 lb extra weight is applied for 100,000 opening and closing cycles Positive test result 

Load test	
	Static load 67 lb applied ten times for five seconds, each at 45° opening angle Positive test result  Dynamic load 44 lb extra weight applied for fifty opening and closing cycles Positive test result 

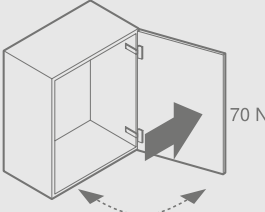
Over push test	
	Without load - CLIP hinges and COMPACT hinges with integrated BLUMOTION - increasing forces up to 15 lb applied for a total of 10 times for 5 seconds each - COMPACT hinges - increasing forces up to 11 lb applied for a total of 10 times for 5 seconds Positive test result 

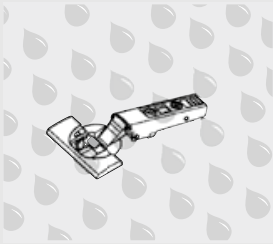Corrosion test	
	Based on DIN EN ISO 9227 and DIN EN ISO 6270-2 for simulating corrosion influences. Positive test result 


110° hinge

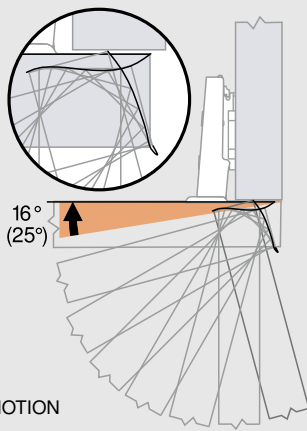


95° thick door hinge

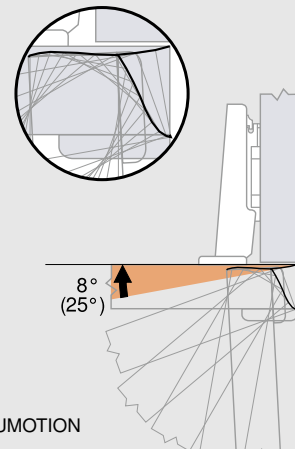


155° hinge

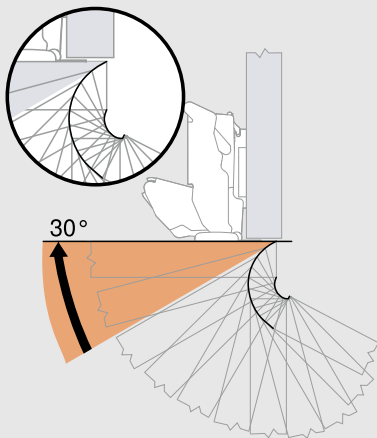


170° hinge

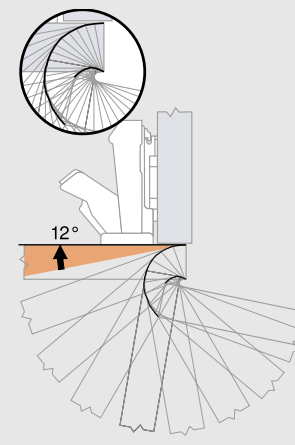

125° hinge

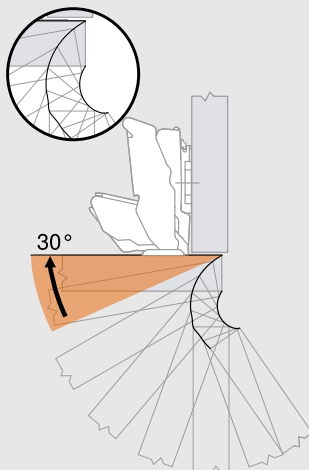


CLIP top BLUMOTION 110° Thin Door Hinge

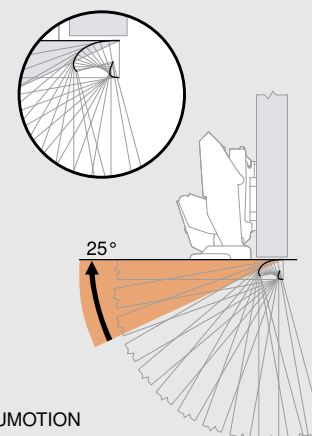


NOTE: Orange area represents the angle where self/soft closing of the hinge begins.

NOTE: The maximum opening angle can be limited by the cabinet depending on the door shape, door thickness T and hinge setting.


94° Glass Door Hinge

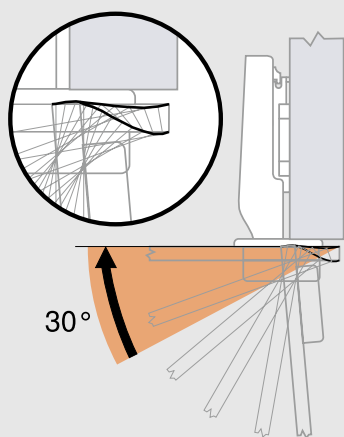


CLIP top 94° Mini Hinge

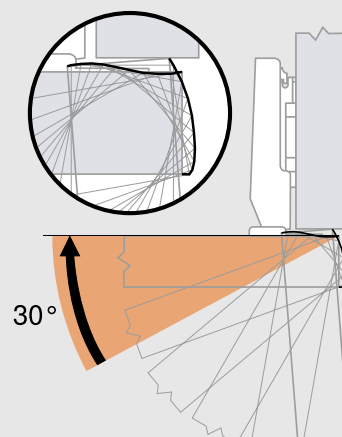


CLIP top 60° Bi-Fold Hinge

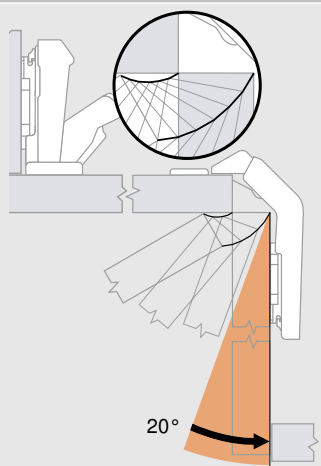

107° hinge

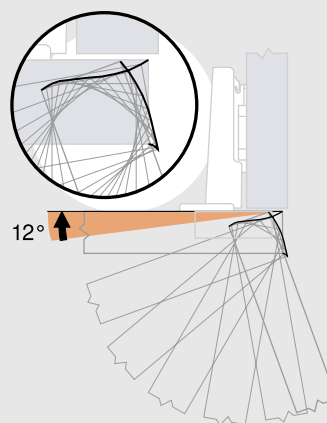

100° hinge

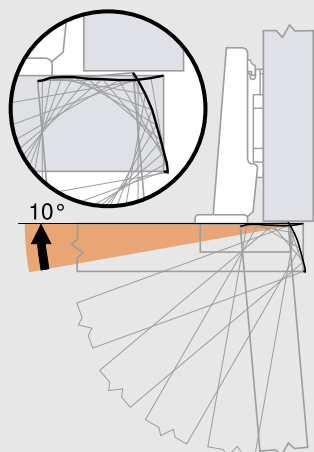

NOTE: Orange area represents the angle where self/soft closing of the hinge begins.

NOTE: The maximum opening angle can be limited by the cabinet depending on the door shape, door thickness T and hinge setting.



Stay Connected.

Follow us to discover new products, additional resources,
installation tips and insights on maximizing storage space.

Type 'Blum USA' in the search bar to find us!



Our services at a glance

Our services support you throughout your entire process – from planning and design, all the way through to manufacturing. Take advantage of our tried-and-tested and user-friendly services for your projects with hinges.



Planning, design, quoting

Product Database offers specific product details, photos and CAD data. Our Product Configurator provides you with checked and complete parts lists specifically for your application.



Ordering

To make it easy to order your hinge configuration, you can manage your different projects and order lists with ease under “My Projects” and “My Order Lists.”



Manufacturing

CAM data can be downloaded from the Product Configurator to assist you during the cabinet manufacturing process. Have a Blum EASYSTICK? Transfer BXF files from the Product Configurator directly to your machine.



Assembly, installation

Download our EASY ASSEMBLY app for quick access to assembly and installation instruction sheets and videos. The easy-to-use interface allows you to filter by product type. Save your most-used products to your favorites to find the information again quickly.



Marketing

Using our free Marketing Media Library, you can find photos, videos and logos to assist you in your own marketing efforts.



Sign up now for a free
E-SERVICES account.
e-services.blum.com



Find out more about our
E-SERVICES:
blum.com/e-services

Part no.	Page no.	Part no.	Page no.
171A5010	38, 39, 40, 41, 43, 45	177H3100	50
171A5040	38, 39, 44, 45	177H3100E	50
171A5070	38, 39, 40, 42, 46	177H3130E	50
171A5500	38, 39, 40, 41, 42, 43, 44, 45, 46	181.6130	39, 55
173H7100	39, 40, 41, 42, 43, 44, 45, 46, 49	30C2508	66, 73
173H9100	49	30C2508.BL	73
173H9100.04	52, 53	30C255B.06	66
173H9100.08	46, 52, 53	30C255B.08	66
173H9100.12	52, 53	30C255B.10	66
173H9100.16	52, 53	30C255B.12	66
173H9130	49, 53	30C255B.E8	66
173H9130.06	52, 53	30C2582	87
173H9130.10	52, 53	30C258B.05	66
173H9130.14	52, 53	30C258B.06	66
173H9130.18	52, 53	30C258B.08	66
173L6100	48	30C258B.10	66
173L6130	48	30C258B.12	66
173L8100	48	30C258B.E8	66
173L8130	48	31C1508	67, 68, 73
174E6100.01	48	31C1508.BL	73
174E610Z	48	31C158B.20	68
174H7100E	49	31C355B.16	67
174H7100I	49	31C355B.20	67
174H710ZE	49	31C355B.21	67
174H7130E	49	31C355B.22	67
174H7130I	49	31C355B.24	67
175H3100	50	31C358B.16	67
175H5030.21	51	31C358B.20	67
175H6000	51	31C358B.21	67
175H6030	51	31C358B.22	67
175H6040	51	31C358B.24	67
175H6060	51	31C358B.25	67
175H7100	50	34.3582.01	87
175H7130	50	36.3515	73
175H7190	39, 46, 50	38B355BF22	72, 79
175H9100	50	38B358BF22	66, 67, 68, 69, 70, 71, 72, 73
175H9130	50	38C315B3.1	66, 67, 68, 69, 70, 71, 72, 73
175H9160	15, 39, 40, 41, 44, 46, 50	38C3508	70, 71, 73
175H9190	39, 41, 42, 43, 46, 50	38C355B.20	71
175H9190.22	39, 42, 43, 46, 50	38C355B9	66, 67, 68, 69, 70, 71, 72, 73
175L6030.21	51	38C355C.20	76
175L6600.22	51	38C358B.20	71
175L6600.24	51	38C358C.20	76
175L6630.22	51	38C358C.22	76
175L6660.22	51	38C358C.24	76
175L8190	48	38N3508B	69, 73

Part no.	Page no.	Part no.	Page no.
38N355B.06	69	60A.1220	87
38N355B.08	69	608.1200	87
38N355B.10	69	612.2010	86
38N355B.12	69	612.2020	86
38N355BE08	69	65.059A	85
38N355C.06	74	65.1051.02	84
38N355C.08	74	65.5030.01	85
38N355A.10	74	65.5010	85
38N355C.12	74	65.5070	84
38N355CE08	74	65.5300*	84
38N358B.05	69	65.7500.03	85
38N358B.06	69	65.7510.03	85
38N358B.08	69	65.7590	85
38N358B.10	69	661.1000.HG	86
38N358B.12	69	661.1150.HG	86
38N358BE08	69	661.1300.HG	86
38N358C.06	74	661.1450.HG	86
38N358C.08	74	661.2000.HG	86
38N358A.10	74	661.2500.HG	86
38N358C.12	74	668.1450.EH	86
38N358CE08	74	70.0532	87
39C355B.16	70	70.1503	54
39C355B.20	70	70.1503.BP	54
39C355B.21	70	70.1553	54
39C355B.22	70	70.1663	79, 54
39C355B.24	70	70.4503	31, 54
39C355B.25	70	70.6103	30, 47
39C355C.16	75	74.1103	47
39C355C.20	75	7074N	79, 86
39C355C.22	75	707N	89
39C355C.24	75	70M2550.TL	36
39C358B.16	70	70M2580.TL	36
39C358B.20	70	70M2650.TL	36
39C358B.21	70	70M2750.TL	36
39C358B.22	70	70M2780.TL	36
39C358B.24	70	70T1504	55
39C358B.25	70	70T3504	55, 79
39C358C.16	75	71B3550	10
39C358C.20	75	70T3507.21	54
39C358C.22	75	70T3553	47
39C358C.24	75	70T3580.TL	24
39C358C.25	75	70T3650.TL	24
6062N	86	70T3750.TL	24
6064N	86	70T5582.01	87
606N	59, 61, 62, 63, 72, 79, 86	70T6540BTL	29
606P	59, 61, 62, 63, 72, 79, 86	70T6550.TL	29

Part no.	Page no.	Part no.	Page no.
70T7553	14, 15, 17, 31, 47	71T3690	24
70T7553.09	31, 47	71T3750	24, 79
70T9550.TL	28	71T3780	24, 79
70T9580.TL	28	71T3790	24, 79
70T9650.TL	28	71T5550	26
70T9750	28	71T5580	26
71B3580	10	71T558E	26
71B358E	10	71T5590B	26
71B3590	10	71T5650	26
71B3650	10	71T5680	26
71B3680	10	71T5690B	26
71B3690	10	71T6540B	29
71B3750	10, 79	71T6550	29
71B3780	10, 79	71T6580	29
71B3790	10, 79	71T6640B	29
71B37X0	53	71T6650	29
71B7550	13, 14,	71T6680	29
71B7550D	16	71T7550	31
71B7580	13, 14, 16	71T7590	31
71B7590	13, 14	71T9550	28
71B7650	13, 15, 31	71T9580	28
71B7690	13, 15, 31	71T9590B	28
71B9550	12	71T9650	28
71B9580	12	71T9680	28
71B9590	12, 38, 39, 40, 41, 45	71T9690B	28
71B9650	12	71T9750	28
71B9680	12	71T9780	28
71B9690	12, 38, 39, 42, 46	71T9790B	28
71B9750	12	72T3580.TL	-
71B9780	12	73B3550	11
71B9790	12, 38, 39, 43	73B3580	11
71M2550	36	73B358E	11
71M2580	36	73B3590	11
71M2650	36	73T3550	25
71M2680	36	73T3580	25
71M2750	36	73T358E	25
71M2780	36	73T3590	25
71T0550	34	73T5550	27
71T0650	34	73T5580	27
71T0750	34	73T558E	27
71T3550	24	73T5590B	27
71T3580	24	75T4100	35
71T358E	24	75T4200	35
71T3590	24	75T4300	35
71T3650	24	79B3490	38, 39, 45, 46
71T3680	24	79B3491	38, 39, 45, 46

Part no.	Page no.	Part no.	Page no.
79B3493	38, 39, 45, 46	M01.ZB10.T3 L	83
79B3598	18, 38, 39, 41, 43	M01.ZB20.02 R	83
79B9494	38, 39, 40, 41, 42, 43	M01.ZB35.02 R	83
79B9496	38, 39, 40	M2V.2E00	80
79B9498	38, 39, 40, 41	M30.0212	82
79B9595	38, 39, 41, 42, 43, 44	M30.1304.01	82
79B9596	38, 39, 41, 42, 43, 44	M30.1304.02	82
79B9698	38, 39, 42, 43, 44	M30.1313.UM	81
79T8500.10	32	M30.1316	82
79T8530.10	32	M30.1329	81
80.6507	54	M31.1000.01	84
8114Z	77	M31.ZB08.02	84
8200Z	77	M31.ZB35.02	84
834TH	69, 70, 71, 74, 75, 76, 86	M53.2004*US	80
90M2103.01	54	M53.2053*US	80
956A1004	58	MZA.5200	82
956A1006F	58	MZA.5300	82
956A1201	59	MZD.2000	80
956A1501	59	MZD.2V00	80
956.1004	58	MZD.5000	80
956.1201	59	MZE.2110	82
970A1002	60, 63	MZF.1000.01	82
970.5201	63	MZK.190S	81
970.5701	63	MZK.2009	82
971A0500	62	MZK.880S	81
971A0700	62	MZL.1250.US	82
971A9700.22	77	MZM.0010.01	83
971A9709	77	MZM.0040	83
973A0500.01	60, 61	MZM.0047	83
973A0600	60, 61	MZM.0053	83
973A0700	60, 61	MZR.5300.02	82
973A6000	30, 60, 61	MZS.1000	82
BIT HOLDER	86	MZS.2000	82
DB-10 x 2mm	83	MZS.3000	82
DB-10mm	83	MZV.2E00	82
DB-2.5mm	83	MZW.1300	84
DB-2mm	83	POZI BIT #2X1	86
DB-5mm	83	POZI BIT #2X2	86
DB-8mm	83	POZI DRIVER	86
M01.ZB05.D2 R	83	VPB-5	83
M01.ZB05.D3 L	83	Z10M200U	80
M01.ZB08.03 L	83	ZME.0710	94
M01.ZB10.02 R	83		
M01.ZB10.03 L	83		
M01.ZB10.T2 R	83		

A warm, sunlit modern kitchen. In the foreground, a young woman with blonde hair sits on a black stool at a long, light-colored wooden kitchen island. She is looking towards the right. In the background, a man in a striped shirt is cooking at the island. The kitchen features large windows, pendant lights, and a dining table with chairs. The floor is made of light-colored wood in a herringbone pattern.

moving ideas

At Blum, we pay attention to those small, but valuable, details. We're attentive in everything we do. With our carefully engineered hardware, innovative motion technologies and customized services, we help move your ideas forward. Let's move the world together.



Quality of living

We engineer our products with your lifetime in mind. As your mobility needs change, Blum hardware keeps your cabinets accessible.



Product range

Everything from a single source: Our wide range of products allows you to keep up with the trends of today and tomorrow.



Inspiration

We monitor global trends and strive to create the solutions of tomorrow. We like to share our insights with you.



Innovation

We stay in motion. Our curiosity and pioneering spirit drive us to develop new products and services for you.



Services

We support your daily operations with customized services tailored to your processes.



Quality

We continuously strive to improve our products, services and ourselves.



Trust

It's our goal to build lasting relationships with our customers, employees and in our community.

Julius Blum started our journey in 1952 with horseshoe studs. Today we supply innovative hardware to customers in over 120 countries.

Please visit blum.com for information on other Blum products
LIT.HNG1000.10.25 Ident. 26233310 © 2025 Blum, Inc.

Blum, Inc.
7733 Old Plank Rd.
Stanley, NC 28164
800-438-6788
blum.com

FSC LOGO



ISO 9001
Certified Quality
System

