


Figure G4 — Out-of-order vs normalized CWND & throughput (Multilayer) — 25 s sim, 1000 ms state updates
Case: Tokyo to Buenos-Aires

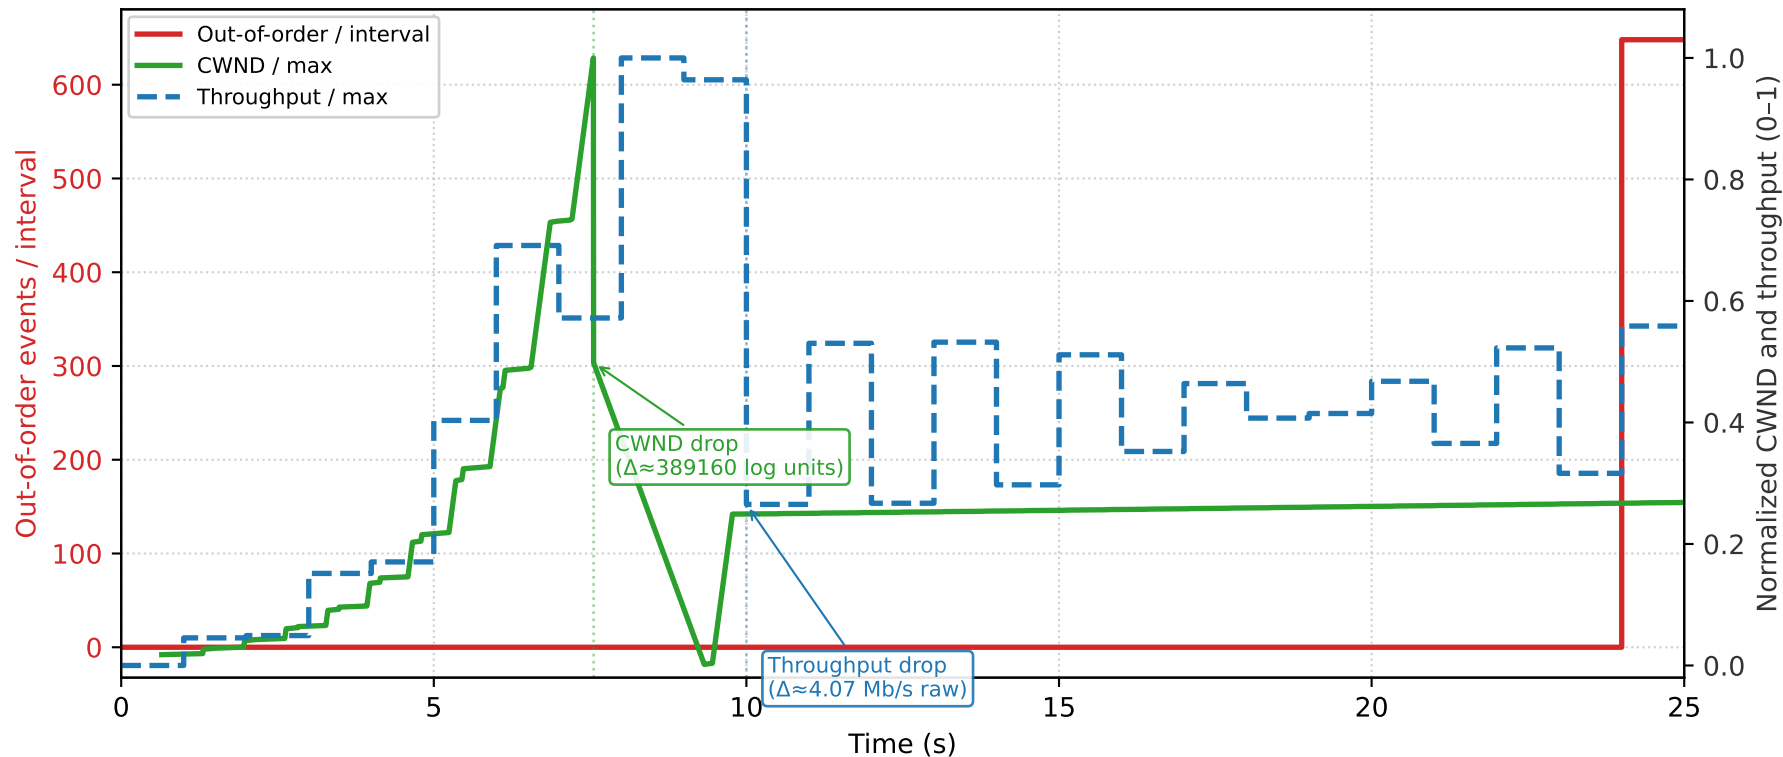

Summary — out_of_order_rate = 25.9200 events/s (pingmesh); cwnd_variation_std = 11276.492 (std of Δ CWND, same units as log); throughput_std = 1.411 Mb/s.
Lower variation usually means more stable transport.

Normalized traces: each curve is divided by its own max so CWND and throughput share the 0-1 axis. Absolute Mbps can differ; compare shape and variability. For higher multilayer Mb/s, re-run TCP with routing/parameters tuned for long paths.