








The 7805 voltage regulator MAY GET HOT during operation

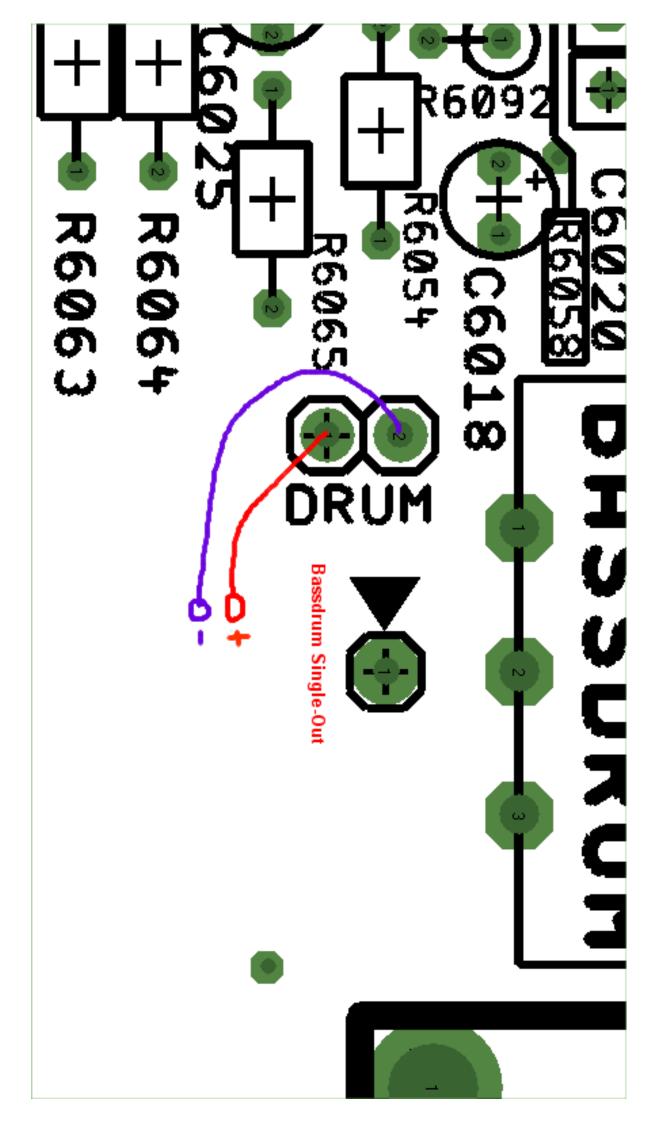


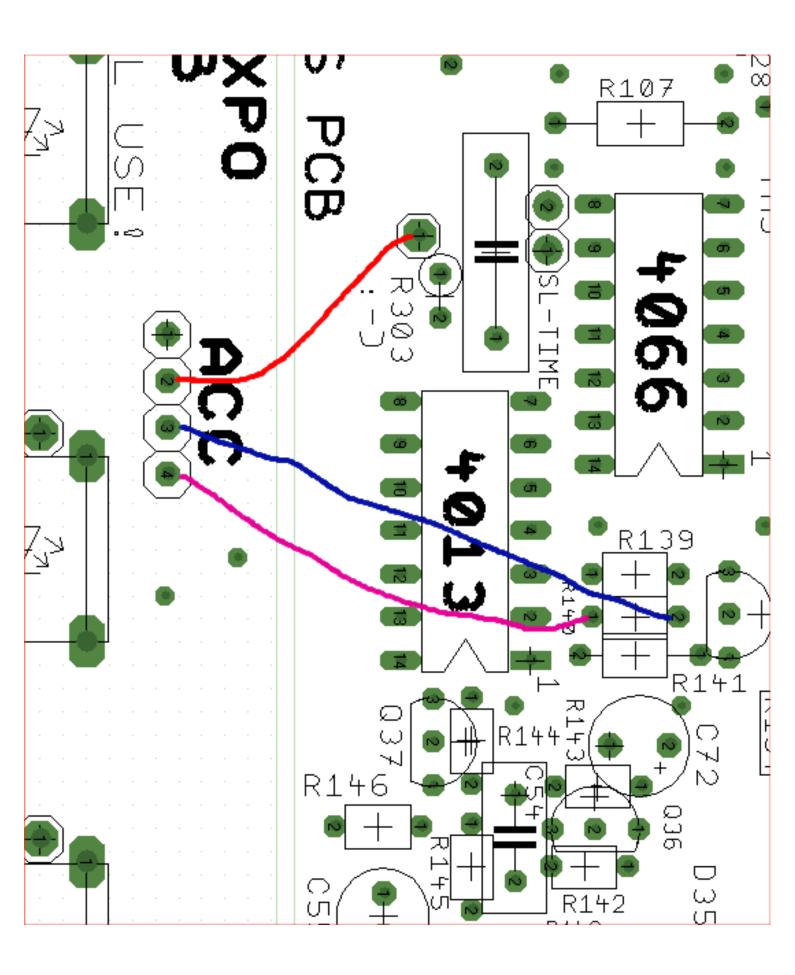


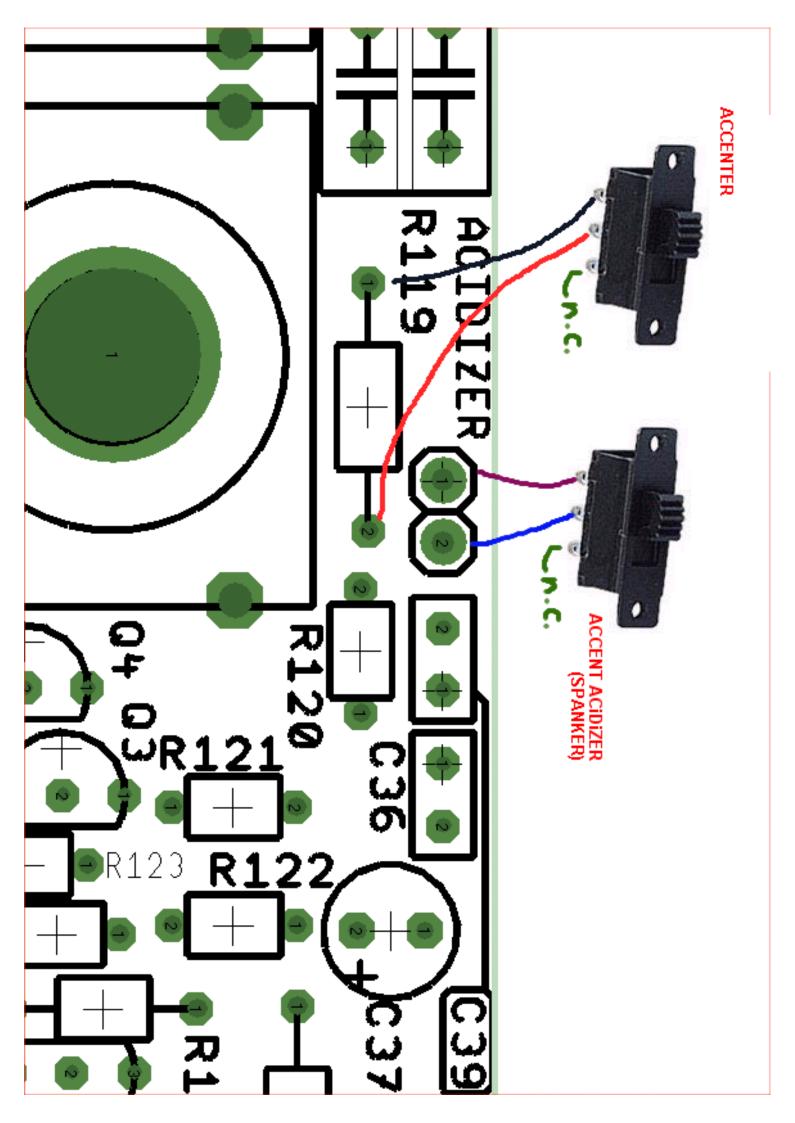


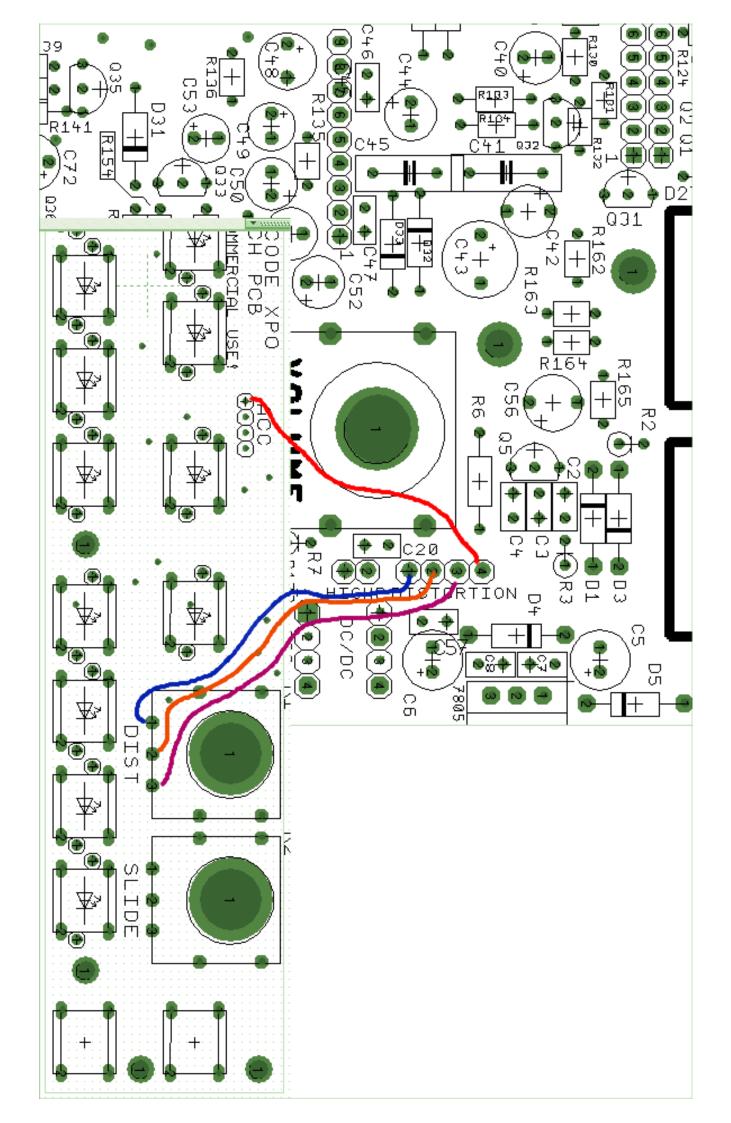


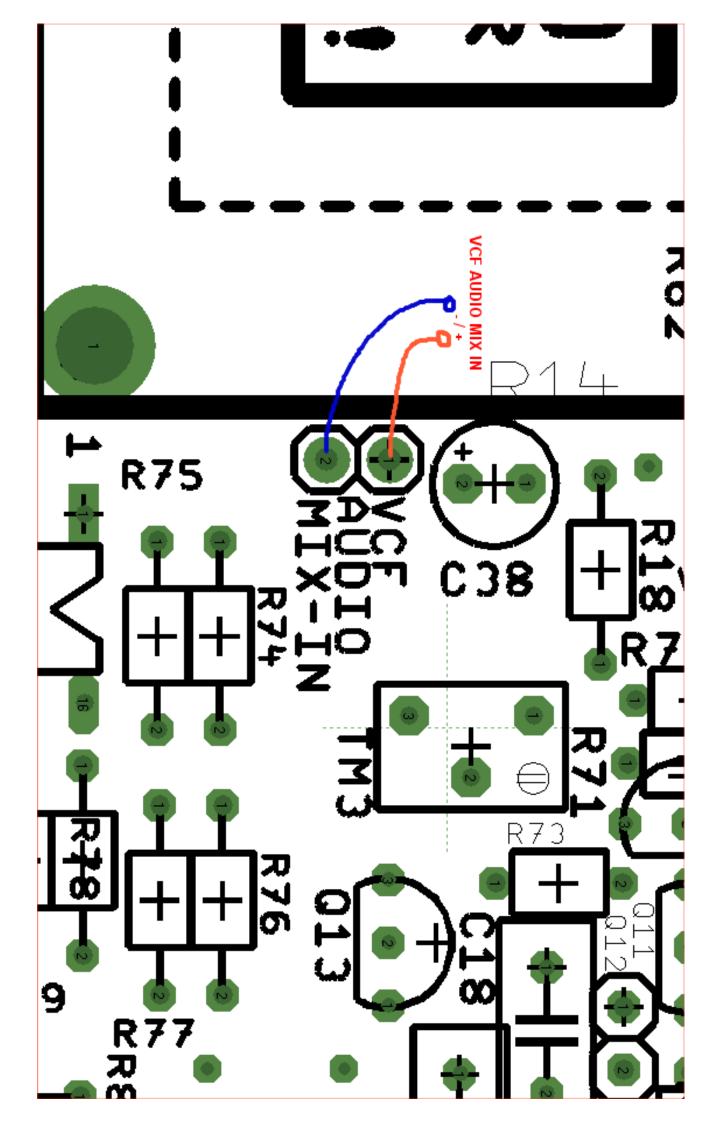


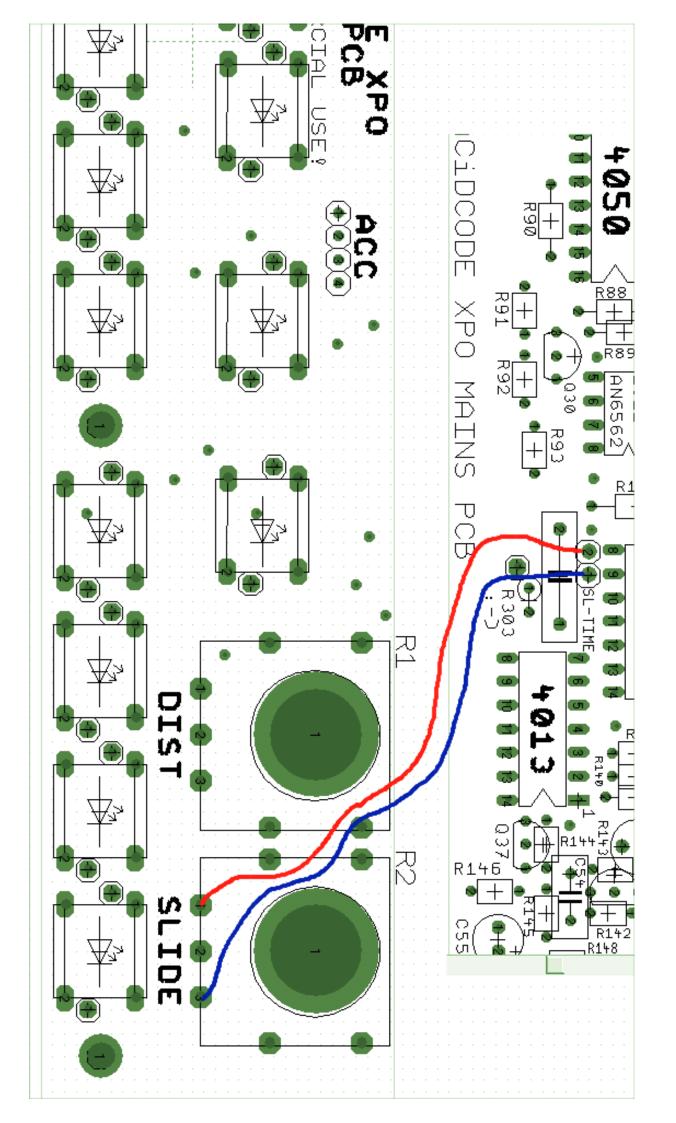

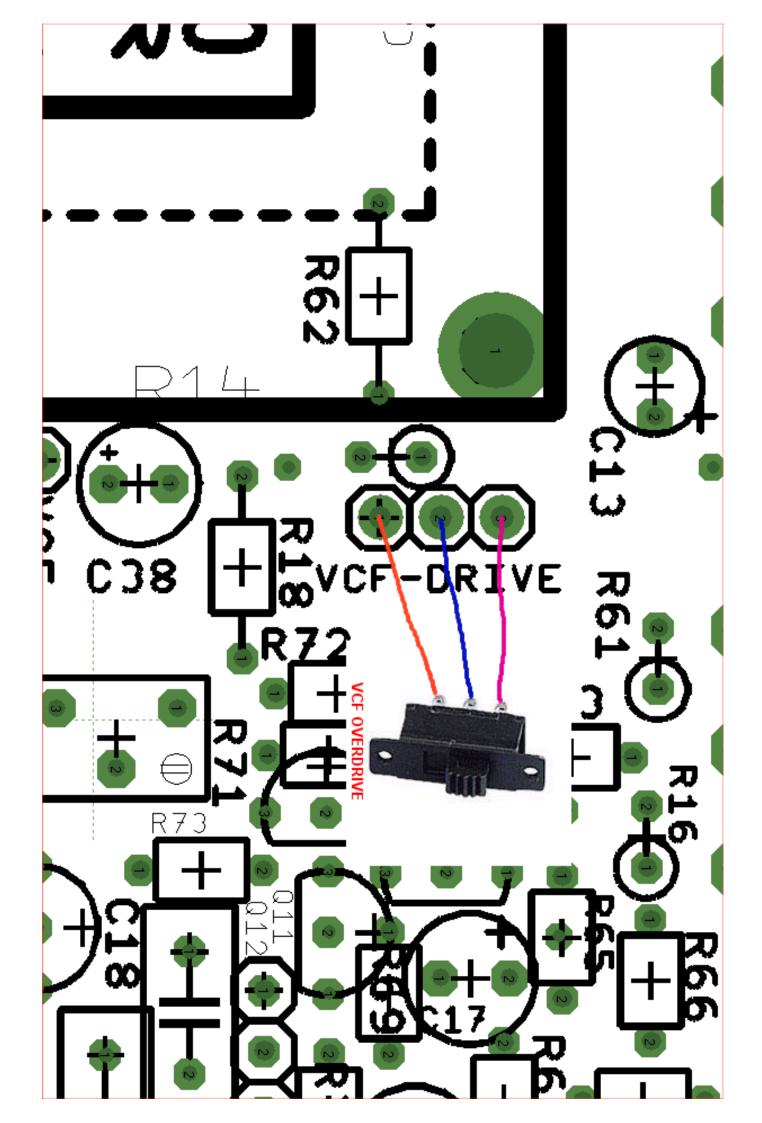

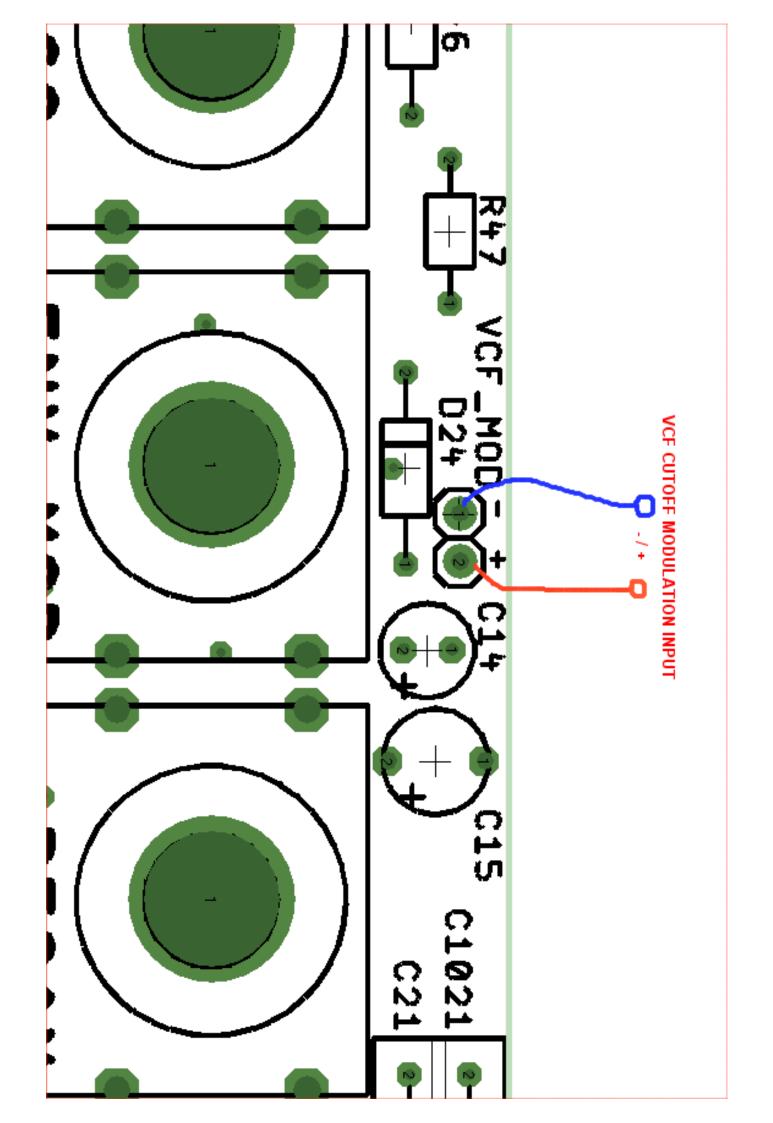

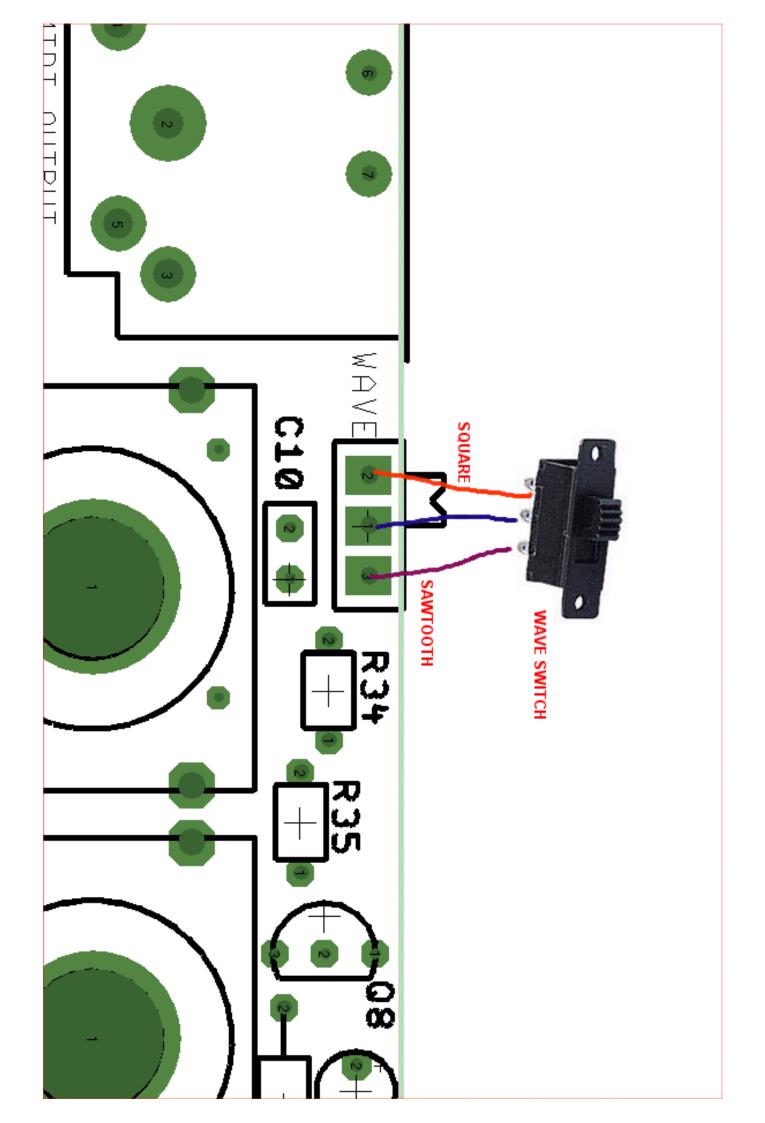

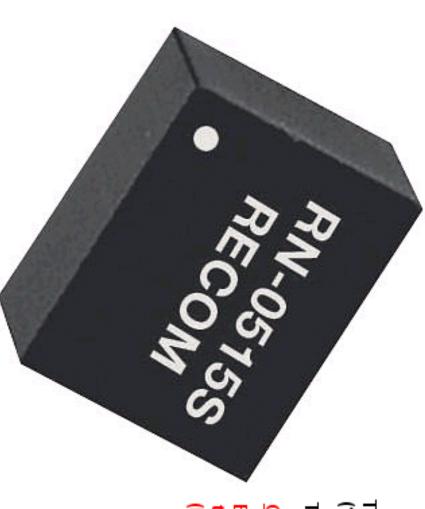



(1,25 Watts Version). The DC/DC Converter (5 Volts to 15 Volts) from RECOM offers 85mA


The 15V current draw is approx. 20mA (peak) in the ML-303.


CAUTION


Even when the ML-303 uses only 25% of max. current the device MAY GET HOT during operation! (No cooler required).

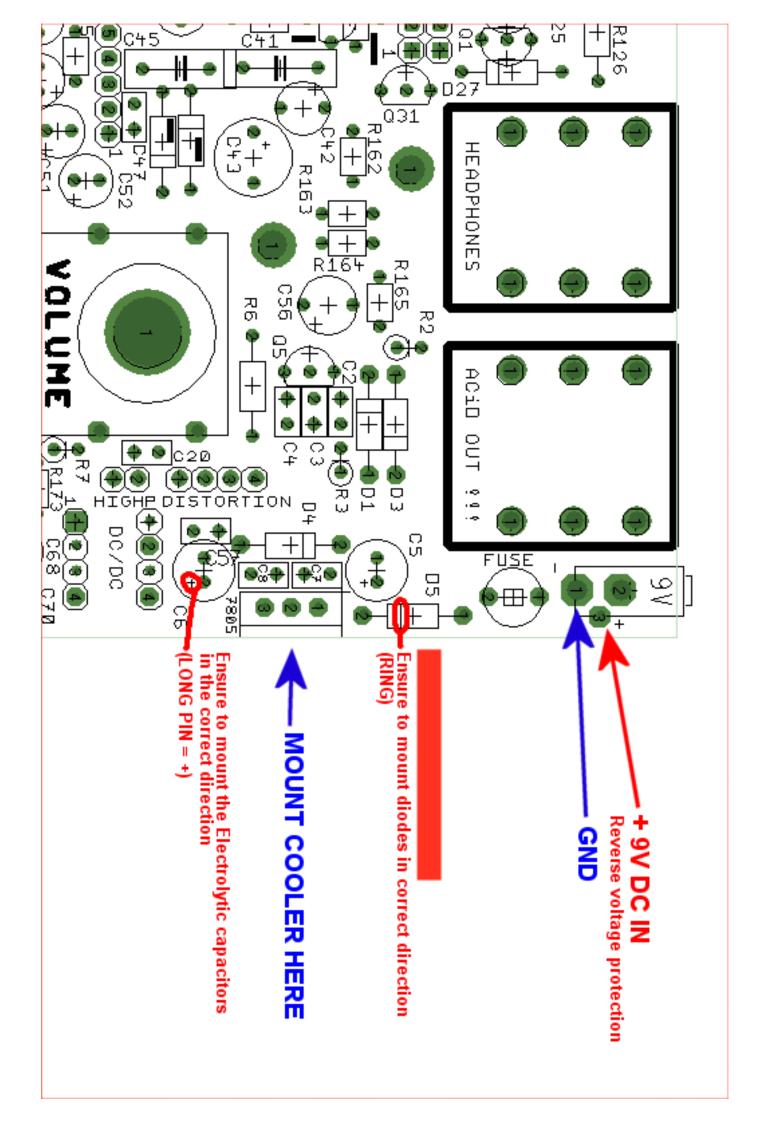


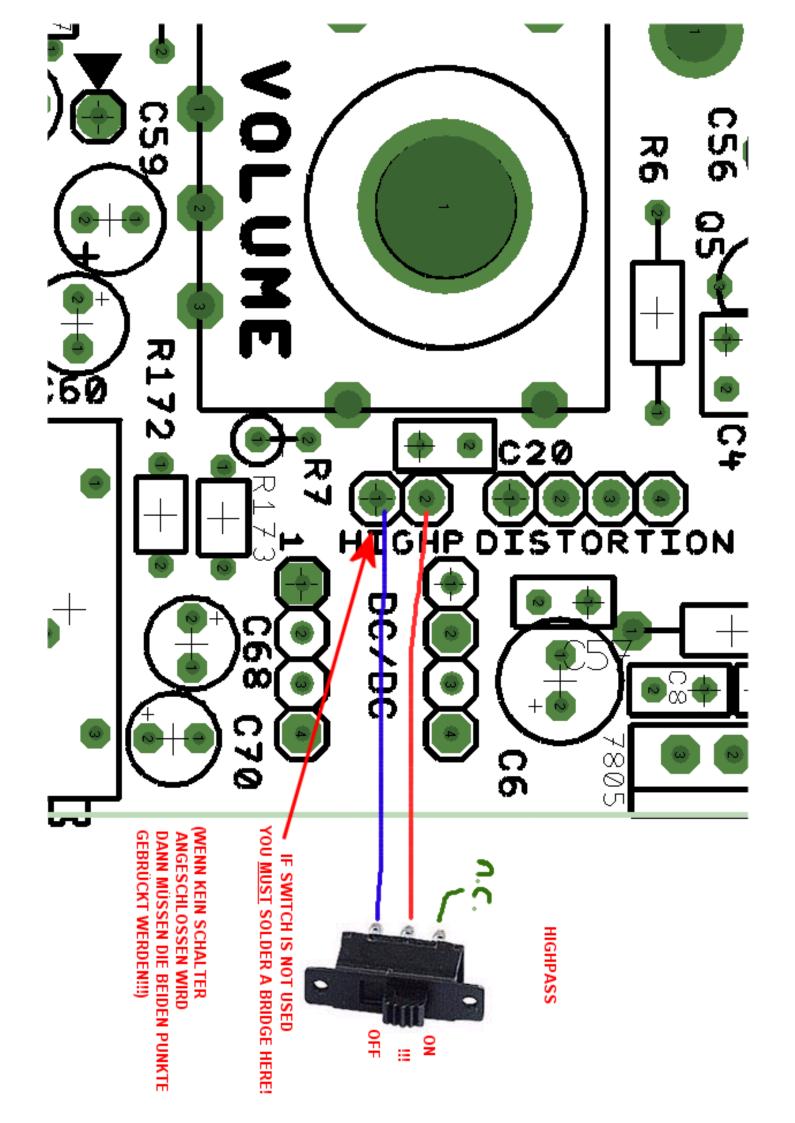

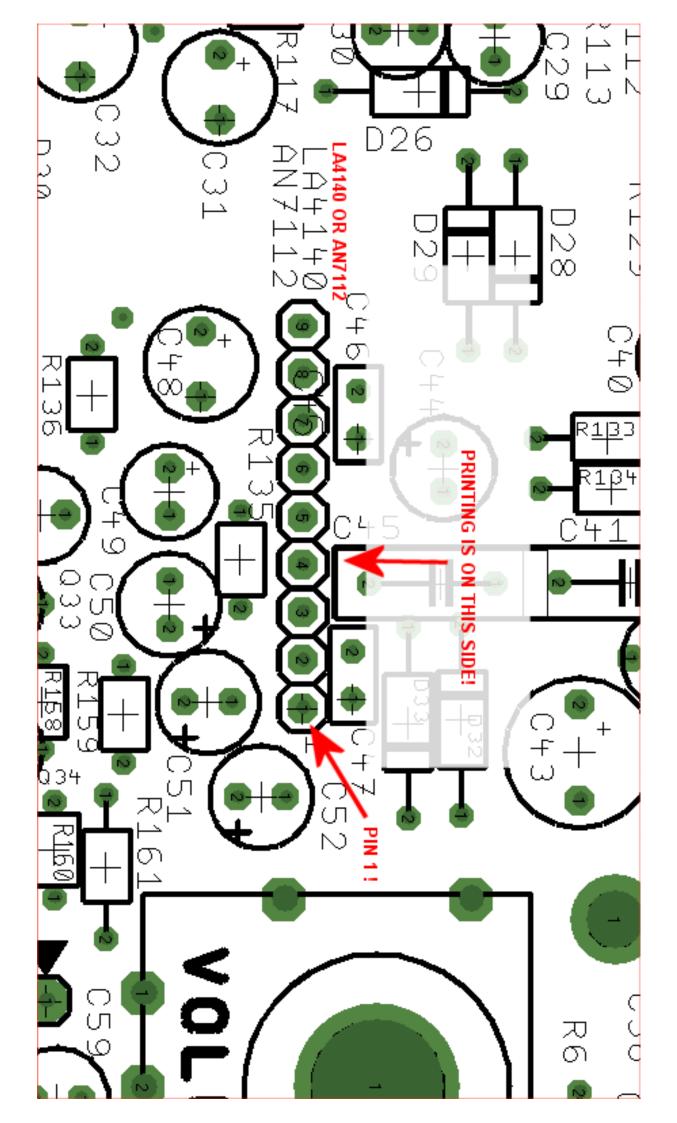

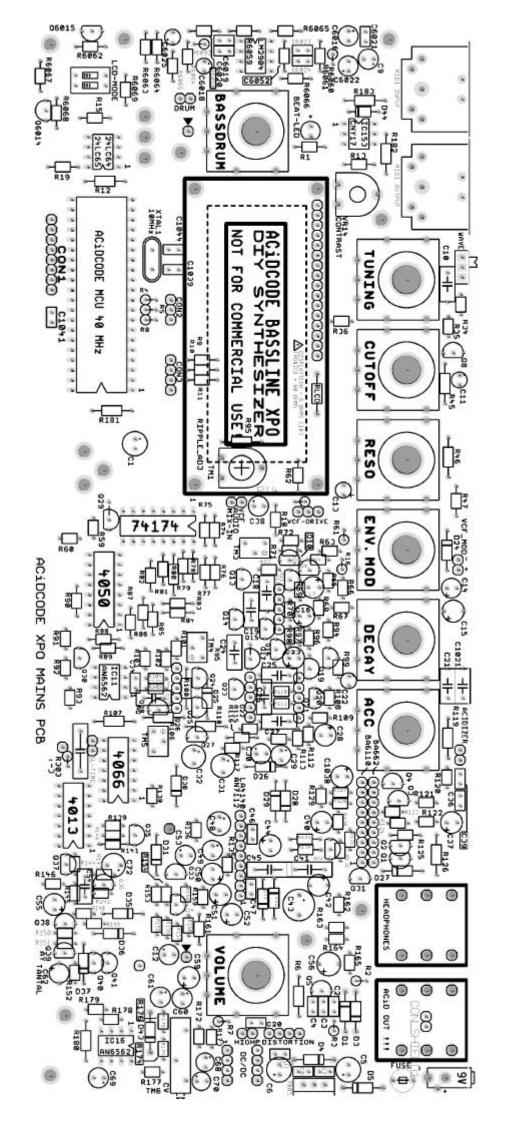

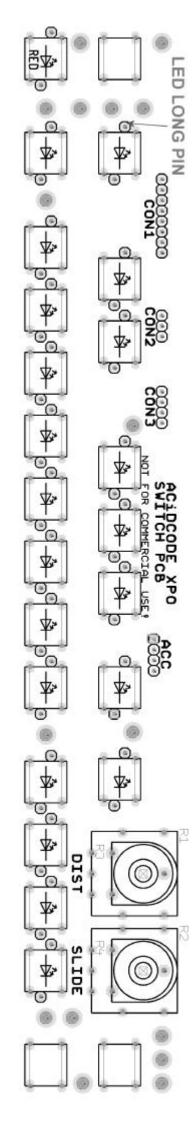

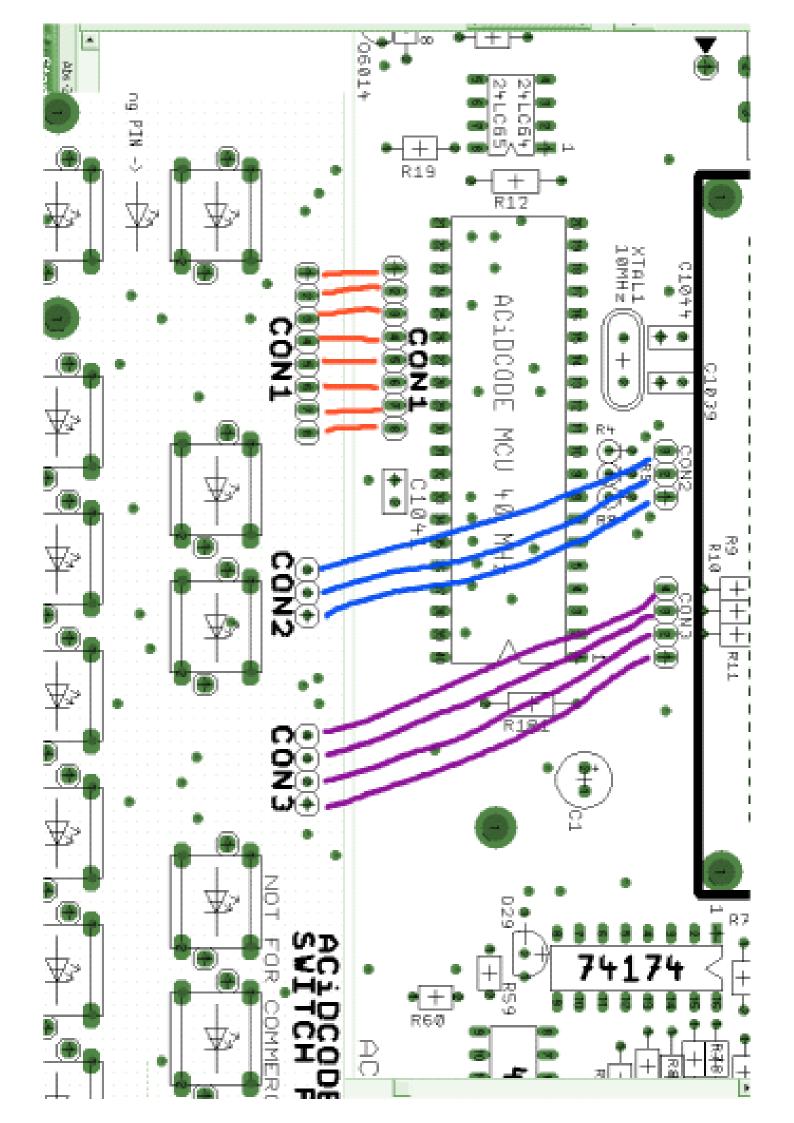



For the DELTRON switches there are several different plastic caps available.

The round, transparent ones are available at CONRAD.

They are available in 3 different heights...

When mounting the LEDs please mark the ANODE (long PIN) with an EDDING-Pen to avoid soldering in wrong direction.



