IEEE MeditCom

LINKÖPING UNIVERSITY

TECHNISCHE UNIVERSITÄT BERLIN

AGE OF INFORMATION (AOI) A TOOL FOR DESIGNING TIME-CRITICAL NETWORKS

Jorge Torres Gómez, TU Berlin
Nikolaos Pappas, Linköping University
July, 2024

Telecommunication Networks Group

Outline

- **Part I: Fundamentals**
  - Introduction
  - Definition of Age of Information (AoI)
  - AoI Metrics
  - Goal-oriented communications
- **Part II: Hands-on in Wireless Channels**
  - AoI calculation
  - Average AoI
  - Average PAoI

Introduction

Source Link Receiver

Case 1

Generation Time > Packet delay

Source Link Receiver

Case 2

Generation Time < Packet delay

Introduction

- Related metrics (not sufficient)
  - Packet delay
  - Throughput

Information Freshness

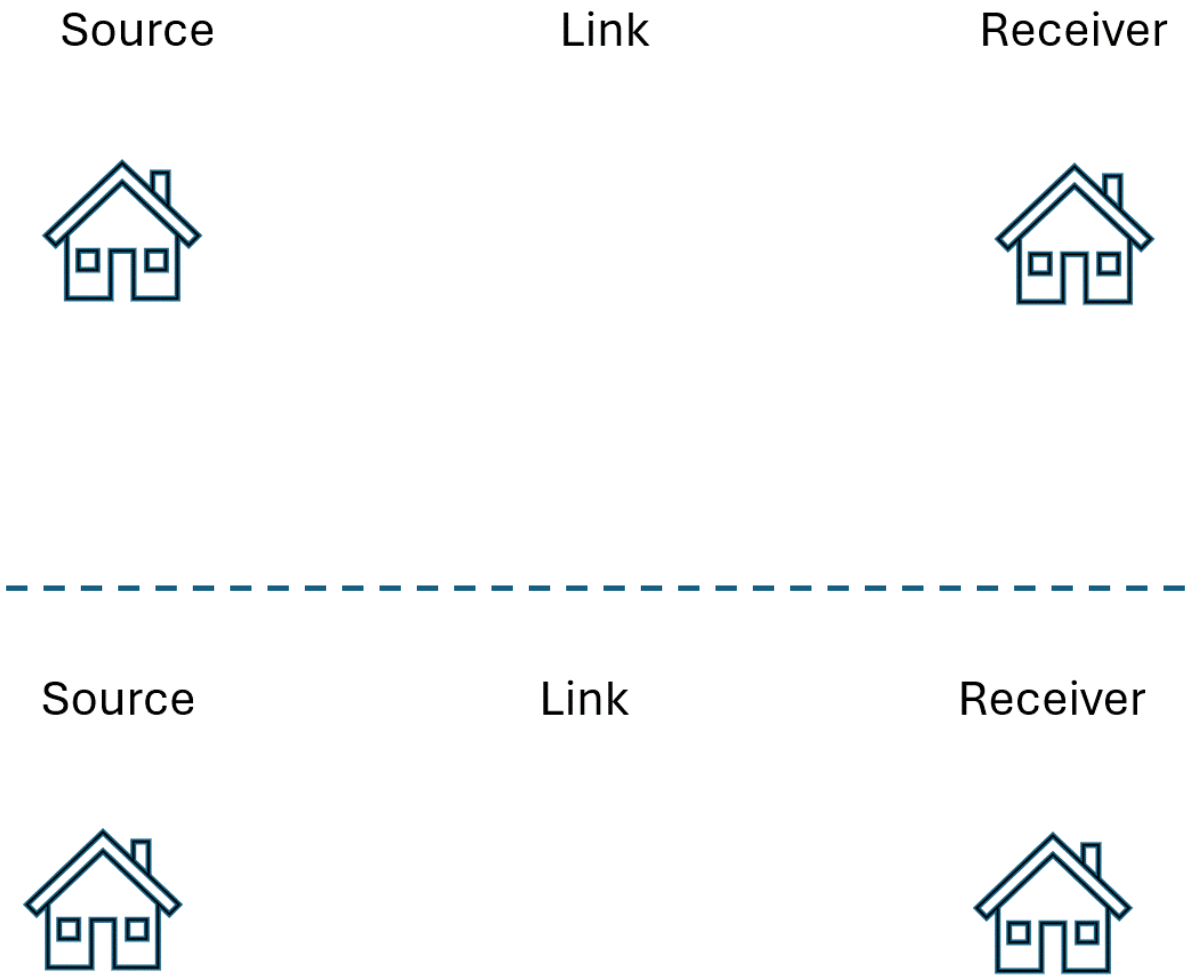

Introduction

- Related metrics (not sufficient)
  - Packet delay
  - Throughput

Information Freshness

Autonomous driving

Information Freshness

Source

Link

Receiver

Information Freshness

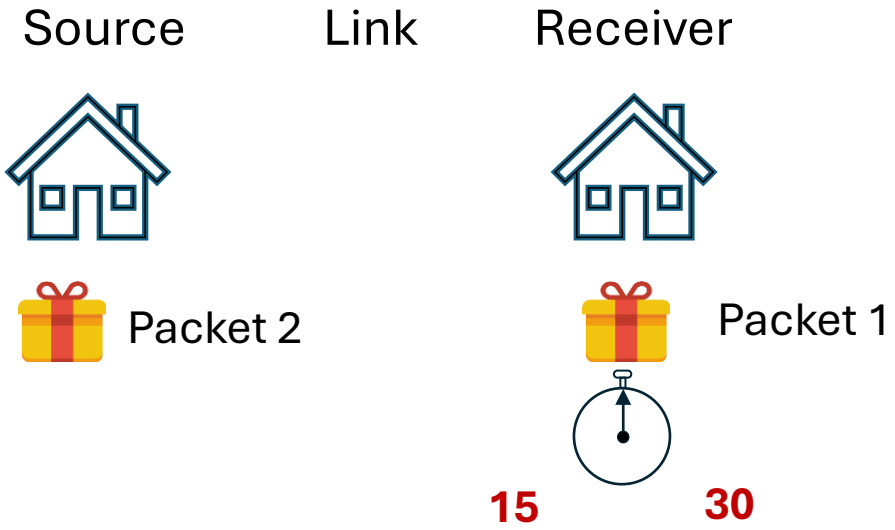

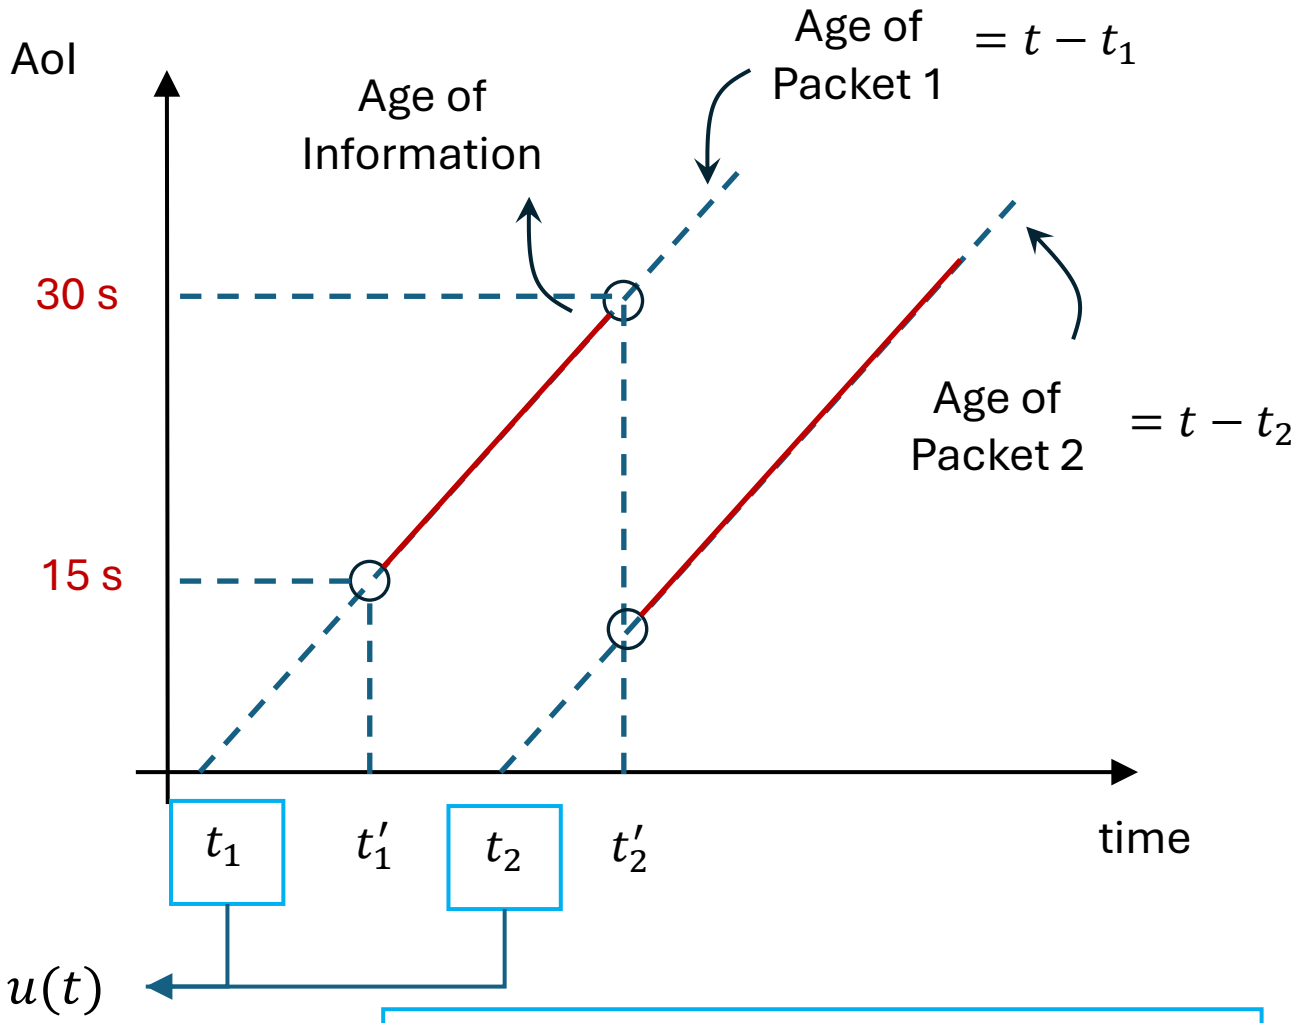

Definition

$$\text{AoI} = t - u(t), t \geq u(t)$$

Information Freshness

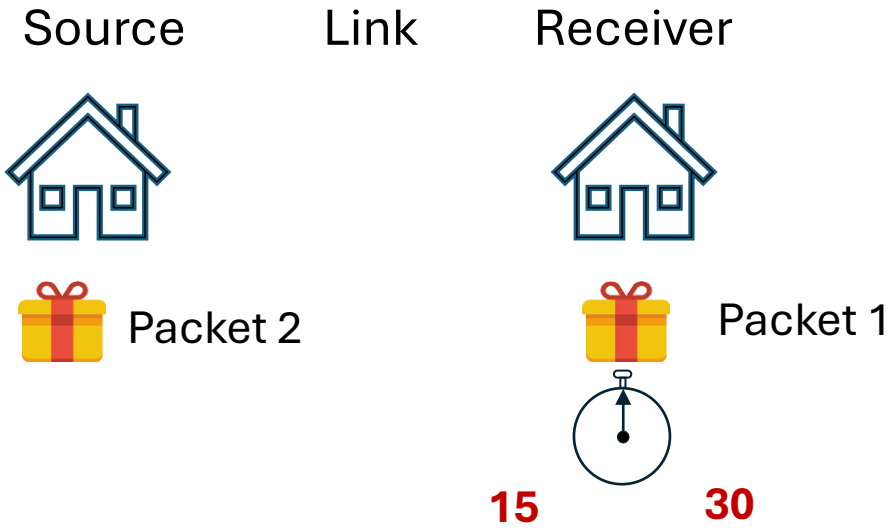

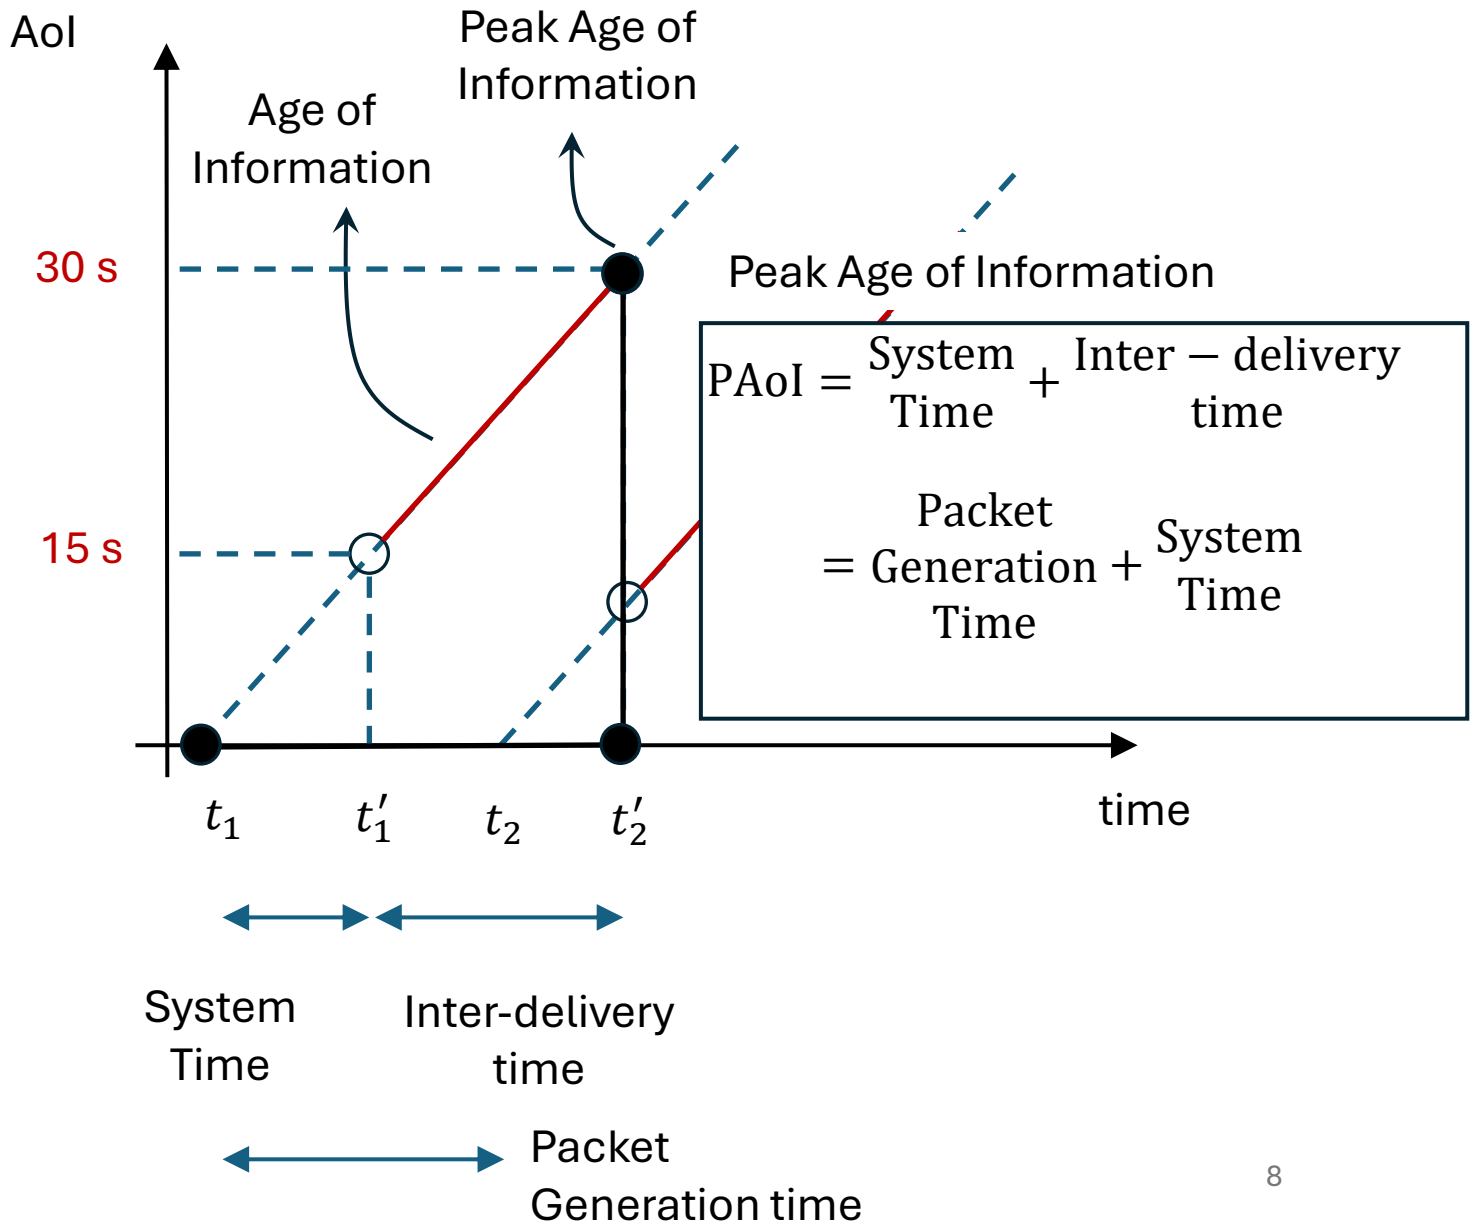

Definition

$$\text{AoI} = t - u(t), t \geq u(t)$$

Information Freshness

Remarks

- AoI is an end-to-end metric.
- AoI captures the timeliness of information.
- AoI accounts for System Time, Inter-delivery time, and Generation time, all-together.

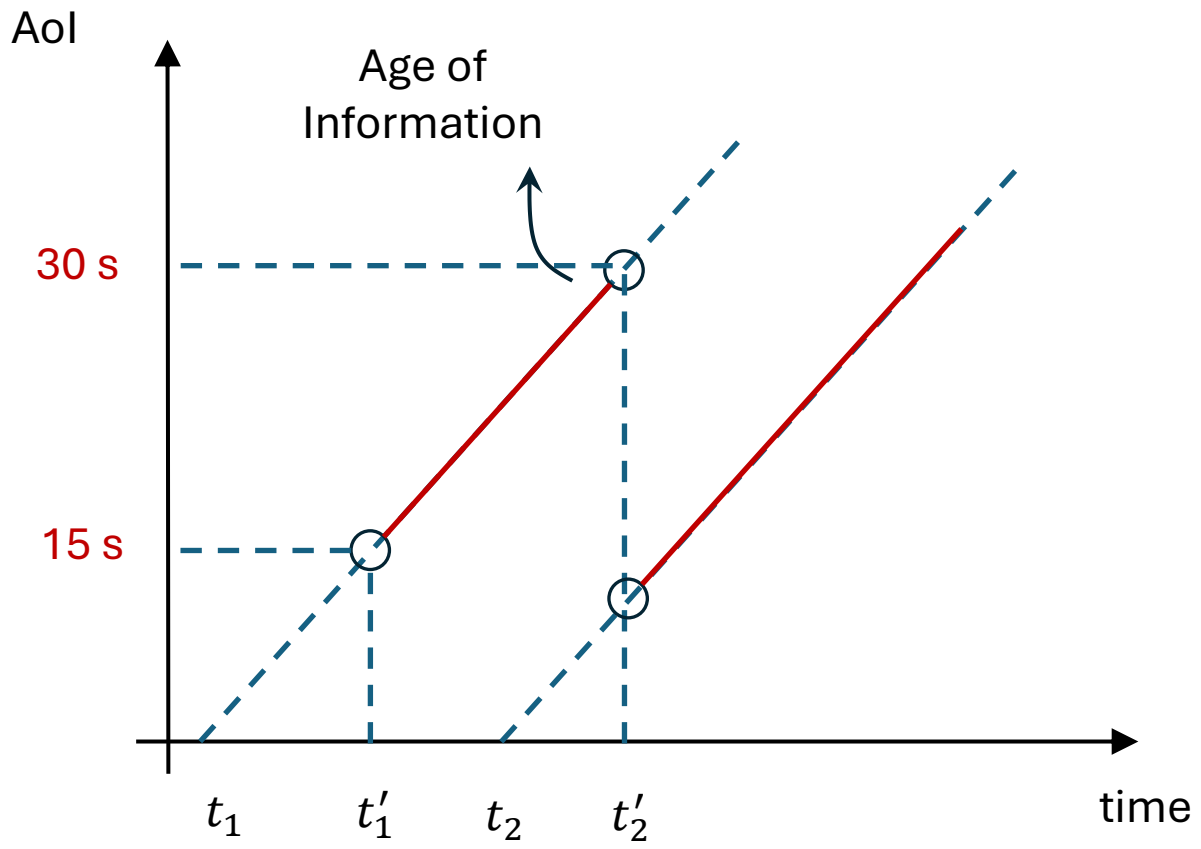

AoI metrics

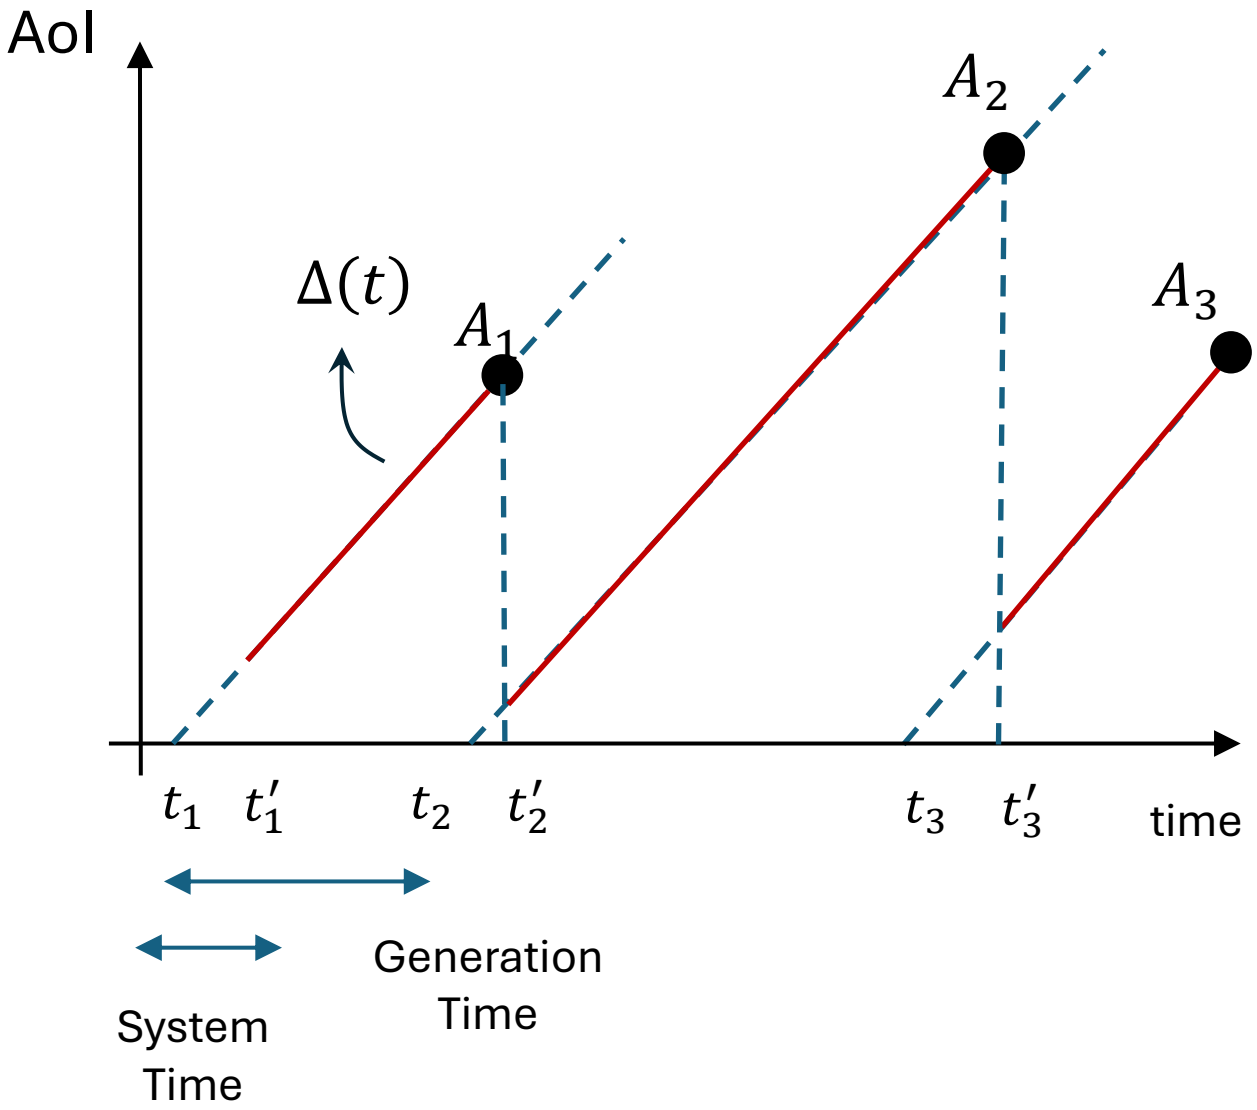

Average AoI

$$\Delta = \lim_{T\to\infty} \int_0^T \Delta(t)\, dt \qquad (1)$$

$$= \lambda\left(\mathrm{E}[GT] + \frac{\mathrm{E}[G^2]}{2}\right),\ \lambda = \lim_{T\to\infty} \frac{N(T)}{T}$$

Average PAoI

$$\Delta^{(p)} = \mathrm{E}[A_i] \qquad (2)$$

$$= \mathrm{E}[G] + \mathrm{E}[T]$$

Average AoI metric: FCFS queue

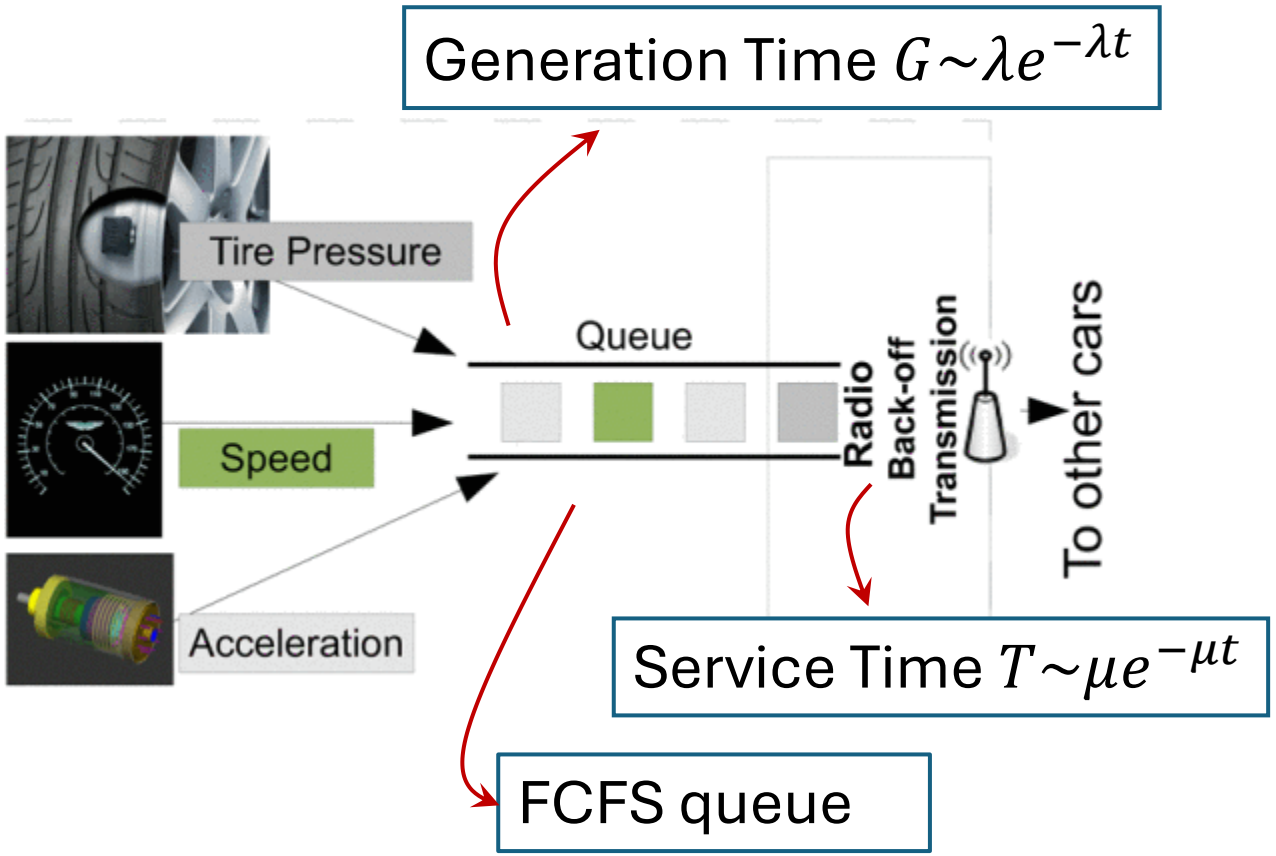

$$\Delta = \frac{1}{\mu}\left(1 + \frac{1}{\rho} + \frac{\rho^2}{1-\rho}\right), \quad \rho = \frac{\lambda}{\mu} \qquad (1)$$

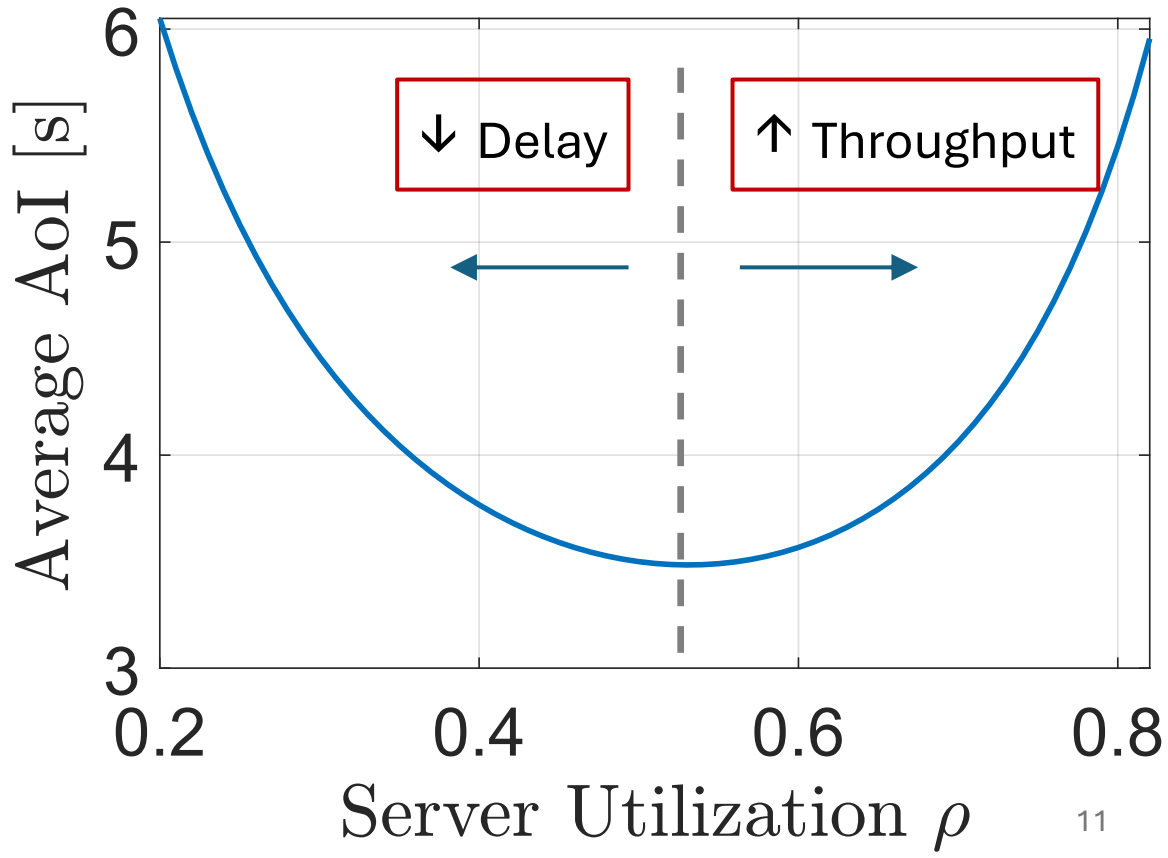

S. Kaul, R. Yates and M. Gruteser, "Real-time status: How often should one update?," 2012 Proceedings IEEE INFOCOM, Orlando, FL, USA, 2012, pp. 2731-2735.

Remarks on the AoI metrics

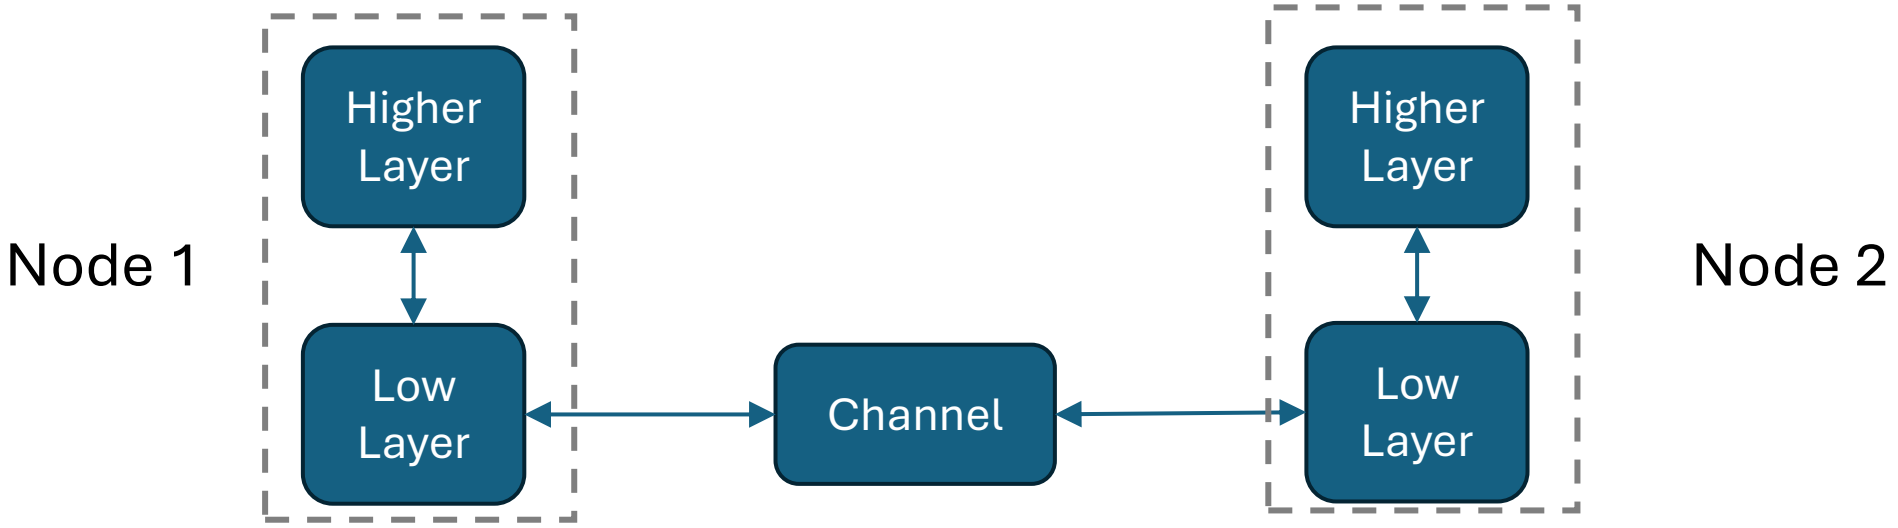

Statistical Framework

- Tacit distinction:
  - Data communication systems
  - Information update systems
- Freshness as a balance between delay and throughput.

Shannon Model

- Instantaneous decoding
- Zero latency
- Data agnostic
- Data is always available

Non linear AoI-metrics

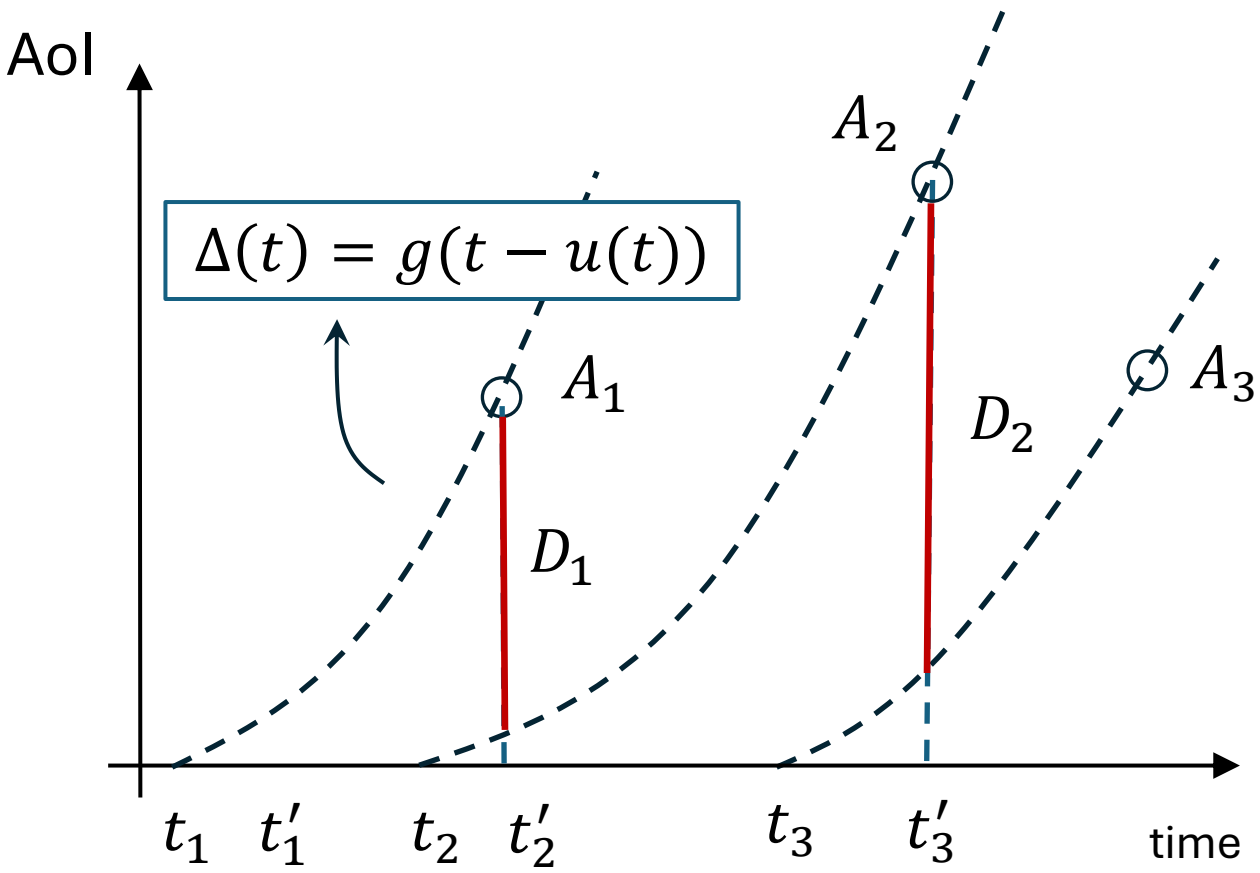

- Cost of Update Delay

$$g(t) = \begin{cases} \alpha t \\ e^{\alpha t} - 1 \\ \log(\alpha t + 1) \end{cases}$$

- Value of Information Update

$$V = \mathrm{E}\left[\frac{D_i}{A_i}\right]$$

[1] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "Age and value of information: Non-linear age case", IEEE ISIT 2017.
[2] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "The cost of delay in status updates and their value: Non-linear ageing", IEEE Trans. Comm., 2020.

Non linear AoI-metrics

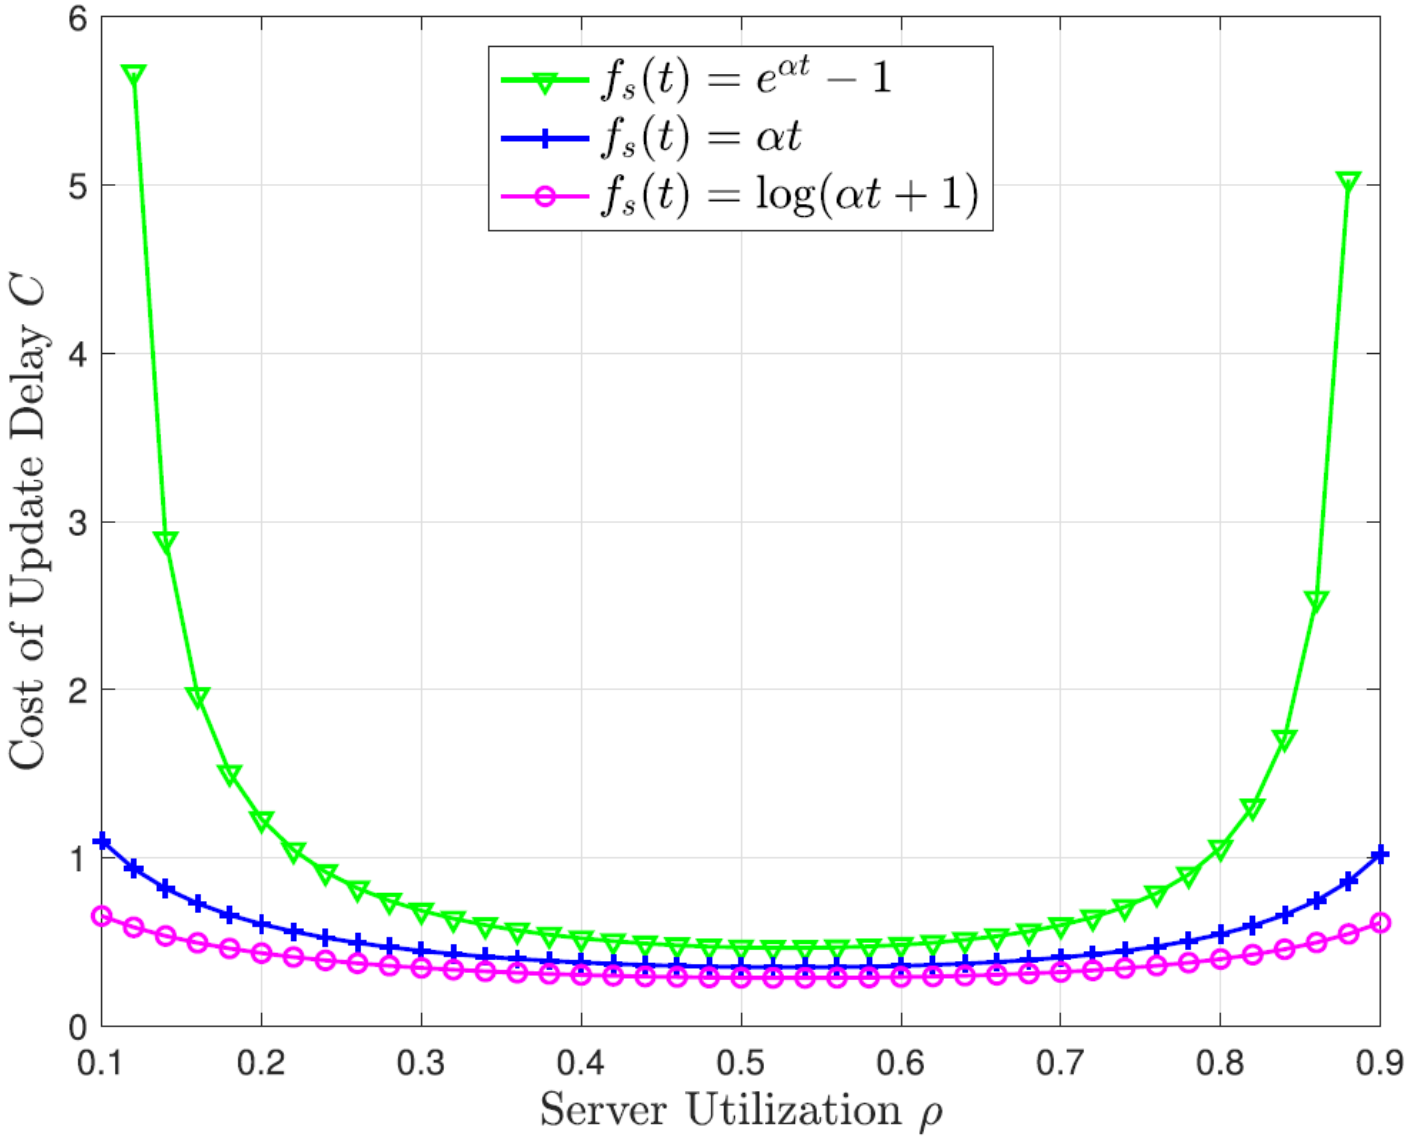

- Cost of Update Delay

$$g(t) = \begin{cases} \alpha t \\ e^{\alpha t} - 1 \\ \log(\alpha t + 1) \end{cases}$$

- Value of Information Update

$$V = \mathrm{E}\left[\frac{D_i}{A_i}\right]$$

[1] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "Age and value of information: Non-linear age case", IEEE ISIT 2017.
[2] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "The cost of delay in status updates and their value: Non-linear ageing", IEEE Trans. Comm., 2020.

Non linear AoI-metrics

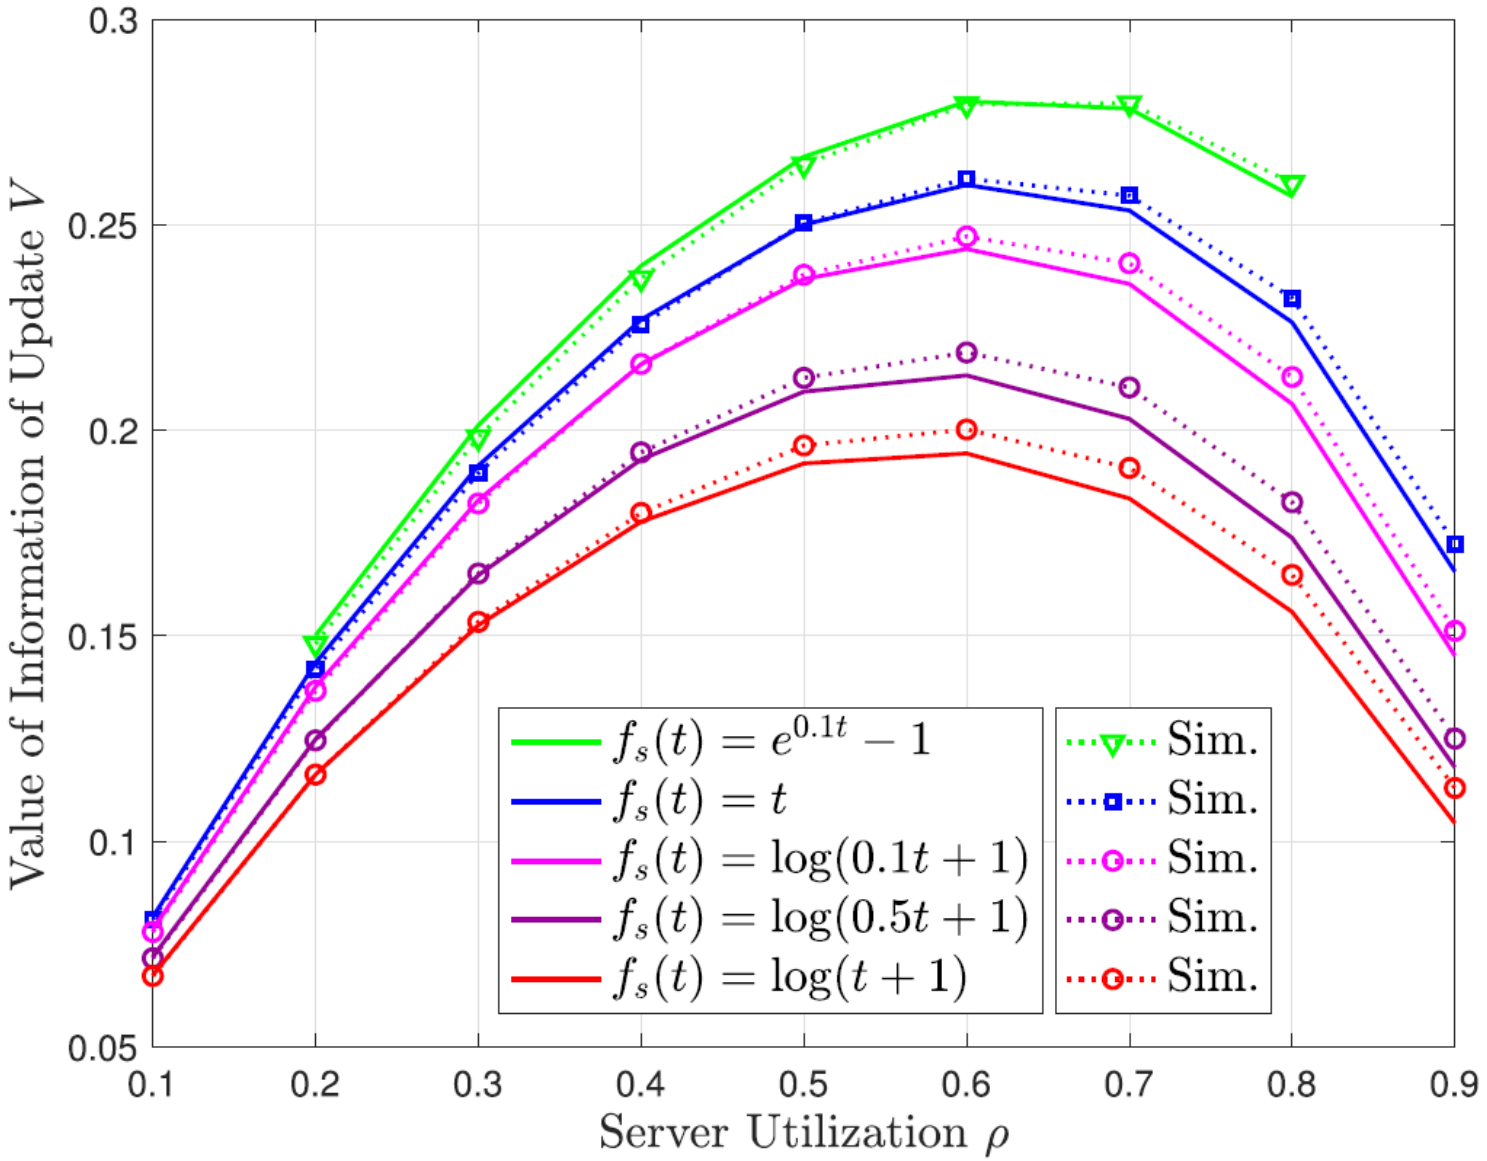

- Cost of Update Delay

$$g(t) = \begin{cases} \alpha t \\ e^{\alpha t} - 1 \\ \log(\alpha t + 1) \end{cases}$$

- Value of Information Update

$$V = \mathrm{E}\left[\frac{D_i}{A_i}\right]$$

[1] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "Age and value of information: Non-linear age case", IEEE ISIT 2017.
[2] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, "The cost of delay in status updates and their value: Non-linear ageing", IEEE Trans. Comm., 2020.

Goal Oriented Communications

- Communicate with a specific goal.
- Semantics (Pragmatic)
  - Utility to achieve a goal.
- Information Attributes
  - Innate (objective): freshness, precision.
  - Contextual (goal): timeliness (deadline), completeness.
- Policy
  - Generate and communicate based on the goal.

Fault Detection and autonomous maintenance

Remote Monitor

on/off channel

Sensor



- Pull-based communication model

- Sensor State: healthy or faulty
- Slotted time

Challenge: Optimally decide, at the beginning of a time slot, whether to probe or not the sensor.

G. Stamatakis, N. Pappas, A. Fragkiadakis, N. Petroulakis, A. Traganitis, “Semantics-Aware Active Fault Detection in Status Updating Systems", IEEE Open Journal of Communications Society, vol. 5, Feb. 2024.

Fault Detection and autonomous maintenance

Challenge: Optimally decide, at the beginning of a time slot, whether to probe or not the sensor.

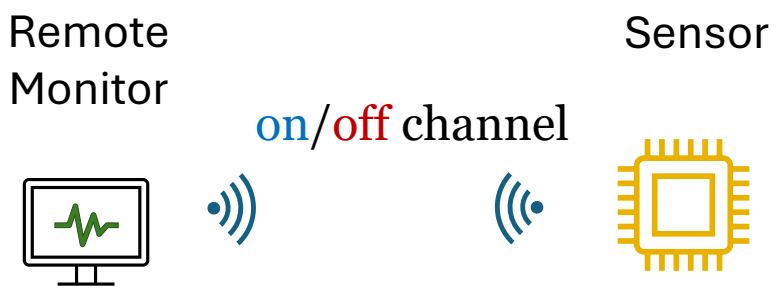

- Pull-based communication model
- Sensor State: healthy or faulty
- Slotted time

Procedure

Minimize the total accumulated cost over a finite time horizon.

Transition cost is a function of

- Agent's confidence about the sensor and links status
- Staleness of the status updates
- Cost associated with the probing action.

G. Stamatakis, N. Pappas, A. Fragkiadakis, N. Petroulakis, A. Traganitis, "Semantics-Aware Active Fault Detection in Status Updating Systems", IEEE Open Journal of Communications Society, vol. 5, Feb. 2024.

Fault Detection and autonomous maintenance

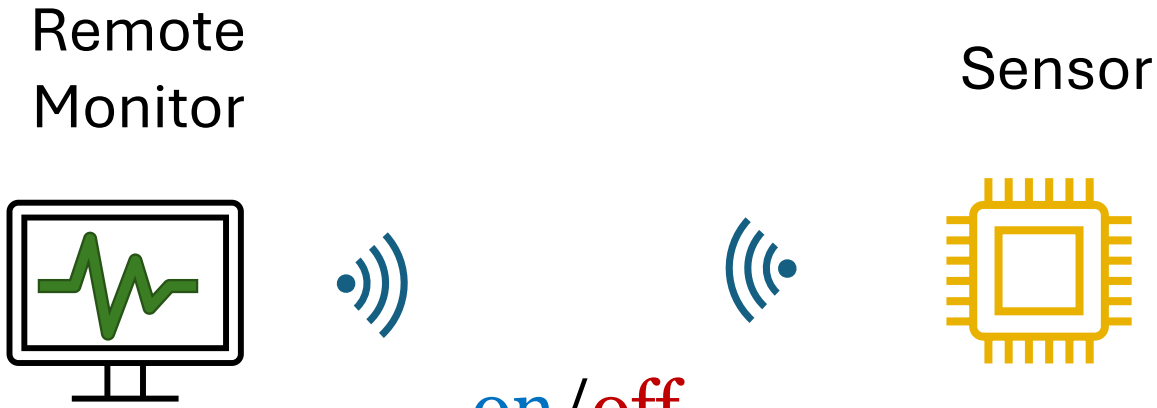

- Sensor State: healthy or faulty
- Slotted time

Transition cost

- Agent's confidence:
  - Entropy of reported status
- Staleness of the status updates
  - Age of Information
- Cost associated to probing request
  - Ratio of resources per probing/resources per transmission

Value of Information

$$V = \lambda_1 H + \lambda_2 \times \text{average AoI} \quad (1)$$

Transition cost

$$g = c + V \quad (2)$$

Fault Detection and autonomous maintenance

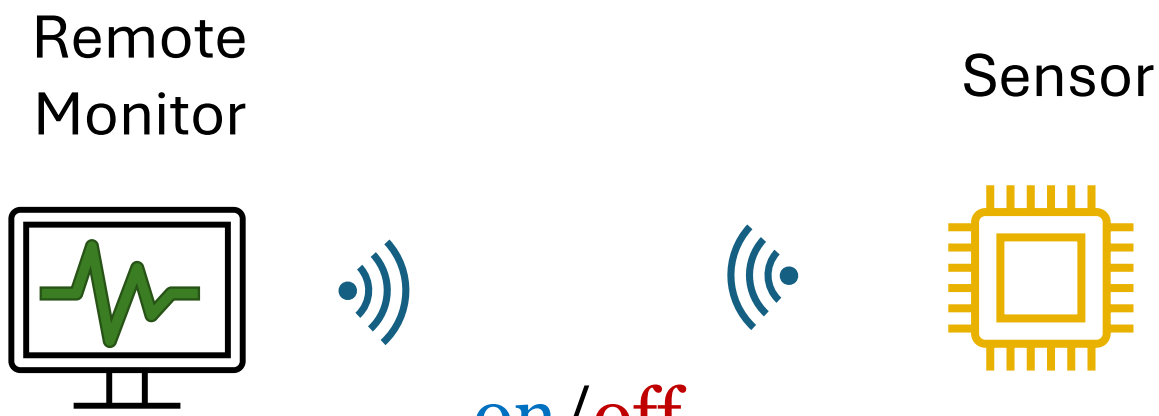

- Sensor State: healthy or faulty
- Slotted time

Dynamic program

$$J(x_t) = \min_{a \in \{0,1\}} \left[g_t + \sum_{z,s,i} p_t^i \, p_{is} \, r_s(a,z) \, J(x_{t+1}) \right]$$

Probability of System States

Probability of Observations

Transition cost

Observations

Actions

Fault Detection and autonomous maintenance

Remote Monitor



Sensor

on/off channel

- Sensor State: healthy or faulty
- Slotted time

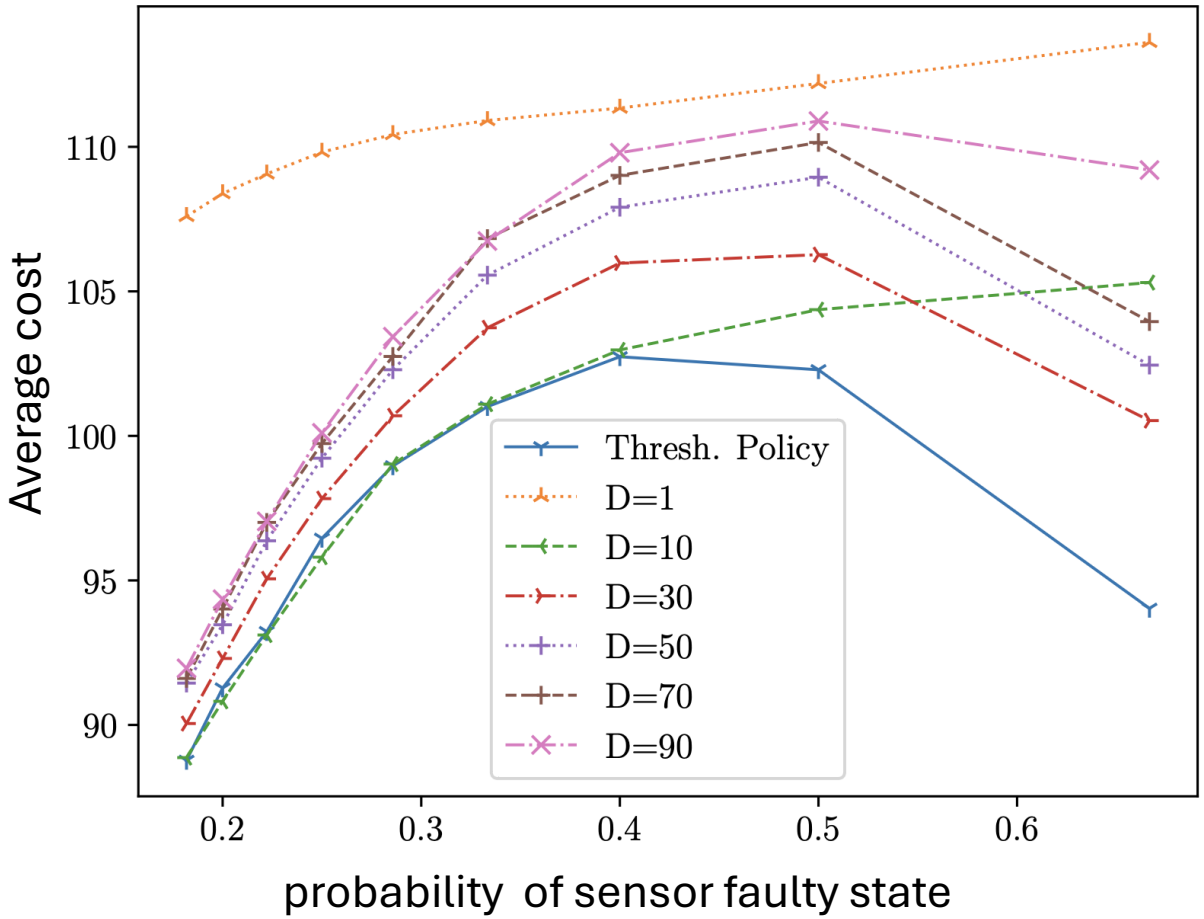

G. Stamatakis, N. Pappas, A. Fragkiadakis, N. Petroulakis, A. Traganitis, “Semantics-Aware Active Fault Detection in Status Updating Systems", IEEE Open Journal of Communications Society, vol. 5, Feb. 2024.

Molecular Communications

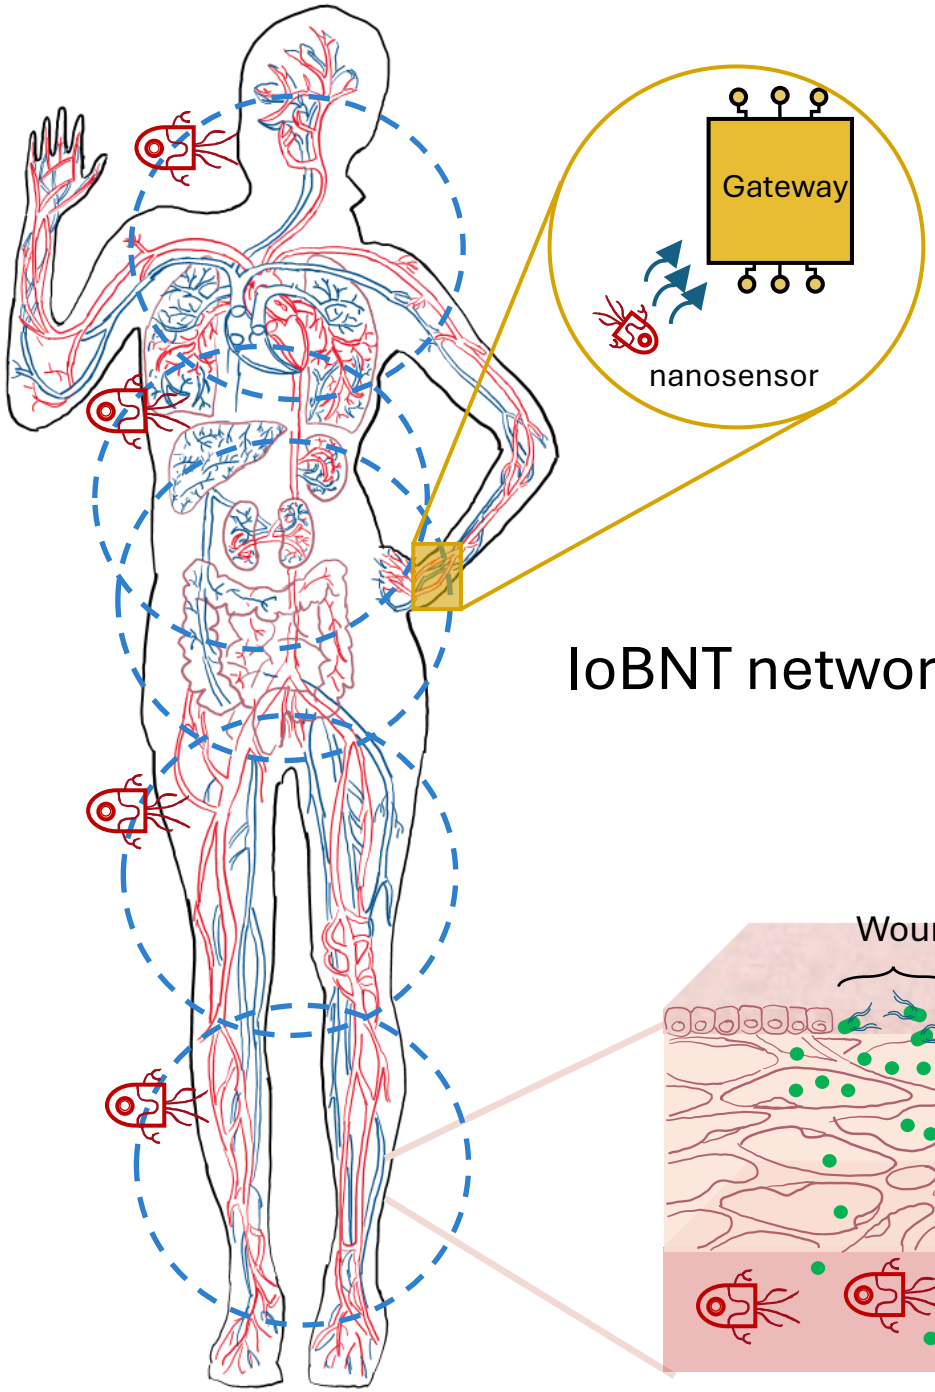

IoBNT network

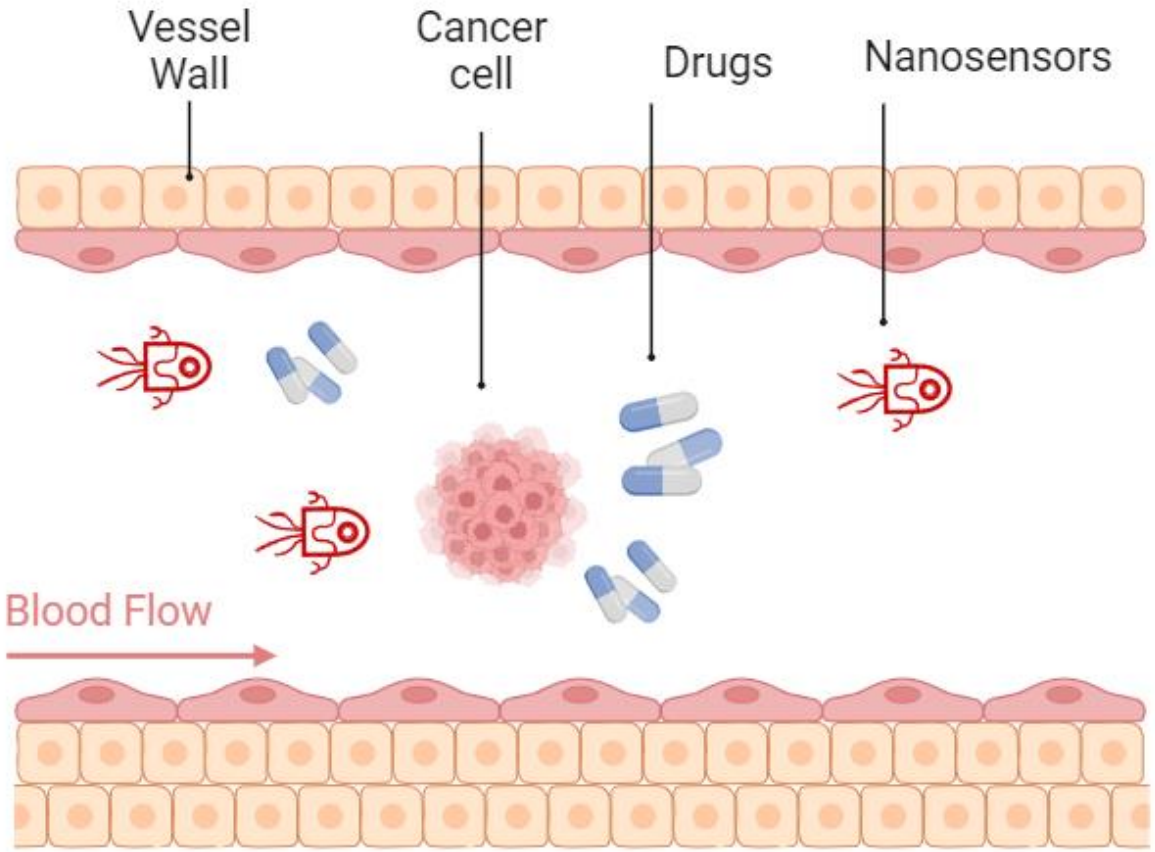

[1] Jorge Torres Gómez, Joana Angjo and Falko Dressler, "Age of Information-based Performance of Ultrasonic Communication Channels for Nanosensor-to-Gateway Communication," IEEE Transactions on Molecular, Biological and Multi-Scale Communications, vol. 9 (2), pp. 112–123, June 2023.

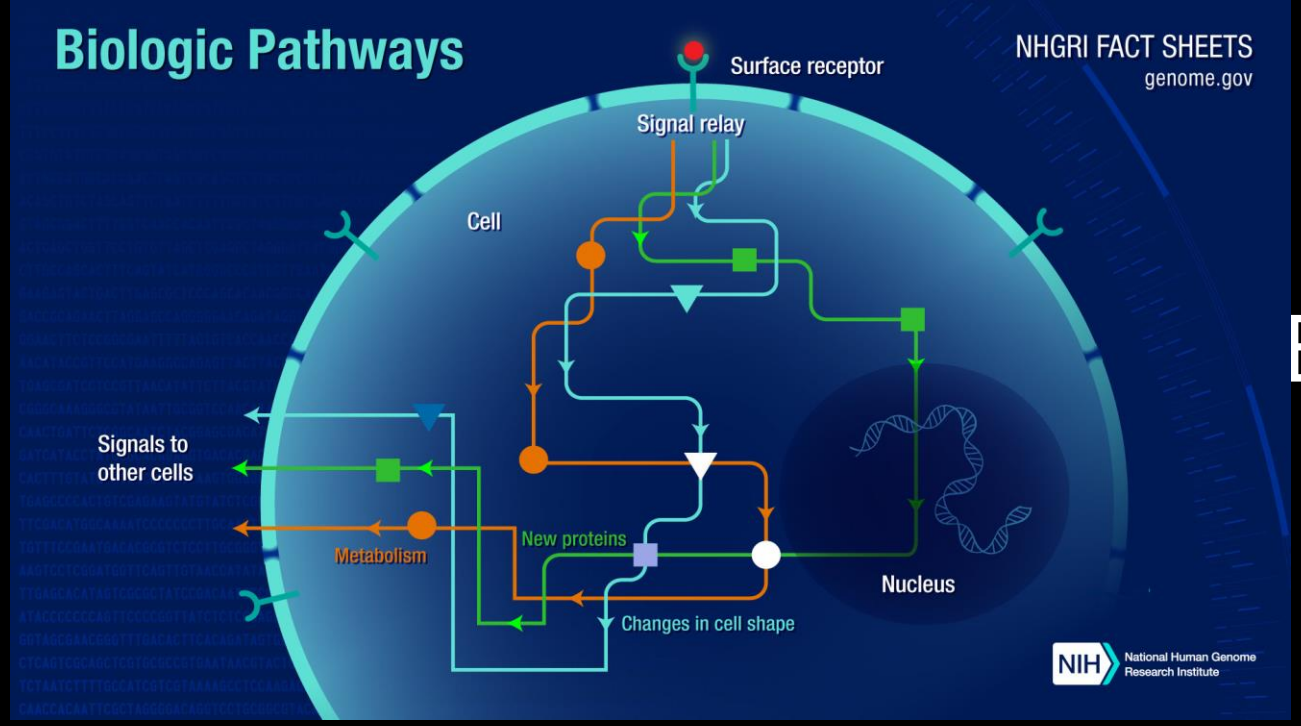

Biochemical Pathways

[1] https://www.genome.gov/about-genomics/fact-sheets/Biological-Pathways-Fact-Sheet

[2]https://bionumbers.hms.harvard.edu/bionumber.aspx?id=104756&ver=1&trm=life+cycle+gene+regulation+homo+sapiens&org=

[3]https://bionumbers.hms.harvard.edu/bionumber.aspx?id=106404&ver=2&trm=life+cycle+metabolism&org=

[4] A. McMichael and P. Bowness, 'HLA-B27: natural function and pathogenic role in spondyloarthritis', Arthritis Res, vol. 4, no. Suppl 3, pp. S153–S158, 2002, doi: 10.1186/ar571.

Component	Lifecycle
Mitosis HeLa cells	1.10 hours [2]
Protein HLA-B27 [3]	4 hours [4]

Human Microbiome

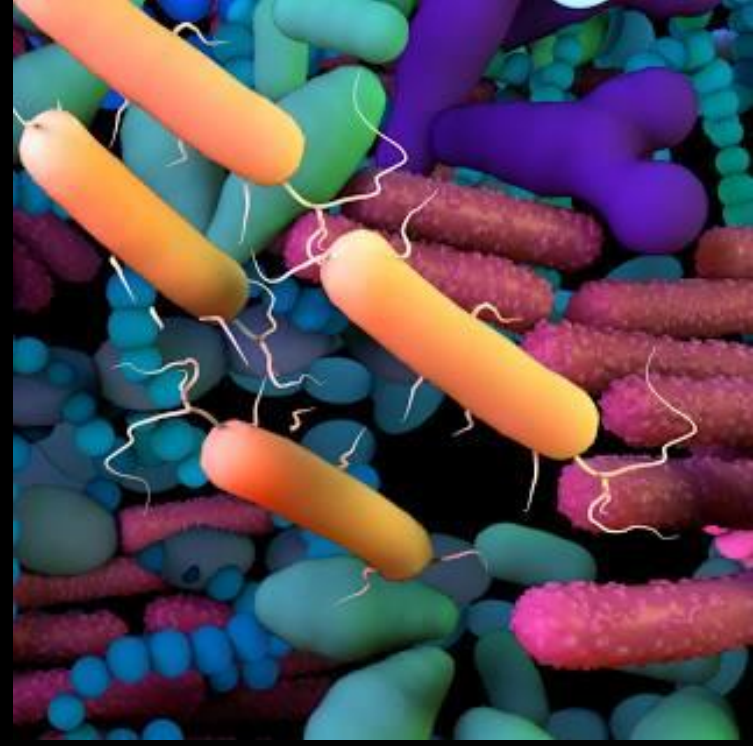

Component	Lifecycle
Mitosis HeLa cells	1.10 hours [2]
Protein HLA-B27 [3]	4 hours [4]
Bacteria P. Aeruginosa	1.5 – 2 hours [5]

[1] https://www.genome.gov/about-genomics/fact-sheets/Biological-Pathways-Fact-Sheet

[2]https://bionumbers.hms.harvard.edu/bionumber.aspx?id=104756&ver=1&trm=life+cycle+gene+regulation+homo+sapiens&org=

[3]https://bionumbers.hms.harvard.edu/bionumber.aspx?id=106404&ver=2&trm=life+cycle+metabolism&org=

[4] A. McMichael and P. Bowness, 'HLA-B27: natural function and pathogenic role in spondyloarthritis', Arthritis Res, vol. 4, no. Suppl 3, pp. S153–S158, 2002, doi: 10.1186/ar571.

[5] I. F. Akyildiz, M. Ghovanloo, U. Guler, T. Ozkaya-Ahmadov, A. F. Sarioglu, and B. D. Unluturk, 'PANACEA: An Internet of Bio-NanoThings Application for Early Detection and Mitigation of Infectious Diseases', IEEE Access, pp. 1–1, 2020, doi: 10.1109/ACCESS.2020.3012139.

Molecular Communication Channels

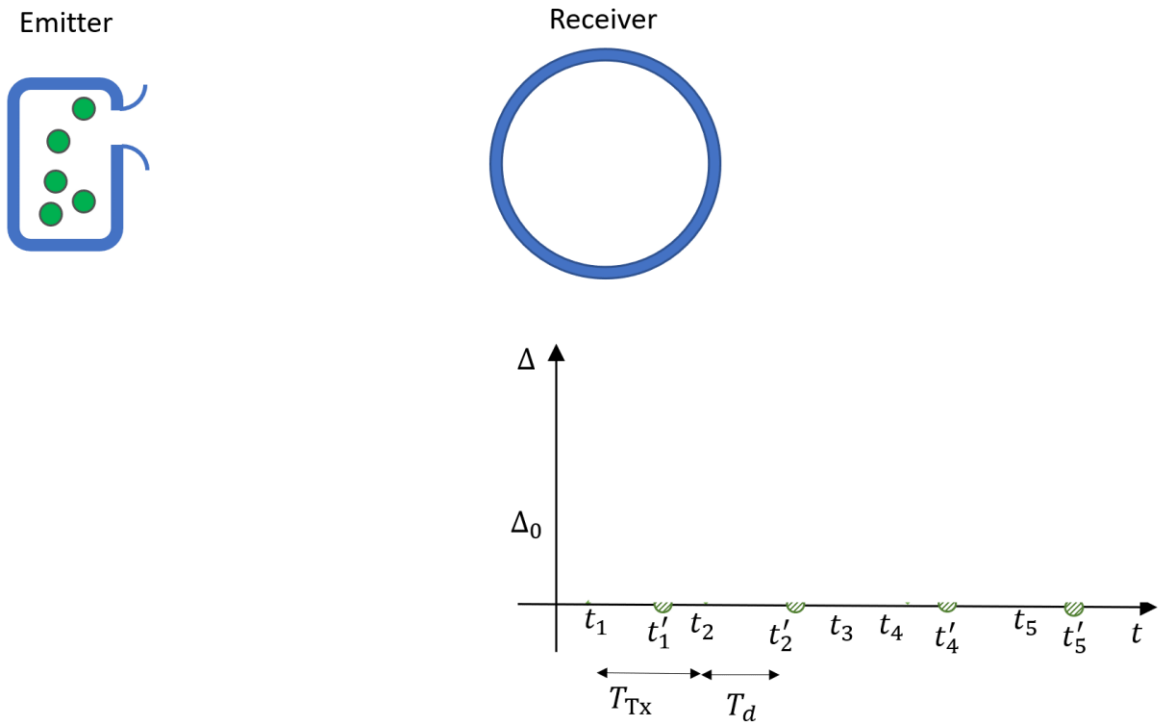

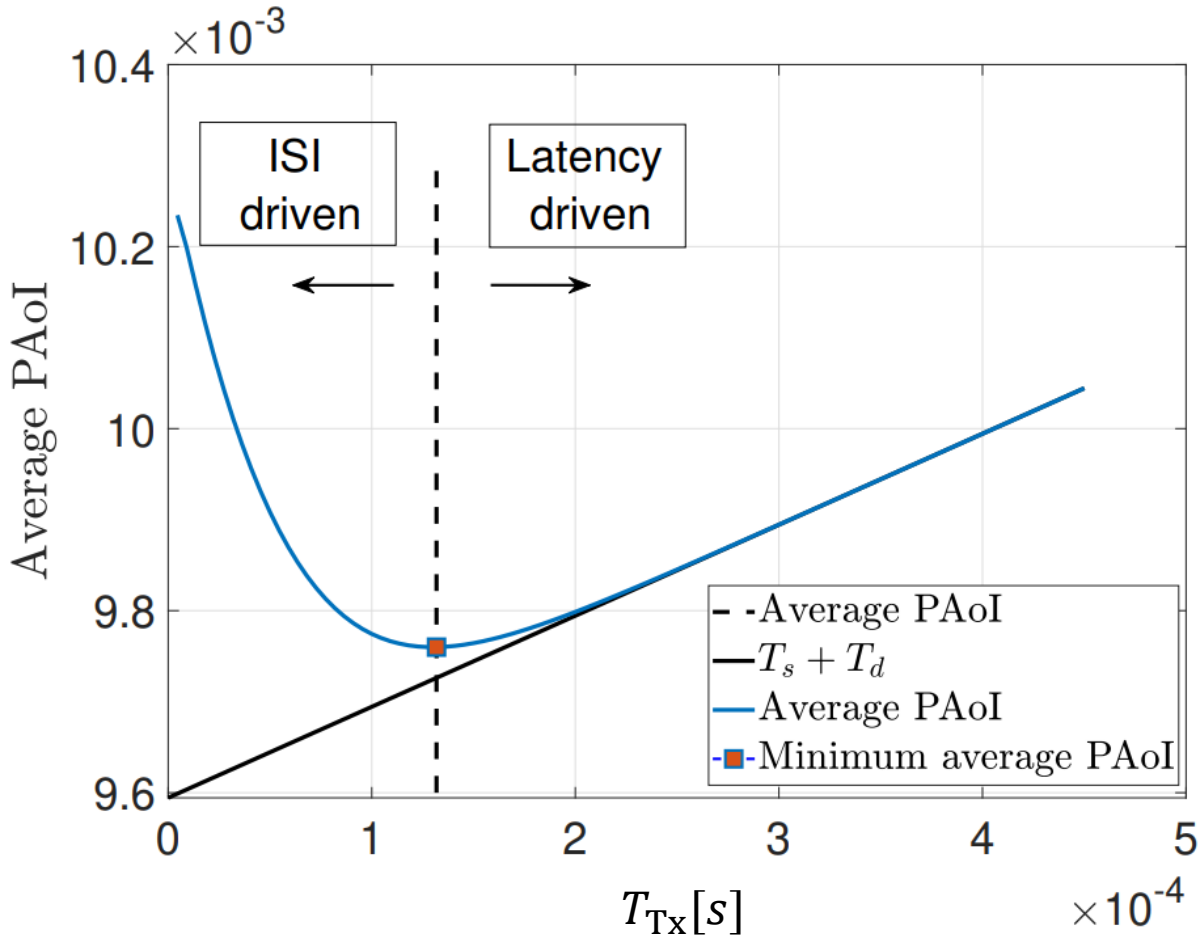

Average PAoI

$$\Delta^{(p)} = \frac{1}{T}\sum_{i=1}^{N(t)} A_i = \mathbb{E}[T_{\mathrm{Tx}}] + \mathbb{E}[T_d] \qquad (1)$$

$$= T_{\mathrm{Tx}} + \frac{1}{1-p_e}\frac{d^2}{6D} \qquad (2)$$

[1] Jorge Torres Gómez, Ketki Pitke, Lukas Stratmann and Falko Dressler, "Age of Information in Molecular Communication Channels," Elsevier Digital Signal Processing (DSP), Special Issue on Molecular Communication, vol. 124, pp. 103108, May 2022.

Foundations and Trends® in Networking
12:3

Age of Information

A New Concept, Metric, and Tool

Antzela Kosta, Nikolaos Pappas and Vangelis Angelakis

now
the essence of knowledge

CONTRIBUTED PAPER

A Perspective on Time Toward Wireless 6G

This article provides a systematic treatment of various timing measures in wireless communication, setting the basis for design and optimization for the next-generation real-time systems.

By Petar Popovski, *Fellow IEEE*, Federico Chiariotti, *Member IEEE*, Kaibin Huang, *Fellow IEEE*, Anders E. Kalør, *Graduate Student Member IEEE*, Marios Kountouris, *Senior Member IEEE*, Nikolaos Pappas, *Senior Member IEEE*, and Beatriz Soret, *Member IEEE*

IEEE ComSoc IEEE Open Journal of the Communications Society

Received 30 December 2023; revised 28 January 2024; accepted 22 February 2024. Date of publication 29 February 2024; date of current version 15 March 2024.

Digital Object Identifier 10.1109/OJCOMS.2024.3371871

Toward Natively Intelligent Semantic Communications and Networking

STYLIANOS E. TREVLAKIS[1] (Member, IEEE), NIKOLAOS PAPPAS[2] (Senior Member, IEEE), AND ALEXANDROS-APOSTOLOS A. BOULOGEORGOS[3] (Senior Member, IEEE)

INTERNET OF THINGS AND SENSOR NETWORKS

Semantics-Empowered Communication for Networked Intelligent Systems

Marios Kountouris and Nikolaos Pappas

IEEE Communications Magazine • June 2021

INTERNET OF THINGS AND SENSOR NETWORKS

On the Role of Age of Information in the Internet of Things

Mohamed A. Abd-Elmagid, Nikolaos Pappas, and Harpreet S. Dhillon

IEEE Communications Magazine • December 2019

Age of Information

Foundations and Applications

Edited by Nikolaos Pappas, Mohamed A. Abd-Elmagid, Bo Zhou, Walid Saad and Harpreet S. Dhillon

CAMBRIDGE UNIVERSITY PRESS

ACM MOBIHOC 2024

OCT 14-17, 2024, Athens, Greece

General Chairs

- Nikolaos Pappas, Linköping University, Sweden
- Yin Sun, Auburn University, Alabama, USA
- Anthony Ephremides, University of Maryland, College Park, USA

Important Dates

July 31, 2024	Paper submission deadline
August 20, 2024	Notification of acceptance
August 30, 2024	Camera-ready version
October 14, 2024	Workshop event

Part II

Implementing AoI-related metrics in wireless links

Jorge Torres Gómez
TU Berlin

Nikolaos Pappas
Linköping University

IEEE MeditCom

Transmitter

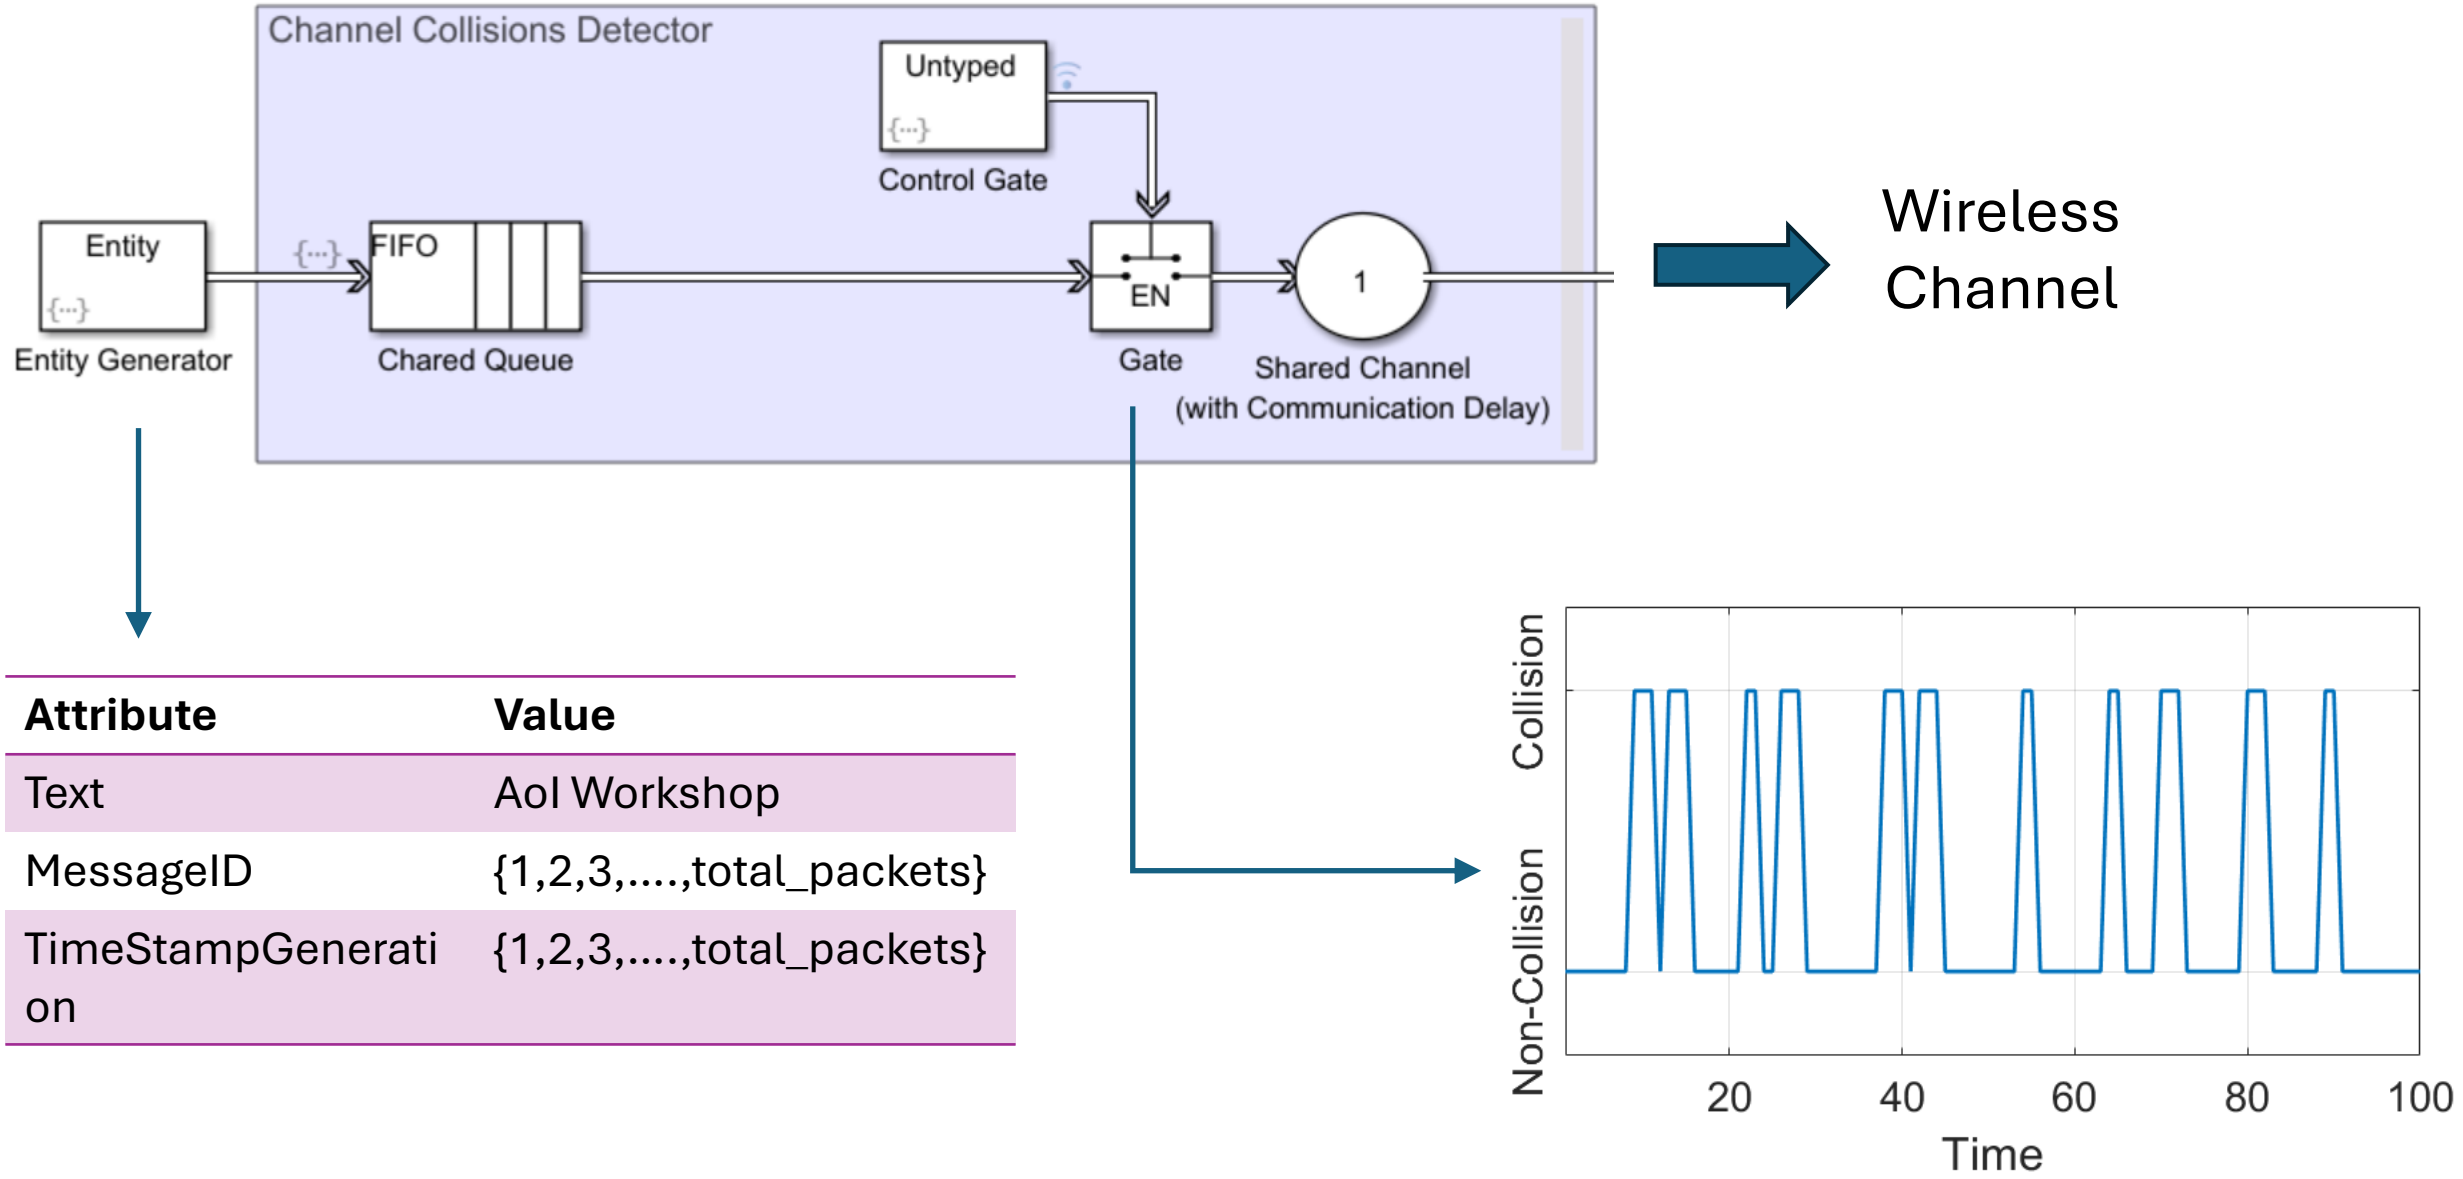

Attribute	Value
Text	AoI Workshop
MessageID	{1,2,3,....,total_packets}
TimeStampGeneration	{1,2,3,....,total_packets}

Transmitter

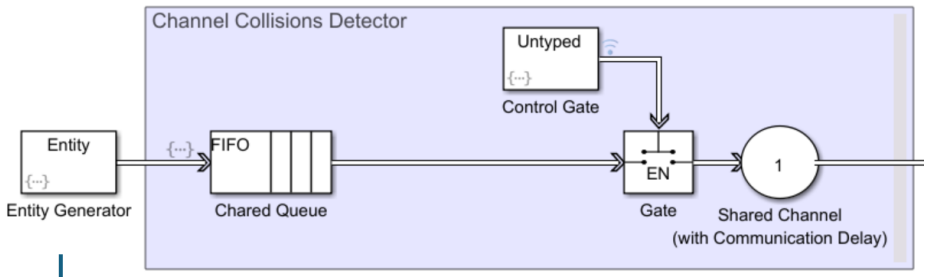

Attribute	Value
Text	AoI Workshop
MessageID	{1,2,3,..,N}
Generation	{1,2,3,..,N}

Channel

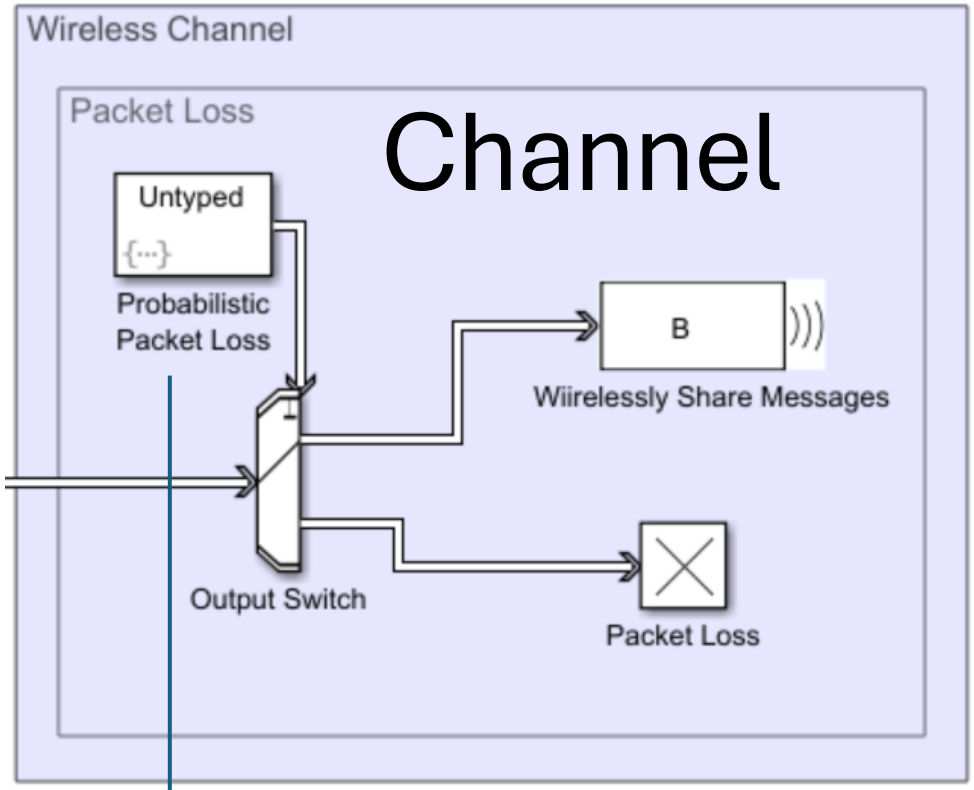

Receiver

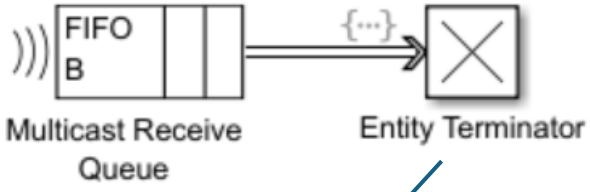

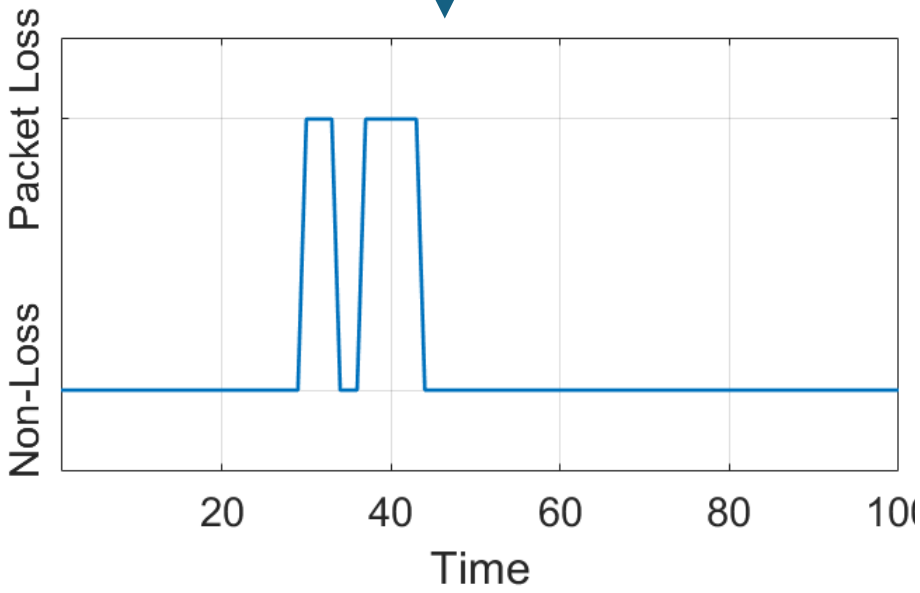

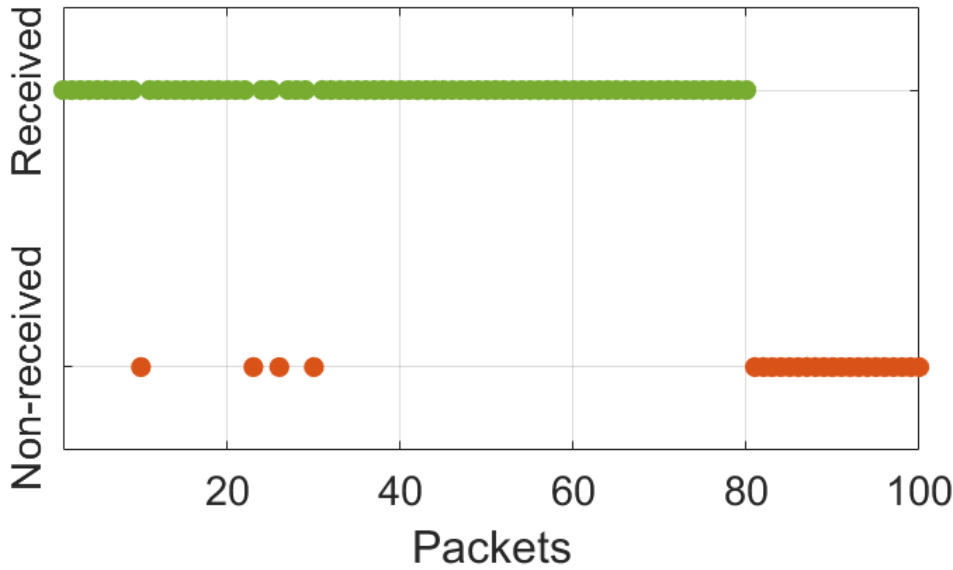

GitHub

MATLAB®

Receiver

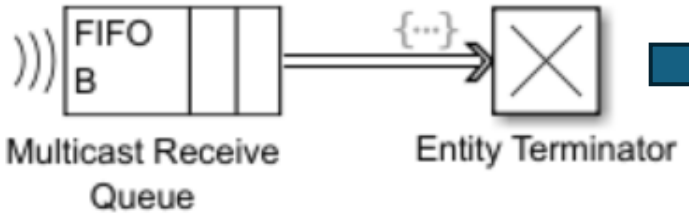
FIFO
B
Multicast Receive Queue
Entity Terminator

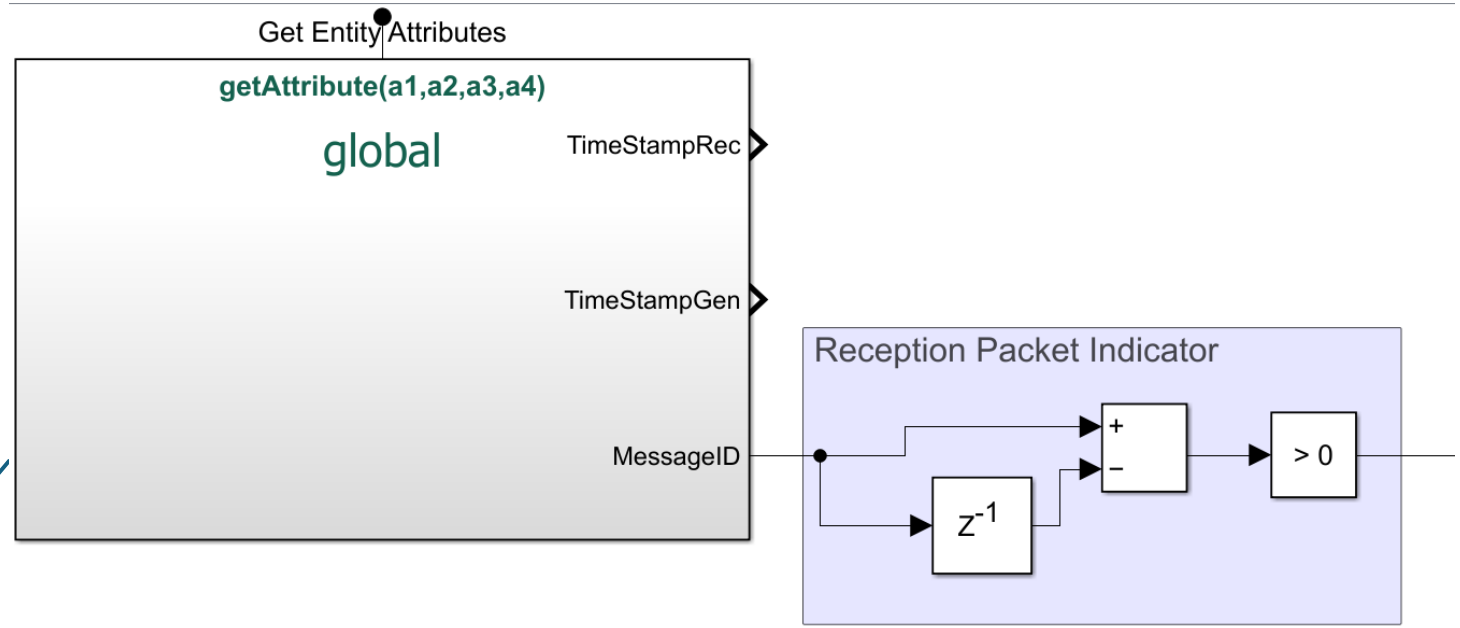
Get Entity Attributes
getAttribute(a1,a2,a3,a4)
global
TimeStampRec
TimeStampGen
MessageID
Reception Packet Indicator
+
−
> 0
z-1

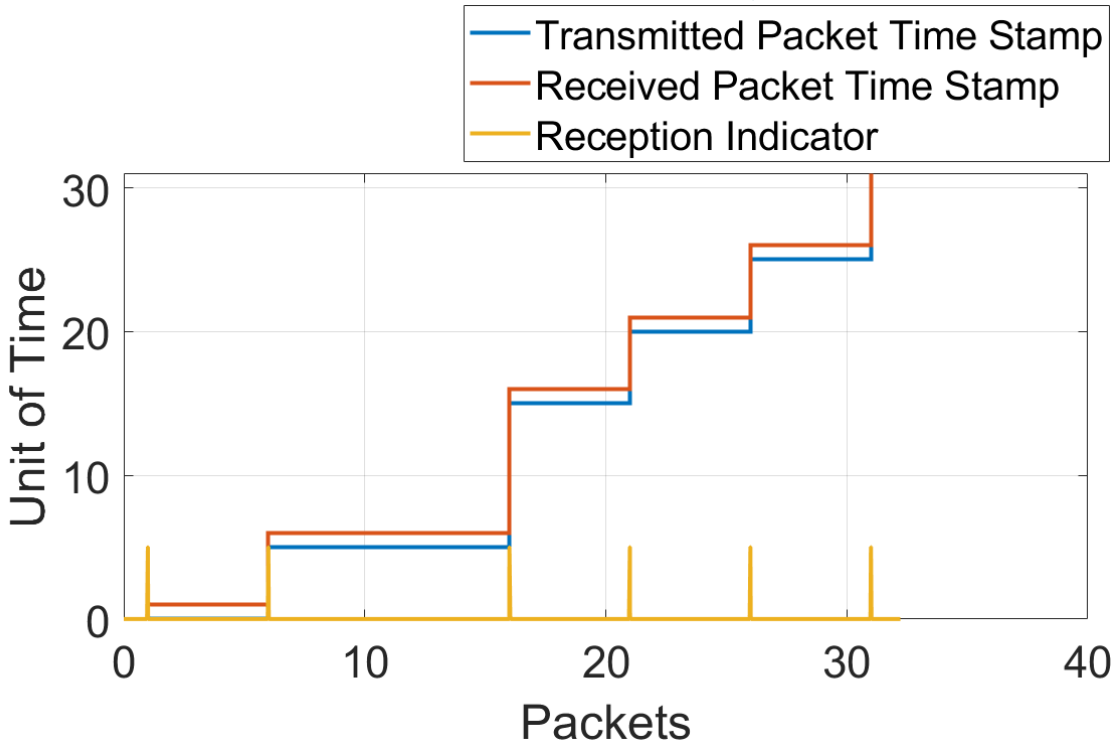
Transmitted Packet Time Stamp
Received Packet Time Stamp
Reception Indicator
Unit of Time
Packets
0
10
20
30
40

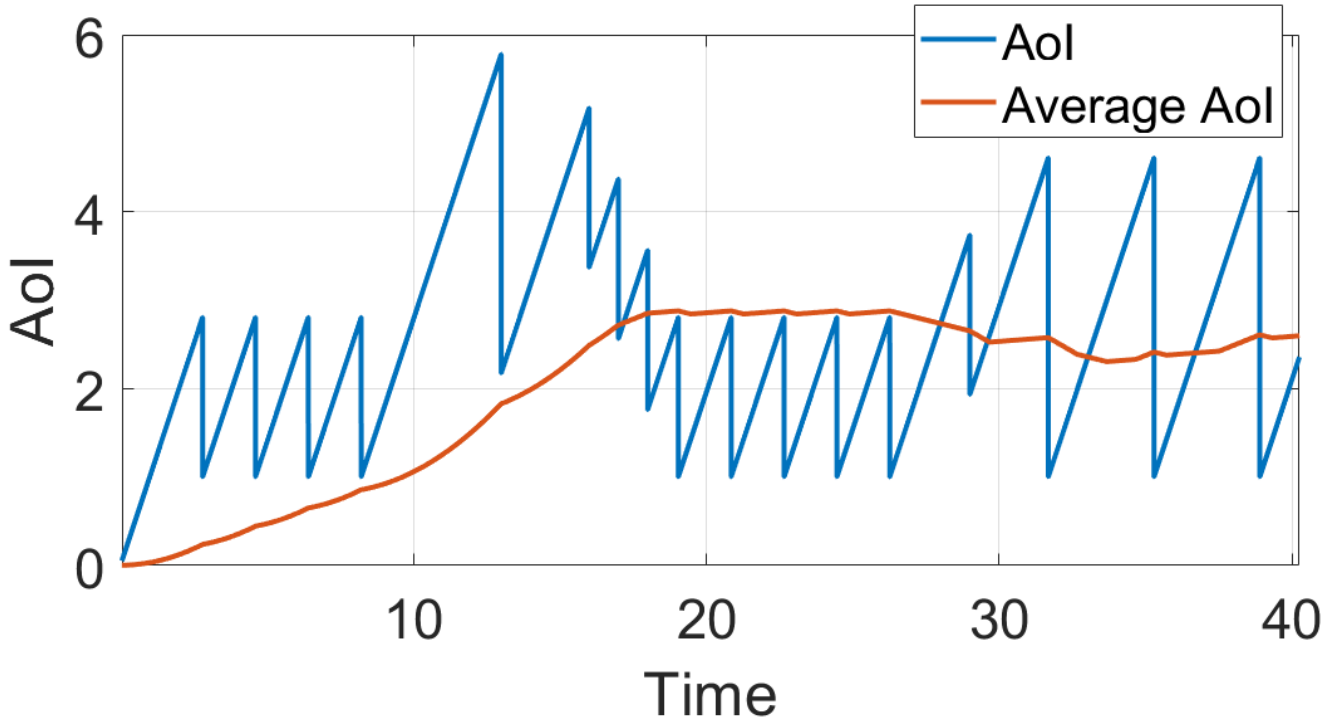
AoI
Average AoI
AoI
Time
0
2
4
6
10
20
30
40

Receiver

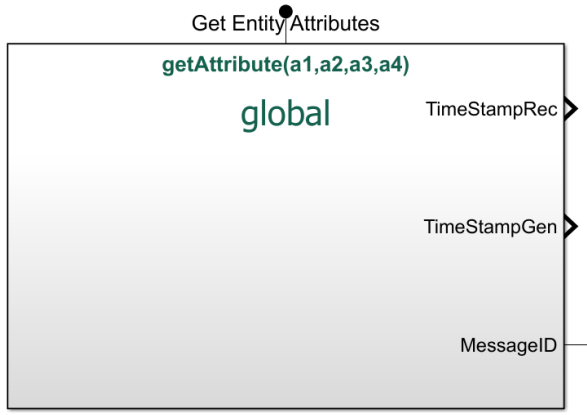
Get Entity Attributes
getAttribute(a1,a2,a3,a4)
global
TimeStampRec
TimeStampGen
MessageID

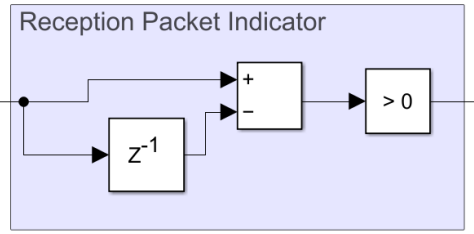
Reception Packet Indicator
+
−
> 0
z-1

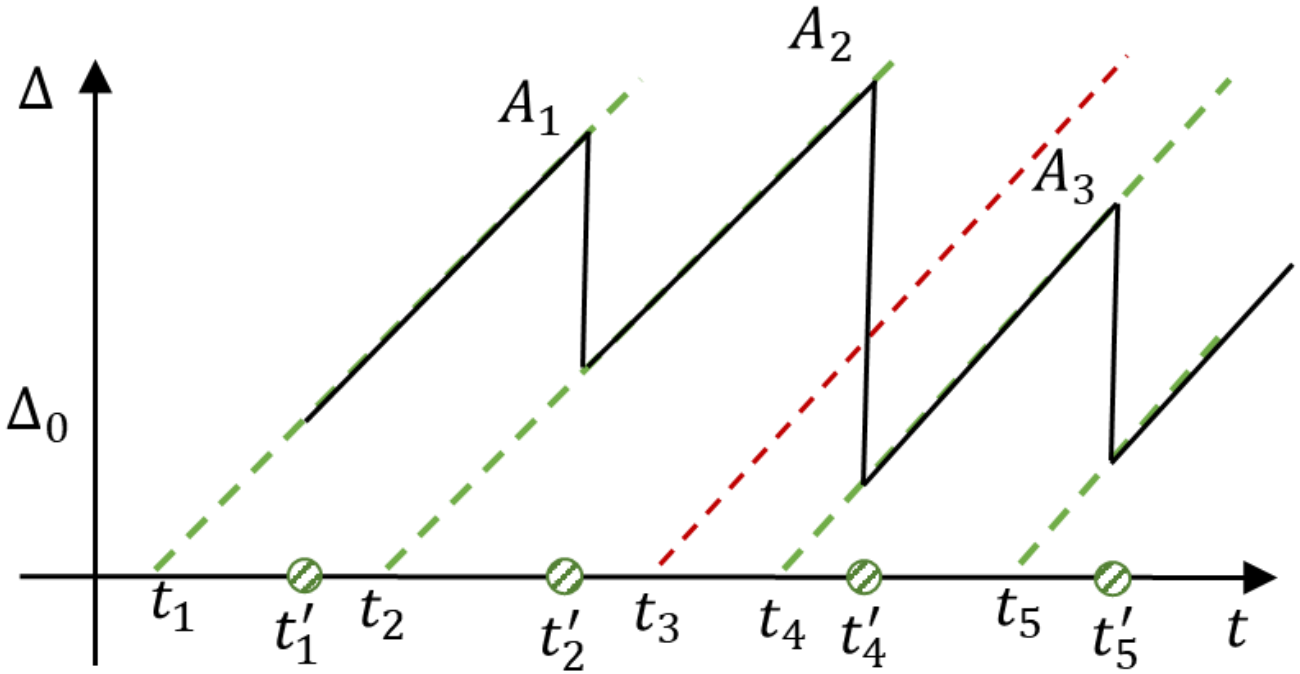
Δ
Δ0
A1
A2
A3
t1
t1'
t2
t2'
t3
t4
t4'
t5
t5'
t

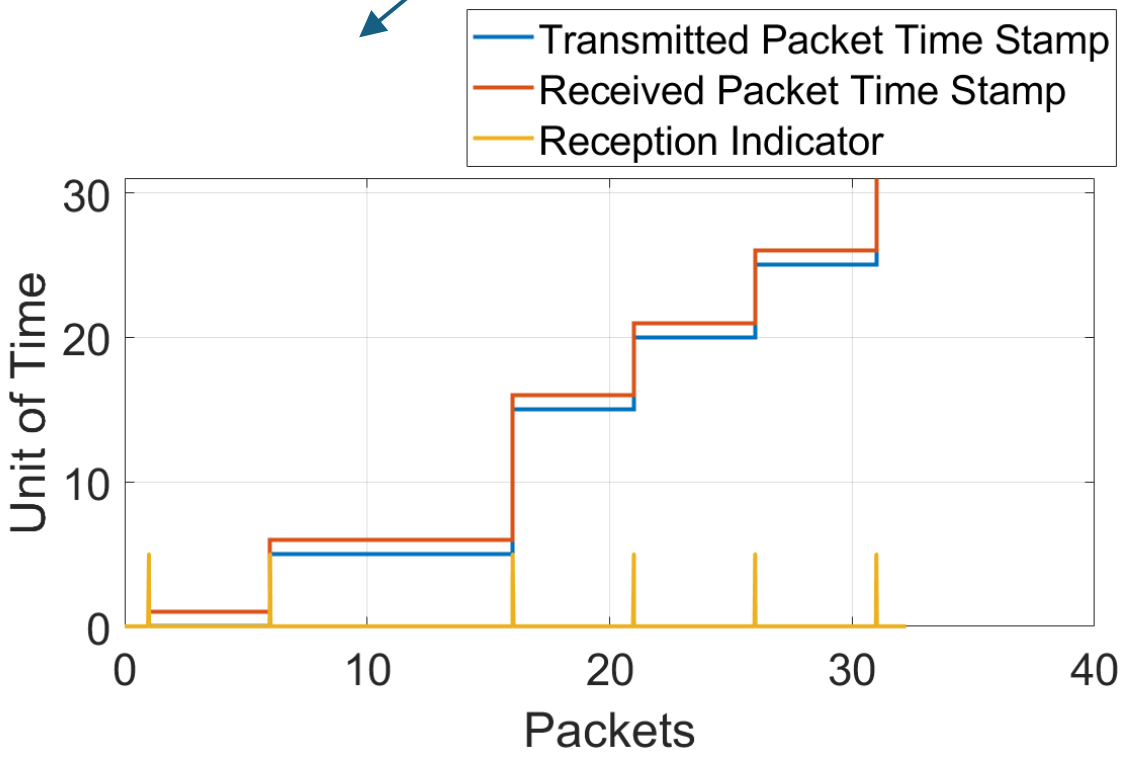
Transmitted Packet Time Stamp
Received Packet Time Stamp
Reception Indicator
Unit of Time
Packets
0
10
20
30
40

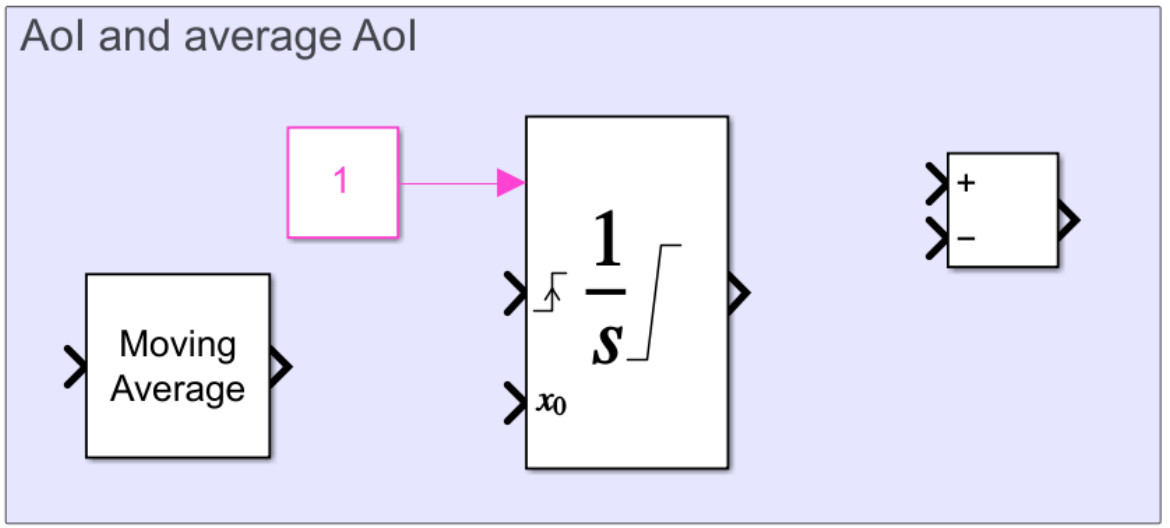
AoI and average AoI
1
Moving Average
1
s
x0
+
−

Transmitter

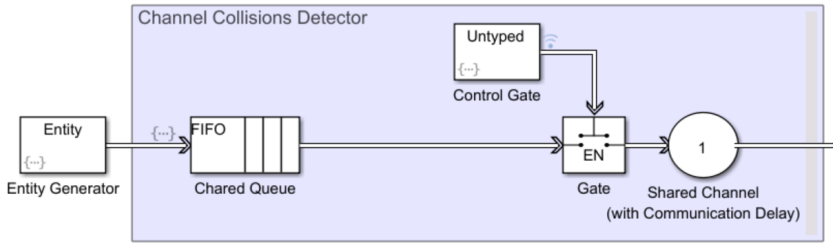

Channel

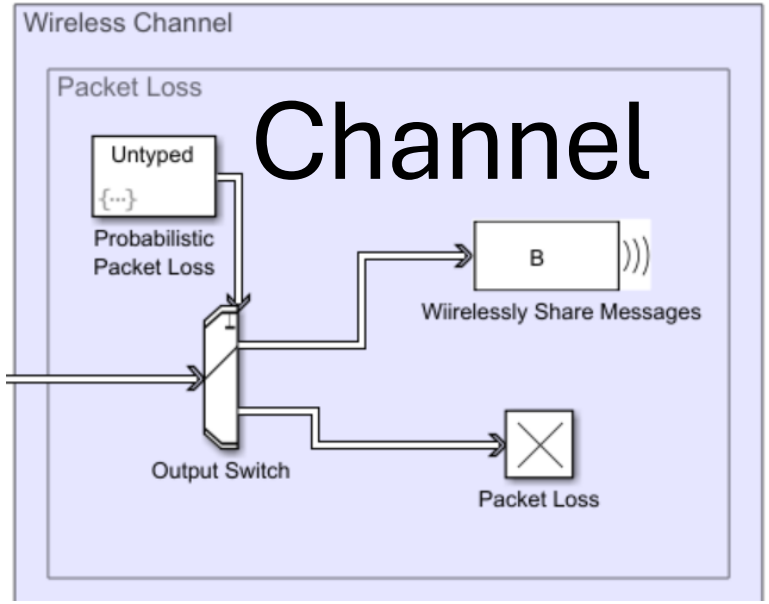

Receiver

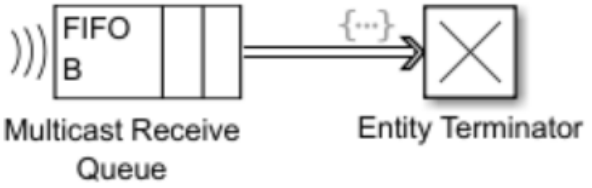



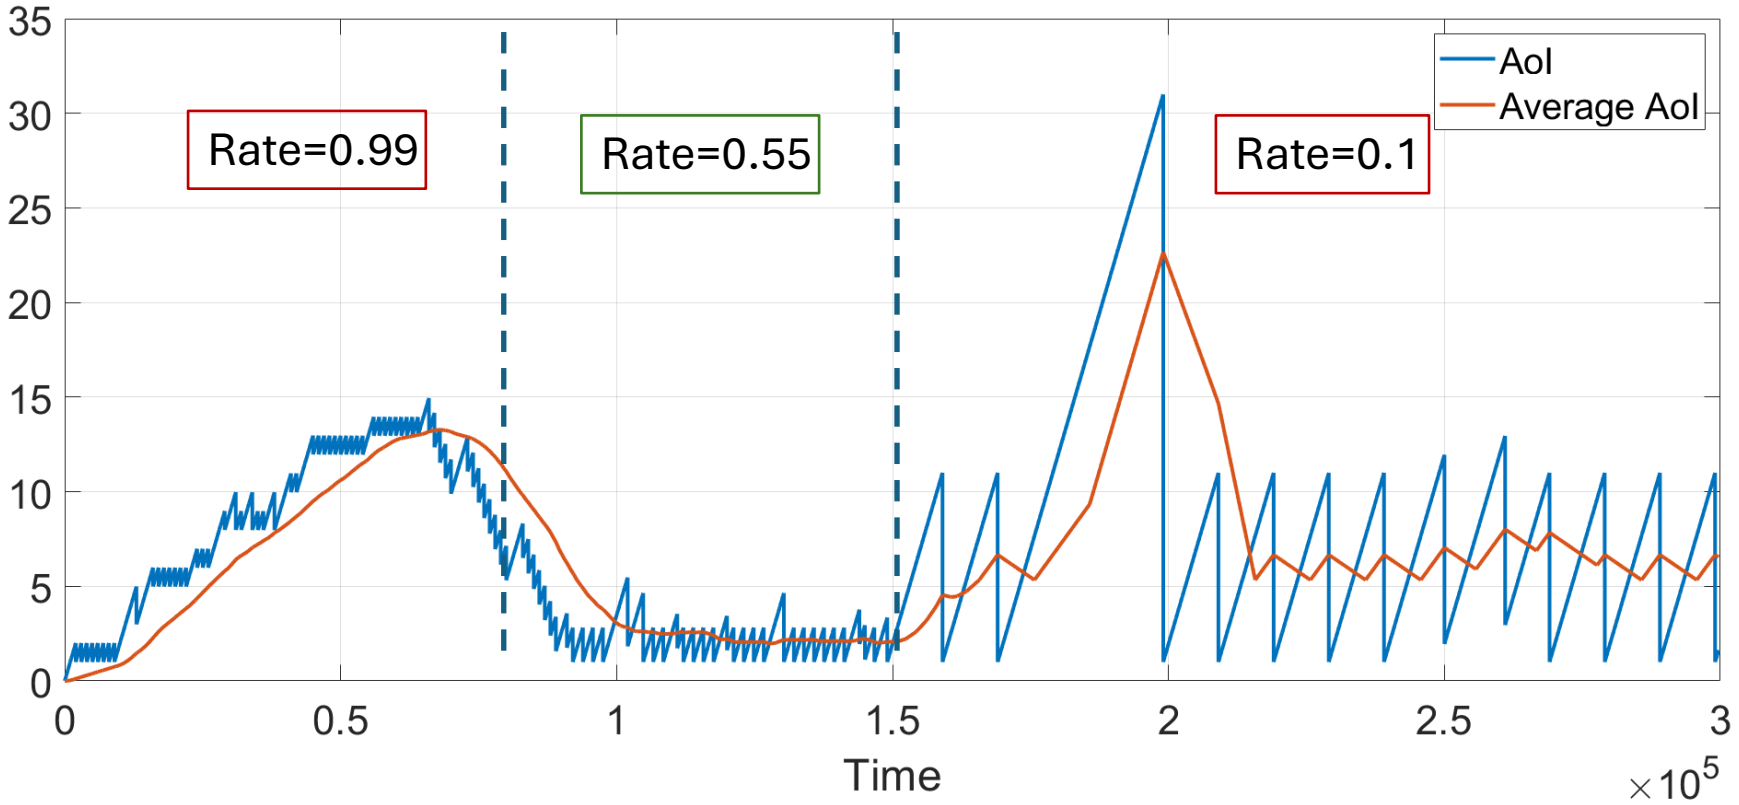

Receiver

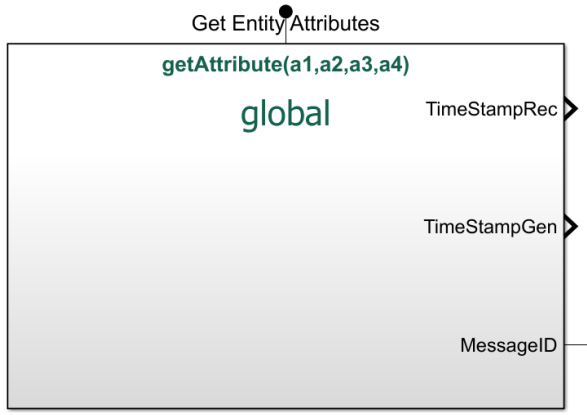
Get Entity Attributes
getAttribute(a1,a2,a3,a4)
global
TimeStampRec
TimeStampGen
MessageID

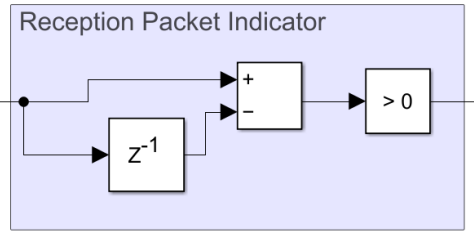
Reception Packet Indicator
+
−
> 0
z-1

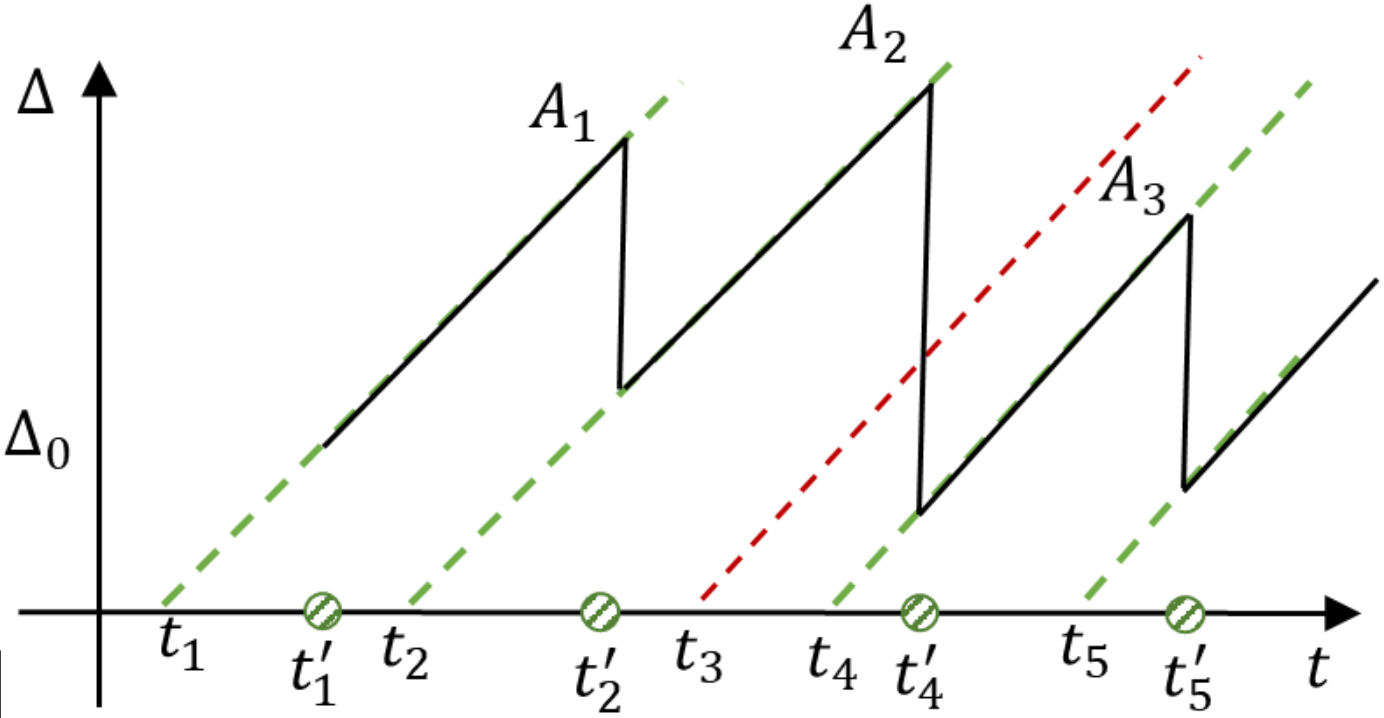
Δ
Δ0
A1
A2
A3
t1
t'1
t2
t'2
t3
t4
t'4
t5
t'5
t

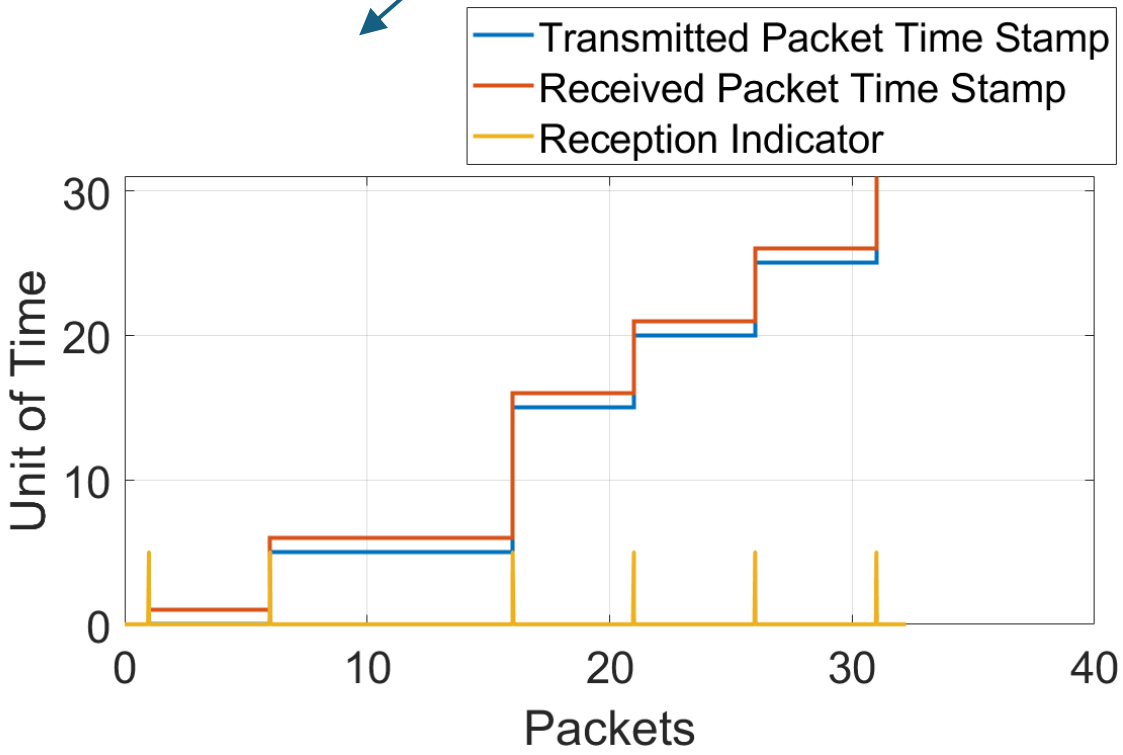
Transmitted Packet Time Stamp
Received Packet Time Stamp
Reception Indicator
Unit of Time
Packets
0
10
20
30
40

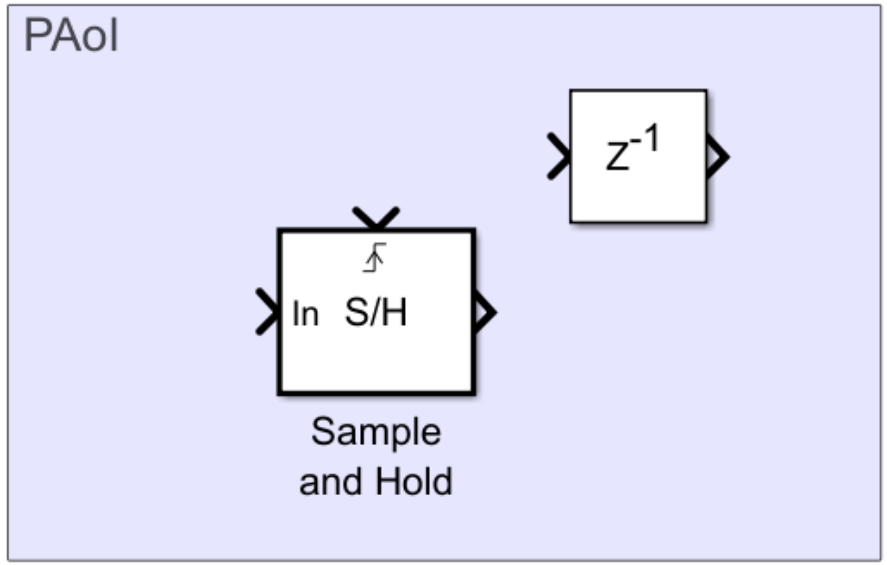
PAoI
z-1
In S/H
Sample
and Hold

Recommended readings

[1] R. D. Yates, Y. Sun, D. R. Brown III, S. K. Kaul, E. Modiano, and S. Ulukus, “Age of Information: An Introduction and Survey”, IEEE JSAC SI AoI, May 2021.

[2] A. Kosta, N. Pappas, V. Angelakis, “Age of Information: A New Concept, Metric, and Tool”, Foundations and Trends in Networking: Vol. 12, No. 3, 2017.

[3] S. Kaul, R. Yates and M. Gruteser, "Real-time status: How often should one update?," 2012 Proceedings IEEE INFOCOM, Orlando, FL, USA, 2012, pp. 2731-2735, doi: 10.1109/INFCOM.2012.6195689.

[4] S. Kaul, R. Yates, M. Gruteser, “Status updates through queues”, CISS 2012.

[5] A. Kosta, N. Pappas, A. Ephremides, and V. Angelakis, “The cost of delay in status updates and their value: Non-linear ageing”, IEEE Trans. Comm., 2020.

[6] P. Popovski et al., "A Perspective on Time Toward Wireless 6G," in Proceedings of the IEEE, vol. 110, no. 8, pp. 1116-1146, Aug. 2022, doi: 10.1109/JPROC.2022.3190205.

IEEE MeditCom

LINKÖPING UNIVERSITY

TECHNISCHE UNIVERSITÄT BERLIN

AGE OF INFORMATION (AOI) A TOOL FOR DESIGNING TIME-CRITICAL NETWORKS

Jorge Torres Gómez, TU Berlin
Nikolaos Pappas, Linköping University
July, 2024

Telecommunication Networks Group