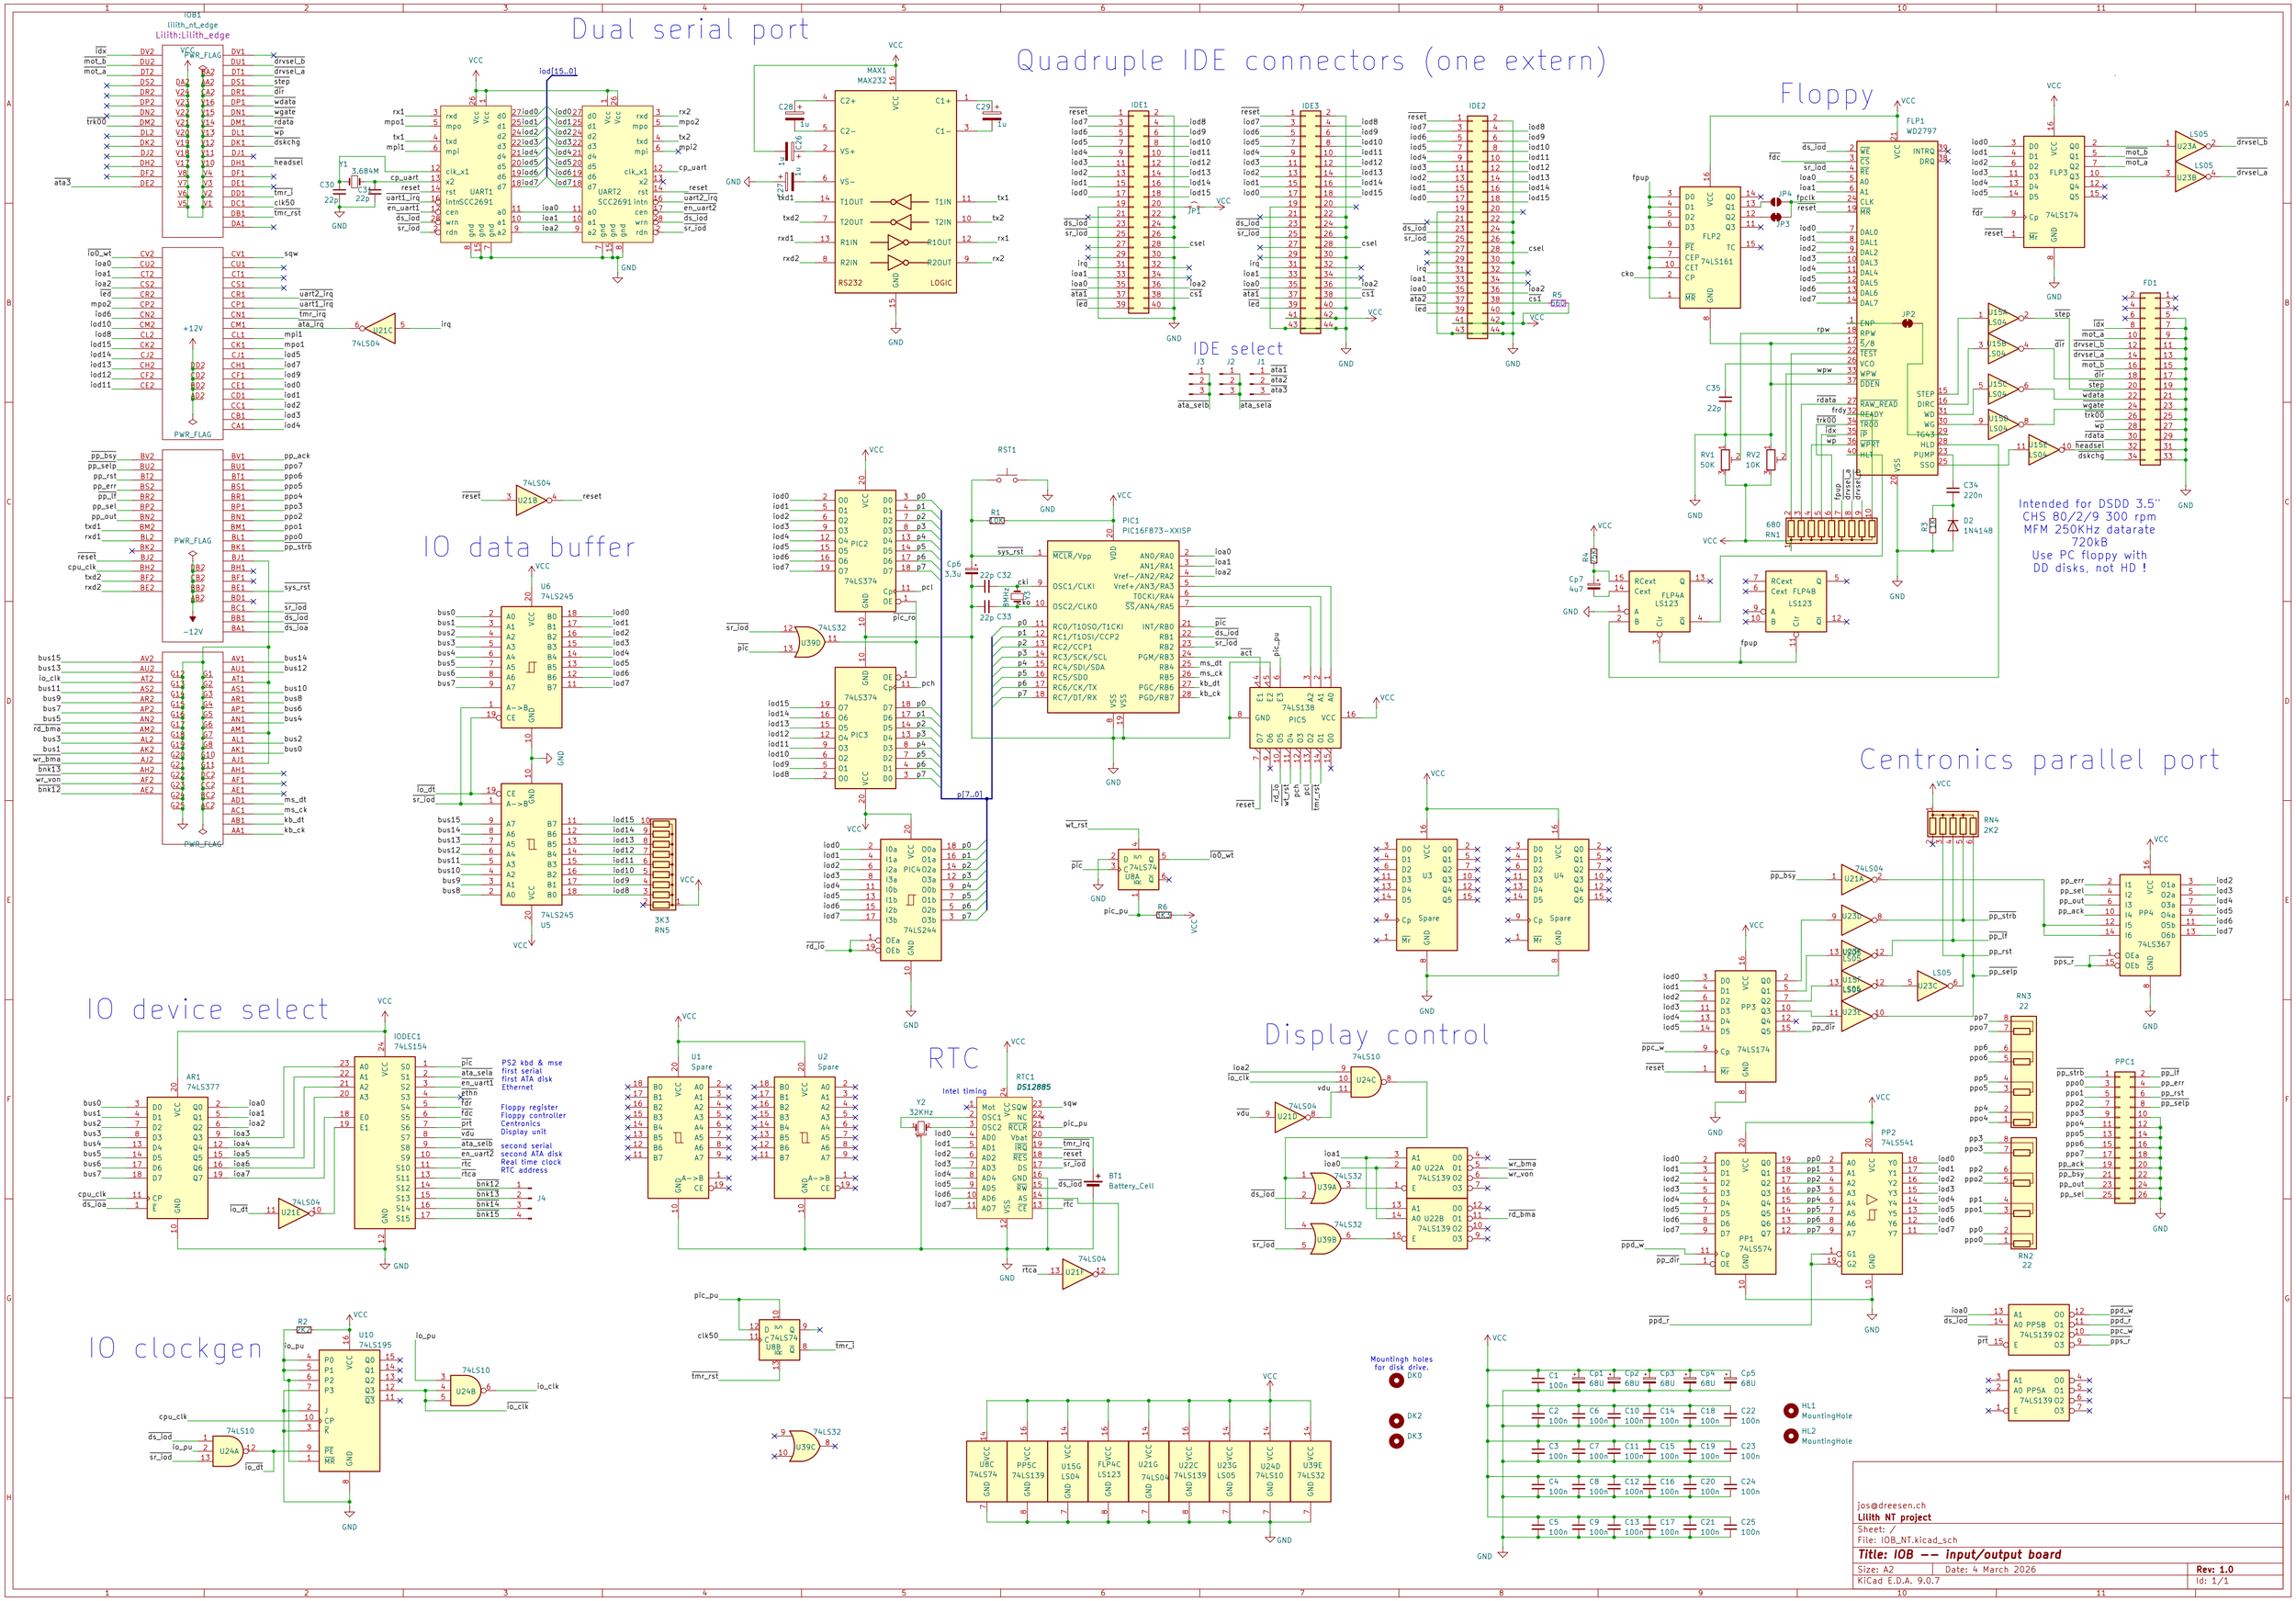
Dual serial port
Quadruple IDE connectors (one extern)
IDE select
Floppy
Intended for DSDD 3.5"
CHS 80/2/9 300 rpm
MFM 250KHz datarate
720kB
Use PC floppy with
DD disks, not HD !
IO data buffer
Centronics parallel port
IO device select
PS2 kbd & mse
first serial
first ATA disk
Ethernet
Floppy register
Floppy controller
Centronics
Display unit
second serial
second ATA disk
Real time clock
RTC address
RTC
Intel timing
Display control
IO clockgen
Mountingh holes
for disk drive.
jos@dreesen.ch
Lilith NT project
Sheet: /
File: IOB_NT.kicad_sch
Title: IOB -- input/output board
Size: A2
Date: 4 March 2026
Rev: 1.0
KiCad E.D.A. 9.0.7
Id: 1/1