
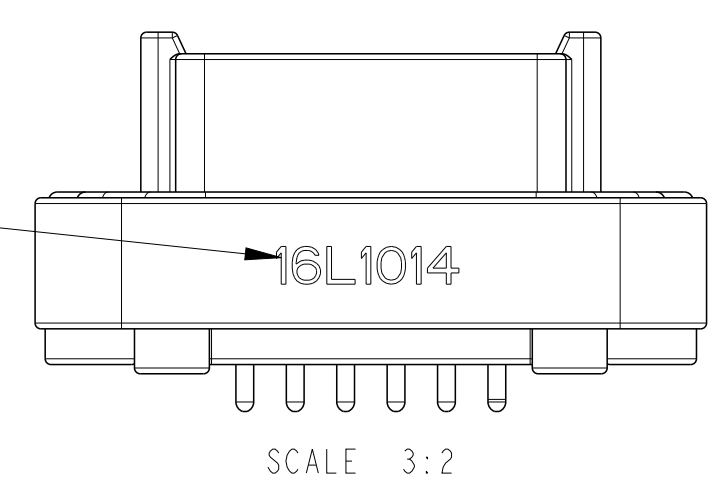
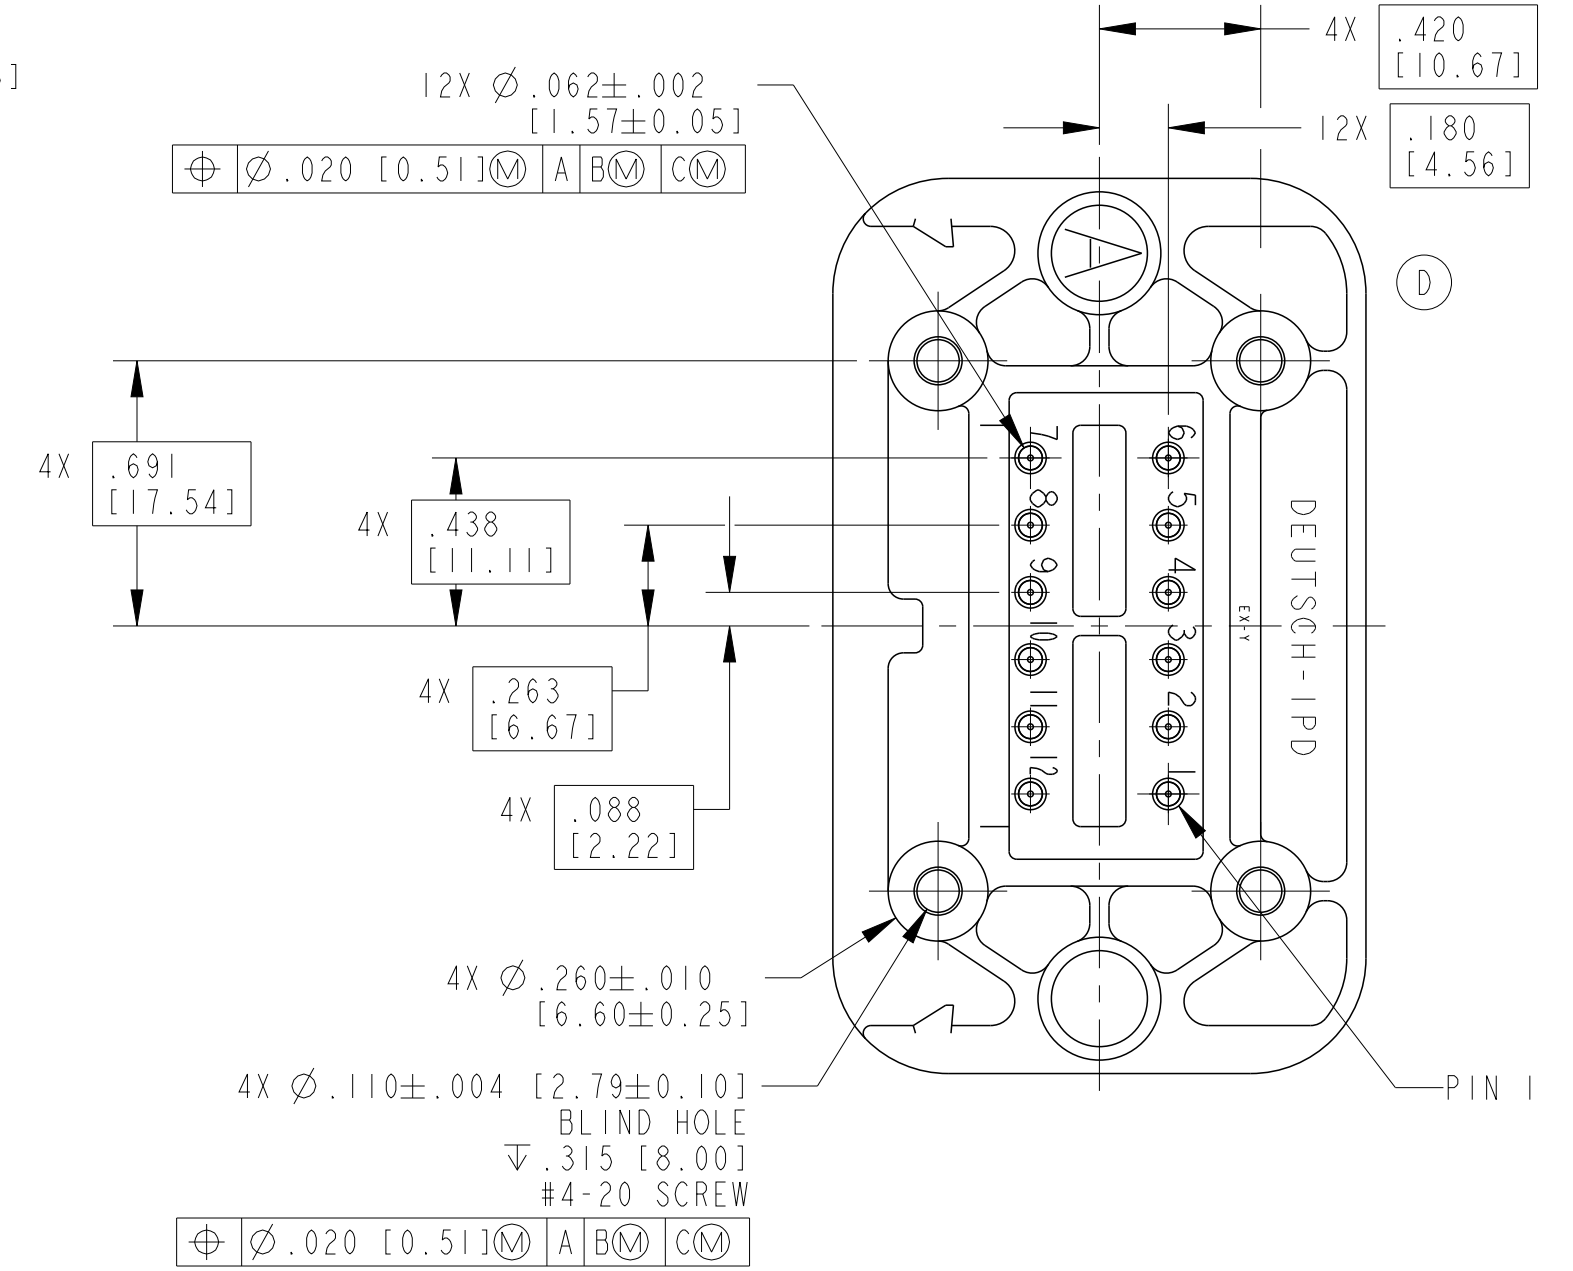
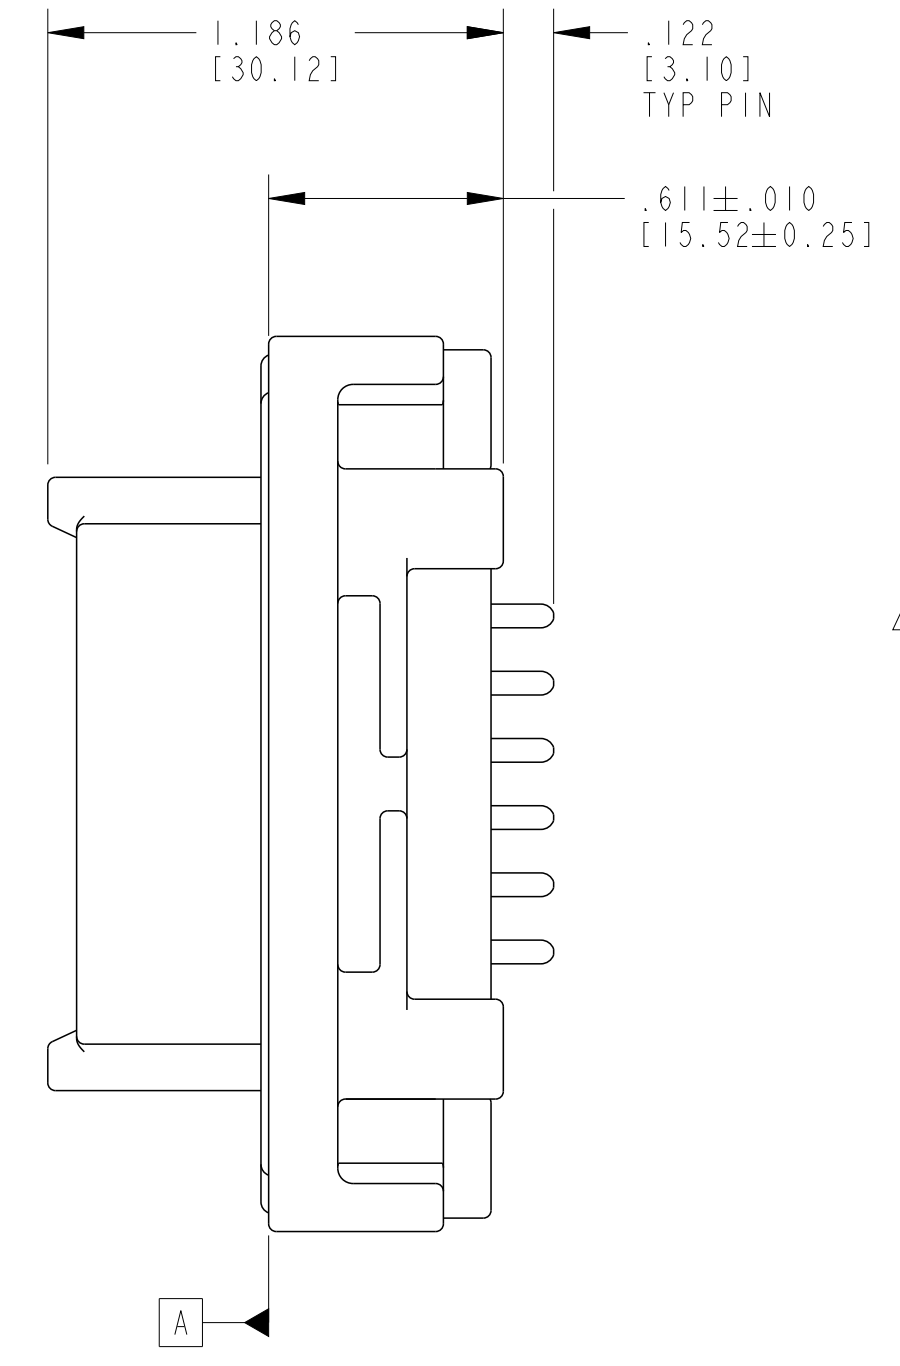


D

C

B

A

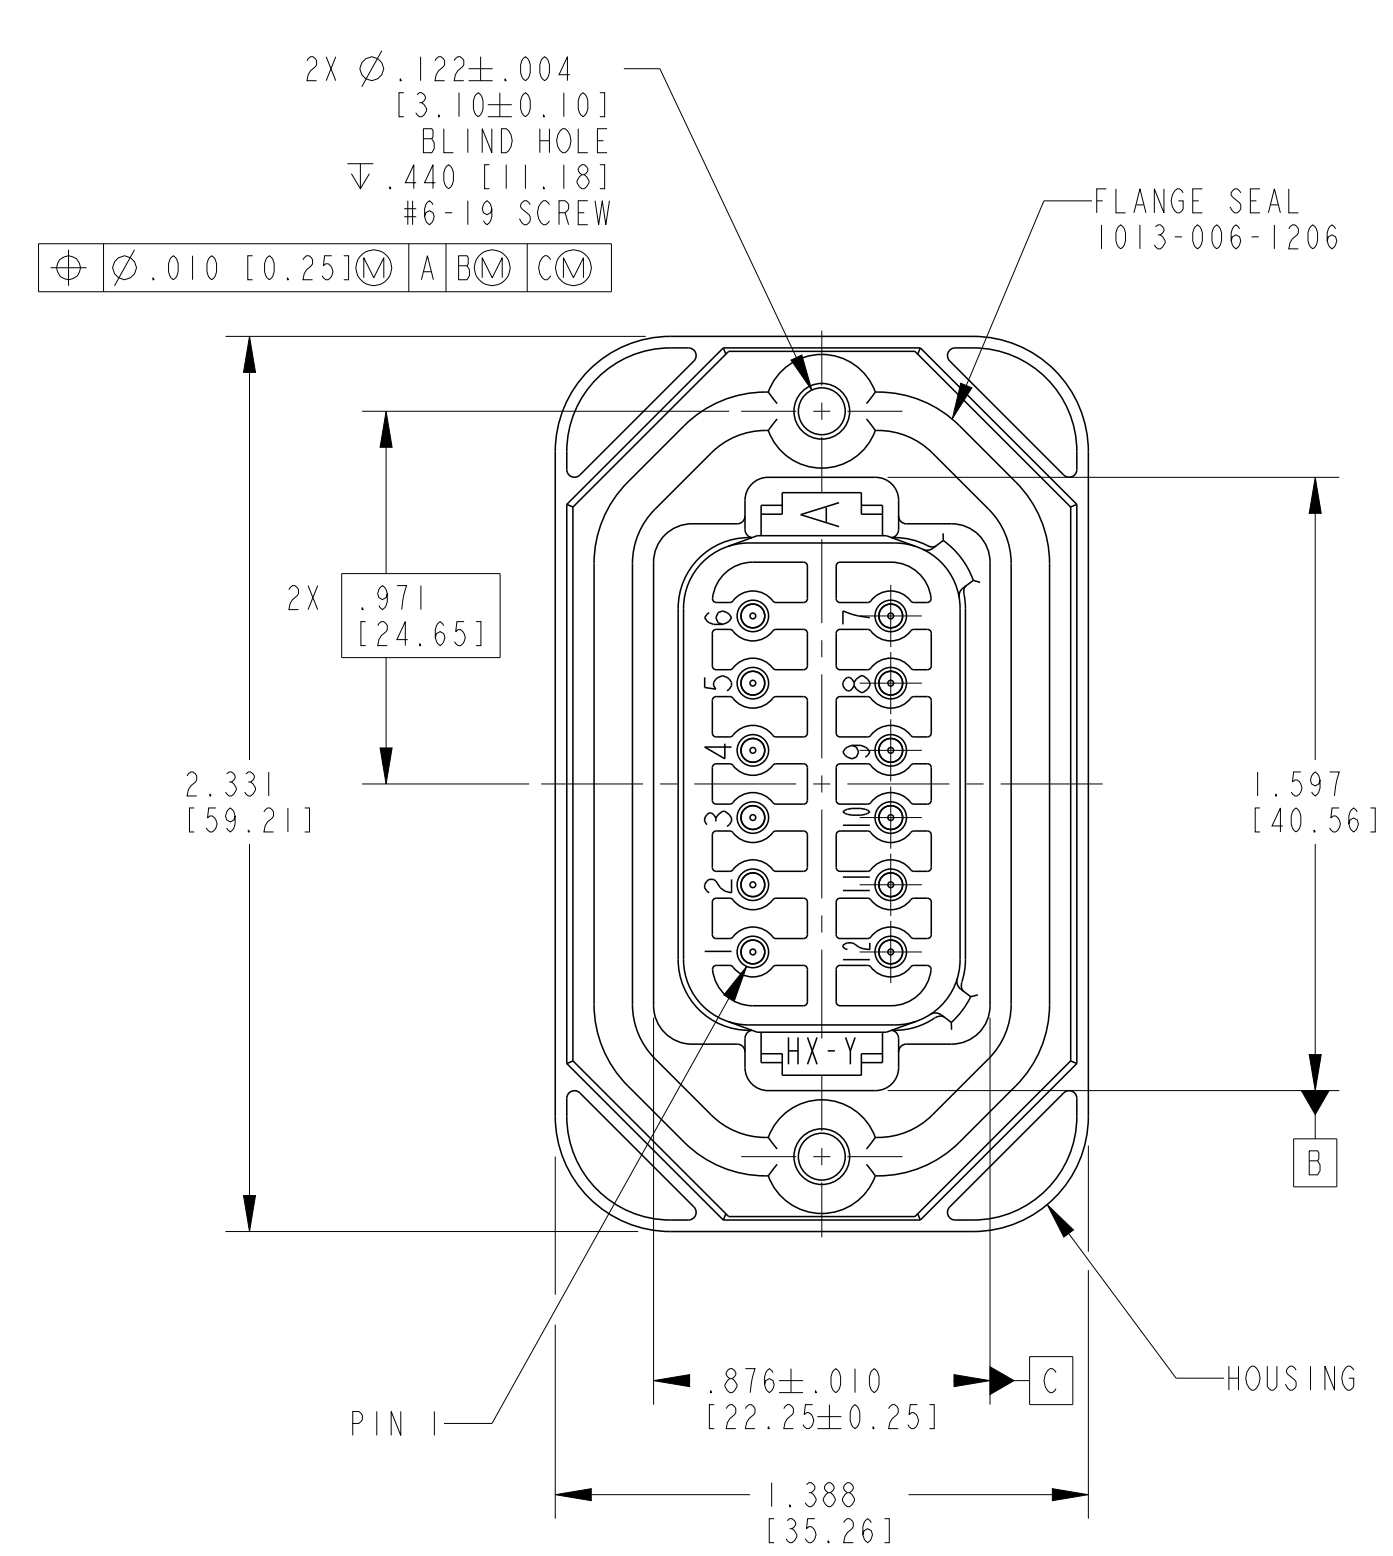

7 DIGIT DATECODE
YEAR: FIRST AND SECOND DIGITS. (16 = 2016)
MONTH: THRID DIGIT, EXCLUDING 1. A = JAN.,
B = FEB., C = MARCH... (L = NOVEMBER)
DAY: FOURTH AND FIFTH DIGITS (10 = 10th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (14 = 2-3PM)




- 9 ALTERNATE HOUSING DESIGN RELATED TO MOLDING TOOL.
- 8 MOUNTING SURFACE SPECIFICATIONS:
SURFACE FINISH: 32 μ in [0.81 μ m] Ra OR LESS
FLATNESS: .005 in/in [0.13 mm/mm] MAX
7. SEE SHEET 2 FOR RECOMMENDED PANEL CUTOUTS.
6. SEE SHEET 3 FOR OTHER KEY ARRANGEMENTS.
5. MOUNTING SCREW TORQUE VALUES ARE AS FOLLOWS:
#6-19 SCREWS: 11-13 IN-LB [1.24-1.46 N-m].
#4-20 SCREWS: 4-9 IN-LB [.45-1.01 N-m].
VALUES VALID FOR PLASTITE 48 SCREWS ONLY.
4. RECOMMENDED MOUNTING SCREWS (NOT INCLUDED): CAMCAR PLASTITE 48, SINGLE HELIX.
3. THIS RECEPTACLE MATES WITH DT06-12SX PLUG (X = A,B,C,D KEYS, XXXX = ALL MODIFICATIONS).
2. CONTACT PLATING - MATING SIDE: NICKEL; PCB SIDE: TIN
- 1 MATERIALS:
HOUSING & PIN ALIGNMENT PLATE: PA46 GF30 (SEE SHEET 3 FOR COLORS)
FLANGE SEAL: SILICONE (RED-ORANGE)
PIN CONTACTS: COPPER ALLOY

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT15-12PA	DT15-12PA
DT15-12PB	DT15-12PB
DT15-12PC	DT15-12PC
DT15-12PD	DT15-12PD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE CHK K. MCKEE APVD D. MEYER	08JUN2001 03JUL2014 03JUL2014	TE Connectivity			
DIMENSIONS: in [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE HEADER 12 PIN 180 DEG. DT SERIES			
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±.025 [0.64] 4 PLC ±- ANGLES ±0°30'0"		PRODUCT SPEC 108-151009		SIZE A2	
MATERIAL 		FINISH -		APPLICATION SPEC -		CAGE CODE 4AFU8	
				WEIGHT 33.4 (g)		DRAWING NO DT15-12PX	
				CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 2:1		SHEET 1 OF 3	
						REV D2	


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

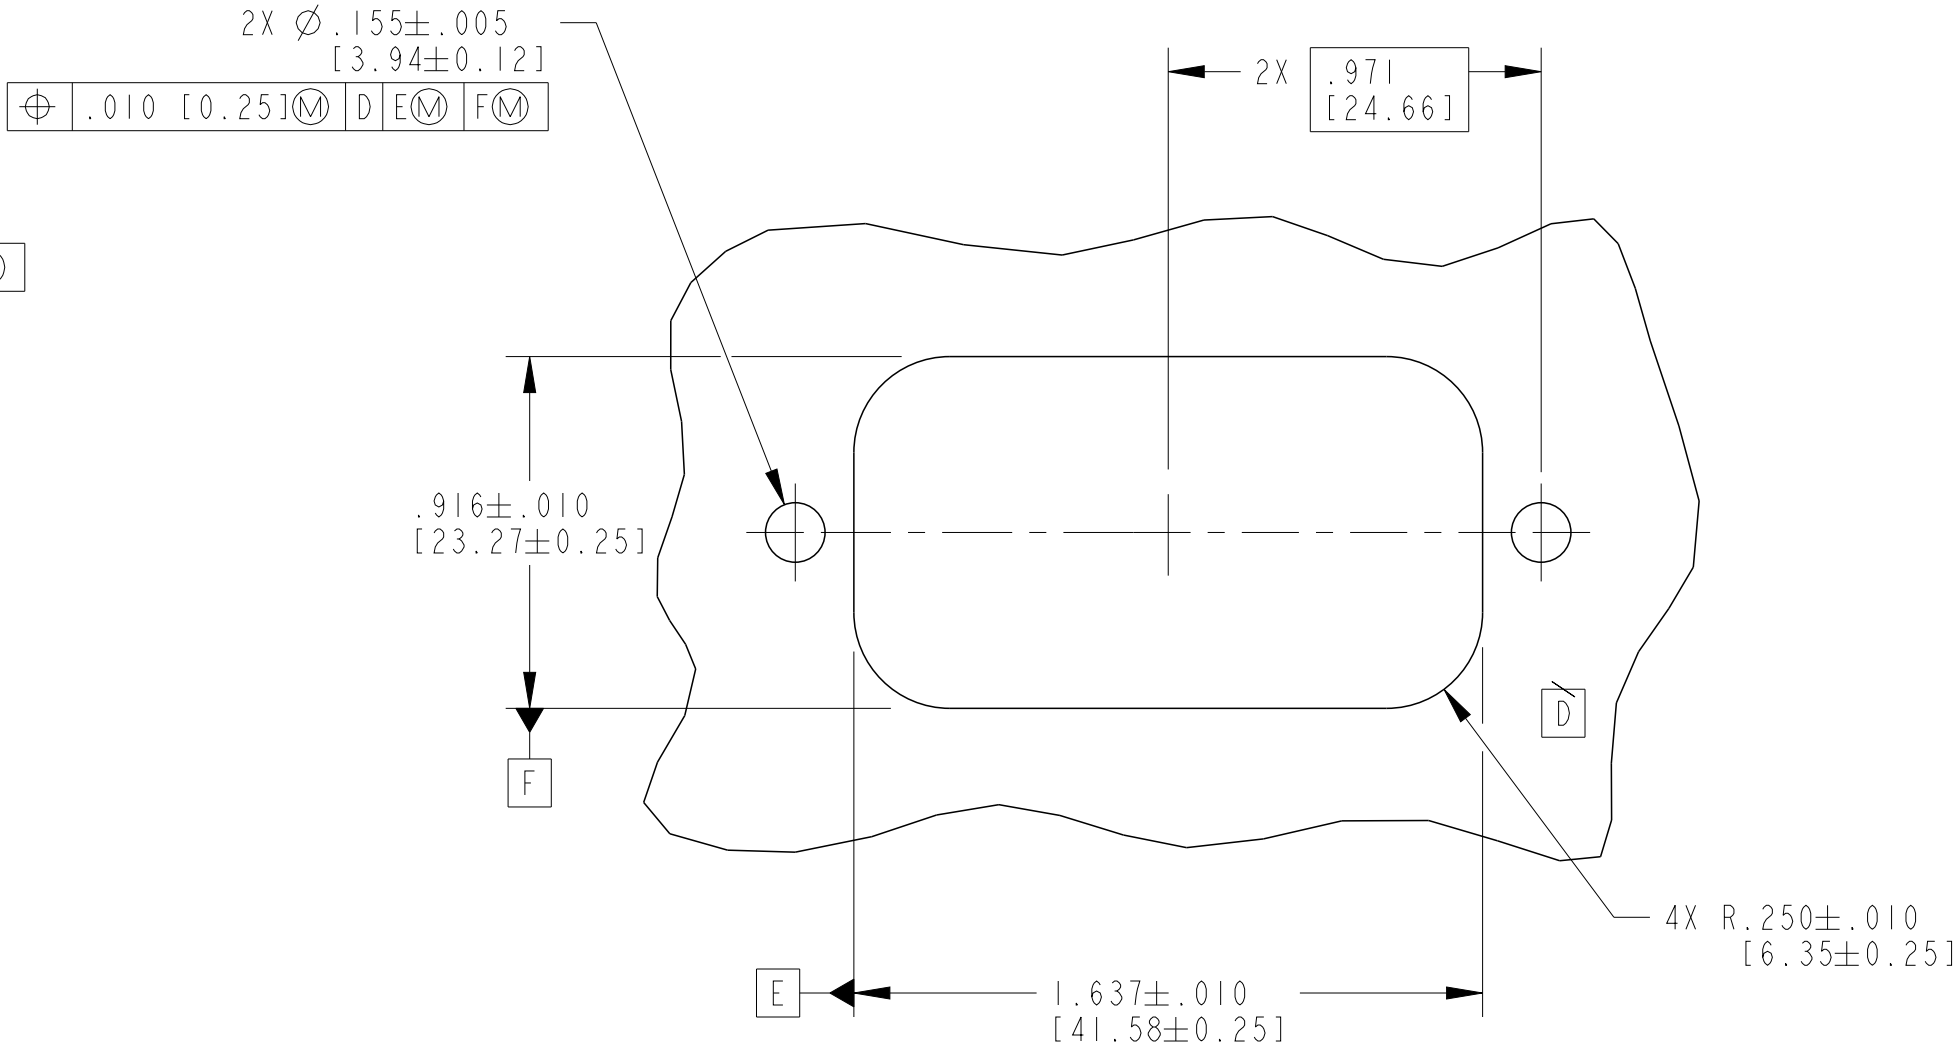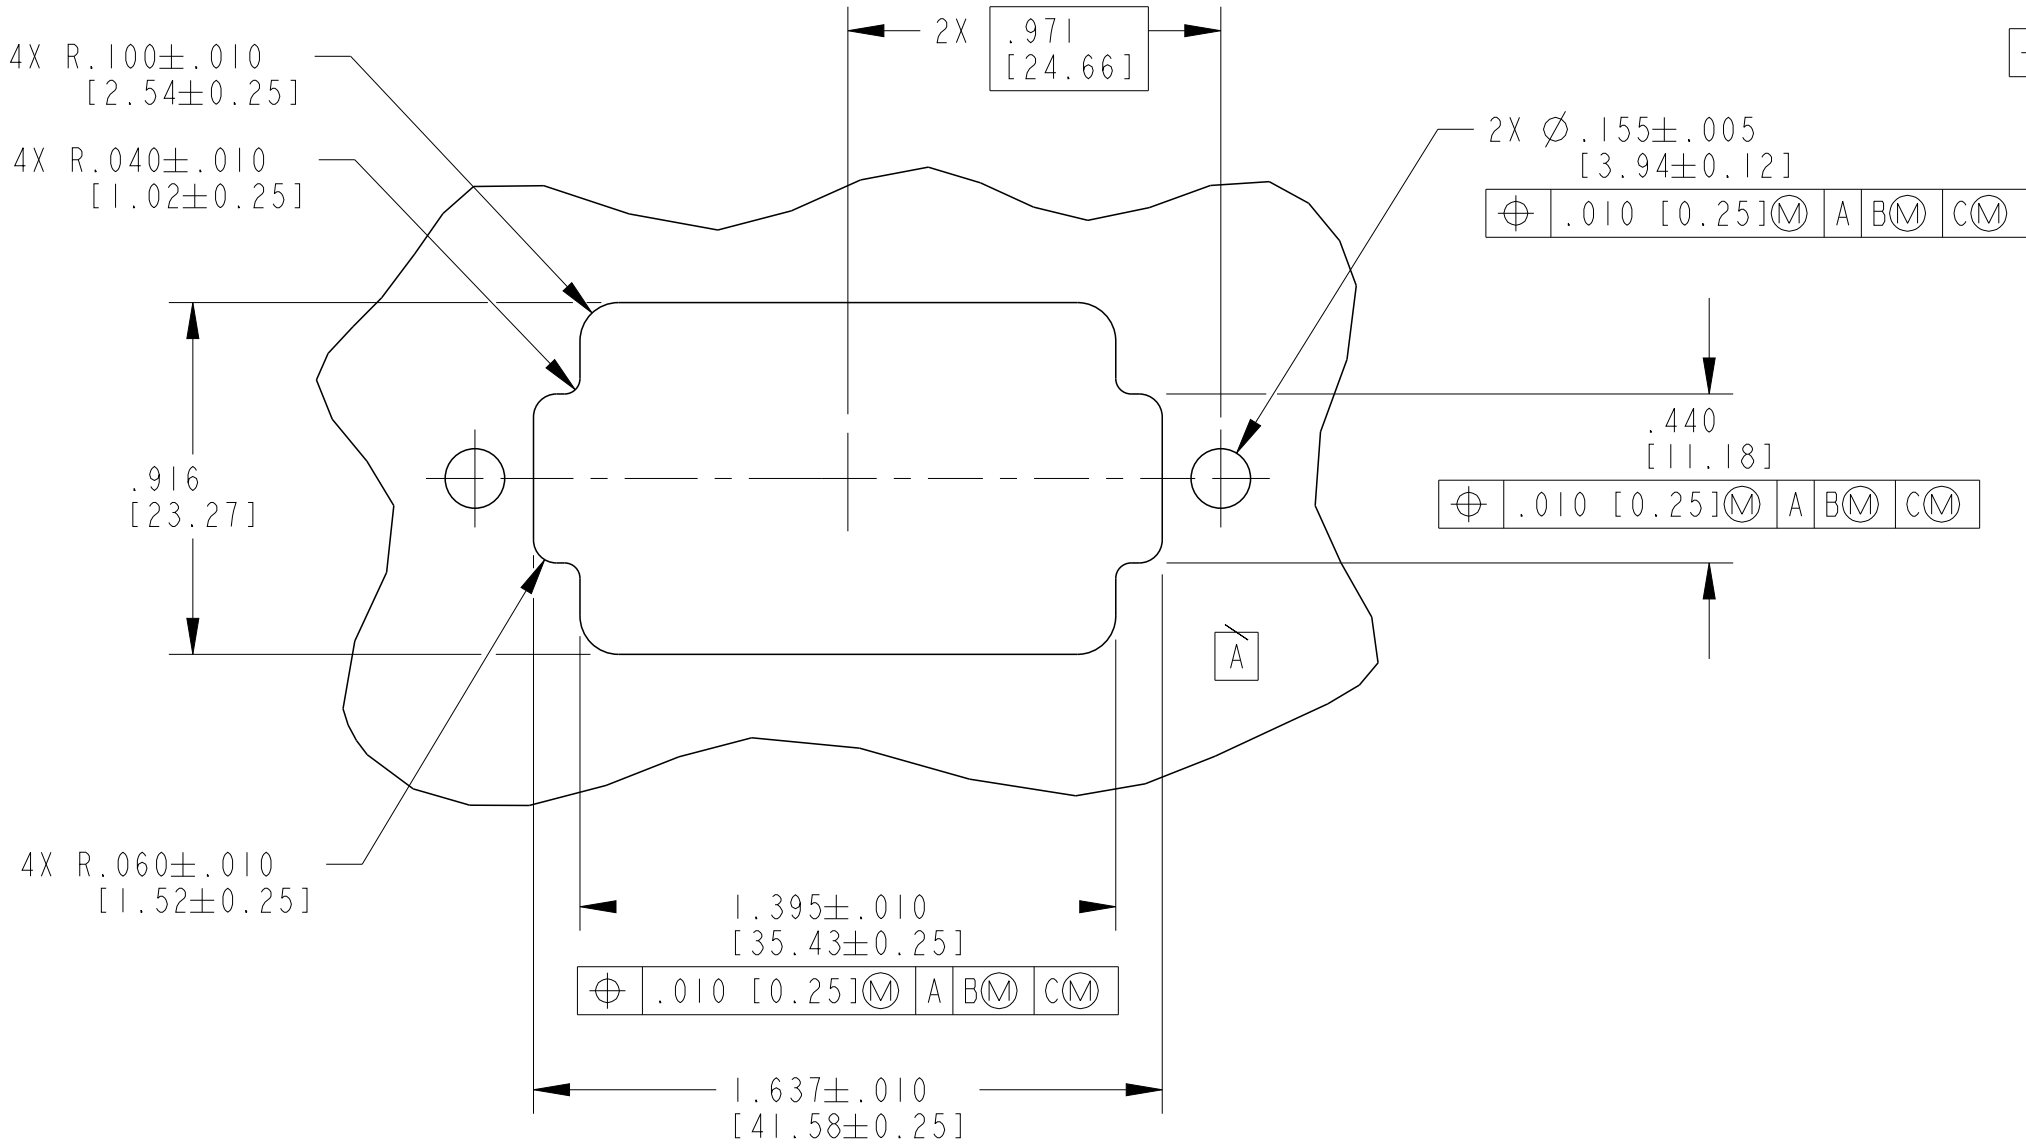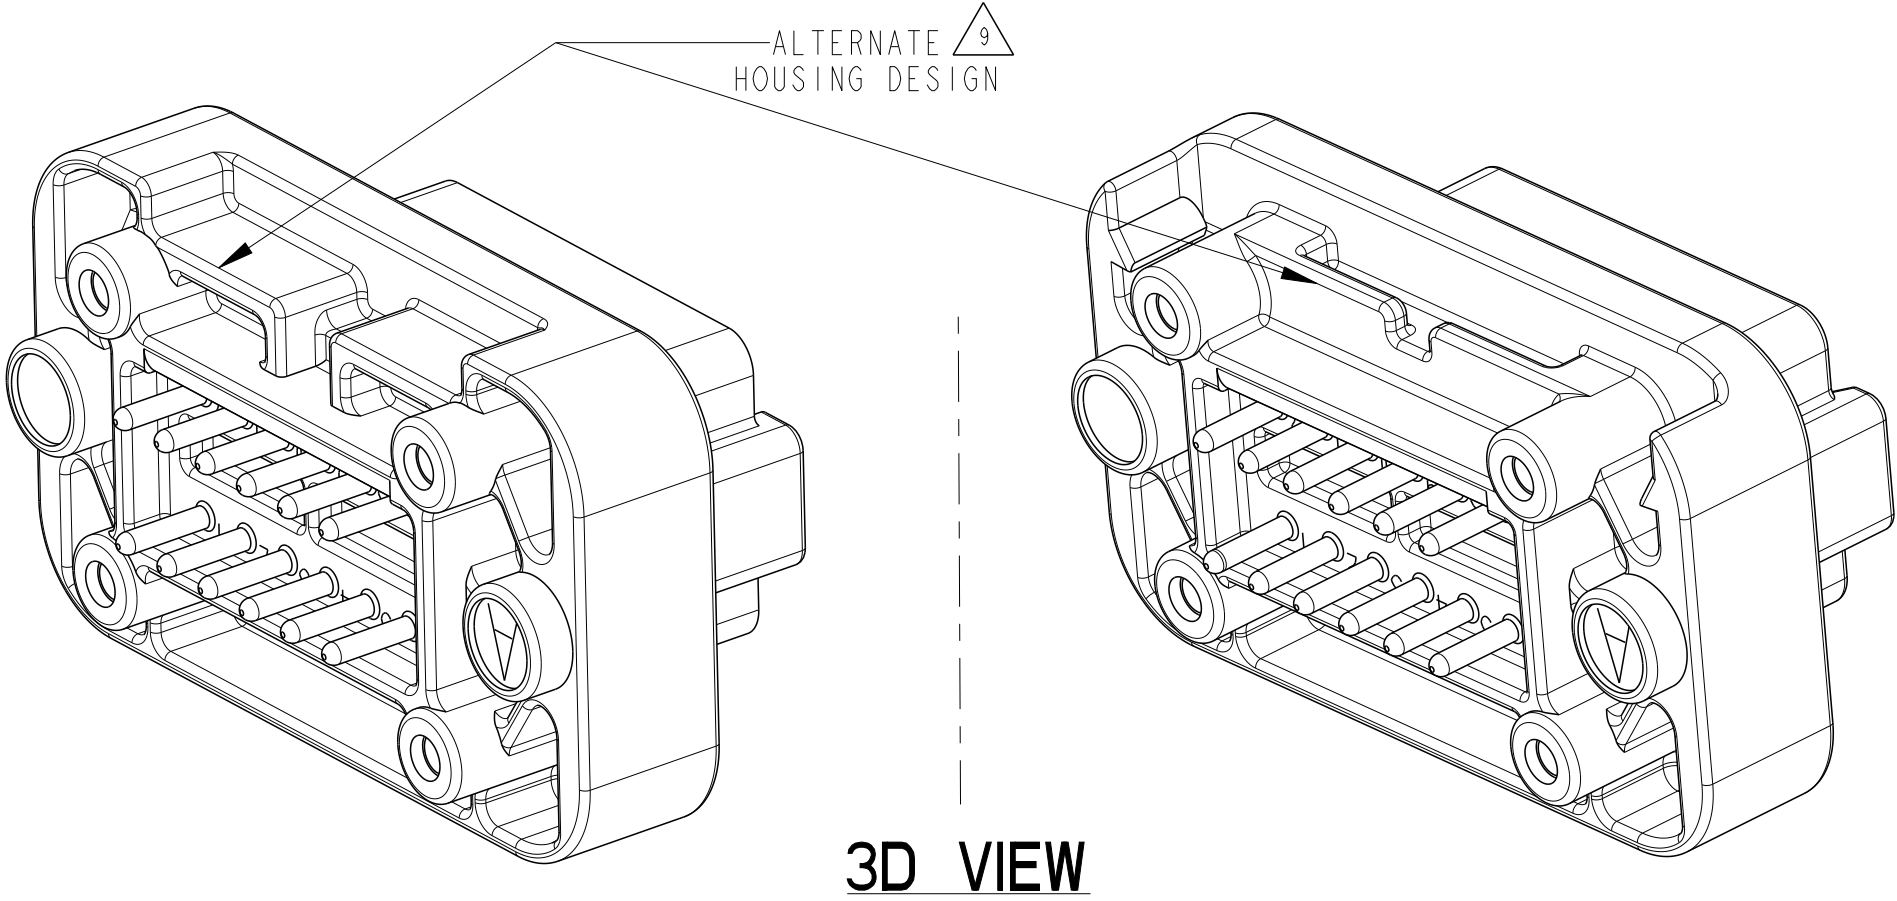


8 RECOMMENDED PANEL CUTOUTS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE CHK K. MCKEE APVD D. MEYER	08JUN2001 03JUL2014 03JUL2014	TE Connectivity	
DIMENSIONS: in [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	108-151009	NAME RECEPTACLE HEADER 12 PIN 180 DEG. DT SERIES	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0°30'0"	APPLICATION SPEC	-	SIZE	CAGE CODE
MATERIAL 	FINISH -	WEIGHT	33.4 (g)	A2	4AFU8
CUSTOMER DRAWING		DRAWING NO C=DT15-12PX		RESTRICTED TO	-
		SCALE	2:1	SHEET	2 OF 3
				REV	D2

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

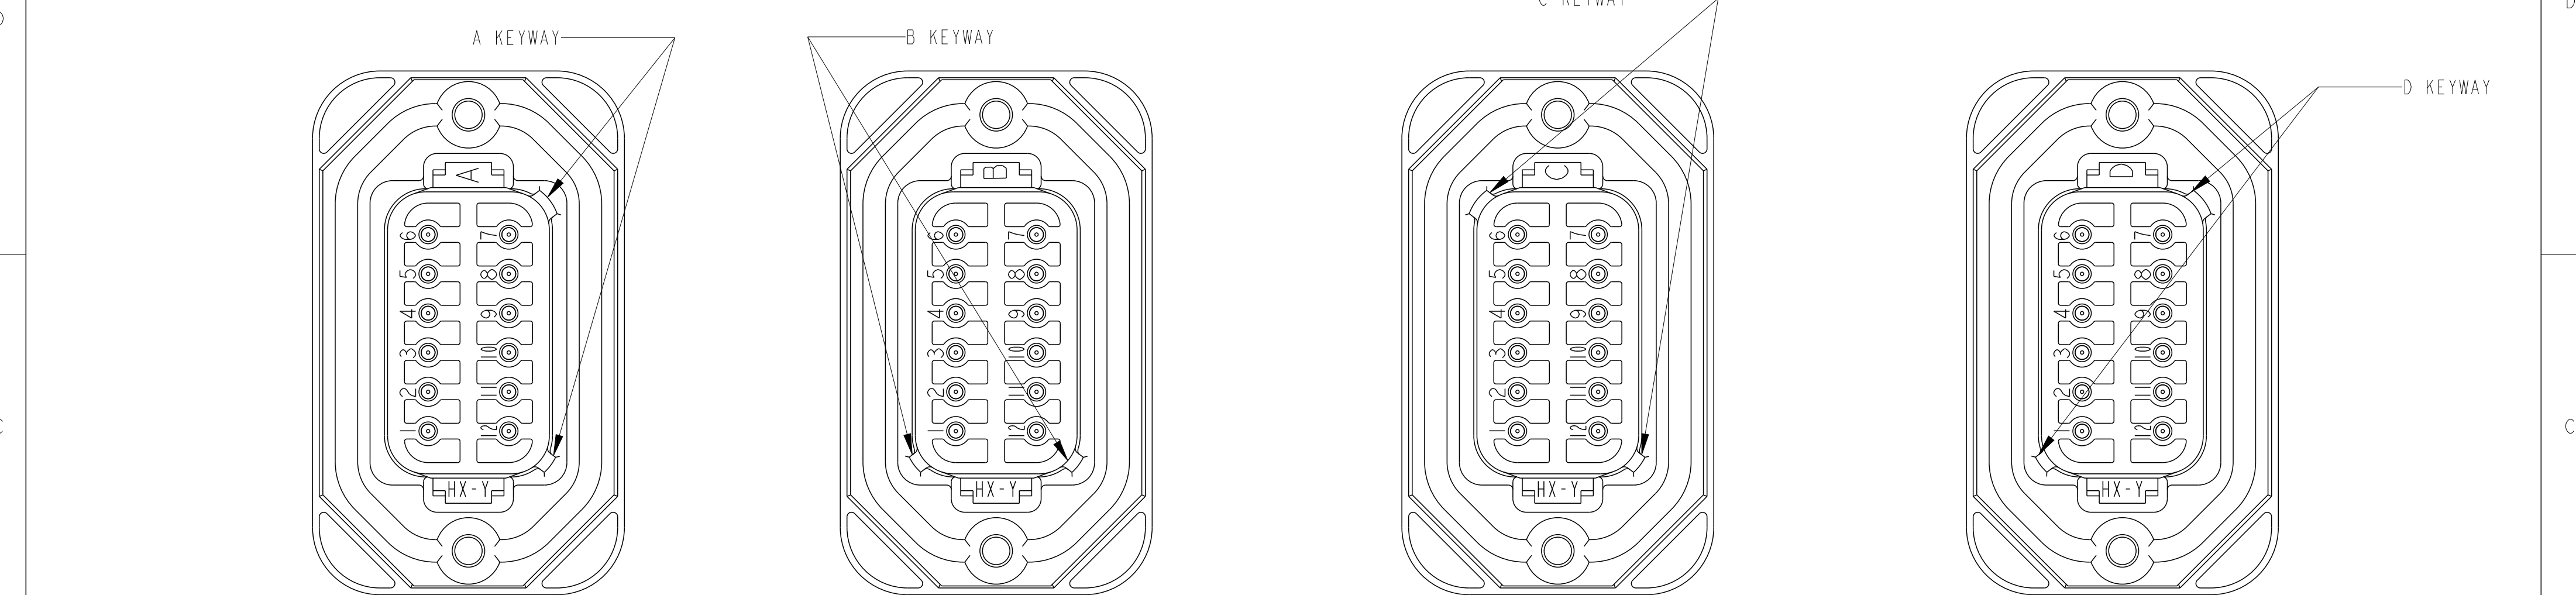

KEYING ARRANGEMENT
INDICATOR, TYP

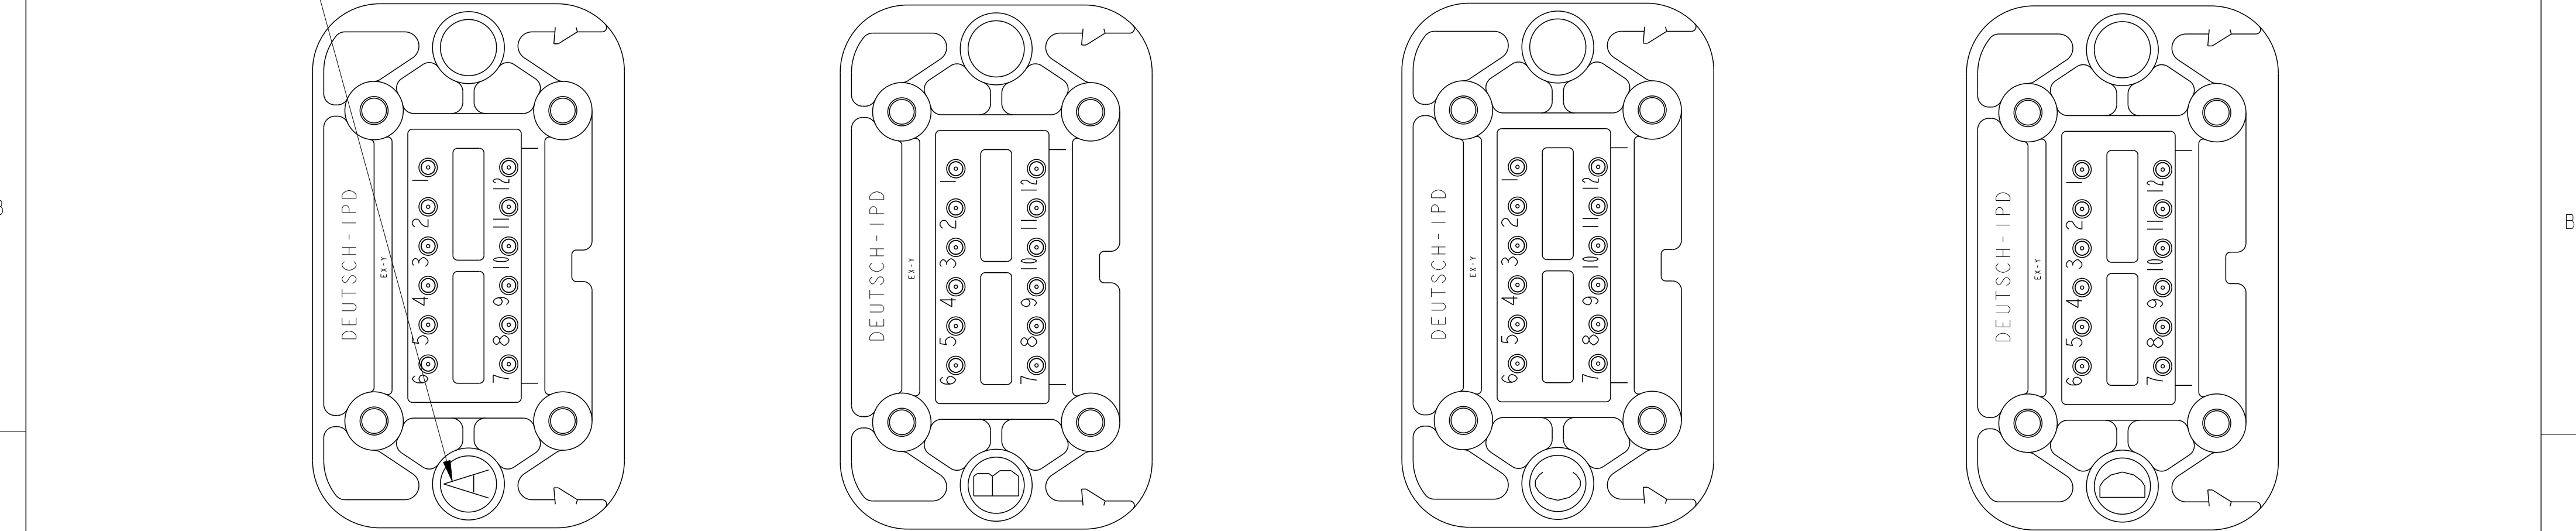

DT15-12PA
COLOR GREY

DT15-12PB
COLOR BLACK

DT15-12PC
COLOR GREEN

DT15-12PD
COLOR BROWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
in [mm]

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.025 [0.64]
4 PLC ±-
ANGLES ±0°30'0"
FINISH -

DWN
P. BURKE 08JUN2001

CHK
K. MCKEE 03JUL2014

APVD
D. MEYER 03JUL2014

PRODUCT SPEC
108-151009

APPLICATION SPEC
-

WEIGHT
33.4 (g)

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE HEADER
12 PIN 180 DEG.
DT SERIES

SIZE
A2

CAGE CODE
4AFU8

DRAWING NO
C-DT15-12PX

RESTRICTED TO
-

SCALE
2:1

SHEET
3 OF 3

REV
D2