




FEATURED PRODUCT GUIDE

Honeywell | Sensing & Productivity Solutions

warnier.com
mobile workers

Contacto: Sr. FRANCISCO VÁZQUEZ
Tel. 670.513.911
e-mail: franv@warnier.com

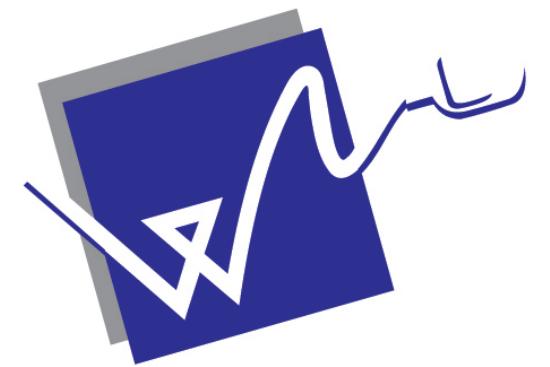

warnier.com
mobile workers

Honeywell Sensing and Productivity Solutions (S&PS) is a global leader providing custom-engineered sensors, switches and controls, and productivity solutions built around our high performance data collection hardware including rugged mobile computers, voice-enabled software, bar code scanners, radio frequency identification (RFID) and workflow printing solutions. Our solutions serve customers in aerospace, automotive, field service, healthcare, industrial, manufacturing, medical, retail, supply chain, test and measurement, and transportation and logistics markets. We provide unparalleled precision and durability that improves efficiency, increases operational productivity and enhances customer service capabilities.

For more information on Honeywell sensing products, visit <http://sensing.honeywell.com>
and on Honeywell productivity solutions visit <http://www.honeywellaids.com>.



Productivity Powerhouse

Honeywell

© 2016 Honeywell International Inc.



What's the key to lifting workforce performance? The right perspective. From a smart dock that mounts in seconds to a field-replaceable screen, each detail of the new Thor™ VM3 Vehicle-Mount Computer is designed to ensure your operators drive better results in every workflow. Case picking, truck loading, cold storage, or putaway – the industry's most capable full-size terminal transforms any vehicle into a productivity engine that will change your perspective on workflow performance.

CHANGE YOUR PERSPECTIVE

Look closer at www.honeywellaidc.com/Perspectives-VM3

Products At A Glance: Distribution Centre / Warehouse

Mobile Computers	
	
	CK3X
DURABILITY (DROP)	Multiple 1.5m (5ft)
DURABILITY (TUMBLE)	> 1,000 tumbles @ 1m
DURABILITY (IP)	IP54, -10°C
DISINFECTANT-READY HOUSING	–
DISPLAY	3.5in QVGA resistive
KEYPAD	Numeric + Alpha
SCANNING OPTIONS	Standard range 1D/2D imager Extended range 1D/2D imager Near-Far range 1D/2D imager
SCAN HANDLE OPTIONS	✓
OPERATING SYSTEM	Microsoft Windows© Embedded Handheld 6.5
WWAN	–
GPS	–
WLAN	802.11 a/b/g/n
NFC	–
PROCESSOR	1GHz
RAM/FLASH	256MB / 1GB
USER ACCESSIBLE SD CARD	✓
RFID SUPPORT	–
VOCOLLECT VOICE CERTIFIED	Yes, Wireless Headset
BATTERY	Standard: 3.7V, 5100mAh
APPLICABLE SOFTWARE	Client Pack (optional); SmartSystems™; CloneNGo; ScanNGo; Session Persistence Server; Enterprise Browser; HTML5 Browser; Launcher; Remote MasterMind



Products At A Glance: Distribution Centre / Warehouse

Mobile Computers		
	Tecton / Tecton CS	CK71
DURABILITY (DROP)	Multiple 1.5m (5ft), Multiple 1.8m (6ft) with protective boot	Multiple 2.4m (8ft)
DURABILITY (TUMBLE)	–	> 2,000 tumbles @ 1m
DURABILITY (IP)	IP65, -20°C standard -30°C (TectonCS with heaters)	IP67, -20°C
DISPLAY	3.5in QVGA resistive	3.5in VGA resistive
KEYPAD	Numeric + 55-key alphanumeric and 32-key numeric alpha / 5 function keys	Numeric + Alpha
SCANNING OPTIONS	Standard range 1D/2D imager Standard-range range 1D laser Near-Far range 1D laser	Standard range 1D/2D imager Extended range 1D/2D imager Near-Far range 1D/2D imager
SCAN HANDLE OPTIONS	✓	✓
OPERATING SYSTEM	Microsoft Windows® CE 6.0	Microsoft Windows© Embedded Handheld 6.5
WWAN	–	–
GPS	–	–
WLAN	802.11 a/b/g	802.11 a/b/g/n
NFC	–	–
PROCESSOR	806MHz	1GHz
RAM/FLASH	256MB / 256MB	512MB / 1GB
USER ACCESSIBLE SD CARD	✓	✓
RFID SUPPORT	–	IP30 Sled
VOCOLLECT VOICE CERTIFIED	Yes, Wired Headset	Yes, Wireless and Wired Headset
BATTERY	7.4V, 2200mAh	3.7V, 5200mAh
APPLICABLE SOFTWARE	Voice-Ready (software agnostic); Remote MasterMind	Client Pack (optional); SmartSystems™; CloneNGo; ScanNGo; Session Persistence Server; Enterprise Browser; HTML5 Browser; Launcher; Remote MasterMind




Products At A Glance: Distribution Centre / Warehouse

Vehicle Mount Computers				
				
	Thor CV31	Thor VM1/CV41	Thor VM2	Thor VM3
DURABILITY (IP)	IP66, -30°C	IP66, -30°C	IP66, -20°C	IP66, -30°C
DISPLAY	6.5in VGA	8in WVGA LED	9.in XGA LED backlit display	12.1in XGA Resistive or PCAP
KEYPAD	Full + compact QWERTY keyboard options	Integrated full QWERTY keyboard	Five programmable multi-function keys	7 programmable multi-function keys, full QWERTY and numeric keyboard options, Microsoft® on-screen keyboard
SCANNING OPTIONS	Supports Thethered and Bluetooth scanners/imagers and printers	Supports Thethered and Bluetooth scanners/imagers and printers	Supports Thethered and Bluetooth scanners/imagers and printers	Supports Thethered and Bluetooth scanners/imagers and printers
SCAN HANDLE OPTIONS	–	–	–	–
OPERATING SYSTEM	Microsoft Windows® Embedded Compact 7 (WEC 7)	Microsoft Windows® CE 6.0	Microsoft Windows® CE 6.0, Microsoft Windows® Embedded Standard 7 (WES 7), Microsoft Windows® 7 (Win 7)	Microsoft Windows® Embedded Compact 7 (WEC 7), Microsoft Windows® Embedded Standard 7 (WES 7), Microsoft Windows® 7 (Win 7), Microsoft Windows® 10 (Win 10)
WWAN	–	3.75G, GSM + CDMA with GPS	3.75G radio with five-band UMTS/HSPA+ GSM/GPRS/EDGE dual-band EV-DO/CDMA	GOBI 5000 4G w/GPS
GPS	–	✓	✓	✓
WLAN	802.11a/b/g/n, Bluetooth, TouchConnect™ for SRX2 Voice Headset	802.11 a/b/g	Microsoft® Windows® CE 6.0: 802.11 a/b/g Windows 7 Pro, WES 7: 802.11 a/b/g/n	802.11a/b/g/n and Bluetooth
NFC	✓	–	–	–
PROCESSOR	1.5 GHz	1.6GHz	1.6GHz	1.6GHz
RAM/FLASH	1 GB / 16 GB	1GB / 1GB	CE 6.0: 1GB / 1GB Windows 7 Pro: 2GB / 32 GB WES7: 2GB/ 16GB	WEC 7: 4 GB / 2GB WES 7: 4 GB / 64 GB Windows 7: 4 GB/64 GB Windows 10 Industry: 4 GB / 64 GB
USER ACCESSIBLE SD CARD	✓	✓	✓	✓
RFID SUPPORT	Supports tethered IV7 RFID reader	CV41 supports IV7 RFID reader	–	–
VOCOLLECT VOICE CERTIFIED	Yes, Wireless Headset	CV41 w/ WinCE6.0 only, Wireless Headset	Audio for headset, Integrated stereo speakers w/ adjustable volume control, Integrated microphone	–
BATTERY	Standard 30 minute UPS	Standard 30 minute UPS	Standard 30 minute UPS	Standard 30 minute UPS
APPLICABLE SOFTWARE	System software: SmartSystems™, CloneNGo; Device Health Management; Optional software: Terminal Emulation; Enterprise Browser; HTML5 Browser; Launcher; Remote MasterMind	Terminal Emulation/Browsers: VM1: RFTerm CV41: Enterprise Terminal Emulation	System Software: CE 6.0: Microsoft® Internet Explorer 6, Microsoft® on-screen keyboard, DCWedge barcode wedge; Windows 7 Pro & WES 7: Microsoft® Internet Explorer 10, Freefloat Key on-screen keyboard, Freefloat Link wedge ; Optional Software: Terminal emulators, Remote MasterMind	System Software: Microsoft® Internet Explorer, Configuration Cloning Utility, Screen Blanking, Zoom Zone, Launcher Optional Software: Client Pack - (Enterprise Terminal Emulator, Enterprise Browser), Remote MasterMind

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Distribution Centre / Warehouse

Handheld RFID Readers		
	70 Series RFID	IP30
ATTACHMENT	Integrated feature of the handheld	Add-on Handle; comm. via BT (Bluetooth interface only for 70 Series)
SUPPORTED COMPUTER PLATFORMS	CN70/70e, CK70	70 Series (CN70/70e, CK70, CK71)
REGIONAL CERTIFICATION	US/Canada (FCC), EU (ETSI), AU, NZ	FCC and ETSI regions, other countries (configuration dependent)
ENVIRONMENTAL	IP67, 2.4m to concrete, NI option	IP64, 1.3m to concrete
ANTENNA TYPE	Omni-directional (> 90-deg cone)	Linear (70-deg cone)
TYPICAL MAX READ RANGE	1-3m (3-10ft)	3m+ (10ft+)
WIRELESS NETWORK INTERFACES	Wi-Fi, Bluetooth (WWAN/GPS not available)	Wi-Fi, Bluetooth, HSPA or CDMA and GPS options on handheld computer base
BATTERY CAPACITY	4000mAh (CN70/70e), 5200mAh (CK70)	Computer: up to 5200mAh IP30: 2400mAh
WEIGHT	450g CN70; 491g CN70e; 562g CK70	430g standalone w/ battery
APPLICABLE SOFTWARE	SmartSystems™; ScanNGo; Enterprise Browser; HTML5 Browser; Launcher; Imaging Solutions (SAV, MDI); Skynax® Mobility Management	Support for Microsoft RFID Mobile

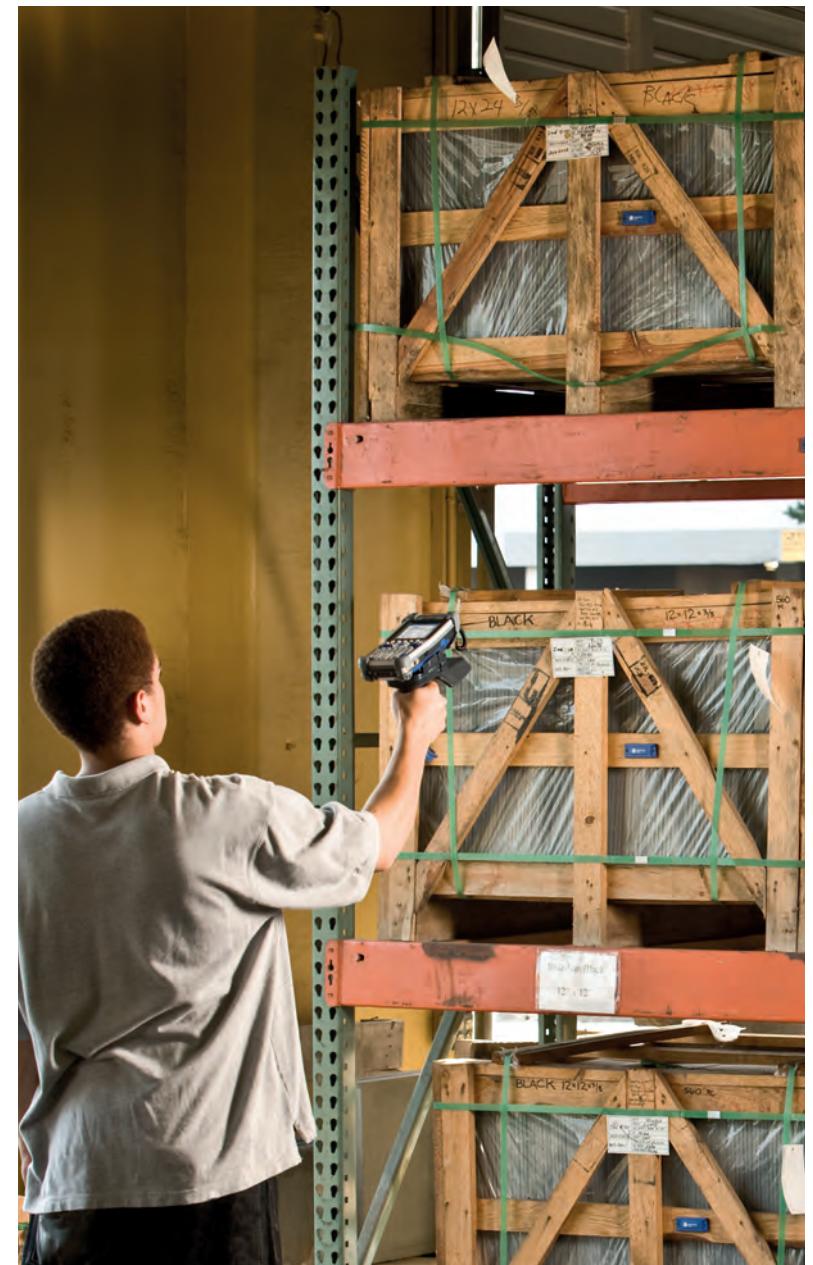

Products At A Glance: Distribution Centre / Warehouse

Industrial Printers						
	PD43	M-Class MK II	PM23c	PM43c	PM43	I-Class MK II
PRODUCT CLASS	4in Direct Thermal or Thermal Transfer Light Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Mid-Range Industrial Printer	2in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Industrial Printer
DISPLAY & INPUT	Colour Display	128 x 64 LCD Graphics	3.5in Color Touchscreen Display or Intuitive Icons	3.5in Color Touchscreen Display or Intuitive Icons	3.5in Color Touchscreen Display or Intuitive Icons	128 x 64 LCD Graphics
MAX. PRINT SPEED	200mm/sec (8 ips)	152 mmmps (6 ips) 254 mmmps (10 ips)	300mm/s (12ips)	300mm/s (12ips)	300mm/s (12ips)	304 mmmps (12 ips)
RESOLUTION	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi) 24 dots/mm(600 dpi)
MAX. PRINT WIDTH	104mm (4.1in)	108 mm (4.25 in)	63mm (2.5in)	115mm (4.52in)	115mm (4.52in)	104.1 mm (4.10 in)
DIMENSIONS (WXHxD)	211 x 249 x 470 mm (8.3 x 9.8 x 18.5in)	259 x 257 x 462 mm (10.21 x 10.10 x 18.19 in)	206 x 181 x 432mm (8.1 x 7.1 x 17.0in)	253 x 181 x 431mm (9.9 x 7.1 x 17.0in)	284 x 295 x 483mm (11.2 x 11.6 x 19.0in)	322.6 x 320.5 x 472.4 mm (12.7 x 12.62 x 18.6)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface
SMART PRINTING LANGUAGES	C# for Printers, Fingerprint	MCL	C# for Printers, Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint	n/a
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Distribution Centre / Warehouse

ENHANCED
VERSION
COMING
SOON!

Industrial Printers



	MP Compact4 Mobile MK II	PX4i	PX6i	H-Class	p1125
PRODUCT CLASS	Direct Thermal Conveyor and Forklift Printer	4in Direct Thermal or Thermal Transfer High Performance Industrial Printer	6in Direct Thermal or Thermal Transfer High Performance Industrial Printer	4in / 6in / 8in Thermal Transfer High Performance Industrial Printer	4in / 6in Direct Thermal (Thermal Transfer Optional) Industrial Printer
DISPLAY & INPUT	Single Multi Function Control Button	Two-Line Text Display	Two-Line Text Display	240 x 320 LCD Graphics	320 x 240 Color Graphic Touchscreen
MAX. PRINT SPEED	125 mmps (5ips)	300mm/s (12ips)	225mm/s (9ips)	304 mmmps (12 ips)	256 mmmps (10 ips)
RESOLUTION	8 dots / mm or 12 dots /mm 203 dpi or 300 dpi	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi)	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi) 24 dots/mm(600 dpi)	11.8 dots/mm (300 dpi)
MAX. PRINT WIDTH	104 mm (4.1 in)	110 mm (4.3in)	167mm (6.5in)	103.9 mm (4.09 in)	108.5 mm (4.27 in) - p1125 173.5mm (6.83 in) p1725
DIMENSIONS (WXHxD)	230 x 105 x 260 mm (9.1 x 4.1 x 10.2 in)	275 x 238 x 482mm (10.8 x 9.4 x 19.0in)	335 x 238 x 482mm (13.2 x 9.4 x 19.0in)	330 x 321 x 480 mm (13 x 12.6 x 18.9 in)	274 x 475 x 302 mm (10.8x 18.7x11.9 in) - p1125 339 x 475 x 302 mm (13.4 x 18.7 x 11.9) - p1725
DEVICE MANAGEMENT SUPPORTED	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated WEB Interface, HP Open View, IBM Tivoli, Standard Managed Print Service Packages
SMART PRINTING LANGUAGES	—	Fingerprint	Fingerprint	MCL	PCL Macro support
ERP COMPATIBILITY	XML for SAP and Oracle	Certified Device Type and XML Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified SAP Device Type, Oracle and Others

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Distribution Centre / Warehouse

Desktop Printers					
	PC42t	PC43d	PC43t	E-Class MK III	w1110
PRODUCT CLASS	4in Thermal Transfer or Direct Thermal Desktop Printer	4in Direct Thermal Desktop Printer	4in Thermal Transfer Desktop Printer	4in Direct Thermal (Thermal Transfer Optional) Desktop Printer	4in Direct Thermal Desktop Printer
DISPLAY & INPUT	Multicolor LED and 1 Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	Monochrome Graphic Display (pro)	2 Button with LEDs
MAX. PRINT SPEED	101.6 mm/s (4.0 ips)	203mm/s (8ips)	203mm/s (8ips)	127 mm/s (5 ips)	102 mmmps (4 ips)
RESOLUTION	8.0 dots/mm (203 dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203 dpi)	11.8 dots / mm (300 dpi)
MAX. PRINT WIDTH	104.1 mm (4.1 in)	106mm (4.17in)	106mm (4.17in)	108 mm (4.25 in)	19 - 110 mm (0.75 - 4.33 in)
DIMENSIONS (WXHxD)	226 x 177 x 297mm (8.9 x 7.0 x 11.7in)	180 x 167 x 215mm (7.1 x 6.6 x 8.4in)	210 x 227 x 281mm (8.3 x 8.9 x 11.1in)	203.5 x 187 x 282 mm (8.01 x 7.36 x 11.10 in)	172 x 211 x 153 mm (6.75 x 8.32 x 6.02 in)
DEVICE MANAGEMENT SUPPORTED	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated WEB Interface, HP Open View, IBM Tivoli, Standard Laser Tools
SMART PRINTING LANGUAGES	Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint	–	PCL Macro Support
ERP COMPATIBILITY	N/A	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified SAP Device Type

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Distribution Centre / Warehouse

Mobile Printers				
	PB22	PB32	PB50	RL4e
PRODUCT CLASS	2in Rugged Mobile Label Printer	3in Rugged Mobile Label Printer	4in Rugged Mobile Label Printer	4in Rugged Mobile Label Printer
DISPLAY & INPUT	2-Line LCD	2-Line LCD	2-Line LCD	LCD Display with 4 Buttons
MAX. PRINT SPEED	10mm/s (4ips)	101mm/s (4ips)	101mm/s (4ips)	102 mm/s (4 ips)
RESOLUTION	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)
MAX. PRINT WIDTH	48mm (1.89in)	72mm (2.83in)	112mm (4.39in)	105 mm (4.12in)
DIMENSIONS (WXHxD)	101 x 176 x 71mm (4.0 x 6.9 x 2.8in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)	160 x 174 x 79mm (6.3 x 6.9 x 3.1in)	166 x 200 x 81 mm (6.5 x 7.9 x 3.2 in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	PrintSet, SmartSystems	PrintSet, SmartSystems	NETira™ Remote Management, NETira™ MD, NETira™ Connect, Airwatch, Wavelink® Avalanche MC
SMART PRINTING LANGUAGES	Fingerprint	Fingerprint	Fingerprint	NETira™ CT Configuration Tool, NETira™ Label Designer, NETira MS – Menu Scripting
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	SAP, Oracle (via scripting)

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Distribution Centre / Warehouse

	Heavy-Duty Industrial Scanners			Heavy-Duty Industrial Scanners / Rugged Retail Scanners	General Purpose Scanners / Light Industrial Scanners/ Rugged Retail Scanners		Wearable Scanners
							
FORM FACTOR	Handheld	Handheld	Handheld	Mobility	Handheld	Handheld	Wearable Ring Scanner
SCANNING TECHNOLOGY	Area-Imaging Scanner with Adapthus*	Area-Imaging Scanner	Full Range Laser Scanner (8.9cm to 16.5m)	Area-Imaging Scanner	Linear-Imaging Scanner	Area-Imaging Scanner	Laser or Area-Imaging Scanner
WIRED OR WIRELESS	Wired (Granit 1980i) or Wireless (Granit 1981i)	Wired or Wireless	Wired	Wireless	Wired	Wired (1900g) Wireless (1902g)	Wireless (8650/8670) Wired (8610/8620) 8610 to pair with Dolphin 70e 8620 to pair with Dolphin 70e & Dolphin 75e
DURABILITY (DROP)	Multiple 2m (6.5ft)	Multiple 2m (6.5ft)	Multiple 2m (6.5ft)	Multiple 2m (6.5ft)	Multiple 1.5m (5ft)	Multiple 2m (6.5ft)	Multiple 1.2m (4ft)
DURABILITY (IP)	IP65	IP54	IP65	IP65	IP41	IP54	IP54
DECODE COMPATIBILITY	1D, PDF417, 2D	1D, PDF, 2D, DPM Marks	1D	SF61B1D:1D SF61BHP/2D: 1D, PDF, 2D	1D, GS1 DataBar	1D, PDF, 2D, Postal, OCR	Wired Ring Scanner: 8610: 1D 8620: 1D, PDF, 2D, OCR BT Ring Scanner: 8650: 1D 8670: 1D, PDF, 2D, OCR
SCANNING SPEED (MOTION TOLERANCE)	Up to 76cm/s (30in/s)	Up to 22cm/s (9in/s)	35 scans/s	Up to 1,270cm/s (500in/s)	Up to 270 scans/s (20in/s)	Up to 610 scans/s (240in/s)	Up to 580cm/sec (228in/s)
COMMUNICATIONS	USB, RS232, Keyboard Wedge	USB, RS232, Keyboard Wedge, Light Pen Wand Emulation	RS232	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232/C, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	Bluetooth, Integrated cable connector for the wired Ring Scanner
SOFTWARE	EZConfig	EasySet	EZConfig	EasySet	EZConfig	EasySet	Scan Wedge
WARRANTY	3 Years (battery 1 Year)	3 Years	3 Years	3 Years	5 years	Wired (1902g): 5 years Wireless (1452g): 3 years	3 years (battery 1 year)

Products At A Glance: Distribution Centre / Warehouse

Vocollect™ Voice and Voice Headsets					
	A730	A720	A710	A500	SRX2
DESIGNED FOR DC VOICE WORKFLOWS	✓	✓	✓	✓	✓
DURABILITY (DROP)	24 Drops from 5ft 12 Drops from 6ft	24 Drops from 5ft 12 Drops from 6ft	24 Drops from 5ft 12 Drops from 6ft	24 Drops from 5ft 12 Drops from 6ft	24 drops from 6 ft. (1.83 m) at low and high operating temperature
DURABILITY (IP)	IP67	IP67	IP67	IP67	IP54
COLD STORAGE	Op. Temp -20° to 50°C	Op. Temp -30° to 50°C	Op. Temp -30° to 50°C	Op. Temp -30° to 50°C	Op. Temp -22° to 50°C
OPERATING SYSTEM	Microsoft Windows CE 7	Microsoft Windows CE 7	Microsoft Windows CE 7	Microsoft Windows CE 6	Microsoft Windows CE 7
WLAN	802.11 a/b/g/n	802.11 a/b/g/n	802.11 a/b/g/n	802.11 b/g	802.11 b/g
PROCESSOR	OMAP 3703 @ 800MHz	OMAP 3703 @ 800MHz	OMAP 3703 @ 800MHz	OMAP 3503 @ 500MHz	OMAP 3503 @ 500MHz
RAM/FLASH	512MB RAM / 1GB Flash	512MB RAM / 1GB Flash	512MB RAM / 1GB Flash	256MB RAM / 512MB Flash	256MB RAM / 512MB Flash
BATTERY	Standard 10 Watt Hour Capacity for 14 Hours Life High Capacity 20 Watt Hour Capacity for 24 Hours Life	Standard 10 Watt Hour Capacity for 14 Hours Life High Capacity 20 Watt Hour Capacity for 24 Hours Life	Standard 10 Watt Hour Capacity for 14 Hours Life High Capacity 20 Watt Hour Capacity for 24 Hours Life	4400mAh	High performance battery. Typically provides 10-20 hours of service
HEADSET SUPPORT	Vocollect SRX2 Wireless	Vocollect SRX2 Wireless/ Vocollect SR Wired	Vocollect SRX2 Wireless	Vocollect SRX2 Wireless/ Vocollect SR Wired	N/A
APPLICABLE SOFTWARE	Vocollect VoiceClient, VoiceCatalyst	Vocollect VoiceClient, VoiceCatalyst	Vocollect VoiceClient, VoiceCatalyst	Vocollect VoiceClient, VoiceCatalyst	Vocollect VoiceClient, VoiceCatalyst, Vocollect Voice M




Products At A Glance: Retail

	Dolphin 6110	Dolphin 60s	Dolphin 70e Black	Mobile Computers	Dolphin 75e	CN51
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.5m (5ft)
DURABILITY (TUMBLE)	> 500 tumbles @ 1m	800 0.5m tumbles	>1000 0.5m tumbles (std. battery) >300 0.5m tumbles (ext. battery)	>1000 0.5m tumbles (std. battery) >300 0.5m tumbles (ext. battery)	>1000 0.5m tumbles (std. battery) >300 0.5m tumbles (ext. battery)	1,000 0.5m tumbles
DURABILITY (IP)	IP54	IP54	IP67	IP67	IP67	IP64
DISPLAY	2.8in QVGA resistive	2.8in QVGA	4.3" WVGA	4.3" WVGA	4" WVGA	4" WVGA
KEYPAD	Numeric	Numeric + QWERTY	On-screen keypad, programmable physical buttons	On-screen keypad, programmable physical buttons	On-screen keypad, programmable physical buttons	Numeric / Qwerty
SCANNING OPTIONS	Standard Range 1D/2D Laser 1D	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies Can be paired with 8620 Wired Ring Scanner (see page 12).	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies Can be paired with 8620 Wired Ring Scanner (see page 12)	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies Can be paired with 8620 Wired Ring Scanner (see page 12)	Integrated imager for 1D and 2D barcode symbologies
SCAN HANDLE OPTIONS	—	—	—	✓	✓	✓
OPERATING SYSTEM	Windows Embedded Handheld 6.5	Windows Embedded Handheld 6.5	Windows Embedded Handheld 6.5 - Android 4.0	Windows® Embedded 8.1 Handheld and Android 4.4	Windows Embedded Handheld 6.5 and Android 4.2	Windows Embedded Handheld 6.5 and Android 4.2
WWAN	—	GSM/GPRS/EDGE Multimode UMTS/HSPA	3.9G - GSM/UMTS/HSPA+ / GPRS/EDGE/Voice & Data	—	GSM/HSPA+/HSDPA HSUPA/WCDMA/EDGE/GPRS Voice & Data	GSM/HSPA+/HSDPA HSUPA/WCDMA/EDGE/GPRS Voice & Data
GPS	—	✓	Integrated Assisted-GPS (A-GPS)	—	Integrated Assisted-GPS (A-GPS) GLONASS support	Integrated Assisted-GPS (A-GPS) GLONASS support
WLAN	802.11 a/b/g/n	802.11 b/g/n	802.11 a/b/g/n	802.11 a/b/g/n/ac	IEEE 802.11 a/b/g/n IEEE 802.11 b/g/n (3G version)	IEEE 802.11 a/b/g/n IEEE 802.11 b/g/n (3G version)
NFC	—	—	✓	✓	—	—
PROCESSOR	800MHz	800 MHz	1GHz single core	2.3 GHZ quad core Qualcomm	1.5GHz dual core	1.5GHz dual core
RAM/FLASH	512MB / 512MB	256MB / 512MB	512MB / 1GB	2GB X 16GB	1GB / 16 GB	1GB / 16 GB
USER ACCESSIBLE SD CARD	✓	✓	✓	✓	✓	✓
RFID SUPPORT	—	—	—	—	—	—
BATTERY	Standard: 3.7V, 2200mAh; Extended: 3.7V, 3300mAh	3.7 V, 3340 mAh	Standard: 3.7 V, 1670 mAh; Extended: 3.7 V, 3340 mAh	Standard: 3.7 V, 1670 mAh; Extended: 3.7 V, 3340 mAh	3.7V, 3900 mAh	3.7V, 3900 mAh
APPLICABLE SOFTWARE	Easy DL for Mobility; Remote MasterMind; Skynax® Mobility Management	Honeywell Powertools® and Demos / Remote MasterMind™ 4.0 for Mobility remote device management	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Microsoft® Windows® Embedded Handheld 6.5 Honeywell SDK for Google® Android™ version 4.0	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™	Device Management: Intermec SmartSystems™ ScanNGo. CloneNGo Device Health Monitoring HTML5 browser Skynax REM	Device Management: Intermec SmartSystems™ ScanNGo. CloneNGo Device Health Monitoring HTML5 browser Skynax REM

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Retail

Mobile Computers		
	Dolphin CT50	CK3R
DURABILITY (DROP)	Multiple 1.5m (5ft)	Multiple 1.2m (4ft)
DURABILITY (TUMBLE)	1,000 1m tumbles	> 1,000 tumbles @ 0.5m
DURABILITY (IP) & OPERATING TEMP	IP67	IP54, -10°C
DISINFECTANT-READY HOUSING	opt	—
DISPLAY	4.7" HD	3.5in QVGA resistive
KEYPAD	On-screen keypad, programmable physical buttons	Numeric + QWERTY
SCANNING OPTIONS	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	Standard range 1D/2D imager, LED aimer
SCAN HANDLE OPTIONS	✓	✓
OPERATING SYSTEM	Windows® Embedded 8.1 Handheld and Android 4.4	Windows Embedded Handheld 6.5
WWAN	LTE (4G) Tri-Band UMTS/HSPA+ (3G) Quad Band GSM/GPRS/EDGE Quad Band	—
GPS	Integrated Assisted-GPS (A-GPS) GLONASS support	—
WLAN	802.11 a/b/g/n/ac	802.11 b/g/n, 2.4 GHz only
NFC	✓	—
PROCESSOR	2.3 GHZ quad core Qualcomm	1GHz
RAM/FLASH	2GB X 16GB	256MB / 512MB
USER ACCESSIBLE SD CARD	✓	✓
RFID SUPPORT	—	—
BATTERY	3.6V, 4040mAh	Standard: 3.7V, 2000mAh; Replacement batteries also include 3.7V, 5100mAh extended battery or 3.7V, 5200mAh smart battery
APPLICABLE SOFTWARE	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™	Client Pack (optional); SmartSystems™; CloneNGo; ScanNGo; Session Persistence Server; Enterprise Browser; Launcher; HTML5 Browser; Remote MasterMind

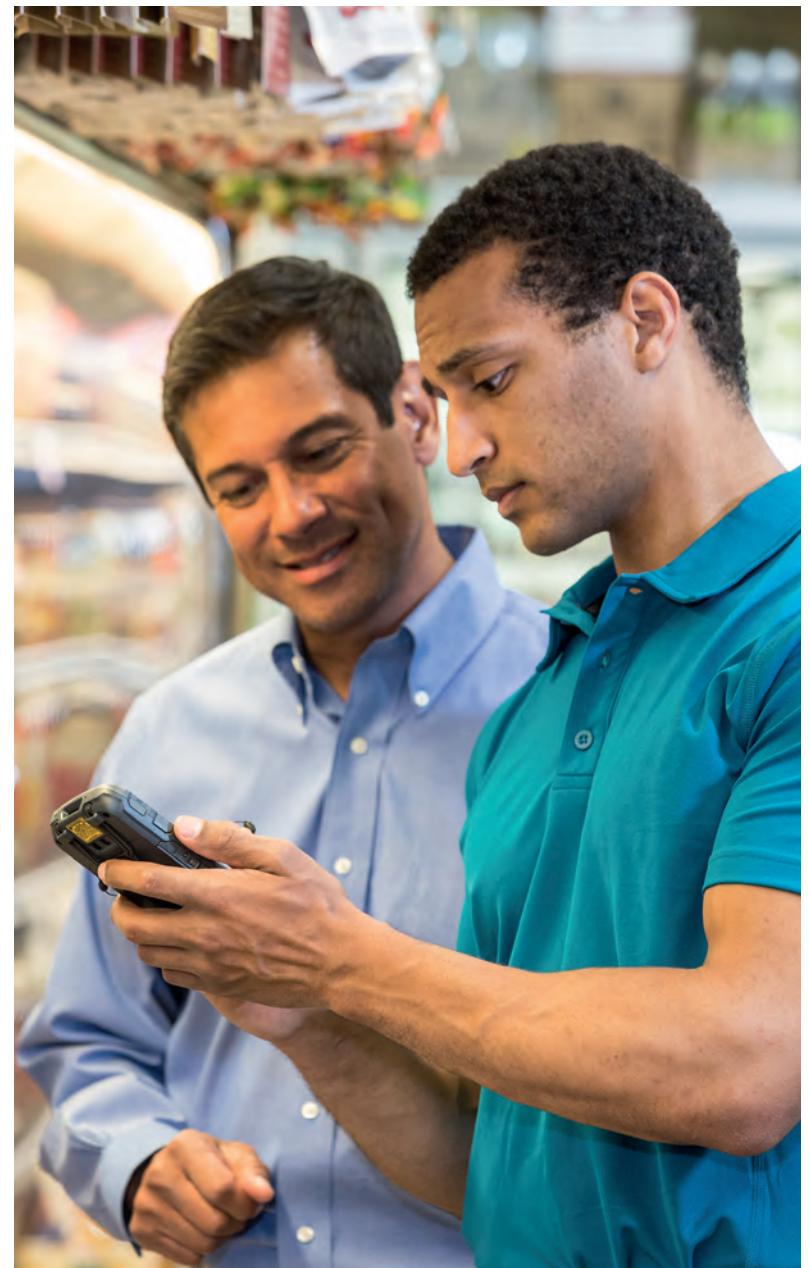

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Retail

Enterprise Sleds for Apple®		
	Captuvo SL22 / SL42	Captuvo SL62
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)
DURABILITY (TUMBLE)	—	—
DURABILITY (IP)	IP30	IP30
ENCRYPTION-READY MAGNETIC STRIPE READER	Optional	Optional
KEYPAD	Touch Only	Touch Only
SCANNING OPTIONS	Standard Range 2D	Standard Range 2D
EASYDL™	Reduces transaction time by 95%	Reduces transaction time by 95%
OPERATING SYSTEM	iOS	iOS
APPLE® DEVICE	SL22: iPod touch® 5th Gen SL42: iPhone® 5, iPhone® 6 and 6 Plus	iPad mini® and iPad mini with Retina display
BATTERY	3.7V, 1150mAh 3.7V, 3340mAh	3.7V, 1150mAh




Products At A Glance: Retail

Industrial Printers							
	PD43	M-Class MK II	PM23c	PM43c	PM43	I-Class MK II	p1120n
PRODUCT CLASS	4in Direct Thermal or Thermal Transfer Light Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Mid-Range Industrial Printer	2in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Industrial Printer
DISPLAY & INPUT	Colour Display	128 x 64 LCD Graphics	3.5in Color Touchscreen Display or Intuitive Icons	3.5in Color Touchscreen Display or Intuitive Icons	3.5in Color Touchscreen Display or Intuitive Icons	128 x 64 LCD Graphics	320 x 240 Color Graphic Touchscreen
MAX. PRINT SPEED	200mm/sec (8 ips) 254 mmmps (10 ips)	152 mmmps (6 ips) 254 mmmps (10 ips)	300mm/s (12ips)	300mm/s (12ips)	300mm/s (12ips)	304 mmmps (12 ips)	152 mmmps (6 ips) - p1115s 203 mmmps (8 ips) - p1120n
RESOLUTION	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi) 24 dots/mm(600 dpi)	23.6 dots / mm (600 dpi) - p1115s 11.8 dots/mm (300 dpi) - p1120n
MAX. PRINT WIDTH	104mm (4.1in)	108 mm (4.25 in)	63mm (2.5in)	115mm (4.52in)	115mm (4.52in)	104.1 mm (4.10 in)	105.7mm (4.16in) - p1115s 108.5 mm (4.27 in) - p1120n
DIMENSIONS (WXHxD)	211 x 249 x 470 mm (8.3 x 9.8 x 18.5in)	259 x 257 x 462 mm (10.21x10.10x18.19 in)	206 x 181 x 432mm (8.1 x 7.1 x 17.0in)	253 x 181 x 431mm (9.9 x 7.1 x 17.0in)	284 x 295 x 483mm (11.2 x 11.6 x 19.0in)	322.6 x 320.5 x 472.4 mm (12.7 x 12.62 x 18.6)	274 x 475 x 302 mm (10.8x18.7x11.9 in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated WEB Interface, HP Open View, IBM Tivoli, Standard Managed Print Service Packages
SMART PRINTING LANGUAGES	C# for Printers, Fingerprint	MCL	C# for Printers, Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint	n/a	PCL Macro support
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified SAP Device Type, Oracle and Others

Products At A Glance: Retail

Desktop Printers				
	PC42t	PC23d	PC43d	PC43t
PRODUCT CLASS	4in Thermal Transfer or Direct Thermal Desktop Printer	2in Direct Thermal Desktop Printer	4in Direct Thermal Desktop Printer	4in Thermal Transfer Desktop Printer
DISPLAY & INPUT	Multicolor LED and 1 Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button
MAX. PRINT SPEED	101.6 mm/s (4.0 ips)	203mm/s (8ips)	203mm/s (8ips)	203mm/s (8ips)
RESOLUTION	8.0 dots/mm (203 dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)
MAX. PRINT WIDTH	104.1 mm (4.1 in)	56mm (2.2in)	106mm (4.17in)	106mm (4.17in)
DIMENSIONS (WXHxD)	226 x 177 x 297mm (8.9 x 7.0 x 11.7in)	125 x 177 x 215mm (4.9 x 6.9 x 8.5in)	180 x 167 x 215mm (7.1 x 6.6 x 8.4in)	210 x 227 x 281mm (8.3 x 8.9 x 11.1in)
DEVICE MANAGEMENT SUPPORTED	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink®, Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™
SMART PRINTING LANGUAGES	Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint
ERP COMPATIBILITY	N/A	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS

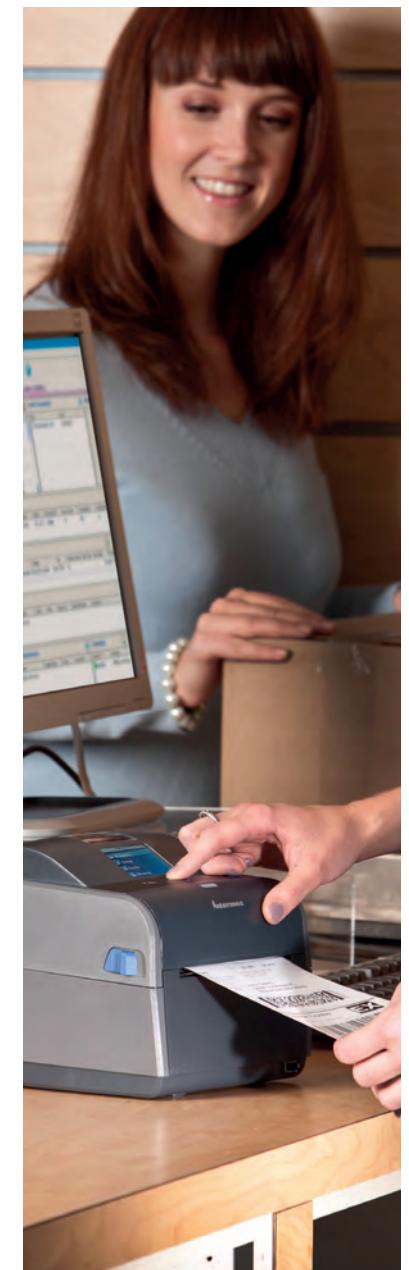

Products At A Glance: Retail

Mobile Printers						
	PR2	PR3	LP3	PB22	PB32	RL3e
PRODUCT CLASS	2in Durable Mobile Receipt Printer	3in Durable Mobile Receipt Printer	3in High-Volume Portable Label Printer	2in Rugged Mobile Label Printer	3in Rugged Mobile Label Printer	3in Rugged Mobile Label Printer
DISPLAY & INPUT	3 Multi-Function Status LEDs	3 Multi-Function Status LEDs	LED Indicators and 3 Button Keypad	2-Line LCD	2-Line LCD	LCD backlit display (128 x 64): printer information, setting, status w/ 4 button keypad: power, media feed, menu, wireless radio
MAX. PRINT SPEED	56mm/s (2ips)	56mm/s (2ips)	51 mm/s (2 ips)	101mm/s (4ips)	101mm/s (4ips)	102 mm/s (4 ips)
RESOLUTION	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)
MAX. PRINT WIDTH	48mm (1.89in)	72mm (2.83in)	88.9 mm (3.5 in)	48mm (1.89in)	72mm (2.83in)	79 mm (3.125 in)
DIMENSIONS (WXHxD)	103 x 61 x 139mm (4.1 x 2.4 x 5.5in)	127 x 58 x 156mm (5.0 x 2.3 x 6.1in)	199.6 x 157.5 x 131.3 mm (7.86 x 6.2 x 5.17 in)	101 x 176 x 71mm (4.0 x 6.9 x 2.8in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)	142 x 193 x 81 mm (4.6 x 7.6 x 3.2 in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	PrintSet, SmartSystems	Datamax O'Neil RMS, Wavelink®, Avalanche MC	PrintSet, SmartSystems	PrintSet, SmartSystems	NETira™ Remote Management, NETira™ MD, NETira™ Connect, Airwatch, Wavelink® Avalanche MC
SMART PRINTING LANGUAGES	–	–	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility	Fingerprint	Fingerprint	NETira™ CT Configuration Tool, NETira™ Label Designer, NETira MS – Menu Scripting

Products At A Glance: Retail


General Purpose Scanners						
	Eclipse 5145	Voyager 9520 Voyager 9540	Voyager 1200g/1202g	Voyager 1202g-BF	Voyager 1250g	Fusion 3780
FORM FACTOR	Handheld	Handheld	Handheld	Handheld	Handheld	Handheld
SCANNING TECHNOLOGY	Single-Line Laser with CodeGate®	Single-Line Laser with CodeGate®	Single-Line Laser with CodeGate®	Single-Line Laser with CodeGate®, with an innovative Battery Free technology	Single-Line Laser with CodeGate®	Omnidirectional Laser Scanner with CodeGate®
WIRED OR WIRELESS	Wired	Wired	Wired (1200g) Wireless (1202g)	Wireless	Wired	Wired
DURABILITY (DROP)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)
DURABILITY (IP)	Sealed to resist airborne particulate contaminants	Sealed to resist airborne particulate contaminants	IP41	IP42	IP41	Sealed to resist airborne particulate contaminants
DECODE COMPATIBILITY	1D, GS1 DataBar	1D, GS1 DataBar	1D, GS1 DataBar	1D, GS1 DataBar	1D, GS1 DataBar	1D, GS1 DataBar
SCANNING SPEED (MOTION TOLERANCE)	72 scans/s	73 scans/s	100 scans/s	100 scans/s	100 scans/s	Omnidirectional: 1,333 scans/s Single Line: 67 scans/s
COMMUNICATIONS	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485), Laser Emulation, Light Pen Wand Emulation	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)
SOFTWARE	MetroSet2	MetroSet3	EZConfig	EZConfig	EZConfig	MetroSet2
WARRANTY	3 years	5 years	Wired (1200): 5 years Wireless (1202): 3 years	3 years	5 years	

Products At A Glance: Retail

General Purpose Scanners						
	Voyager 1400g	Voyager 1450g/1452g	SG20	Xenon 1900g / 1902g	Hyperion 1300g	SF61B
FORM FACTOR	Handheld	Handheld	Handheld	Handheld	Handheld	Mobility
SCANNING TECHNOLOGY	Area-Imaging Scanner	Area-Imaging Scanner	Area-Imaging Scanner	Area-Imaging Scanner with Adaptus®	Linear-Imaging Scanner	Area-Imaging Scanner
WIRED OR WIRELESS	Wired	Wired (1450g) Wireless (1452g)	Wired & Wireless	Wired (1900g) Wireless (1920g)	Wired	Wireless
DURABILITY (DROP)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.2m (4ft)	Multiple 1.8m (6ft)	Multiple 1.5m (5ft)	Multiple 2.0m (6.5ft)
DURABILITY (IP)	IP41	IP40 (1450g) IP42 (1452g)	IP30	IP41	IP41	IP65
DECODE COMPATIBILITY	1D version: 1D 2D version: 1D, PDF, 2D	1D version: 1D 2D version: 1D, PDF, 2D	SG20x1D: 1D SG20xHP: 1D, PDF417, 2D	1D, PDF, 2D, Postal, OCR	1D, GS1 DataBar	SF61B1D: 1D SF61BHP/2D: 1D, PDF, 2D
SCANNING SPEED (MOTION TOLERANCE)	Up to 10cm/s (4in/s)	Up to 10cm/s (4in/s)	Up to 1,270cm/s (500in/s)	Up to 610cm/s (240in/s)	Up to 270 scans/s (20in/s)	Up to 1,270cm/s (500in/s)
COMMUNICATIONS	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)
SOFTWARE	EZConfig	EZConfig	EasySet	EasySet	EZConfig	EasySet
WARRANTY	5 years	Wired (1450g): 5 years Wireless (1452g): 3 years	Wired (SG20T): 5 years Wireless (SG20B): 3 years	Wired (1902g): 5 years Wireless (1452g): 3 years	5 years	3 years

Products At A Glance: Retail

Mobile Scanning	
	
	Voyager 1602g
FORM FACTOR	Handheld
SCANNING TECHNOLOGY	Area-Imaging Scanner
WIRED OR WIRELESS	Wireless
DURABILITY (DROP)	Multiple 1.4m (4ft)
DURABILITY (IP)	IP42
DECODE COMPATIBILITY	1D version: 1D 2D version: 1D, PDF, 2D
SCANNING SPEED (MOTION TOLERANCE)	Up to 10cm/s (4in/s)
COMMUNICATIONS	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)
SOFTWARE	EZConfig
WARRANTY	3 years

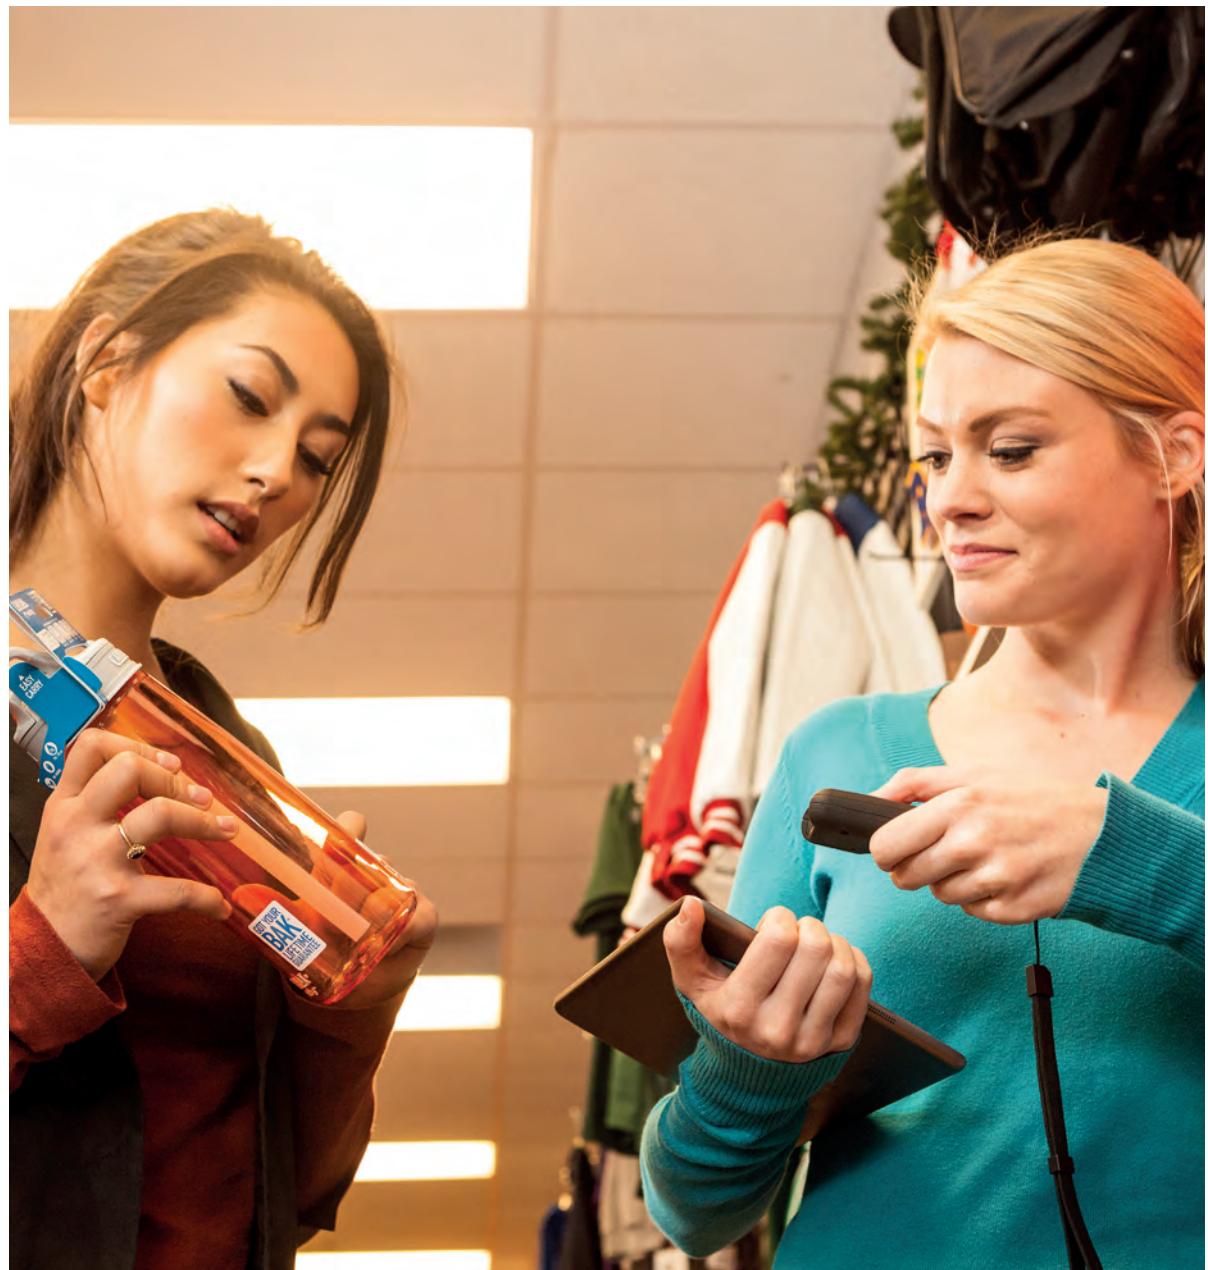

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Retail

Hands-Free Scanners						
	Stratos 2400 / 2700	Solaris 7820	Solaris 7980g	Orbit 7120 / OrbitCG 7180	Genesis 7580g	Vuquest 3310g / 3320g
FORM FACTOR	Hands-Free	Hands-Free	Hands-Free	Hands-Free	Hands-Free	Hands-Free
SCANNING TECHNOLOGY	Omnidirectional (Stratos 2400) Hybrid: Omnidirectional + Area Imager (Stratos 2700)	Omnidirectional Laser Scanner	Area-Imaging Scanner with Adaptaus®	Omnidirectional Laser Scanner with CodeGate®	Area-Imaging Scanner with Adaptaus®	Area-Imaging Scanner
WIRED OR WIRELESS	Wired	Wired	Wired	Wired	Wired	Wired
DURABILITY (DROP)	–	–	–	1.2m (4ft)	1.5m (5ft)	1.5m (5ft)
DURABILITY (IP)	Sealed to resist airborne particulate contaminants, IP42 (Stratos 2700)	Sealed to resist airborne particulate contaminants	IP5X	Sealed to resist airborne particulate contaminants	Sealed to resist airborne particulate contaminants	IP53
DECODE COMPATIBILITY	1D, GS1 DataBar (Stratos 2400) 1D, GS1 DataBar, 2D (Stratos 2700)	1D, GS1 DataBar 1D, GS1	1D, PDF, 2D, Postal, GS1, OCR	1D, GS1 DataBar 1D, GS1	1D, PDF, 2D, Postal, OCR	1D, PDF, 2D, Postal, OCR
SCANNING SPEED (MOTION TOLERANCE)	5400 scans/s (Stratos 2400) 21500 scans/s (Stratos 2700)	1,800 scans/s	300cm/s (118 in/s)	1,120 scans/s	200cm/s (78in/s)	270cm/s (106in/s)
COMMUNICATIONS	USB, RS232, IBM46xx(RS485)	USB, RS232, Keyboard Wedge, IBM 46xx(RS485)	USB, RS232, Keyboard Wedge, IBM 46xx(RS485)	USB, RS232, Keyboard Wedge, IBM 46xx(RS485), Light Pen Wand Emulation	USB, RS232, Keyboard Wedge, IBM 46xx(RS485)	USB, RS232, Keyboard Wedge
SOFTWARE	MetroSet2, EZConfig	MetroSet2	EZConfig	MetroSet2	EZConfig	EZConfig
WARRANTY	2 years	2 years	3 years	3 years	2 years	2 years

NEW VERSION
3320G
COMING
SOON!

Products At A Glance: Healthcare

Dolphin CT50h	
DURABILITY (DROP)	Multiple 1.2 m (4 ft)
DURABILITY (TUMBLE)	500 (1 m) tumbles
DURABILITY (IP) & OPERATING TEMP	IP54
DISINFECTANT-READY HOUSING	✓
DISPLAY	4.7" HD
KEYPAD	On-screen keypad, programmable physical buttons
SCANNING OPTIONS	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies
SCAN HANDLE OPTIONS	✓
OPERATING SYSTEM	Android 4.4
WLAN	802.11 a/b/g/n/ac
NFC	✓
PROCESSOR	2.3 GHZ quad core Qualcomm
RAM/FLASH	2GB / 16GB
USER ACCESSIBLE SD CARD	✓
BATTERY	3.6V, 4040mAh
APPLICABLE SOFTWARE	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™



This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Healthcare

Enterprise Sleds for Apple®		
	Captuvo SL22h	Captuvo SL42h
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)
DURABILITY (TUMBLE)	—	—
DURABILITY (IP)	IP54	IP54
DISINFECTANT-READY HOUSING	✓	✓
KEYPAD	Touch Only	Touch Only
SCANNING OPTIONS	High Density 1D/2D	High Density 1D/2D
EASYDL™	Reduces transaction time by 95%	Reduces transaction time by 95%
OPERATING SYSTEM	iOS	iOS
APPLE® DEVICE	iPod Touch 5th Generation	iPhone 5th generation, 5s and 5c
BATTERY	Standard: 3.7V, 1670mAh Extended: 3.7V, 3340mAh	Standard: 3.7V, 1670mAh Extended: 3.7V, 3340mAh



Products At A Glance: Healthcare

	Industrial Printers		Mobile Printers	
	M-Class MK II	P1115s	PB22	PB32
PRODUCT CLASS	4in Direct Thermal (Thermal Transfer Optional) Mid-Range Industrial Printer	4in Direct Thermal (Thermal Transfer Optional) Industrial Printer	2in Rugged Mobile Label Printer	3in Rugged Mobile Label Printer
DISPLAY & INPUT	128 x 64 LCD Graphics	320 x 240 Color Graphic Touchscreen	2-Line LCD	2-Line LCD
MAX. PRINT SPEED	152 mmmps (6 ips) 254 mmmps (10 ips)	152 mmmps (6 ips) - p1115s 203 mmmps (8 ips) - p1120n	101mm/s (4ips)	101 mm/s (4ips)
RESOLUTION	8 dots/mm (203 dpi) 11.8 dots/mm (300 dpi)	23.6 dots / mm (600 dpi) - p1115s 11.8 dots/mm (300 dpi) - p1120n	8 dots/mm (203dpi)	8 dots/mm (203dpi)
MAX. PRINT WIDTH	108 mm (4.25 in)	105.7mm (4.16in) - p1115s 108.5 mm (4.27 in) - p1120n	48mm (1.89in)	72mm (2.83in)
DIMENSIONS (WXHxD)	259 x 257 x 462 mm (10.21 x 10.10 x 18.19 in)	274 x 475 x 302 mm (10.8x 18.7x11.9 in)	101 x 176 x 71mm (4.0 x 6.9 x 2.8in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)
DEVICE MANAGEMENT SUPPORTED	Integrated Web Interface	Integrated WEB Interface, HP Open View, IBM Tivoli, Standard Managed Print Service Packages	PrintSet, SmartSystems	PrintSet, SmartSystems
SMART PRINTING LANGUAGES	MCL	PCL Macro support	Fingerprint	Fingerprint
ERP COMPATIBILITY	XML for SAP and Oracle	Certified SAP Device Type, Oracle and Others	–	–

Positive Patient Identification with Intermec by Honeywell Wristbands

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.


Products At A Glance: Healthcare

Desktop Printers					
	PC23d	PC43d	PC43t	E-Class MK III	w1110
PRODUCT CLASS	2in Direct Thermal Desktop Printer	4in Direct Thermal Desktop Printer	4in Thermal Transfer Desktop Printer	4in Direct Thermal (Thermal Transfer Optional) Desktop Printer	4in Direct Thermal Desktop Printer
DISPLAY & INPUT	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	Monochrome Graphic Display (pro)	2 Button with LEDs
MAX. PRINT SPEED	203mm/s (8 ips)	203mm/s (8ips)	203mm/s (8ips)	127 mm/s (5 ips)	102 mmmps (4 ips)
RESOLUTION	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203 dpi)	11.8 dots / mm (300 dpi)
MAX. PRINT WIDTH	56mm (2.2in)	106mm (4.17in)	106mm (4.17in)	108 mm (4.25 in)	19 - 110 mm (0.75 - 4.33 in)
DIMENSIONS (WXHxD)	125 x 177 x 215mm (4.9 x 6.9 x 8.5in)	180 x 167 x 215mm (7.1 x 6.6 x 8.4in)	210 x 227 x 281mm (8.3 x 8.9 x 11.1in)	203.5 x 187 x 282 mm (8.01 x 7.36 x 11.10 in)	172 x 211 x 153 mm (6.75 x 8.32 x 6.02 in)
DEVICE MANAGEMENT SUPPORTED	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated WEB Interface, HP Open View, IBM Tivoli, Standard Laser Tools
SMART PRINTING LANGUAGES	C# for Printers, Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint		PCL Macro Support
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	XML for SAP and Oracle	Certified SAP Device Type

Products At A Glance: Healthcare

	Rugged Healthcare Scanners		Hands-Free Healthcare Scanners	
	Xenon 1900h	SF61BHC	Genesis 7580	Vuquest 3310g / 3320g
FORM FACTOR	Handheld	Mobility	Hands-Free	Hands-Free
SCANNING TECHNOLOGY	Area-Imaging Scanner with Adaptus®	Area-Imaging Scanner	Area-Imaging Scanner with Adaptus®	Area-Imaging Scanner
WIRED OR WIRELESS	Wired or Wireless	Wireless	Wired	Wired
DURABILITY (DROP)	Multiple 1.8m (6ft)	Multiple 2.0m (6.5ft)	1.5m (5ft)	1.5m (5ft)
DURABILITY (IP)	IP41	IP64	Sealed to resist airborne particulate contaminants	IP53
DECODE COMPATIBILITY	1D, PDF, 2D, Postal, OCR	SF61B1D: 1D SF61BHP/2D: 1D, PDF, 2D	1D, PDF, 2D, Postal, OCR	1D, PDF, 2D, Postal, OCR
SCANNING SPEED (MOTION TOLERANCE)	Up to 610cm/s (240in/s)	Up to 1,270cm/s (500in/s)	200cm/s (78in/s)	270cm/s (106in/s)
COMMUNICATIONS	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge
SOFTWARE	EZConfig	EasySet	EZConfig	EZConfig
WARRANTY	Wired (1900h): 5 years Wireless (1902h): 3 years	3 years	2 years	2 years

NEW VERSION
3320G
COMING
SOON!

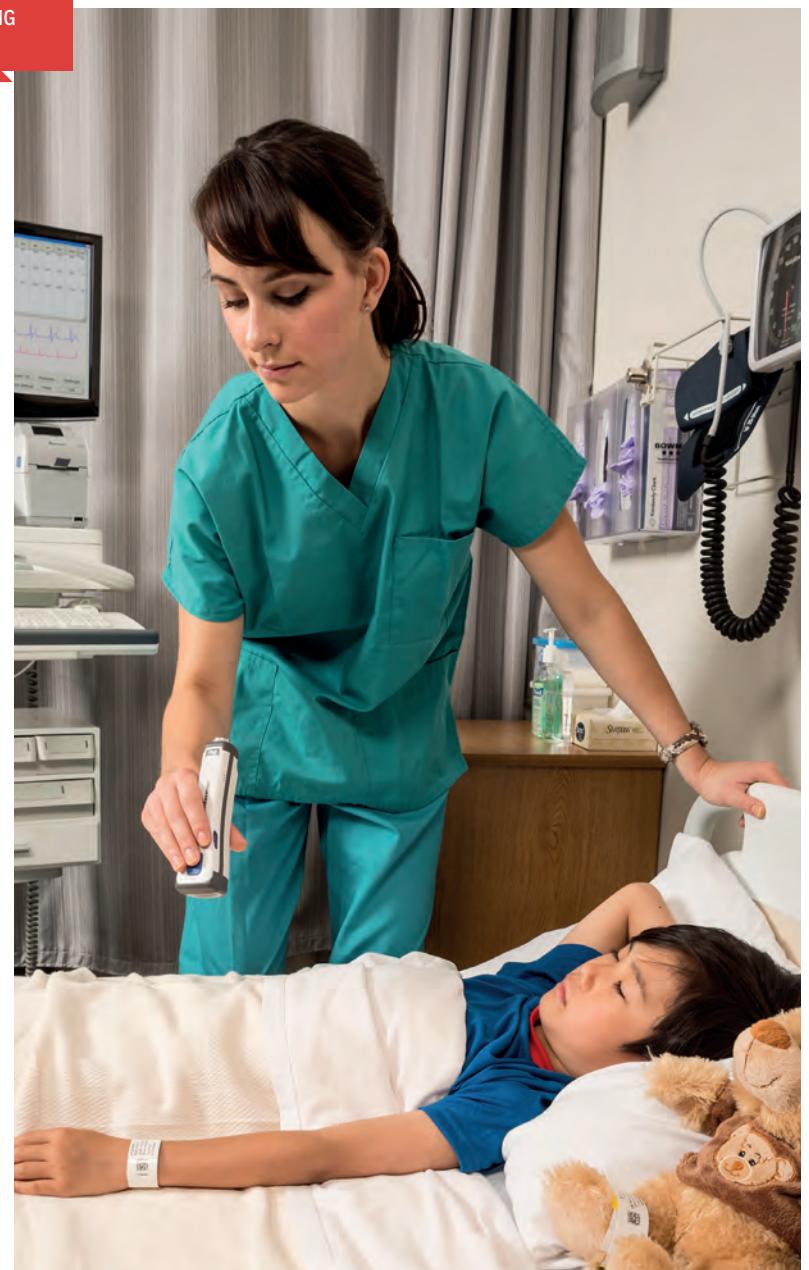

Products At A Glance: T&L / Postal / Courier

Mobile Computers					
					
	Dolphin 60s	Dolphin 70e Black	Dolphin CT50	CN51	Dolphin 99EX
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	Multiple 1.8m (6ft)
DURABILITY (TUMBLE)	800 0.5m tumbles	250 0.5m tumbles	1,000 1m tumbles	1,000 0.5m tumbles	> 2,000 tumbles @ 1m
DURABILITY (IP)	IP54	IP67	IP67	IP64	IP67
DISPLAY	2.8in QVGA	4.3in WVGA	4.7" HD	4in WVGA resistive	3.7in VGA resistive
KEYPAD	Numeric + QWERTY	On-screen with 5 dedicated physical buttons	On-screen keypad, programmable physical buttons	27- key Numeric / 43- key QWERTY with backlit keypads	Alphanumeric, Alpha shifted numeric, Numeric shifted
SCANNING OPTIONS	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	EA30 or EA31 integrated imager reader for 1D, 2D barcode symbologies	High Density 1D/2D Standard Range 1D/2D Extended Range 1D/2D
SCAN HANDLE OPTIONS	–	–	✓	✓	✓
OPERATING SYSTEM	Windows Embedded Handheld 6.5	Windows Embedded Handheld 6.5, Android 4.0	Windows® Embedded 8.1 Handheld and Android 4.4	Windows Embedded Handheld 6.5, Android 4.2	Windows Embedded Handheld 6.5
WWAN	GSM/GPRS/EDGE Multimode UMTS/HSPA	1. 3.9G - GSM/UMTS/HSPA+/GPRS/EDGE/Voice & Data 2. 3.9G – HSPA+/UMTS GSM/GPRS/EDGE and EVDO	LTE (4G) Tri-Band UMTS/HSPA+ (3G) Quad Band GSM/GPRS/EDGE Quad Band	1. GSM/HSPA+/HSDPA HSUPA/WCDMA/EDGE/GPRS Voice & Data. 2. CDMA/EVDO Voice & Data	GSM (Voice and Data): 3.9G - HSPA+, GSM/GPRS/EDGE
GPS	✓	Integrated Assisted-GPS (A-GPS)	Integrated Assisted-GPS (A-GPS) GLONASS support	Integrated Assisted-GPS (A-GPS) GLONASS support	✓
WLAN	802.11 b/g/n	IEEE 802.11 a/b/g/n	802.11 a/b/g/n/ac	IEEE 802.11 a/b/g/n IEEE 802.11 b/g/n (3G version)	802.11 a/b/g/n
NFC	–	✓	✓	–	–
PROCESSOR	800 MHz	1GHz single core TI OMAP	2.3 GHZ quad core Qualcomm	1.5GHz dual core TI OMAP 4470	1GHz
RAM/FLASH	256MB / 512MB	512MB / 1GB	2GB / 16GB	1GB / 16 GB	512MB / 1GB
USER ACCESSIBLE SD CARD	✓	✓	✓	✓	✓
BATTERY	3.7 V, 3340 mAh	Standard: Li-ion 3.7 V, 1670 mAh; Extended: Li-ion 3.7 V, 3340 mAh. Standard: 7.5 hrs; Extended: 12 hrs.	3.6V, 4040mAh	Smart Battery Pack: 3.7V, 3900 mAh;	Standard: 3.7V, 3060mAh; Extended: 3.7V, 5000mAh
APPLICABLE SOFTWARE	Honeywell Powertools® and Demos / Remote MasterMind™ 4.0 for Mobility remote device management	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Microsoft® Windows® Embedded Handheld 6.5 Honeywell SDK for Google® Android™ version 4.0	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™	Device Management: Intermec SmartSystems™; ScanNGo; CloneNGo; Device Health Monitoring; HTML5 browser; Skynax; REM	ClientMax for Dolphin; EZConfig for Mobility; Remote MasterMind; Skynax® for Mobility Management

Products At A Glance: T&L / Postal / Courier

	Industrial Printers		Desktop Printers		
	PD43	PM43	PC42t	PC43d	PC43t
PRODUCT CLASS	4in Direct Thermal or Thermal Transfer Light Industrial Printer	4in Direct Thermal or Thermal Transfer Mid-Range Industrial Printer	4in Thermal Transfer or Direct Thermal Desktop Printer	4in Direct Thermal Desktop Printer	4in Thermal Transfer Desktop Printer
DISPLAY & INPUT	Colour Display	3.5in Color Touchscreen Display or Intuitive Icons	Multicolor LED and 1 Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button	2.3in Color Display with 8 Buttons and Print/Feed Button, or Intuitive Icons with Print/Feed Button
MAX. PRINT SPEED	200mm/sec (8 ips)	300mm/s (12 ips)	101.6 mm/s (4.0 ips)	203mm/s (8 ips)	203mm/s (8 ips)
RESOLUTION	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi) 11.8 dots/mm (300dpi) 16 dots/mm (406dpi)	8.0 dots/mm (203 dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)	8 dots/mm (203dpi), 11.8 dots/mm (300dpi)
MAX. PRINT WIDTH	104mm (4.1in)	115mm (4.52in)	104.1 mm (4.1 in)	106mm (4.17in)	106mm (4.17in)
DIMENSIONS (WXHxD)	211 x 249 x 470 mm (8.3 x 9.8 x 18.5in)	284 x 295 x 483mm (11.2 x 11.6 x 19.0in)	226 x 177 x 297mm (8.9 x 7.0 x 11.7in)	180 x 167 x 215mm (7.1 x 6.6 x 8.4in)	210 x 227 x 281mm (8.3 x 8.9 x 11.1in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink® Avalanche™	Integrated Web Interface	Integrated Web Interface, SmartSystems™, Wavelink®, Avalanche™	Integrated Web Interface, SmartSystems™, Wavelink®, Avalanche™
SMART PRINTING LANGUAGES	C# for Printers, Fingerprint	C# for Printers, Fingerprint	Fingerprint	C# for Printers, Fingerprint	C# for Printers, Fingerprint
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML- Enabled for SAP® All, Oracle® WMS	N/A	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: T&L / Postal / Courier

Mobile Printers				
	PB50	PB51	MF2te	MF4te
PRODUCT CLASS	4in Rugged Mobile Label Printer	4in Rugged Mobile Label Printer	2in Rugged Mobile Receipt Printer	4in Rugged Mobile Receipt Printer
DISPLAY & INPUT	2-Line LCD	2-Line LCD	LED Indicators and 2 Buttons	LED Indicators and 2 Buttons
MAX. PRINT SPEED	101mm/s (4ips)	101mm/s (4ips)	51 mm/s (2 ips)	51 mm/s (2 ips)
RESOLUTION	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)	8 dots/ mm (203 dpi)
MAX. PRINT WIDTH	112mm (4.39in)	112mm (4.39in)	57 mm (2.25 in)	57 mm (2.25 in)
DIMENSIONS (WXHxD)	160 x 174 x 79mm (6.3 x 6.9 x 3.1in)	161 x 174 x 79mm (6.3 x 6.9 x 3.1in)	139.7 x 109.22 x 63.5 mm (5.5 x 4.3 x 2.5 in)	175.8 x 172.2 x 69.1 mm (6.9 x 6.8 x 2.7in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	PrintSet, SmartSystems	Datamax O'Neil RMS, Wavelink® Avalanche MC	Datamax O'Neil RMS, Wavelink® Avalanche MC
SMART PRINTING LANGUAGES	Fingerprint	Fingerprint	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility
ERP COMPATIBILITY	Certified Device Type and XML-Enabled for SAP® All, Oracle® WMS	–	–	–



Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: T&L / Postal / Courier

Mobile Printers					
	PR2	PR3	Apex Series	PB21	PB31
PRODUCT CLASS	2in Durable Mobile Receipt Printer	3in Durable Mobile Receipt Printer	2,3 and 4 in Lightweight Mobile Receipt Printers	2in Rugged Mobile Receipt Printer	3in Rugged Mobile Receipt Printer
DISPLAY & INPUT	3 Multi-Function Status LEDs	4 Multi-Function Status LEDs	LED Indicators and 2 Buttons	2-Line LCD	2-Line LCD
MAX. PRINT SPEED	56mm/s (2ips)	56mm/s (2ips)	51 mm/s (2 ips) - Apex 2 and 3 76 mm/s (3ips) - Apex 4	101mm/s (4ips)	101mm/s (4ips)
RESOLUTION	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/mm (203 dpi)	8 dots/mm (203 dpi)	8 dots/mm (203 dpi)
MAX. PRINT WIDTH	48mm (1.89in)	72mm (2.83in)	48mm (1.89) Apex 2 72mm (2.83) Apex 3 104 mm (4.10) Apex 4	48mm (1.89in)	72mm (2.83in)
DIMENSIONS (WXHxD)	103 x 61 x 139mm (4.1 x 2.4 x 5.5in)	127 x 58 x 156mm (5.0 x 2.3 x 6.1in)	135 x 103 x 60 mm / 5.4 x 4.1 x 2.4 (Apex 2) 156 x 127 x 58 mm / 6.1 x 5 x 2.3 in (Apex 3) 191 x 166 x 63 mm / 7.5 x 6.5 x 2.5 (Apex 4)	101 x 176 x 71mm (4.0 x 6.9 x 2.8in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	PrintSet, SmartSystems	N/A	PrintSet, SmartSystems	PrintSet, SmartSystems
SMART PRINTING LANGUAGES	–	–	Cassini Configuration Tool, Form Fiesta Label Designer, Datamax O'Neil Toolkit for iOS devices	Fingerprint	Fingerprint

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Direct Store Delivery

Mobile Computers			Enterprise Sleds for Apple®	
	CN51	Dolphin CT50	Captuvo SL22 / SL42	Captuvo SL62
DURABILITY (DROP)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)	DURABILITY (DROP)	Multiple 1.2m (4ft)
DURABILITY (TUMBLE)	1,000 0.5m tumbles	1,000 1m tumbles	DURABILITY (TUMBLE)	–
DURABILITY (IP)	IP64	IP67	DURABILITY (IP)	IP30
DISPLAY	4in WVGA resistive	4.7" HD	ENCRYPTION-READY MAGNETIC STRIPE READER	Optional
KEYPAD	27 - key Numeric / 43- key QWERTY with backlit keypads	On-screen keypad, programmable physical buttons	KEYPAD	Touch Only
SCANNING OPTIONS	EA30 or EA31 integrated imager reader for 1D, 2D barcode symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	SCANNING OPTIONS	Standard Range 2D
SCAN HANDLE OPTIONS	✓	✓	EASYDL™	Reduces transaction time by 95%
OPERATING SYSTEM	Windows Embedded Handheld 6.5, Android 4.2	Windows® Embedded 8.1 Handheld and Android 4.4	OPERATING SYSTEM	iOS
WWAN	1. GSM/HSPA+/HSDPA HSUPA/WCDMA/EDGE/GPRS Voice & Data. 2. CDMA/EVDO Voice & Data	LTE (4G) Tri-Band UMTS/HSPA+ (3G) Quad Band GSM/GPRS/EDGE Quad Band	APPLE® DEVICE	SL22: iPod touch® 5th Gen SL42: iPhone® 5, iPhone® 6 and 6 Plus
GPS	Integrated Assisted-GPS (A-GPS) GLONASS support	Integrated Assisted-GPS (A-GPS) GLONASS support	BATTERY	3.7V, 1150mAh 3.7V, 3340mAh
WLAN	IEEE 802.11 a/b/g/n IEEE 802.11 b/g/n (3G version)	802.11 a/b/g/n/ac		
NFC	–	✓		
PROCESSOR	1.5GHz dual core TI OMAP 4470	2.3 GHZ quad core Qualcomm		
RAM/FLASH	1GB / 16 GB	2GB / 16GB		
USER ACCESSIBLE SD CARD	✓	✓		
BATTERY	Smart Battery Pack: 3.7V, 3900 mAh	3.6V, 4040mAh		
APPLICABLE SOFTWARE	Device Management: Intermec SmartSystems™; ScanNGo; CloneNGo; Device Health Monitoring; HTML5 browser; Skynax; REM	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™		

Products At A Glance: Direct Store Delivery

Mobile Printers								
	PR2	PR3	PB21	PB31	PB51	PW50	6822	PrintPAD
PRODUCT CLASS	2in Durable Mobile Receipt Printer	3in Durable Mobile Receipt Printer	2in Rugged Mobile Receipt Printer	3in Rugged Mobile Receipt Printer	4in Rugged Mobile Receipt Printer	4in Commercial Mobile Workboard Printer	Full-Page Commercial Mobile Workboard Printer	4in Integrated Printing System
DISPLAY & INPUT	3 Multi-Function Status LEDs	3 Multi-Function Status LEDs	2-Line LCD	2-Line LCD	2-Line LCD	3 Icons	3 Icons, 1 LED	LED Indicators and 2 Buttons
MAX. PRINT SPEED	56mm/s (2ips)	56mm/s (2ips)	101mm/s (4ips)	101mm/s (4ips)	101mm/s (4ips)	100mm/s (4ips)	2ppm	51 mm/s (2 ips)
RESOLUTION	8 dots/mm (203dpi)	Full Page	8 dots/ mm (203 dpi)					
MAX. PRINT WIDTH	48mm (1.89in)	72mm (2.83in)	48mm (1.89in)	72mm (2.83in)	112mm (4.39in)	108mm (4.25in)	21.5cm (8.5in)	112.01 (4.41 in)
DIMENSIONS (WXHxD)	103 x 61 x 139mm (4.1 x 2.4 x 5.5in)	127 x 58 x 156mm (5.0 x 2.3 x 6.1in)	101 x 176 x 71mm (4.0 x 6.9 x 2.8in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)	160 x 174 x 79mm (6.3 x 6.9 x 3.1in)	310 x 180 x 80mm (12.2 x 7.0 x 3.2in)	419 x 130 x 381mm (16.5 x 5.13 x 15.0in)	190.5 x 299.7 x 60.9 mm (7.5 x 11.8 x 2.4 in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	6822 Configuration Utility	Datamax O'Neil RMS, Wavelink® Avalanche MC					
SMART PRINTING LANGUAGES	–	–	Fingerprint	Fingerprint	Fingerprint	Fingerprint	–	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Field Service

Mobile Computers				
				
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)	Multiple 1.5m (5ft)	Multiple 1.5m (5ft)
DURABILITY (TUMBLE)	800 0.5m tumbles	250 0.5m tumbles	1,000 0.5m tumbles	1,000 1m tumbles
DURABILITY (IP)	IP54	IP67	IP64	IP67
DISPLAY	2.8in QVGA	4.3in WVGA	4in WVGA resistive	4.7" HD
KEYPAD	Numeric + QWERTY	On-screen with 5 dedicated physical buttons	27- key Numeric / 43- key QWERTY with backlit keypads	On-screen keypad, programmable physical buttons
SCANNING OPTIONS	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies	EA30 or EA31 integrated imager reader for 1D, 2D barcode symbologies	Dedicated imager capable of decoding standard 1D and 2D bar code symbologies
SCAN HANDLE OPTIONS	–	–	✓	✓
OPERATING SYSTEM	Windows Embedded Handheld 6.5	Windows Embedded Handheld 6.5, Android 4.0	Windows Embedded Handheld 6.5, Android 4.2	Windows® Embedded 8.1 Handheld and Android 4.4
WWAN	GSM/GPRS/EDGE Multimode UMTS/HSPA	3.9G - GSM/UMTS/HSPA+/GPRS/EDGE/Voice & Data 3.9G – HSPA+/UMTS GSM/GPRS/ EDGE and EVDO	GSM/HSPA+/HSDPA HSUPA/WCDMA/EDGE/GPRS Voice & Data. CDMA/EVDO Voice & Data	LTE (4G) Tri-Band UMTS/HSPA+ (3G) Quad Band GSM/GPRS/EDGE Quad Band
GPS	✓	Integrated Assisted-GPS (A-GPS)	Integrated Assisted-GPS (A-GPS) GLONASS support	Integrated Assisted-GPS (A-GPS) GLONASS support
WLAN	802.11 b/g/n	IEEE 802.11 a/b/g/n	IEEE 802.11 a/b/g/n IEEE 802.11 b/g/n (3G version)	802.11 a/b/g/n/ac
NFC	–	✓	–	✓
PROCESSOR	800 MHz	1GHz single core TI OMAP	1.5GHz dual core TI OMAP 4470	2.3 GHZ quad core Qualcomm
RAM/FLASH	256MB / 512MB	512MB / 1GB	1GB / 16 GB	2GB / 16GB
USER ACCESSIBLE SD CARD	✓	✓	✓	✓
BATTERY	3.7 V, 3340 mAh	Standard: Li-ion 3.7 V, 1670 mAh; Extended: Li-ion 3.7 V, 3340 mAh	Smart Battery Pack: 3.7V, 3900 mAh; Batteries are IEEE 1725 compliant, Li-Ion, removable, rechargeable	3.6V, 4040mAh
APPLICABLE SOFTWARE	Honeywell Powertools® and Demos / Remote MasterMind™ 4.0 for Mobility remote device management	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Microsoft® Windows® Embedded Handheld 6.5 Honeywell SDK for Google® Android™ version 4.0	Device Management: Intermec SmartSystems™; ScanNGo; CloneNGo; Device Health Monitoring; HTML5 browser; Skynax; REM	Honeywell Powertools® and Demos Remote MasterMind™ 4.0 for Mobility remote device management Honeywell SDK for Google® Android™

Products At A Glance: Field Service

Enterprise Sleds for Apple®		
	Captuvo SL22 / SL42	Captuvo SL62
DURABILITY (DROP)	Multiple 1.2m (4ft)	Multiple 1.2m (4ft)
DURABILITY (TUMBLE)	–	–
DURABILITY (IP)	IP30	IP30
ENCRYPTION-READY MAGNETIC STRIPE READER	Optional	Optional
KEYPAD	Touch Only	Touch Only
SCANNING OPTIONS	Standard Range 2D	Standard Range 2D
EASYDL™	Reduces transaction time by 95%	Reduces transaction time by 95%
OPERATING SYSTEM	iOS	iOS
APPLE® DEVICE	SL22: iPod touch® 5th Gen SL42: iPhone® 5, iPhone® 6 and 6 Plus	iPad mini® and iPad mini with Retina display
BATTERY	3.7V, 1150mAh 3.7V, 3340mAh	3.7V, 1150mAh



Products At A Glance: Field Service

Mobile Printers								
	PB51	MF2te	MF4te	PR2	PR3	PB31	PW50	PrintPAD
PRODUCT CLASS	4in Rugged Mobile Label Printer	2in Rugged Mobile Receipt Printer	4in Rugged Mobile Receipt Printer	2in Durable Mobile Receipt Printer	3in Durable Mobile Receipt Printer	3in Rugged Mobile Label Printer	4in Commercial Mobile Workboard Printer	4in Integrated Printing System
DISPLAY & INPUT	2-Line LCD	LED Indicators and 2 Buttons	LED Indicators and 2 Buttons	3 Multi-Function Status LEDs	4 Multi-Function Status LEDs	2-Line LCD	3 Icons	LED Indicators and 2 Buttons
MAX. PRINT SPEED	101mm/s(4ips)	51 mm/s (2 ips)	51 mm/s (2 ips)	56mm/s (2ips)	56mm/s (2ips)	101mm/s(4ips)	100mm/s(4ips)	51 mm/s (2 ips)
RESOLUTION	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)	8 dots/ mm (203 dpi)	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/mm (203dpi)	8 dots/ mm (203 dpi)
MAX. PRINT WIDTH	112mm (4.39in)	57 mm (2.25 in)	57 mm (2.25 in)	48mm (1.89in)	72mm (2.83in)	72mm (2.83in)	108mm (4.25in)	112.01 (4.41 in)
DIMENSIONS (WXHxD)	161 x 174 x 79mm (6.3 x 6.9 x 3.1in) (5.5 x 4.3 x 2.5 in)	139.7 x 109.22 x 63.5 mm	175.8 x 172.2 x 69.1 mm (6.9 x 6.8 x 2.7in)	103 x 61 x 139mm (4.1 x 2.4 x 5.5in)	127 x 58 x 156mm (5.0 x 2.3 x 6.1in)	127 x 182 x 81mm (5.0 x 7.2 x 3.2in)	310 x 180 x 80mm (12.2 x 7.0 x 3.2in)	190.5 x 299.7 x 60.9 mm (7.5 x 11.8 x 2.4 in)
DEVICE MANAGEMENT SUPPORTED	PrintSet, SmartSystems	Datamax O'Neil RMS, Wavelink® Avalanche MC	Datamax O'Neil RMS, Wavelink® Avalanche MC	PrintSet, SmartSystems	PrintSet, SmartSystems	PrintSet, SmartSystems	PrintSet, SmartSystems	Datamax O'Neil RMS, Wavelink® Avalanche MC
SMART PRINTING LANGUAGES	Fingerprint	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility	–	–	Fingerprint	Fingerprint	mFlash Configuration Tool, Datamax O'Neil Package Builder Group File Utility
ERP COMPATIBILITY	–	–	–	–	–	–	–	–

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.

Products At A Glance: Field Service

Mobile Scanning		Rugged Field Service Scanners				Hands-Free Scanners	
	Voyager 1602g		Granit 1911i	SF61B	Solaris 7820g	Solaris 7980g	
FORM FACTOR	Handheld	FORM FACTOR	Handheld	Mobility	Hands-Free	Hands-Free	
SCANNING TECHNOLOGY	Area-Imaging Scanner	SCANNING TECHNOLOGY	Area-Imaging Scanner with Adaptus®	Area-Imaging Scanner	Omnidirectional Laser Scanner	Area-Imaging Scanner with Adaptus®	
WIRED OR WIRELESS	Wireless	WIRED OR WIRELESS	Wireless	Wireless	Wired	Wired	
DURABILITY (DROP)	Multiple 1.4m (4ft)	DURABILITY (DROP)	Multiple 2m (6.5f)	Multiple 2m (6.5f)	-	-	
DURABILITY (IP)	IP42	DURABILITY (IP)	IP65	IP65	Sealed to resist airborne particulate contaminants	IP5X	
DECODE COMPATIBILITY	1D version: 1D 2D version: 1D, PDF, 2D	DECODE COMPATIBILITY	1D, PDF417, 2D	SF61B1D: 1D SF61BHP/2D: 1D, PDF, 2D	1D, GS1 DataBar 1D, GS1	1D, PDF, 2D, Postal, GS1, OCR	
SCANNING SPEED (MOTION TOLERANCE)	Up to 10cm/s (4in/s)	SCANNING SPEED (MOTION TOLERANCE)	Up to 610cm/s (240in/s)	Up to 1,270cm/s (500in/s)	1,800 scans/s	300cm/s (118 in/s)	
COMMUNICATIONS	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	COMMUNICATIONS	USB, RS232, Keyboard Wedge	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	USB, RS232, Keyboard Wedge, IBM 46xx (RS485)	
SOFTWARE	EZConfig	SOFTWARE	EZConfig	EasySet	MetroSet2	EZConfig	
WARRANTY	3 years	WARRANTY		3 years			

Products At A Glance: Hazardous Environments

Mobile Computers	
	
	Dolphin 99EX NI*
DURABILITY (DROP)	Multiple 1.8m (6ft)
DURABILITY (TUMBLE)	> 2,000 tumbles @ 1m
DURABILITY (IP)	IP67
DISPLAY	3.7in VGA resistive
KEYPAD	Numeric, Alphanumeric
SCANNING OPTIONS	High Density 1D/2D Standard Range 1D/2D Extended Range 1D/2D
SCAN HANDLE OPTIONS	—
OPERATING SYSTEM	Windows Embedded Handheld 6.5
WWAN	3.9G, GSM for voice and data, + GSM/CDMA data only software definable radio
GPS	✓
WLAN	802.11 a/b/g/n
PROCESSOR	1GHz
RAM/FLASH	512MB / 1GB
USER ACCESSIBLE SD CARD	✓
RFID SUPPORT	—
BATTERY	Standard: 3.7V, 3060mAh; Extended: 3.7V, 5000mAh
APPLICABLE SOFTWARE	ClientMax for Dolphin; EZConfig for Mobility; Skynax® for Mobility Management



*ATEX Non-incendive Zones 2 & 22

Get the best print results with Intermec by Honeywell Media.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.



**Deliver on time, the first time,
every time: The new Dolphin CT50.**

Honeywell

© 2016 Honeywell International Inc.

This product overview focuses on our main, featured products. For complete product line overview, please consult our website.



One-hour delivery windows. Up-to-the-minute tracking. First-time deliveries, every time. Delighting your customers is the cornerstone of your success in this industry. And driving remarkable savings and responsiveness through process automation is how you'll do it every day, every route, anywhere in the world: Introducing the new Dolphin™ CT50 Mobile Computer.

CHANGE YOUR PESPECTIVE

Look closer at www.honeywellaidc.com/DolphinCT50