

Support and Documentation / Datasheets / Datasheets and Examples for Accessories and Sensors

LJTick-DAC Datasheet

The LJTick-DAC works with the T-series (T4/T7/T8) and with any UD family device (U3/U6/UE9), except for the oldest U3 hardware revision 1.20 (U3A, pre 2007), as that U3 did not support I2C. The LJTick-DAC does not work with the U12.

The LJTick-DAC connects to a digital I/O block (e.g. FIO6/FIO7), not to the DAC0/DAC1 terminals.



Figure 1: LJTick-DAC



Figure 2: LJTick-DAC with U3

The LJTick-DAC (LJTDAC) is an analog output expansion module. It provides a pair of 14-bit outputs with a range of ± 10 volts. The 4-pin design plugs into any of the standard DIO/DIO/G

screw terminal blocks on the LabJack, and thus up to 10 of these can be used per device to add 20 analog outputs.

The update rate of the LJTDAC is limited by the communication time between the host and the device. See Section 3.1 of the U3/U6/UE9 User's Guide or [data rates for T-Series devices](#) for detailed information, but it generally takes about 1 ms to do an update via USB "high-high" or Ethernet, while it takes about 4 ms via other USB connections. Only 1 DAC channel can be updated per low-level communication. That means, for instance, that if updates are done at the 1 ms rate to build a 100 Hz sine wave, there will only be about 5 updates per half-cycle of the waveform and it will appear to be a smooth sine. With a 10 Hz sine wave, however, there will be about 50 updates per half-cycle and the waveform will appear much smoother.

The pins shown on the right side of the LJTDAC (Figure 1) connect to the LabJack. The VS/GND pins power the LJTDAC, while the DIOA/DIOB pins are used for digital communication (I2C) between the LJTDAC and LabJack. DIOA is the serial clock (SCL) and DIOB is the serial data (SDA). Following are descriptions of the screw-terminal connections:

GND: Connected directly to LabJack ground (GND).

VS: This is the same 5 volt output as the VS terminals on the LabJack itself. This is an output terminal, not an input. It can be used to provide 5 volt (nominal) power as needed.

DACA/DACB: Output of each 14-bit digital-to-analog converter.

Low-Level I2C Communication

The LJTDAC has a non-volatile 128-byte EEPROM (Microchip 24C01C) on the I2C bus with a 7-bit address of 0x50 (d80), and thus an 8-bit address byte of 0xA0 (d160). Bytes 0-63 are available to the user, while bytes 64-127 are reserved.



EEPROM Address	Description	Nominal Value
0-63	User Area	
64-71	DACA Slope	3.1586E+03 bits/volt
72-79	DACA Offset	3.2624E+04 bits

80-87	DACB Slope	3.1586E+03 bits/volt
88-95	DACB Offset	3.2624E+04 bits
96-99	Serial Number	
100-127	Reserved	

The slopes and offsets are stored in 64-bit fixed point format (signed 32.32, little endian, 2's complement). The serial number is simply an unsigned 32-bit value where byte 96 is the LSB and byte 99 is the MSB.

The DAC (digital-to-analog converter) chip on the LJTDAC is the LTC2617 (linear.com) with a 7-bit address of 0x12 (d18), and thus an 8-bit address byte of 0x24 (d36). The data is justified to 16 bits, so a binary value of 0 (actually 0-3) results in minimum output (~10.3 volts) and a binary value of 65535 (actually 65532-65535) results in maximum output (~10.4 volts).

For more information about low-level communication with the LJTDAC, see the I2C example in the [VC6_LJUD](#) archive or see the Linux example.

UD Communication

The LJTick-DAC works with any UD family device (U3/U6/UE9), except for U3 hardware revision 1.20 (U3A), as that U3 did not support I2C. It also does not work with the U12 (which is not a UD family device).

The LabJack UD driver for Windows (V2.76+) has special support for the LJTDAC. First, the following special channel is used with the put config IOType to specify where the LJTDAC is connected to the LabJack:

`LJ_chTDAC_SCL_PIN_NUM` //Used with `LJ_ioPUT_CONFIG`. The desired pin # is passed in the Value parameter.

Then there is one IOType used for all further communication with the LJTDAC. The value of the Channel parameter used with this IOType is always one of the following 7 special channels:

`LJ_ioTDAC_COMMUNICATION` //Main IOType.

`LJ_chTDAC_SERIAL_NUMBER` //Read-only.

LJ_chTDAC_READ_USER_MEM //x1 is array of 64 bytes.

LJ_chTDAC_WRITE_USER_MEM //x1 is array of 64 bytes.

LJ_chTDAC_READ_CAL_CONSTANTS //x1 is array of 4 doubles.

LJ_chTDAC_WRITE_CAL_CONSTANTS //x1 is array of 4 doubles.

LJ_chTDAC_UPDATE_DACA //Pass DAC voltage in Value parameter.

LJ_chTDAC_UPDATE_DACB //Pass DAC voltage in Value parameter.

Note that the _CAL_CONSTANTS special channels above are floating point doubles. The UD library converts to/from the fixed point format stored on the LJTick-DAC.

Typical operation consists of simply setting the pin number for SCL and then updating DAC channel A and/or B:

```
//Tell the driver that SCL is on FI06. The driver then assumes that SDA  
is on FI07.
```

```
//This is just setting a parameter in the driver, and not actually  
talking
```

```
//to the hardware, and thus executes very fast.
```

```
ePut(lngHandle, LJ_ioPUT_CONFIG, LJ_chTDAC_SCL_PIN_NUM,6,0);
```

```
//Set DACA to 1.2 volts. If the driver has not previously talked to an  
LJTDAC
```

```
//on FI06/FI07, it will first retrieve and store the calibration  
constants. The
```

```
//low-level I2C command can only update 1 DAC channel at a time, so there  
//is no advantage to doing two updates within a single add-go-get block.
```

```
ePut(lngHandle, LJ_ioTDAC_COMMUNICATION, LJ_chTDAC_UPDATE_DACA, 1.2, 0);
```

```
//Set DACB to 2.3 volts.
```

```
ePut(lngHandle, LJ_ioTDAC_COMMUNICATION, LJ_chTDAC_UPDATE_DACB, 2.3, 0);
```

For more information about UD communication with the LJTDAC, see the LJTDAC example in the [VC6_LJUD](#) archive.

T-series (T4/T7/T8) & LJM Communication

T-series devices have special registers available for controlling the LJTick-DAC. The TDAC# registers that you write to should correspond to the DIO numbers that the TDAC is connected to.

See the **DIO mapping tables in the T-Series datasheet** for conversions from FIO/EIO/CIO/MIO numbers to DIO#.

LJTick-DAC Analog Output Registers

Name	Start Address	Type	Access
TDAC#(0:21)	30000	FLOAT32	W

LabJack

Measurement & Automation

instance, if LJTick-DAC accessory is connected to FIO2/FIO3 block on main device, TDAC2 corresponds with DACA, and TDAC3 corresponds with DACB.

- Data type: FLOAT32 (type index = 3)
- Write-only
- Default value: 0

Expanded Names	Addresses	Formula
TDAC0, TDAC1, TDAC2, ...	30000, 30002, 30004, ...	address = 30000+(2*#)

TDAC_SERIAL_NUMBER - Address: 55200

Returns the serial number of an LJTick-DAC, and forces a re-read of the calibration constants. Which LJTDAC is determined by the last write to TDAC# ... whether it was successful or not.

- Data type: UINT32 (type index = 1)
- Read-only
- Default value: 0

TDAC_SPEED_THROTTLE - Address: 55202

Sets the I2C clock speed that will be used when communicating with the TDAC. Default value is 65516. See I2C_SPEED_THROTTLE for more detail.

- Data type: UINT32 (type index = 1)
- Readable and writable
- Default value: 65516
- T8:
 - Minimum [firmware](#) version: 1.0000
- T7:
 - Minimum [firmware](#) version: 1.0208
- T4:
 - Minimum [firmware](#) version: 0.1000

Updating an output through the LJM library is easy. For example, the following line of code sets the voltage on the DACB channel associated with DIO11 (aka EIO3). That means DACA on the LJTick-DAC would be connected to DIO10 (aka EIO2):

```
err = LJMEWriteName(handle, "TDAC11", 7.5)
```

MIO2 (DIO22) does not support the LJTick-DAC.

Specifications: (25 deg C, VS = 5 volts)



Parameter	Conditions	Min	Typical	Max	Units
General					
Supply Voltage		4.5	5	5.5	V
Supply Current	Vout = 0, No load		5		mA
	Both Outputs @ 3mA		29		mA
Operating Temperature		0		70	°C
DIO					
Pull-up Resistors	To VS		5100		Ω
Low Level Input Voltage				0.3*VS	V
High Level Input Voltage		0.7*VS			V
Low Level Output Voltage	Sink Current = 3mA	0		0.4	V
Clock Frequency (DIOA)				400	kHz

DAC Outputs					
Typical Output Range		-10.3		10.4	V
Power-up Output Voltage			0.05		V
Resolution				14	bits
				1.22	mV
Accuracy			0.05	0.5	% FS
Differential Linearity Error				±1	counts
Integral Linearity Error			±5	±16	counts
Temperature Drift			20		ppm/°C
Update Time (1)			1		ms
Update Rate (1)			1000		Hz
Slew Rate			0.1		V/μs
Output Impedance			0.1		Ω
Output Current (2)	Total for both channels			10	mA

(1) The update time is similar to the numbers found in Section 3.1 of the U3/UE9 User's Guide. The time is typically about 1 ms over Ethernet or USB "high-high", and typically about 4 ms over USB "other".

(2) This is the current limit for both channels combined. The first thing you notice as you get close to the current limit is that the minimum output voltage increases, and this effect will be worse if your VS supply voltage is low. For example, at 10 mA, the minimum output is typically about -9.5 volts.

LJTickDAC Testing Utility

For your convenience, the **LJTickDAC** testing utility for UD family devices is available for download.

Declaration of Conformity

Manufacturers Name: LabJack Corporation

Manufacturers Address: 6900 West Jefferson Ave Suite 110, Lakewood, CO 80235 USA

Declares that the product

Product Name: LabJack Tick DAC

Model Number: LJTick-DAC


conforms to the following Product Specifications:

EMC Directive: 89/336/EEC

EN 55011 Class A

EN 61326-1: General Requirements

Drawings and CAD

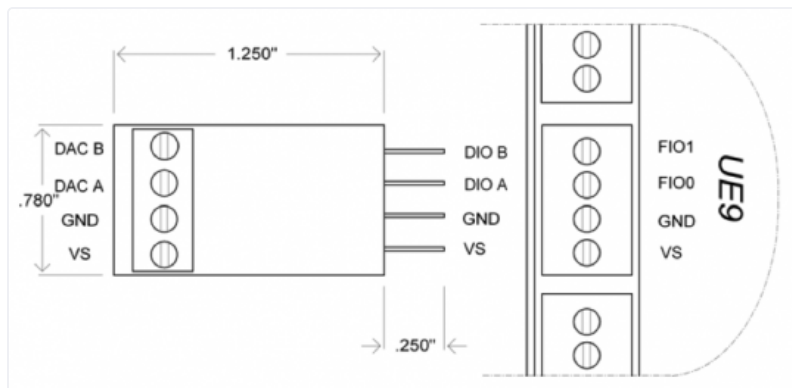

LJTick-DAC.IGS

LJTick-DAC.STEP



Previous page
LJTick-CurrentShunt Datasheet

Next page
LJTick-DAC Testing Utility



Copyright © 2025 • Powered by Scroll Viewport & Atlassian Confluence