

FPGA configuration

1 DE2-115 Altera FPGA

2 Connecting FPGA

3 System device monitor

The FPGA board is found and listed as a new device named USB-Blaster

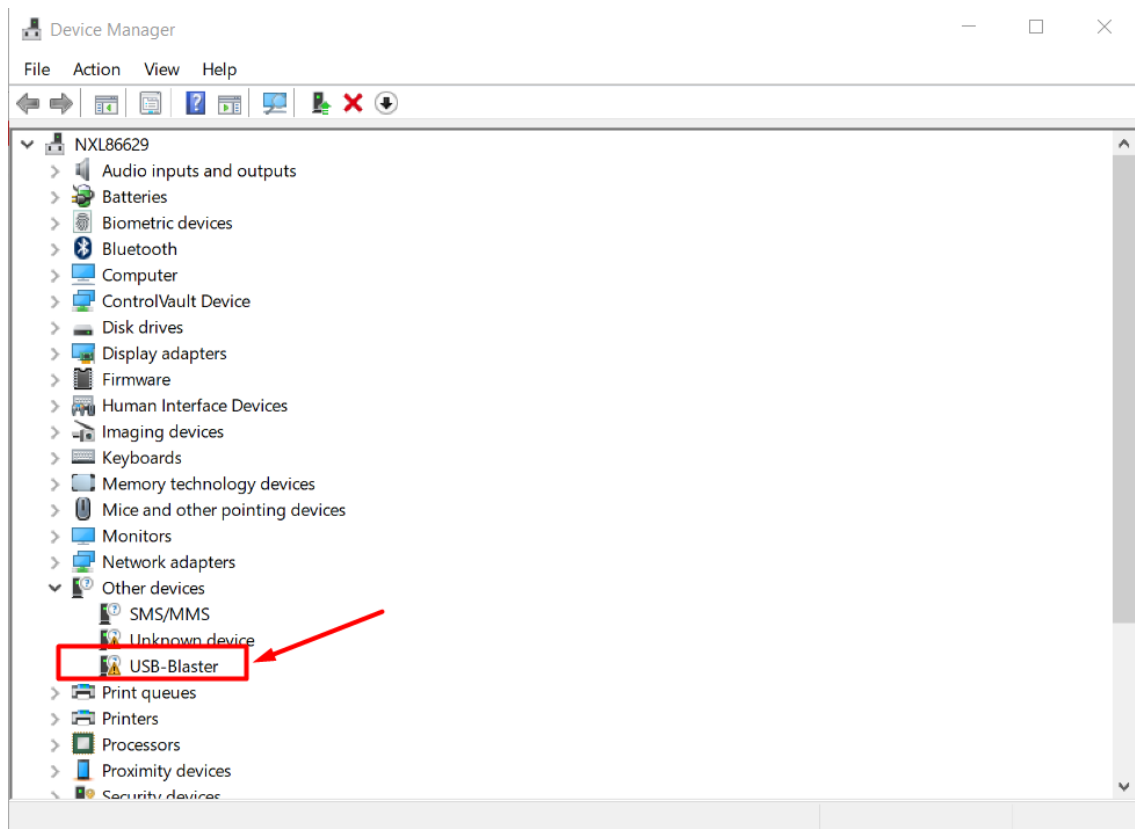


Figure 1 USB-Blaster device

4 Installing drivers for FPGA

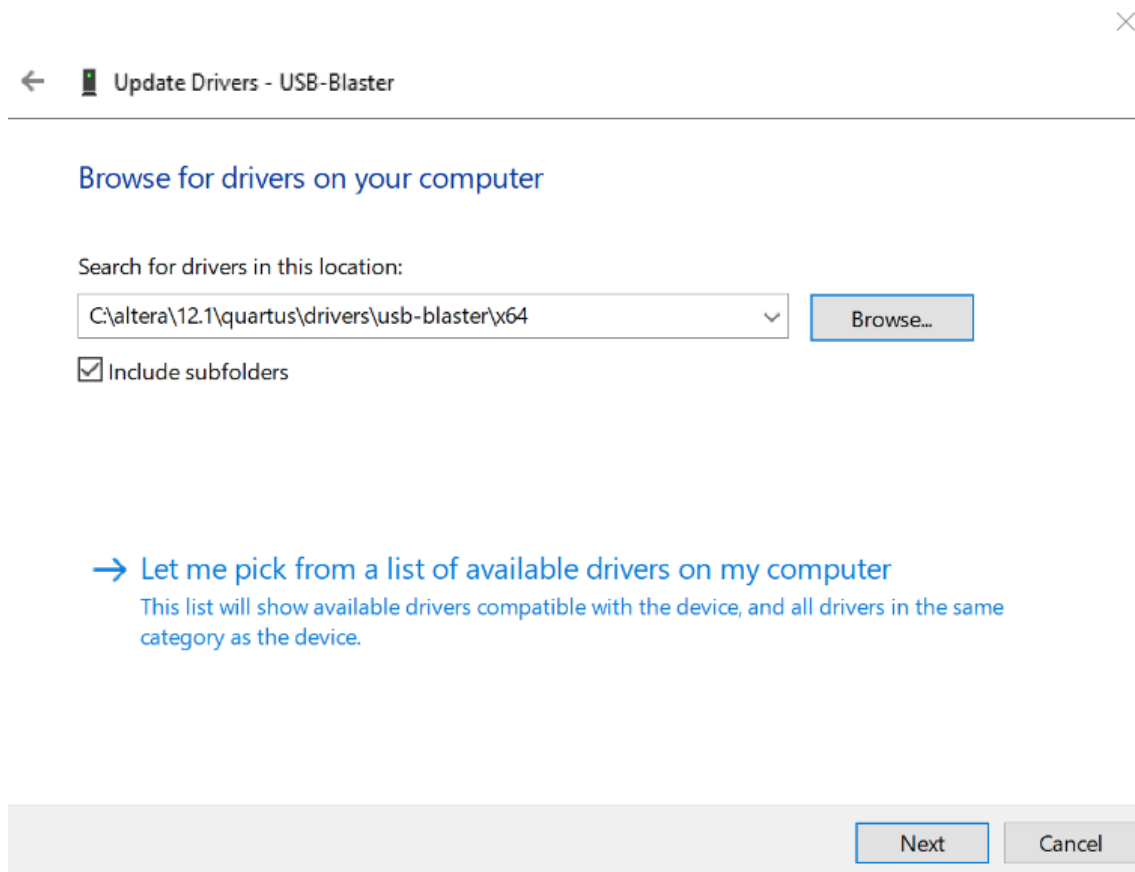


Figure 2 Locating drivers (*select usb-blaster folder*)

5 Already installed driver

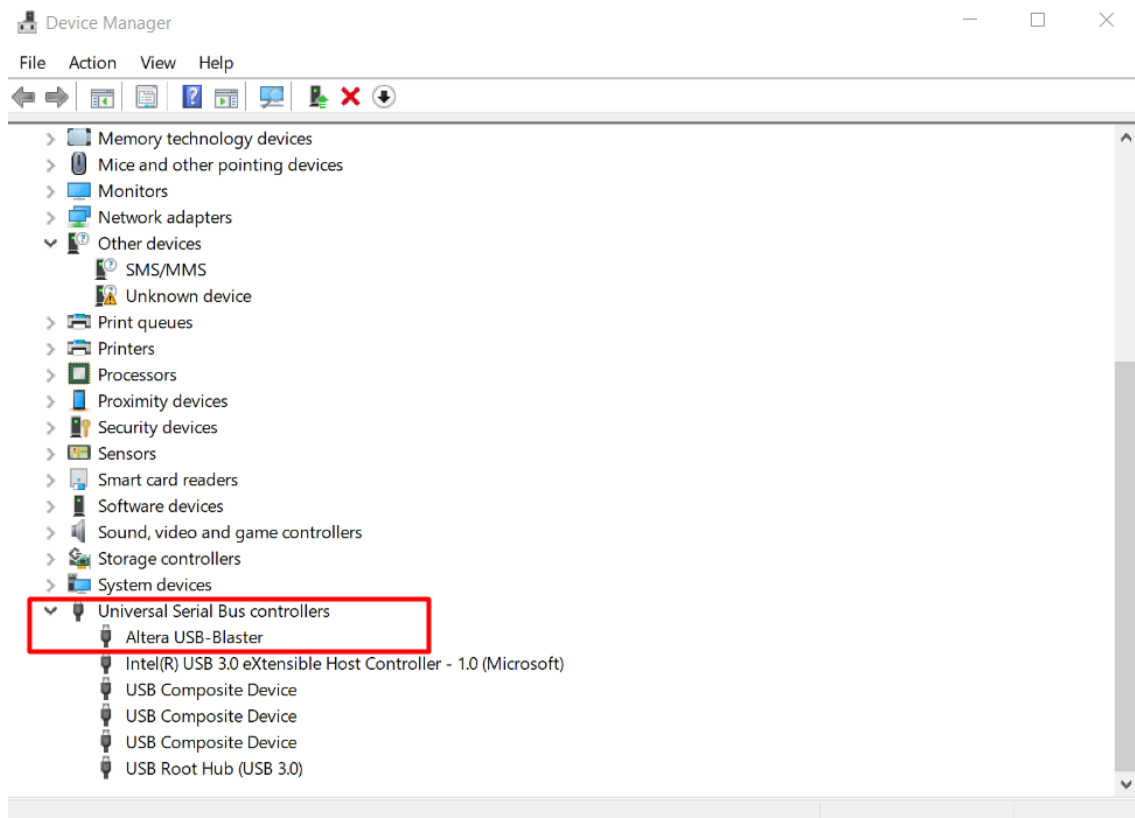


Figure 3 Correct detection

6 Reference

- 6.1 Terasic setup https://www.youtube.com/watch?v=5R5Tw_zSKZM
- 6.2 Terasic driver guide
http://www.terasic.com.tw/wiki/Altera_USB_Blaster_Driver_Installation_Instructions
- 6.3 Git <https://git-scm.com/download/win>
- 6.4 Notepad++ <https://notepad-plus-plus.org/download/v7.6.html>
- 6.5 Git setup <https://git-scm.com/book/en/v2/Getting-Started-First-Time-Git-Setup>