

**kono**  
lighting





**URBAN ILLUMINATION**

**STREET LIGHT SERIES**



Welcome to KONO Lighting's advanced collection of LED street lights, where cutting-edge technology meets robust quality. Each fixture is engineered to deliver superior performance, blending functionality with aesthetic precision. Our designs cater to the specific needs of architects and designers, enhancing urban landscapes with sustainable and high-performance lighting solutions.

**kono**  
lighting



# SAVA




**kono**  
lighting

- Body - Die-cast aluminum
- Protector - Lens cover, high strength impact resistance
- Installation & Mounting 5 - 8m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 120lm/w
- CRI - 75
- IK Rating - IK08
- IP Rating - IP66
- Auto switch Nema Socket
- Auto electrical disconnector
- Leveller



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
SAVA 30W	560	245	110	3.0	240
SAVA 50W	560	245	110	4.8	240
SAVA 60W	560	245	110	5.0	240
SAVA 80W	560	245	110	5.2	240

Light distribution

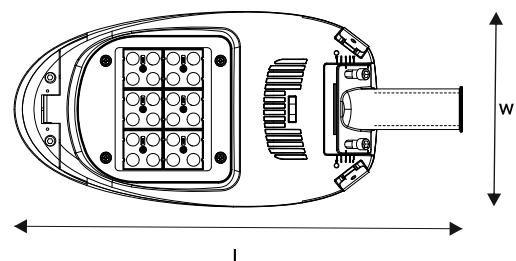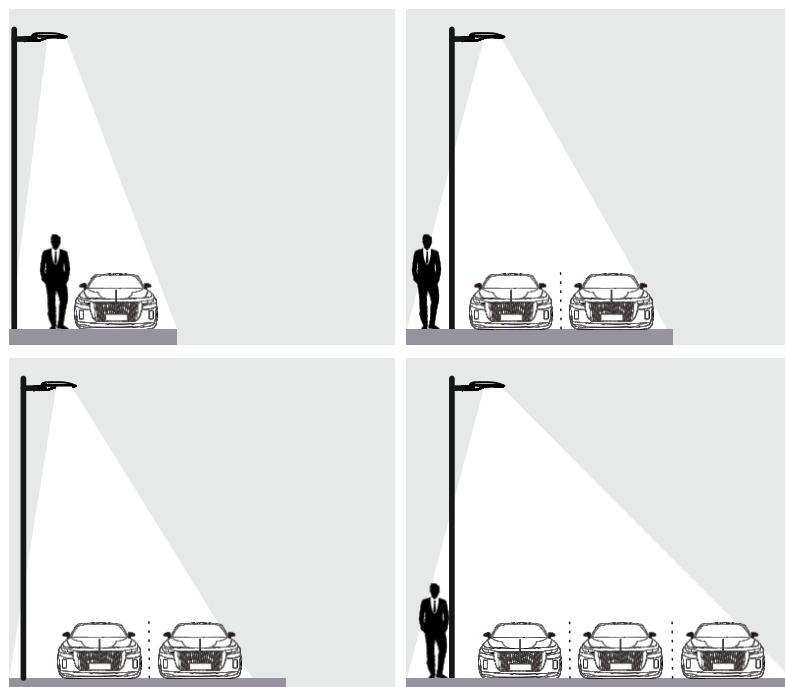






# SANA

**kono**  
lighting

- Body - Die-cast aluminum
- Protector - Lens cover, high strength impact resistance
- Installation & Mounting 5 - 8m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 120lm/w
- CRI - 75
- IK Rating - IK08
- IP Rating - IP66
- Auto switch Nema Socket
- Auto electrical disconnector
- Leveller

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
SANA 40W	420	180	100	1.5	240
SANA 60W	470	180	110	1.8	240
SANA 100W	560	240	115	2.7	240
SANA 150W	690	280	130	4.5	240
SANA 180W	740	280	130	5.3	240

Light distribution

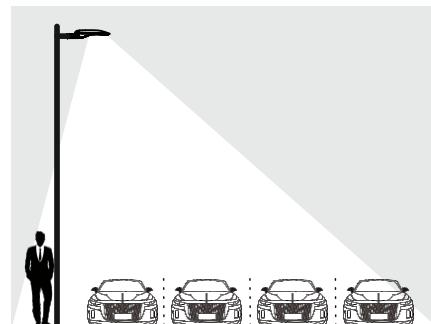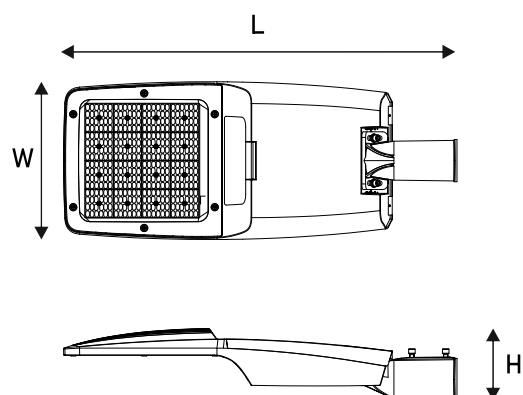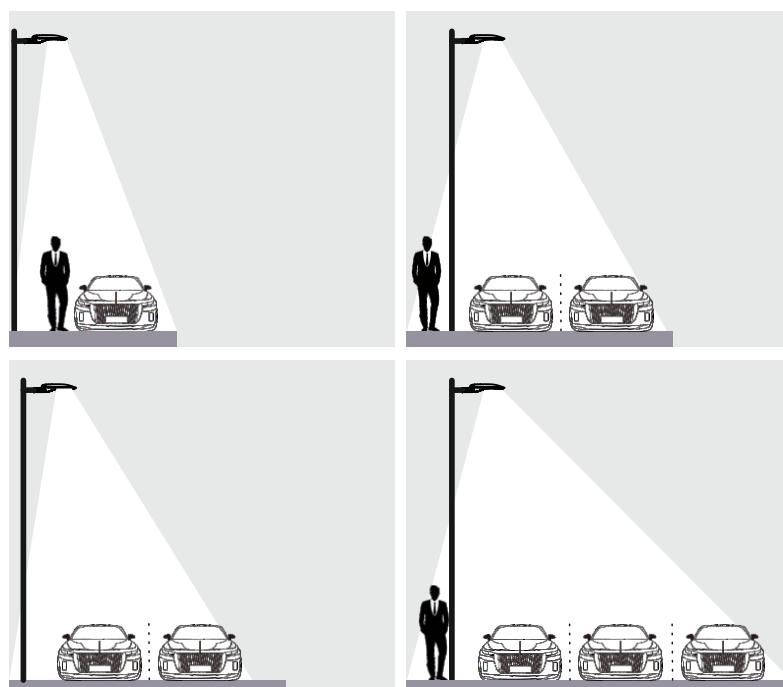




# SARA

- Body - Pressure die-cast aluminum
- Protector - Flat toughened glass
- Installation & Mounting 4 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 140lm/w
- IK Rating - IK08
- IP Rating - IP66
- Auto switch Nema Socket
- Auto electrical disconnector
- Leveller



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
SARA 35W	585	305	134	6.5	240
SARA 60W	585	305	134	6.5	240
SARA 90W	585	305	134	8.0	240
SARA 120W	585	305	134	8.2	240

Light distribution

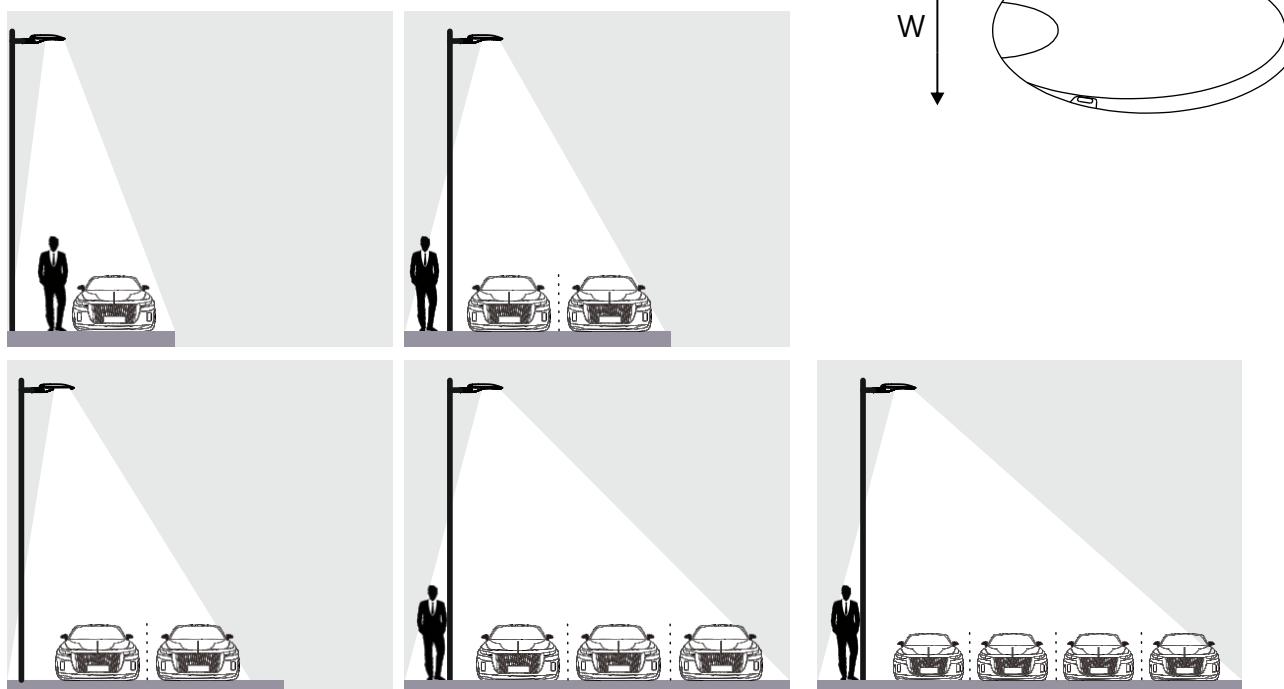

**kono**  
lighting





# SWAN

- Body - Pressure die-cast aluminum
- Protector - Flat toughened glass
- Installation & Mounting 4 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 120lm/w
- IK Rating - IK08
- IP Rating - IP66



Input Power	L	Size W (mm)	Weight (Kg)	Rated Voltage (V)
SWAN 30W	607	262	123	6.5
SWAN 50W	607	262	123	6.5
SWAN 70W	607	262	123	8.0

Light distribution

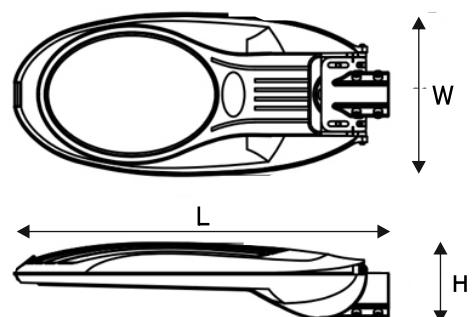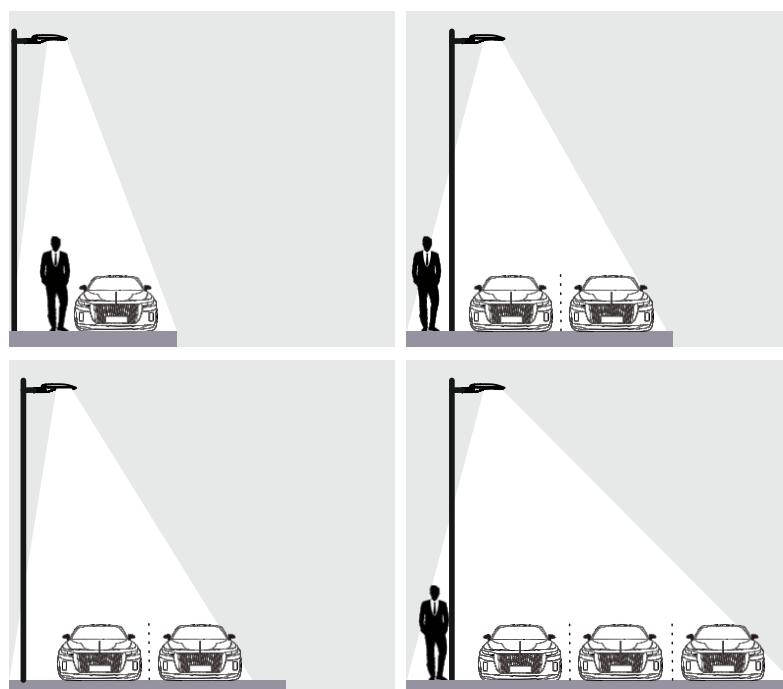



# NERA





**kono**  
lighting

- Body - High Pressure Die-cast aluminum
- Protector - PC Lens
- Installation & Mounting 4 - 6m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- IK Rating - IK08
- IP Rating - IP65
- Nema Provision



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NERA 30W	498	180	115	2	240
NERA 60W	498	180	115	3	240
NERA 100W	629	250	125	4.5	240
NERA 120W	629	250	125	4.5	240
NERA 150W	629	250	125	4.5	240
NERA 180W	698	280	128	6.5	240
NERA 200W	698	280	128	6.5	240
NERA 240W	798	280	128	9	240
NERA 280W	798	280	128	9	240


Light distribution

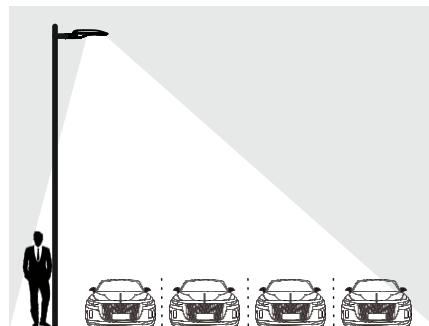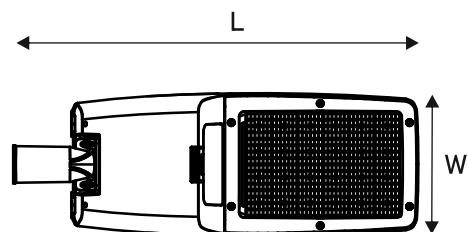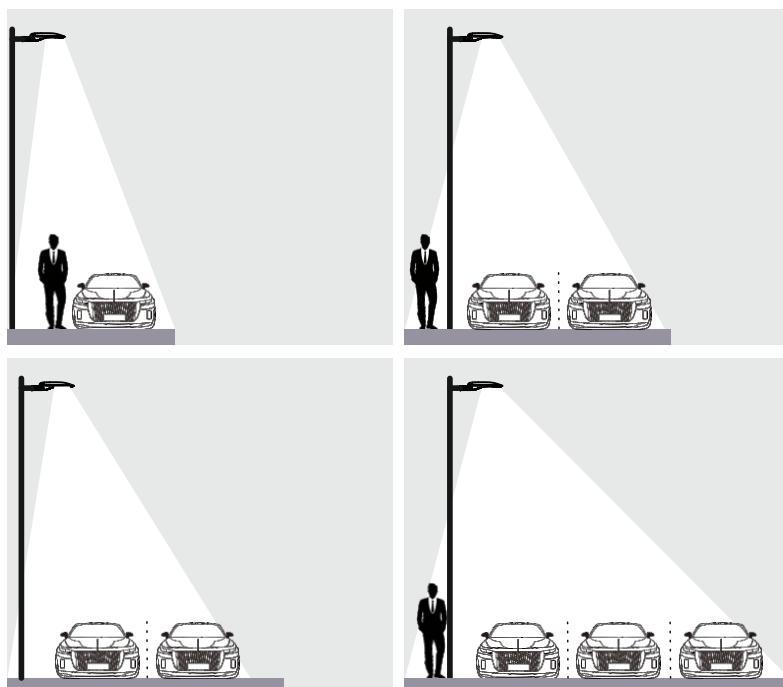


# ELVA

**kono**  
lighting



- Body - High Pressure Die-cast aluminum
- Protector - Glass Cover
- Installation & Mounting 4 - 6m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 120lm/w
- IK Rating - IK08
- IP Rating - IP66
- Nema Provision

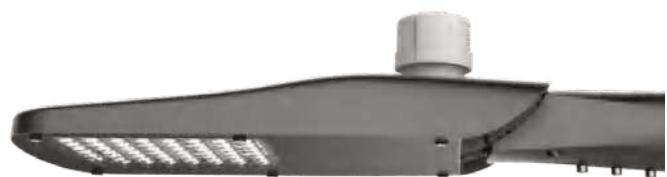

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
ELVA 40W	580	246	90	6	240
ELVA 60W	580	246	90	8	240
ELVA 80W	656	290	90	8	240
ELVA 100W	656	290	90	9	240
ELVA 120W	656	290	90	9	240

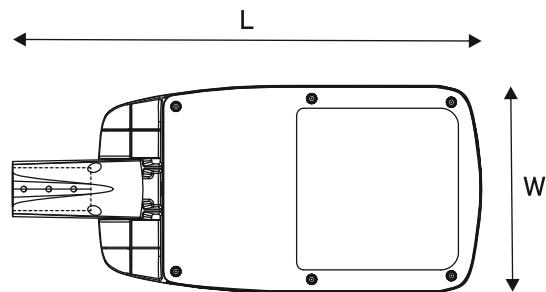

## Light distribution

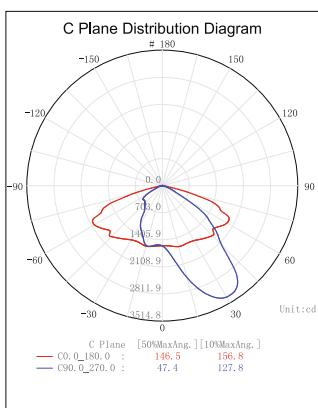



# JENO

**kono**  
lighting


- Body - High Pressure Die-cast aluminum
- Protector - Glass Cover
- Installation & Mounting 4 - 6m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 120lm/w
- IK Rating - IK08
- IP Rating - IP66
- Nema Provision



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
JENO 40W	480	230	110	7	240
JENO 60W	480	230	110	7	240
JENO 80W	617	263	119	7.5	240
JENO 100W	617	263	119	7.5	240
JENO 120W	617	263	119	7.5	240

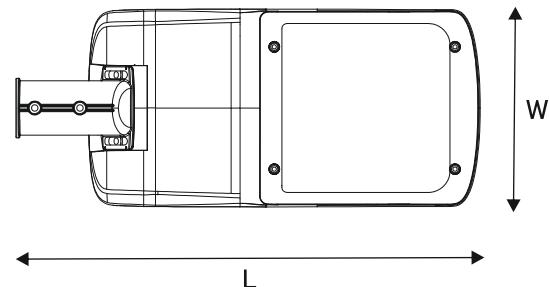

## Light distribution

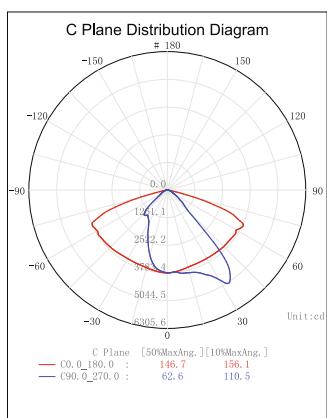



# NILE

## ALL PURPOSE LED LUMINAIRE RANGE

Create a unique ambiance for residents and visitors alike with our Nile LED luminaire. This decorative post-top light fixture not only illuminates but also inspires. Its sleek design opens up exciting possibilities for enhancing urban spaces, making them more inviting and aesthetically pleasing.

Nile boasts cutting-edge technology, ensuring state-of-the-art performance, while its refined aesthetics seamlessly blend form and function. Customization options allow you to tailor Nile to your specific urban environment. Architects and city planners will appreciate how Nile transforms outdoor spaces, taking urban activities to new heights. Nile isn't just a luminaire; it's an experience that redefines how you perceive urban design.





# NILE-2S


- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-2S 30W	590	480	470	6.3	240
NILE-2S 60W	590	480	470	6.5	240
NILE-2S 100W	590	480	470	6.7	240





Light distribution




# NILE-4S

- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-4S 30W	590	480	470	7.9	240
NILE-4S 60W	590	480	470	8.4	240
NILE-4S 100W	590	480	470	8.6	240



Light distribution





# NILE-SL

**kono**  
lighting


- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66
- Auto electrical disconnector



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-SL 30W	670	470	110	6.3	240
NILE-SL 60W	670	470	110	6.5	240
NILE-SL 100W	670	470	110	6.7	240



## Light distribution






# NILE-S

- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-S 30W	480	470	293	6.3	240
NILE-S 60W	480	470	293	6.5	240
NILE-S 100W	480	470	293	6.7	240



Light distribution




# NILE-C

- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 130lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-C 30W	480	470	190	6.3	240
NILE-C 60W	480	470	190	6.5	240
NILE-C 100W	480	470	190	6.7	240



Light distribution




# NILE-SA


- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover
- Installation & Mounting 5 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 140lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66



Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-SA 30W	550	480	470	7.9	240
NILE-SA 60W	550	480	470	8.4	240
NILE-SA 100W	550	480	470	8.6	240

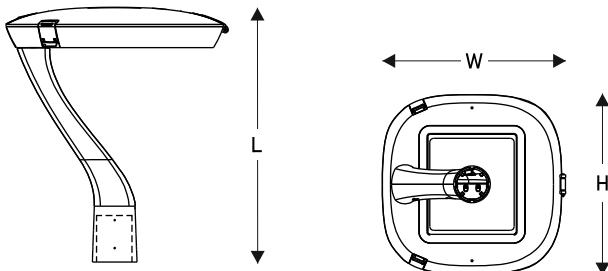


Light distribution




# NILE-4C

- Body - Die-cast aluminum
- Protector - High transparent tempered glass cover/PC diffuser
- Installation & Mounting 3 - 10m
- Spigot - 60mm dia
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 140lm/w
- CRI - 75
- IK Rating - IK09
- IP Rating - IP66

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)
NILE-4C 30W	590	480	470	6.3/7.9	240
NILE-4C 60W	590	480	470	6.5/8.4	240
NILE-4C 100W	590	480	470	6.7/8.5	240

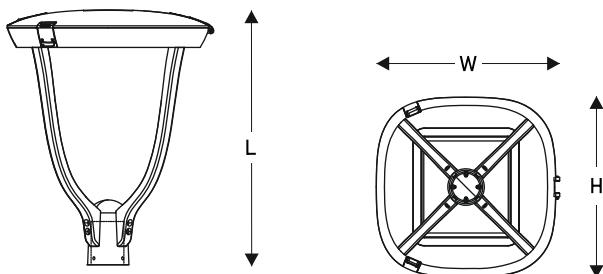

Light distribution





# PATHWAY ILLUMINATION

LED BOLLARD SERIES



Welcome to the Pathway Illumination: LED Bollard series—where advanced engineering meets architectural excellence. Our LED Bollard collection is meticulously designed to enhance urban landscapes, offering unparalleled durability, energy efficiency, and precision lighting. Each bollard integrates cutting-edge LED technology with robust construction materials, ensuring optimal performance in all environments.

Engineered for both functionality and aesthetics, our bollards provide consistent illumination while contributing to the visual harmony of any pathway, park, or urban space.

Experience the synergy of technology and design with Pathway Illumination, setting new standards in outdoor lighting solutions.



**kono**  
lighting




# AVON

**kono**  
lighting

- Body - Die-cast aluminum
- Protector - PC Diffuser
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	H	Size (mm)	$\phi$	Rated Voltage (V)
AVON 10W	610	168	240	

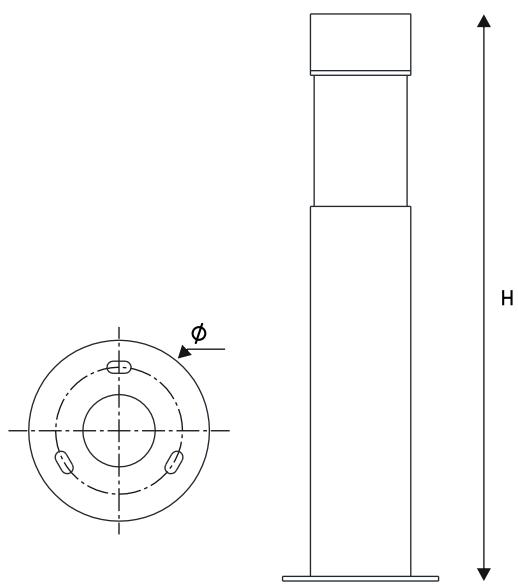




**kono**  
lighting

# AXIL

**kono**  
lighting

- Body - Die-cast aluminum
- Protector - PC Diffuser
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	H	Size (mm)	$\phi$	Rated Voltage (V)
AXIL 5W	600	150	240	

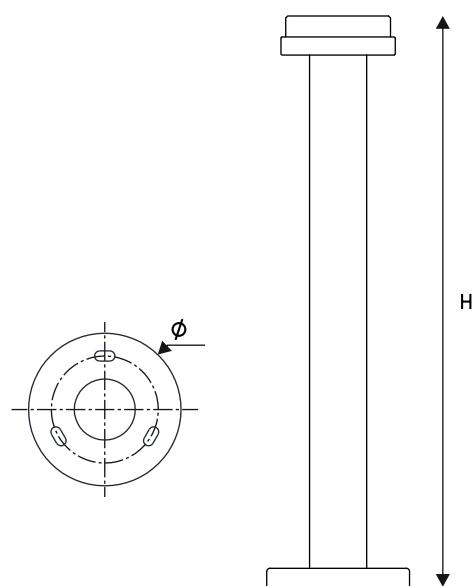

**kono**  
lighting




# AIRO

**kono**  
lighting

- Body - Die-cast aluminum
- Protector - PC Diffuser
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	L	Size W (mm)	H	Rated Voltage (V)
AIRO 3W	600	75	75	240

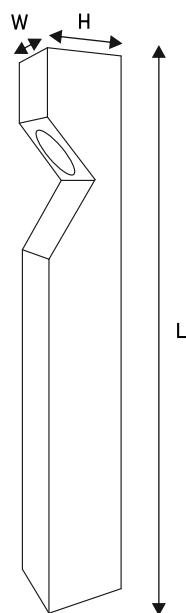




**kono**  
lighting

# ALBY

**kono**  
lighting

- Body - Aluminum/ Stainless Steel
- Protector - PC/PMMA
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	H	Size (mm)	$\phi$	Rated Voltage (V)
AXIL 10W	500	250	240	

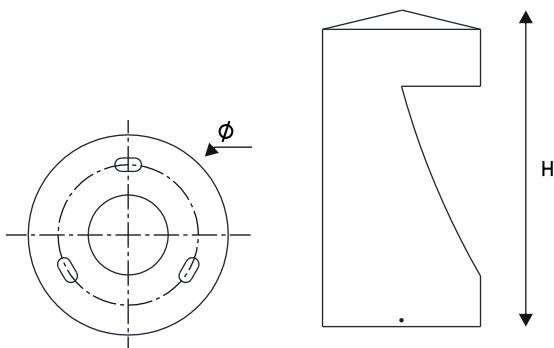



**kono**  
lighting



# AURA

- Body - Aluminum/ Stainless Steel
- Protector - Lens
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	L	Size W (mm)	H	Rated Voltage (V)
AURA 3W	3000	300	150	240

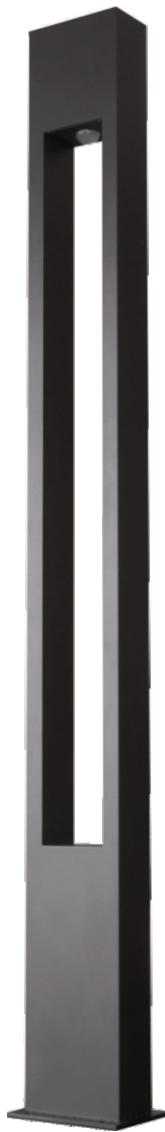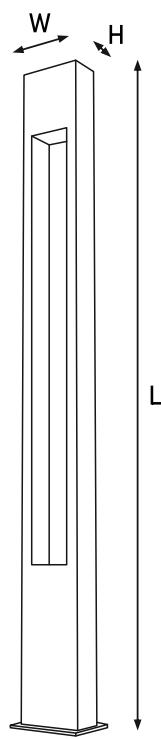

**kono**  
lighting




# ARNO

**kono**  
lighting

- Body - Aluminum/ Stainless Steel
- Protector - Lens
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	L	Size W (mm)	H	Rated Voltage (V)
ARNO 10W	1200	175	75	240

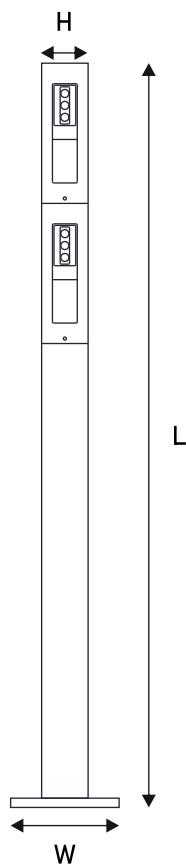


**kono**  
lighting



# ALBY

- Body - Made of iron with treatment of corrosion protection
- Diffuser - PMMA
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	L	Size (mm)	Ø	Rated Voltage (V)
ALBY 30W	805	240	240	240

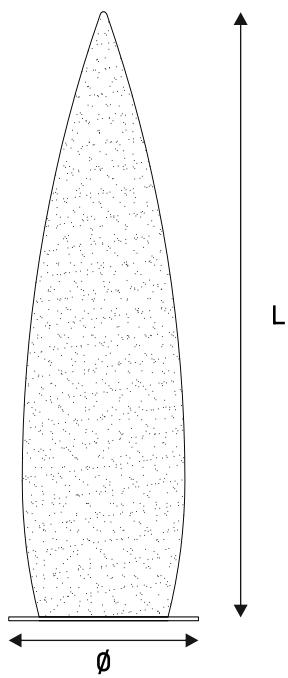

**kono**  
lighting



# ALIA

**kono**  
lighting

- Body - Aluminum/ Stainless Steel
- Protector - Lens
- Finish - Powder coated grey
- CCT - WW/NW/CW
- Efficacy - 100lm/w
- IK Rating - IK08
- IP Rating - IP65

Input Power	H	Size (mm)	Ø	Rated Voltage (V)
ALIA 10W	700	100	240	





# TAMA

## LED RECESSED LIGHT

**kono**  
lighting



Enhance the safety and aesthetics of your stairs with TAMA, our LED Stair Light. Expertly engineered for seamless integration, TAMA offers a sleek, low-profile design that ensures a modern, unobtrusive look. It provides clear, consistent lighting, making it ideal for both residential and commercial settings.


Utilizing advanced LED technology, TAMA delivers energy-efficient performance with a long lifespan, reducing energy costs and maintenance. Built with high-quality materials, it guarantees durability and reliable operation. Upgrade your lighting with TAMA, combining style, efficiency, and safety in one elegant solution.

# TAMA


**kono**  
lighting

- Body - Aluminum housing
- LED Type - SMD
- Finish - Powder coated grey
- Mounting - Surface
- Beam Angle - 10/20/30/40/50/60
- CCT - WW/NW/CW
- Lumen - 40lm/w
- Working Temperature - -30°C-45°C
- CRI - 80
- IK Rating - IK09
- IP Rating - IP65


Input	Power	L	Size W (mm)	H	Rated Voltage (V)	Power Factor
TAMA-I	2W	100	100	40	240	>0.9
TAMA-II	4W	120	120	40	240	>0.9
TAMA-III	6W	120	120	40	240	>0.9

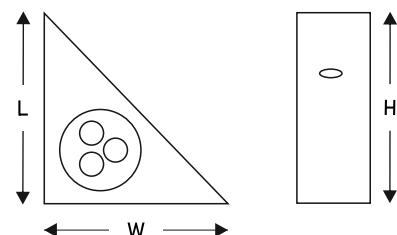

## Installation Instruction

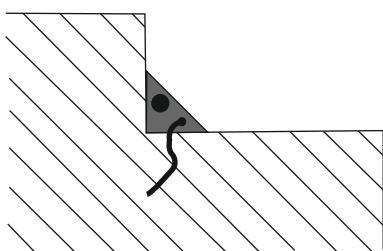

Glue the contact surface with the stairs

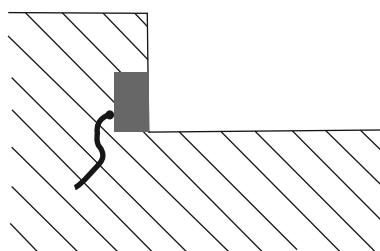

Embedded in the stairway

A close-up photograph of a modern staircase featuring light-colored wooden treads and risers. The stairs are illuminated from below by a series of triangular recessed lights mounted in the wall, which cast a warm glow onto the steps. The lighting creates a dramatic effect, highlighting the texture of the wood and the depth of the stairs.

**kono**  
lighting



# EDEN

**Input Power - 42W**

**Dimension - 150mm x 120mm x 265mm**

**CCT - 2700-6500K**

**Housing - Die-Cast aluminium**

**LED - SMD**


**Beam Angle - 8°/15°/30°/45°/60°**

**Protector - Frosted tempered glass**

**IP Rating - IP66**

**Installation - Base mounting**

**Power Cable - 200mm**

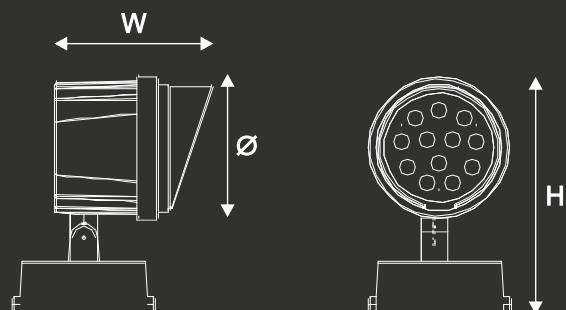

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
42W	220	50Hz	2700K	>0.95	>15%



[www.konolighting.com](http://www.konolighting.com)



# LENA

**Input Power - 30W**

**Dimension - 120mm x 235mm x 118mm**

**CCT - 2700-6500K**

**Housing - Die-Cast aluminium**


**Beam Angle - 30°**

**Protector - Clear glass**

**IP Rating - IP66**

**Installation - Base mounting**

**Power Cable - 200mm**

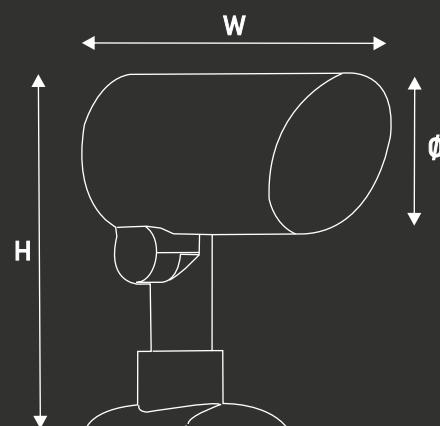

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
30W	220	50Hz	2700K	>0.95	>15%



[www.konolighting.com](http://www.konolighting.com)



# BERA

## LED BRICK LIGHT RANGE



**kono**  
lighting



BERA enhance your environment with the rugged charm and reliable illumination of our Brick LED Lights. Perfect for both indoor and outdoor settings, these fixtures combine durability with energy efficiency, providing brilliant light and a timeless, industrial aesthetic. Illuminate pathways, gardens, and architectural features with robust lighting solutions that stand the test of time.



# BERA-C1

**Input Power - 1W**

**Dimension - Ø50mm x 55mm**

**CCT - 2700K**



**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**

**Power Cable - 200mm**



Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
1W	240	50Hz	2700K	>0.95	>15%





# BERA-C2

**Input Power - 1.3W**

**Dimension - Ø100mm x 55mm**

**CCT - 2700K**



**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**

**Power Cable - 200mm**



Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
2.6W	240	50Hz	2700K	>0.95	>15%





# BERA-C3

**Input Power - 18W**

**Dimension - Ø600mm x 55mm**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**


**IP Rating - IP67**

**Installation - Base mounting**


**Power Cable - 200mm**

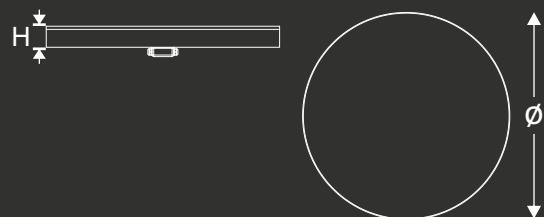

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
18W	240	50Hz	2700K	>0.95	>15%

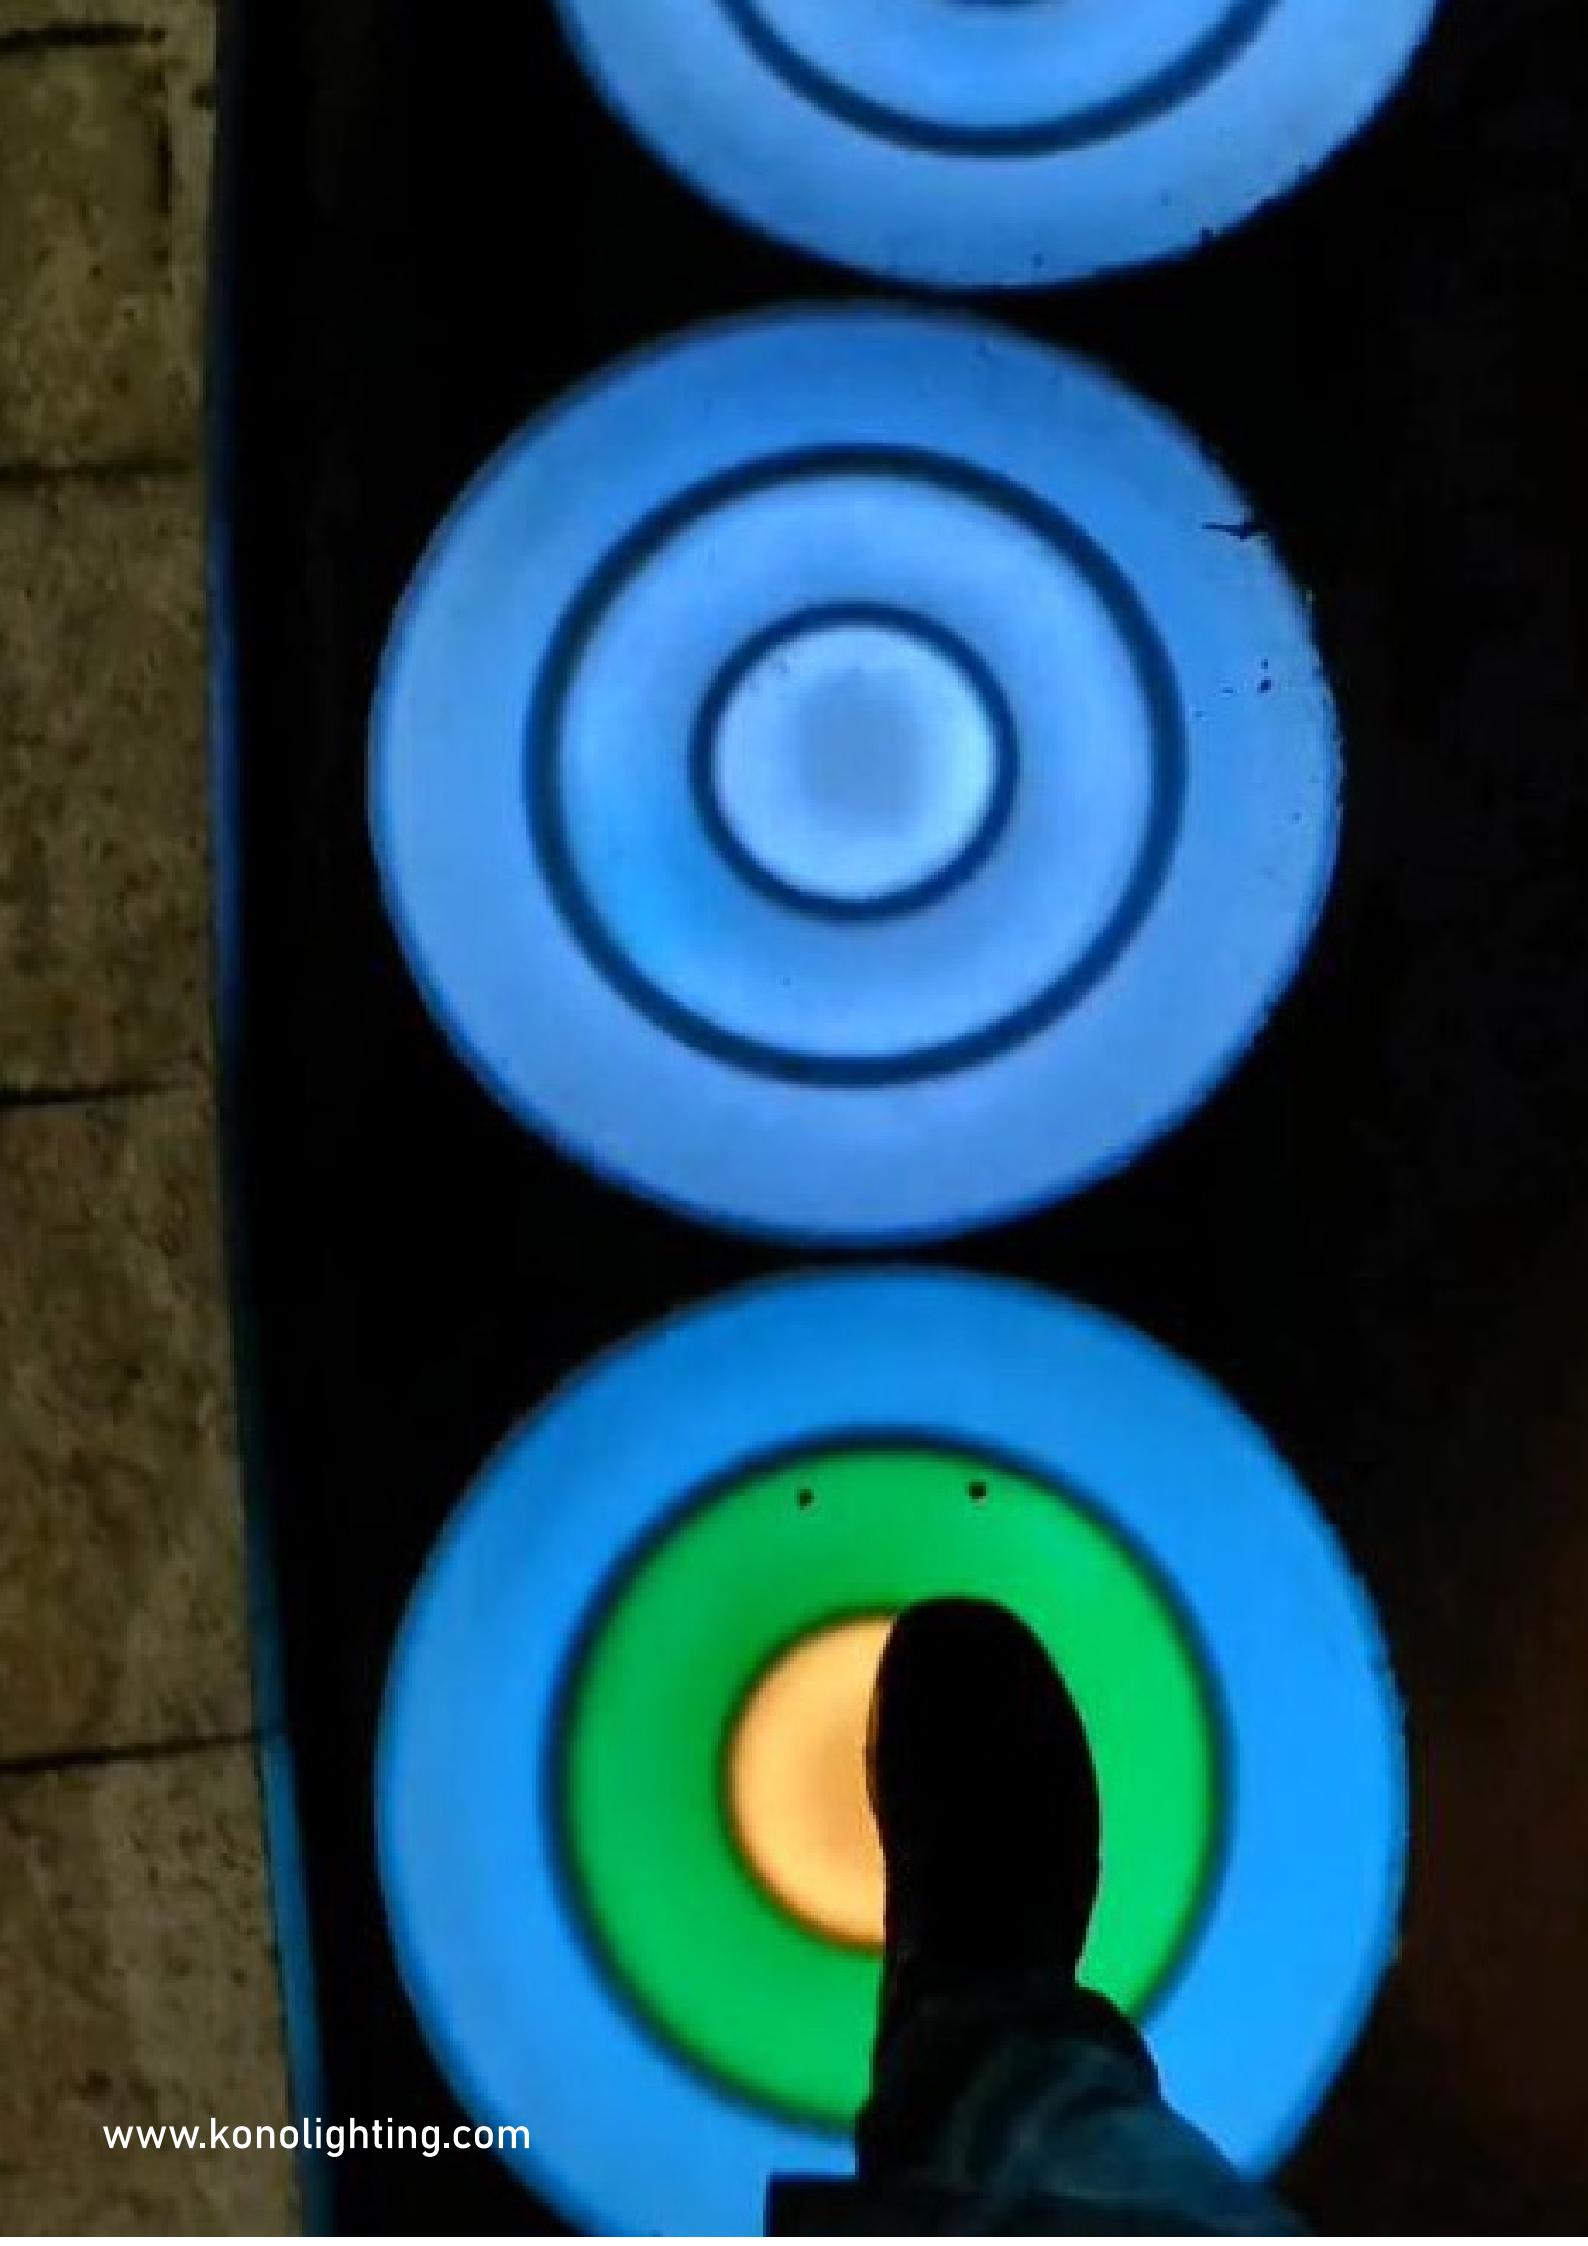A photograph of a person standing in front of a large, illuminated circular light fixture. The fixture consists of several concentric blue rings, with a bright yellow center. The person is positioned in the foreground, facing the light, with their silhouette visible against the bright background.

[www.konolighting.com](http://www.konolighting.com)

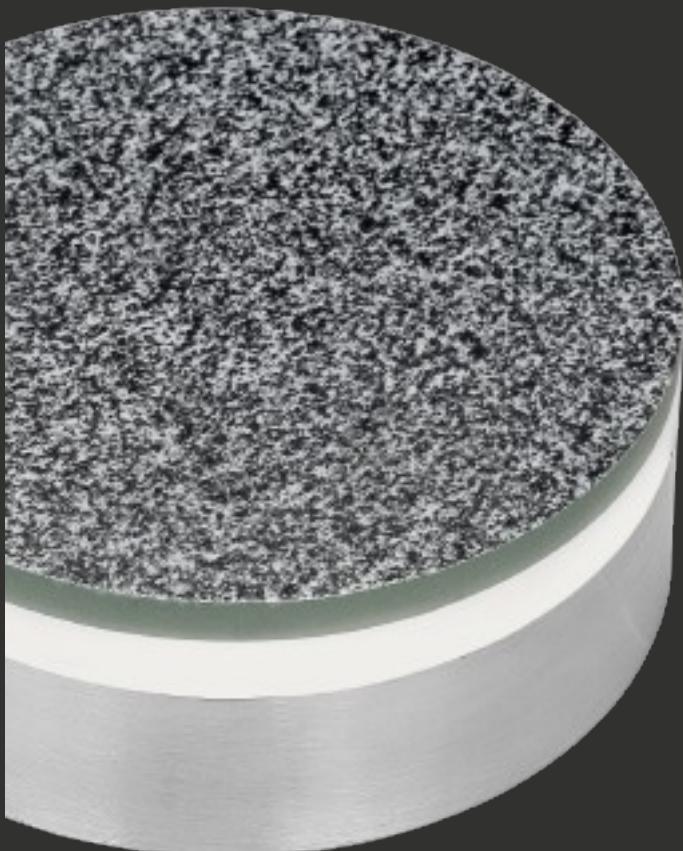

# BERA-C4

**Input Power - 2.6W**

**Dimension - Ø200mm x 55mm**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Marble tempered glass**

**IP Rating - IP67**


**Installation - Base mounting**

**Power Cable - 200mm**

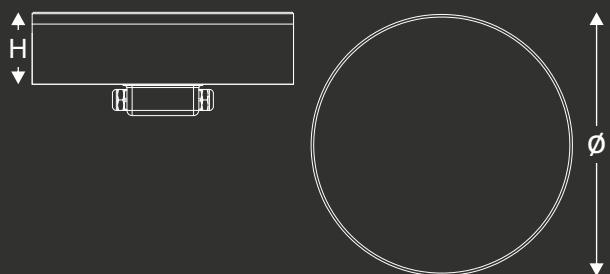

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
2.6W	240	50Hz	2700K	>0.95	>15%



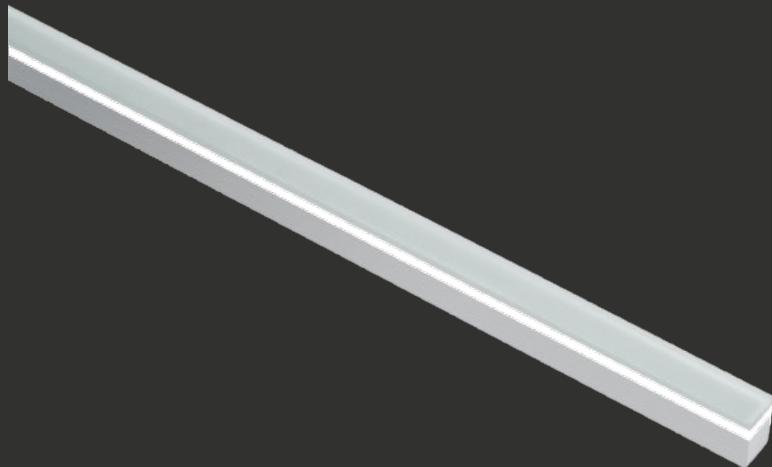

# BERA-L1

**Input Power - 3W**

**Dimension - 500mm x 36mm x 55mm**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**

**IP Rating - IP67**


**Installation - Base mounting**

**Power Cable - 200mm**

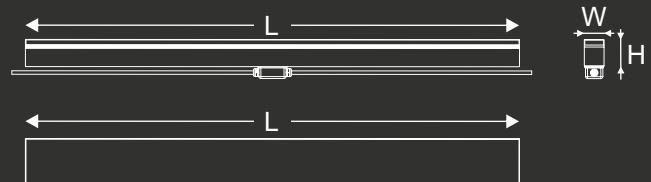

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
3W	240	50Hz	2700K	>0.95	>15%



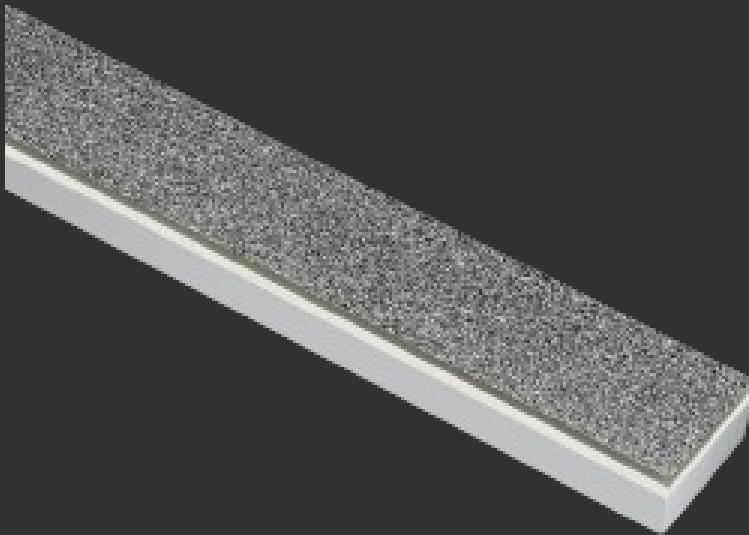

# BERA-L2

**Input Power - 8W**

**Dimension - 1000mm x 50mm x 55mm**

**CCT - 2700K**

**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Marble tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**

**Power Cable - 200mm**



Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
8W	240	50Hz	2700K	>0.95	>15%





# BERA-R1

**Input Power - 2.6W**

**Dimension - 100mm x 200mm x 55mm**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**

**IP Rating - IP67**


**Installation - Base mounting**

**Power Cable - 200mm**

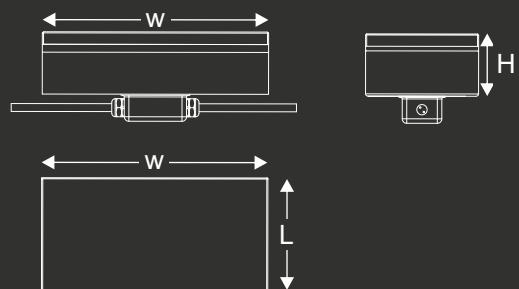

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
2.6W	240	50Hz	2700K	>0.95	>15%



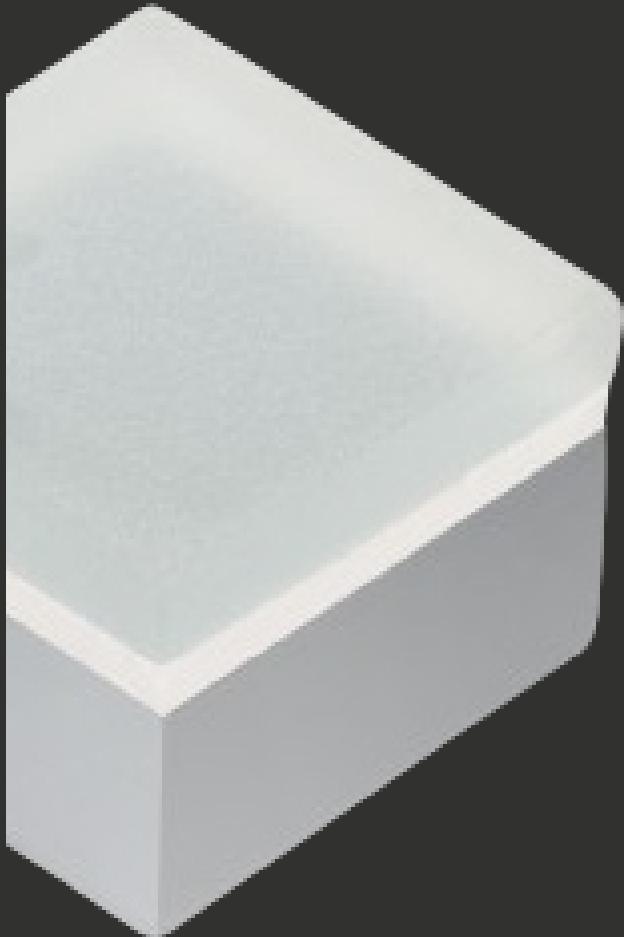

# BERA-S1

**Input Power - 1.3W**

**Dimmension - 100 x 100 x55**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Frosted tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**


**Power Cable - 200mm**

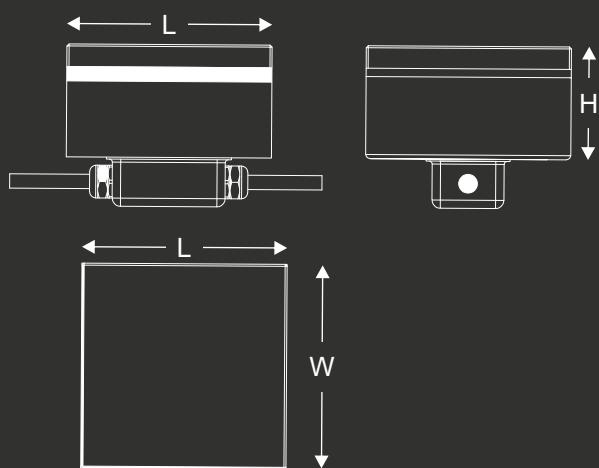

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
1.3W	240	50Hz	2700K	>0.95	>15%



[www.konolighting.com](http://www.konolighting.com)

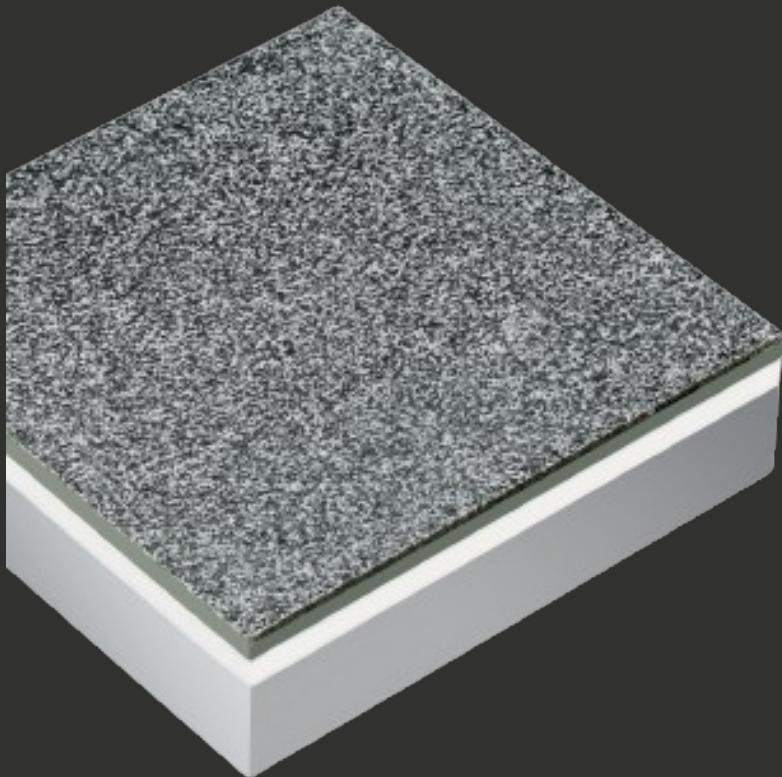

# BERA-S2

**Input Power - 2.6W**

**Dimension - 200mm x 200mm x 55mm**

**CCT - 2700K/RGB**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Marble tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**


**Power Cable - 200mm**

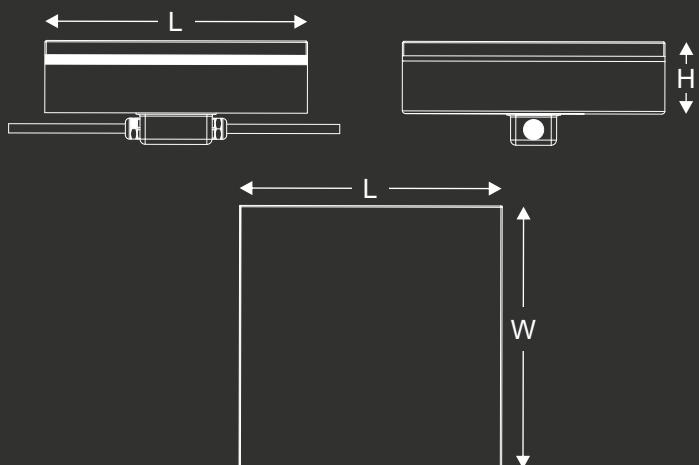

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
2.6W	240	50Hz	2700K	>0.95	>15%



[www.konolighting.com](http://www.konolighting.com)

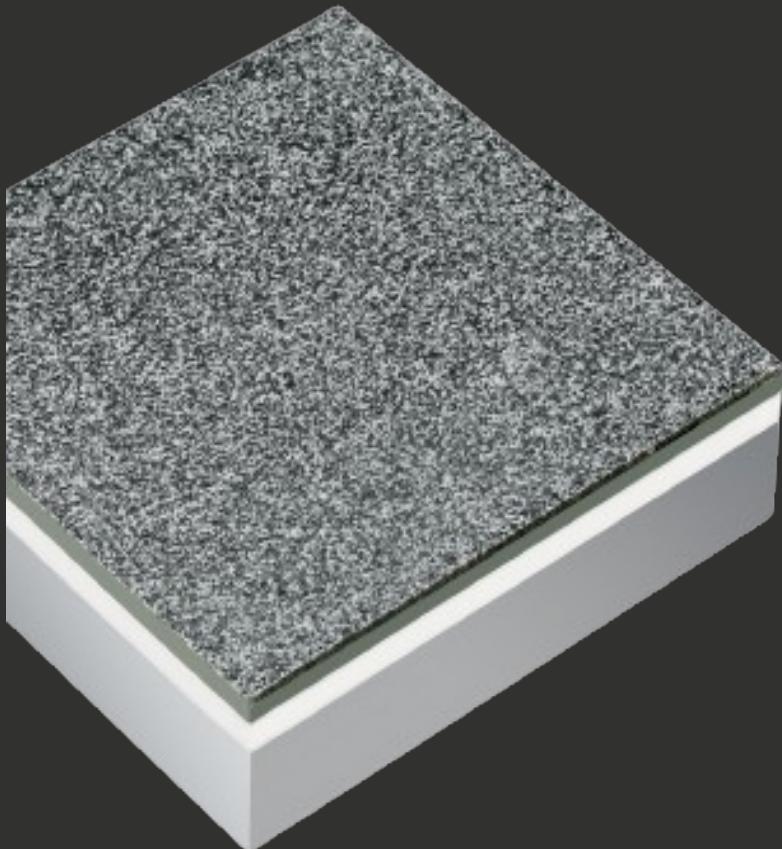

# BERA-S3

**Input Power - 2.6W**

**Dimension - 200mm x 200mm x 60mm**

**CCT - 2700K/RGB**


**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Marble tempered glass**

**IP Rating - IP67**


**Installation - Base mounting**

**Power Cable - 200mm**

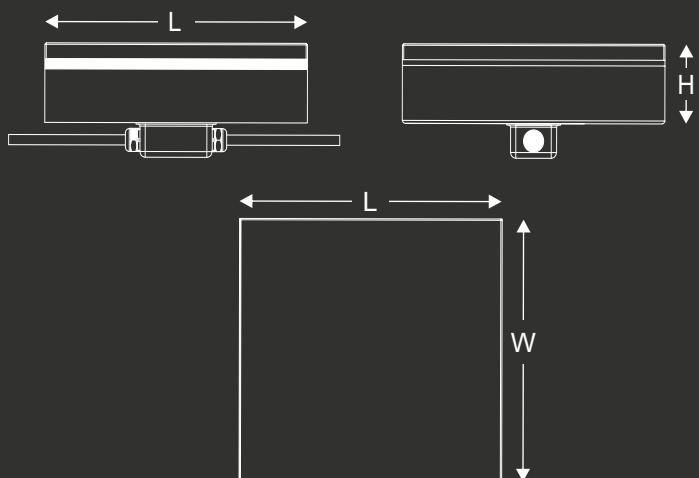

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
2.6W	240	50Hz	2700K	>0.95	>15%



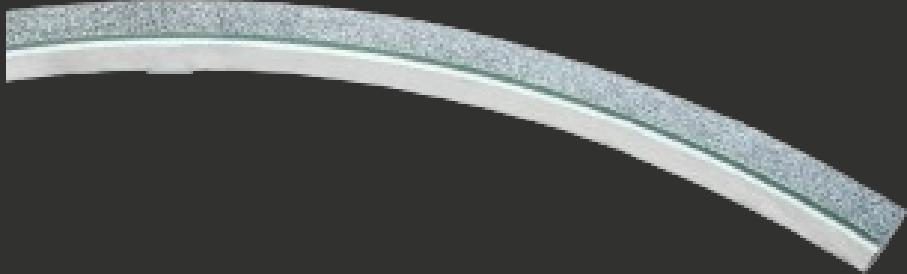

# BERA CURVE

**Input Power - 12W**

**Dimension - 1570mm x 1492mm x 50mm**

**CCT - 2700K**

**Housing - 304 stainless steel bottom case,  
With 201 stainless steel recessed box**

**Protector - Marble tempered glass**

**IP Rating - IP67**

**Installation - Base mounting**

**Power Cable - 200mm**

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
12W	240	50Hz	2700K	>0.95	>15%



[www.konolighting.com](http://www.konolighting.com)



# WILO


## LED WALL TILE RANGE

A close-up photograph of a dark, textured wall, likely made of concrete or metal, featuring a repeating pattern of vertical rectangular recesses. A series of bright, horizontal light strips are embedded within these recesses, creating a strong geometric pattern. The lighting is low-angle, casting long, sharp shadows of the recesses onto the wall surface.

**kono**  
lighting



WILO discover the perfect blend of modern elegance and innovative lighting with our premium Wall Tile LED Fixtures. Designed to transform any space, these fixtures offer exceptional brightness, energy efficiency, and a sleek, contemporary aesthetic. Illuminate your walls with sophisticated, ambient lighting that enhances your interior design and creates a welcoming atmosphere.

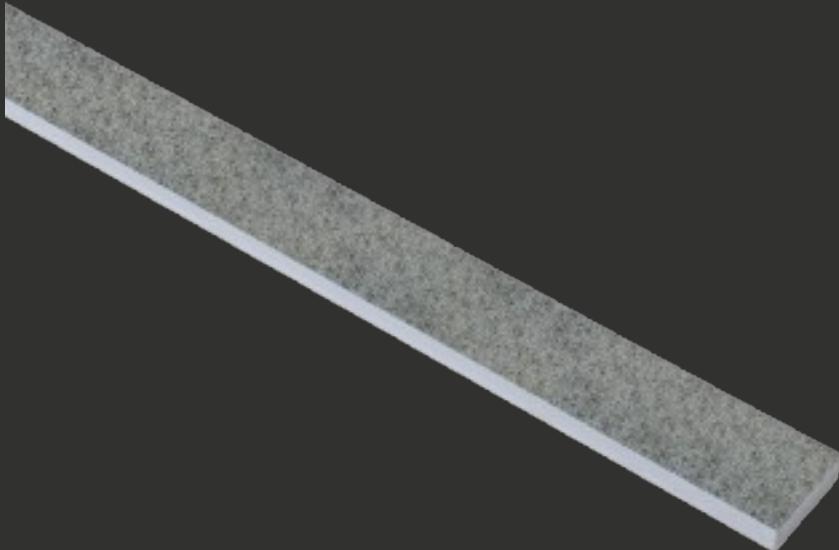

# WILO-L

**Input Power - 6W**

**Dimension - 1000mm x 85mm x 30mm**

**CCT - 2700K**


**Housing - 304 stainless steel bottom case**

**Protector - Marble tempered glass**

**IP Rating - IP65**


**Installation - Wall mounting**

**Power Cable - 200mm**

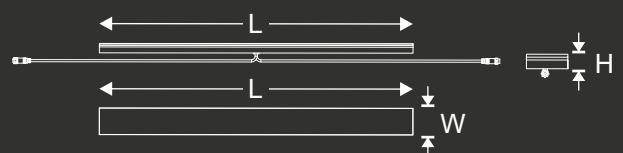

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
6W	240	50Hz	2700K	>0.95	>15%



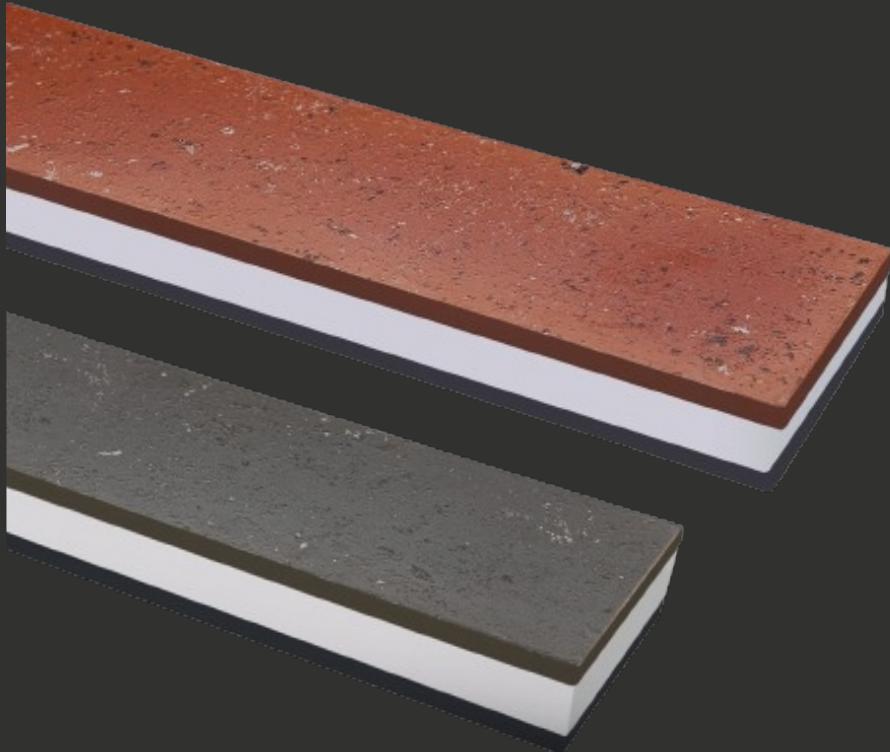

# WILO-R

**Input Power - 1W**

**Dimension - 240mm x 60mm x 15mm**

**CCT - 2700K**

**Housing - 304 stainless steel bottom case**


**Protector - Red Marble tempered glass (WILO-R1)**

**Grey Marble tempered glass (WILO-R2)**


**IP Rating - IP65**

**Installation - Wall mounting**

**Power Cable - 200mm**

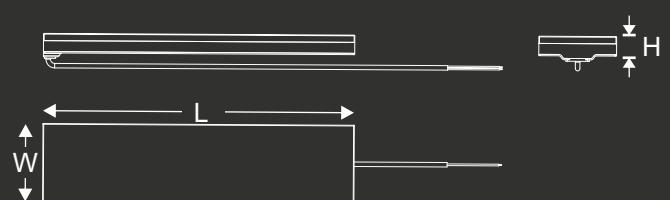

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
1W	240	50Hz	2700K	>0.95	>15%

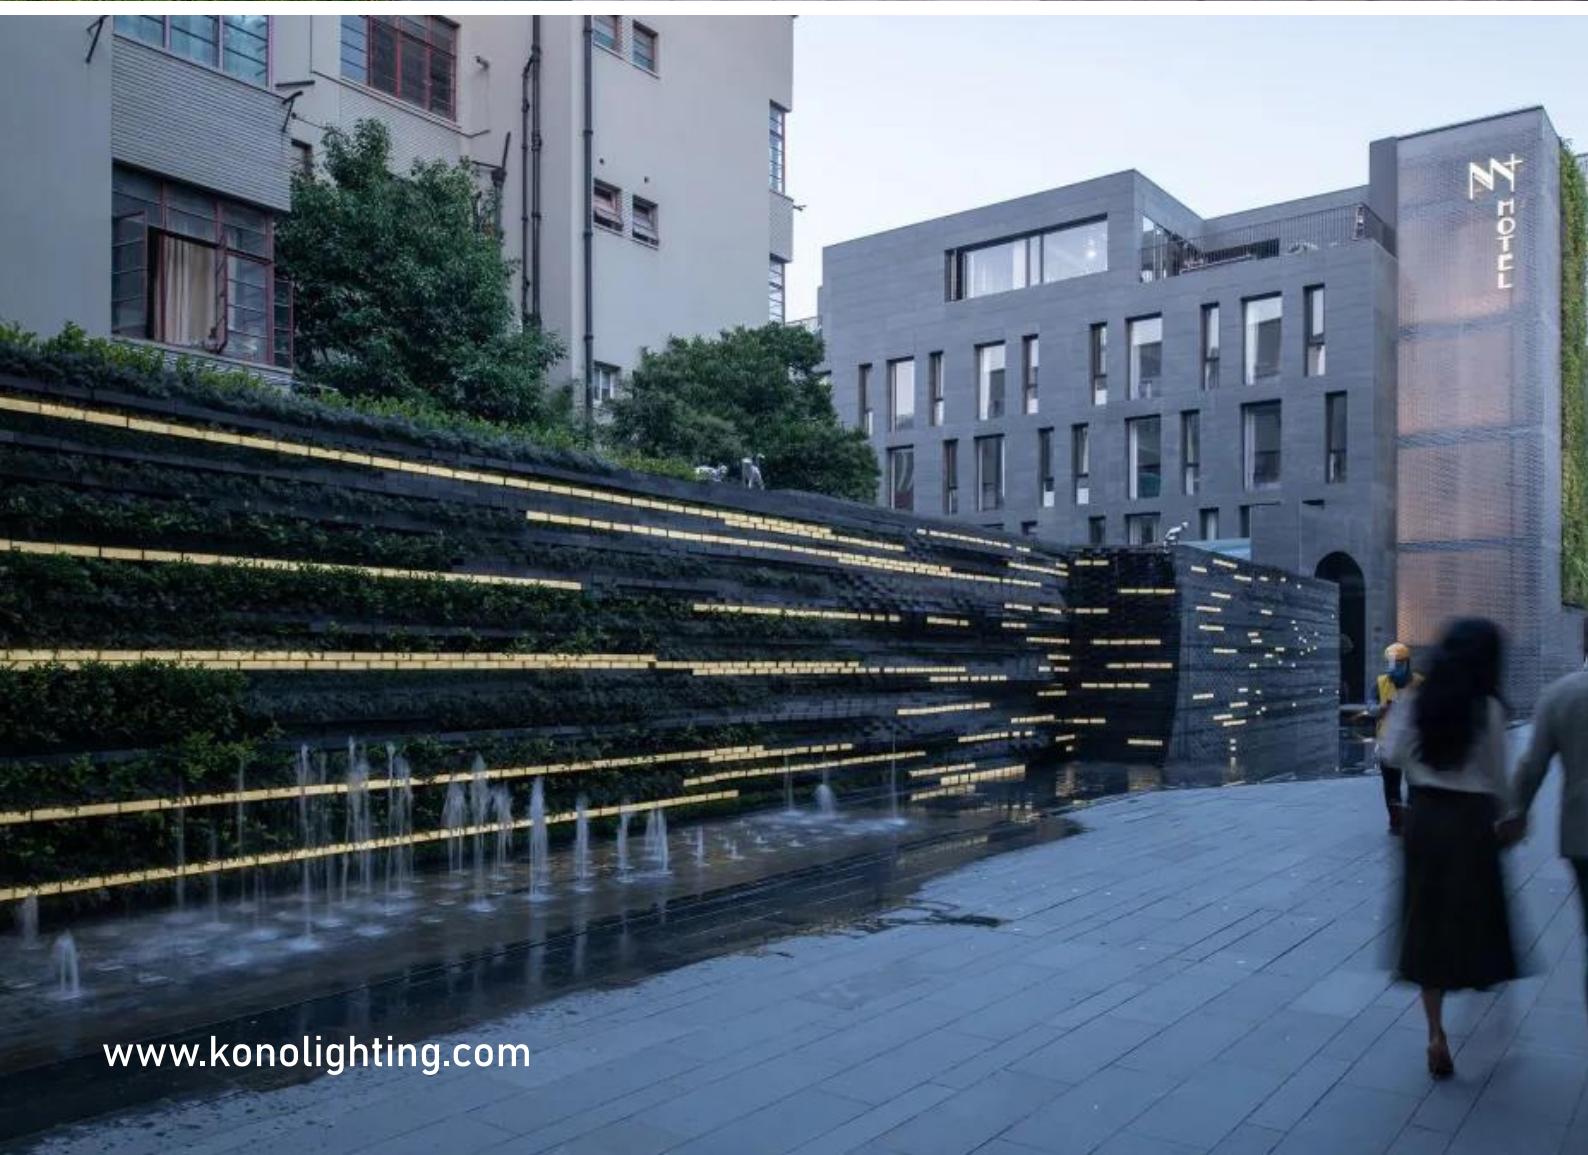



# WILO-S

**Input Power - 6W**

**Dimension - 300mm x 300mm x 22mm**

**CCT - 2700K**

**Housing - 304 stainless steel bottom case**

**Protector - Frosted tempered glass**

**IP Rating - IP65**

**Installation - Wall mounting**

**Power Cable - 200mm**

Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
6W	240	50Hz	2700K	>0.95	>15%


together  
保利广场

肯德基

KFC 早餐

中西搭配  
套餐  
¥6 起

[www.konolighting.com](http://www.konolighting.com)

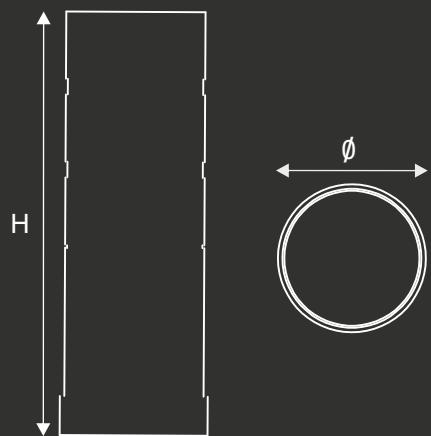


# OHIO-R

**Input Power - 6W**  
**Dimension( Ø x H ) - 230mm x 800mm**  
**CCT - RGB**  
**Material - Terrazzo + Nano light guide**  
**IP Rating - IP65**  
**Installation - Surface**



Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
6W	240	50Hz	RGB	>0.95	>15%



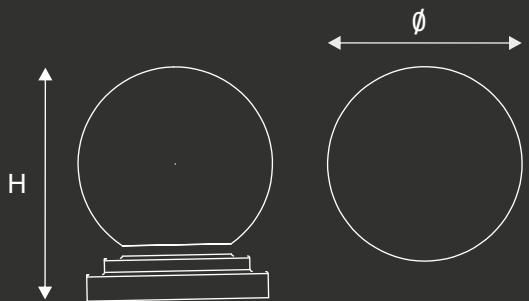

# OHIO-S

**Input Power - 6W**

**Dimension( Ø x H ) - 500mm x 550mm**

**CCT - RGB**

**Material - Terrazzo + Nano light guide**

**IP Rating - IP65**

**Installation - Surface**



Input Power	Voltage	Input Frequency	CCT	Power Factor	ATHD
6W	240	50Hz	RGB	>0.95	>15%





# KEMI

## LED WALL LIGHT RANGE

**kono**  
lighting



The Kemi Wall Light stands as an architectural masterpiece, seamlessly merging functionality with aesthetic excellence. Tailored for modern interiors, its sleek lines and minimalist silhouette exude contemporary elegance. The soft, diffused light emanating through its geometrically inspired structure creates a tranquil ambiance, perfect for residential and commercial settings alike.


Its versatile design ensures effortless integration into various architectural styles, from urban lofts to upscale offices. Whether displayed as a solitary statement piece or in multiples for a dramatic impact, the Kemi Wall Light exemplifies thoughtful design and impeccable craftsmanship, making it a preferred choice for discerning architects and interior designers.

# KEMI-W


**kono**  
lighting

- Body - Aluminum housing
- LED Type - SMD
- Finish - Powder coated grey
- Mounting - Surface
- Beam Angle - 8/15/30/45/60/10°\*30/15°\*60
- CCT - WW/NW/CW/RGB
- Control - DMX/DALI optional
- CRI - 80
- IK Rating - IK09
- IP Rating - IP66

Product Name	Input Power	L	Size W (mm)	H	Rated Voltage (V)	Power Factor
KEMI-W1	6W	139	55	102	220	>0.9
KEMI-W2	9W	139	55	102	220	>0.9
KEMI-W3	12W	139	95	100	220	>0.9
KEMI-W4	18W	139	95	100	220	>0.9

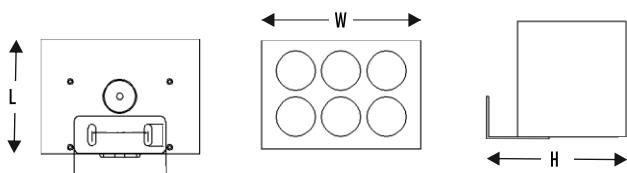


## Light Distribution




# KEMI-S

- Body - Aluminum housing
- LED Type - SMD
- Finish - Powder coated grey
- Mounting - Surface
- Beam Angle - 8/15/30/45/60/10\*30/15\*60
- CCT - WW/NW/CW/RGB
- Control Control - DMX/DALI optional
- CRI - 80
- IK Rating - IK09
- IP Rating - IP66

Product Name	Input Power	L	Size W (mm)	H	Rated Voltage (V)	Power Factor
KEMI-S1	9W	78	139	190	220	>0.9
KEMI-S2	18W	118	139	190	220	>0.9
KEMI-S3	27W	175	139	169	220	>0.9
KEMI-S4	54W	300	139	169	220	>0.9
KEMI-S3	72W	430	139	169	220	>0.9
KEMI-S4	96W	560	139	169	220	>0.9

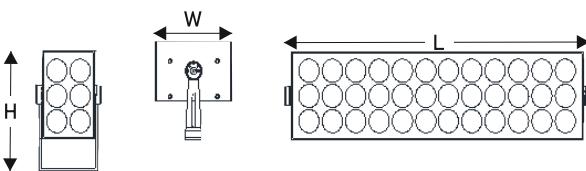

Light Distribution

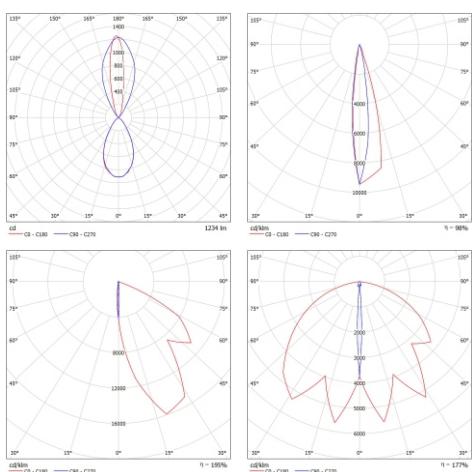



# KEMI-F

- Body - Aluminum housing
- LED Type - SMD
- Finish - Powder coated grey
- Mounting - Surface
- Beam Angle - 8/15/30/45/60/10\*30/15\*60
- CCT - WW/NW/CW/RGB
- Control Control - DMX/DALI optional
- CRI - 80
- IK Rating - IK09
- IP Rating - IP66

Product Name	Input Power	L	Size W (mm)	H	Rated Voltage (V)	Power Factor
KEMI-F1	144W	560	320	330	220	>0.9
KEMI-F2	192W	688	320	330	220	>0.9



Light Distribution

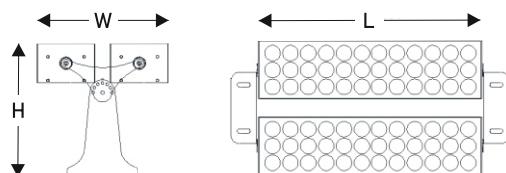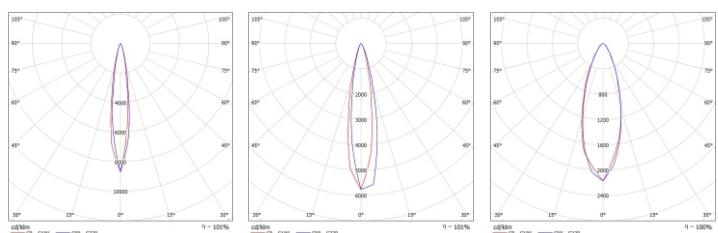



# LUMINERA- $\alpha$

## LASER CUT POLE

**kono**  
lighting



NOIDA

NOIDA


NOIDA

Discover the epitome of elegance with our laser-cut poles, meticulously crafted to redefine outdoor decor. Each pole showcases exquisite precision through intricate laser-cut patterns, creating a stunning focal point in any room. Made from high-quality materials, these poles combine durability with aesthetic appeal, promising longevity and timeless charm. Available in a range of lengths and finishes, they effortlessly complement various design aesthetics, from modern minimalism to classic sophistication.

Whether for residential spaces or commercial environments, our laser-cut poles offer a seamless blend of artistry and functionality. Elevate your interior effortlessly with these versatile poles, designed to enhance the ambiance and style of any space with unmatched grace and refinement.

- Body - Mild steel pipe
- Finish - PU Painted
- The pipe is engraved with various laser cut designs
- Highly efficient asymmetric light distribution for creating ambience.
- Maximised savings in operation & maintenance cost.
- Surge Protection Device: Standard 10KV
- CCT - WW/NW/CW
- Lumen - 120lm/w
- CRI - 90
- Electrical Class I
- IK Rating - IK07
- IP Rating - IP66
- Applications - Parks, Pathways, Jogging Track, Cycle Track

Input Power	H	Size (mm)	Ø	Rated Voltage (V)	Power Factor
LUMINERA-α - 75W	6000	200		240	>0.9

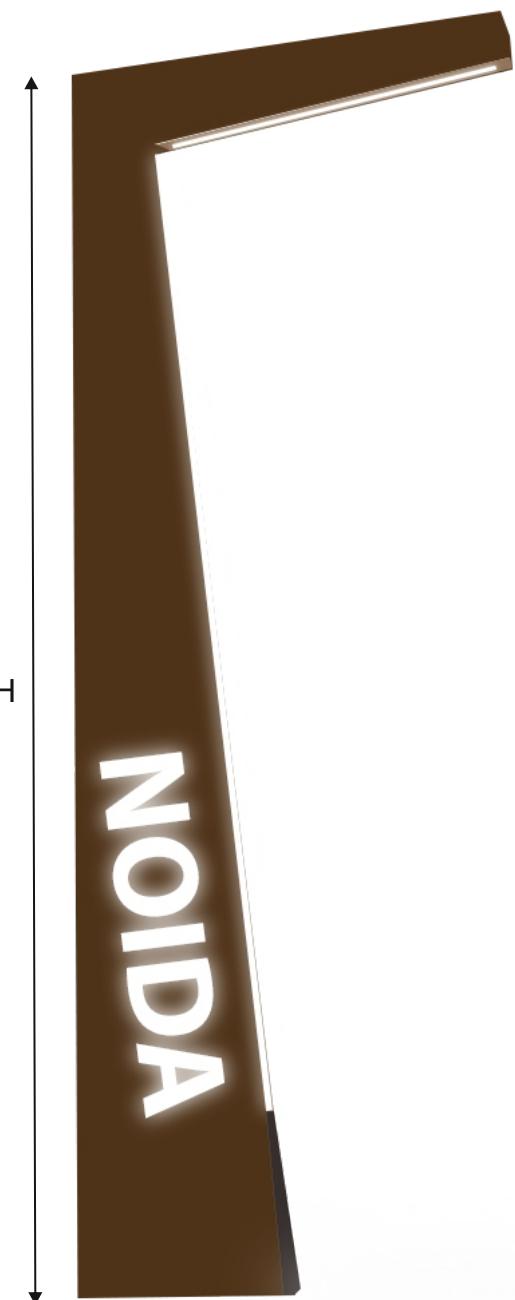

# LET'S DO THIS!



SEND US AN EMAIL:  
[projects@konolighting.com](mailto:projects@konolighting.com)



CALL US:  
+91 9810424873



OUR OFFICE  
15 STATES

