


Triple cut format

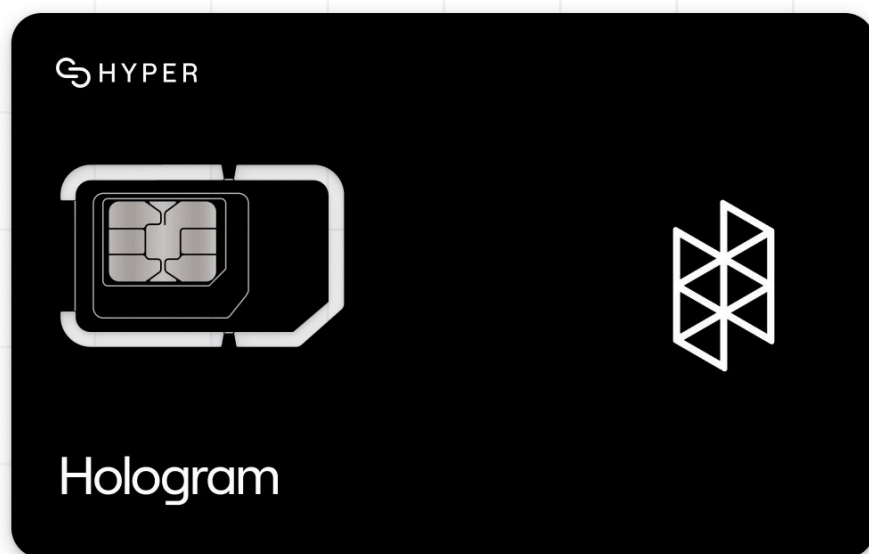

Hyper eUICC SIM

Hyper eUICC SIM – Triple cut format

Product overview

A secure, device-agnostic IoT SIM card for global deployments built for M2M data, with easy activation, transparent pricing, and developer-friendly tools. Hologram's Hyper SIM platform is eUICC compliant and remotely updates coverage over-the-air by adding or removing connectivity profiles, without requiring you to swap the SIM in your device. Network fallback functionality can dynamically switch profiles in the event that a profile loses connectivity.


Primary part number

G3-F

Network availability

Works globally with Hologram's 2G through 5G network including LTE-M and NB-IoT where coverage is available. More information: <https://www.hologram.io/pricing/coverage>

Card layout

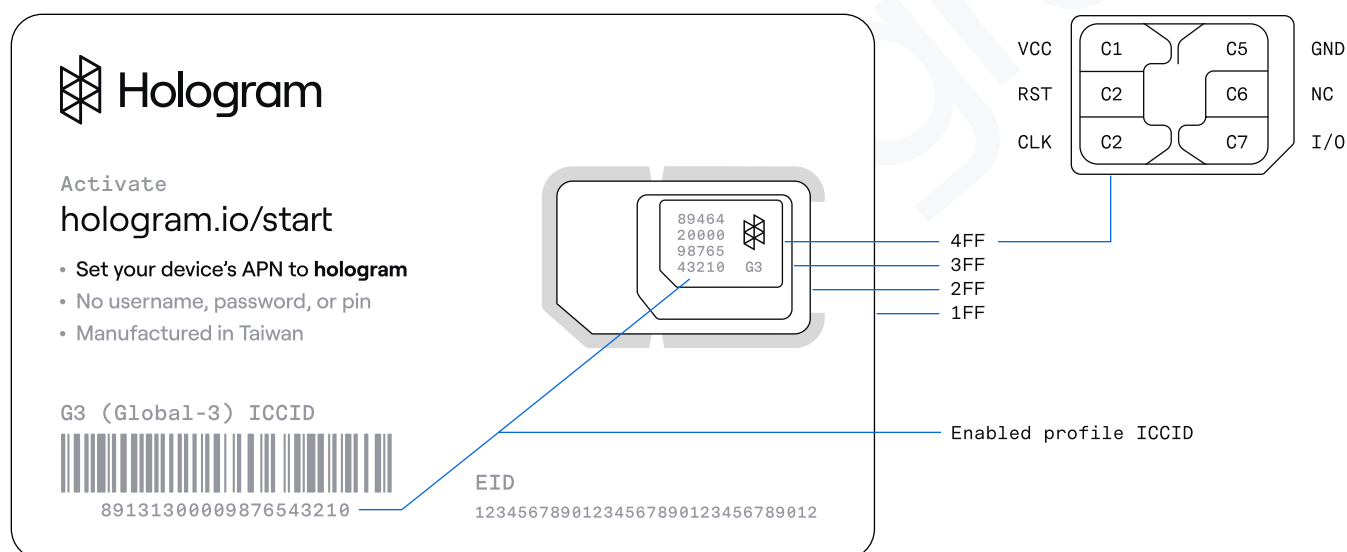

Physical characteristics


Size

1FF	Full-size	85.6 x 54 x 0.71 mm
2FF	Mini-SIM	25 x 15 x 0.71 mm
3FF	Micro-SIM	15 x 12 x 0.71 mm
4FF	Nano-SIM	12.3 x 8.8 x 0.71 mm

Pin definitions

C1	VCC	Input Voltage
C2	RST	Reset
C3	CLK	Clock
C5	GND	Ground
C6	NC	No Connect
C7	I/O	Input/Output

Multi-core card layout

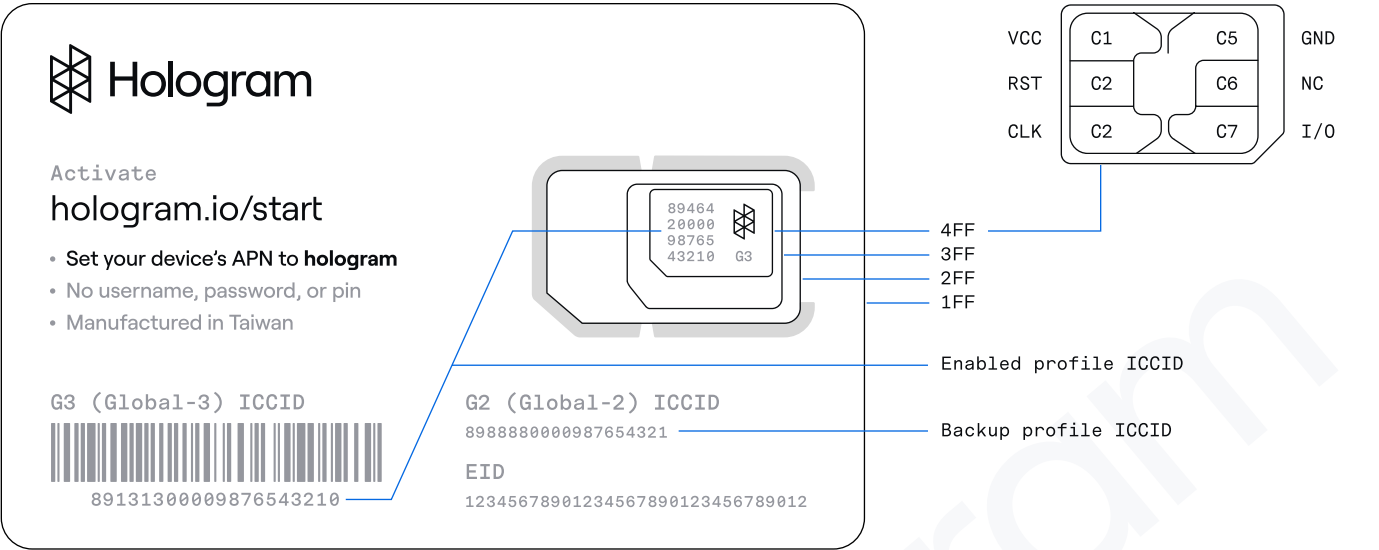

Compliance

Chip	Common Criteria	EAL 4+ PP-0084 (chipset) Certificate: BSI-DSZ-CC-1126-V2-2021
OS	GSMA	SGP.01 Embedded SIM Remote Provisioning Architecture v4.2 SGP.02 Embedded UICC Technical Specification v4.2 SGP.16 M2M Compliance Process v1.3
	TRUSTED CONNECTIVITY ALLIANCE	eUICC Profile Package Interoperable Format Technical Specification v2.3.1
	GLOBALPLATFORM	Card Specification Version 2.3.1 Card Specification Amendments A, B, D & E
Software	ORACLE Java Card	Java Card 3 Platform, Classic Edition version 3.0.5
	3GPP A GLOBAL INITIATIVE	Release 16
Remote SIM provisioning	GSMA	SGP.01 Embedded SIM Remote Provisioning Architecture v4.2 SGP.02 Embedded UICC Technical Specification v4.2 SGP.16 M2M Compliance Process v1.3
Supplier's Declaration of Conformity		Manufactured according to the following standards: • RoHS 2015/863/EU • Reach certification • GSMA SAS-UP • ISO 9001:2015 • ISO 27001 • ISO 14001

Hardware features

Hardware characteristics

Grade	Industrial
Operational temperature	−40°C to +105°C
Data retention	20 years @ 25°C
Write endurance	>1.5M cycles
Memory (NVM)	800 KB
Memory (SRAM)	20 KB

Chip type

Supplier	Infineon
Chip code	SLM17ECB800B

Hardware electrical characteristics

Operating voltage	1.62V to 5.5V
Interface standards	ISO/IEC 7816, T=0 standard for Cards with contacts — USB electrical interface and operating procedures
	ETSI 3GPP TS 102 221 v16.0.0 – Smart Cards; UICC-Terminal interface; Physical and logical characteristics

Manufacturing testing and tolerances

Dimensional tolerance	±0.1 ISO Spec. ID-1, Width: 85.6+0.12/−0.13mm, Height: 54 +0.03/−0.08mm, (2FF/3FF/4FF ±0.17)
Gold plating thickness	Minimum Au 0.03 µm
Salt spray test	>48 hours
Insertion/removal cycle life	>3,000 cycles
Insertion and extraction force	Insertion force not to exceed 10 N, Extraction force not to exceed 2 N
Material	HABS Industrial Grade
Hardness test	9H on SLM17 Module

SIM features

Profiles and fallback

Available user memory	414,384 B
Maximum profiles	10
Applet version	v1 Fallback applet
Default fallback mode	Return to previous, no recovery

Part numbers

Active part numbers	Past part numbers
G3-F	G3
G3-G2-F	—
G3-US2M-F	—
G2-F	GL2-AFB
G1-F	—
G1-G2-F	—
US2+-G2-F	GL2-AFB-USA2+
US2M-G2-F	GL2-AFB-USAM
CA1-G2-F	GL2-AFB-CA1
G3-F-2FF	—

Multipack labeling	Part numbers
Single SIM	G3-G2-F
100-pack	G3-G2-F-100
1000-pack	G3-G2-F-1000