



# RCC Development



# RCC Worker Overview

- RCC – Resource Constrained C/C++
- Supported GPP (x86-64 bit and Cortex A9)
- Supported OS (centos6, centos7, xilinx13\_3, pico\_t6a)
- C and C++ language Workers
- Focus on C++ moving forward



# Application Worker build steps

- 1)OPS: Use pre-existing or create new
- 2)OCS: Use pre-existing or create new
- 3)Create new App Worker (Modify OWD, Makefile, and source code)
- 4)Build the App Worker for target device(s)
- 5)Create Unit Test (<component>-test.xml, generate, verify and view scripts)
- 6)Build Unit Test
- 7)Run Unit Test





# Execution model

- Software Containers provide execution environment for Workers
  - Loads, executes, controls, and configures Workers
  - Moves data between Workers
  - Provides interfaces for local services
    - Including software watchdog timer
  - Evaluates data availability
    - Consumer's buffer has data
    - Producer's buffer has space
- Each RCC Container is a single *thread*





# Execution model



- Shared buffers between Workers that are in the same Container

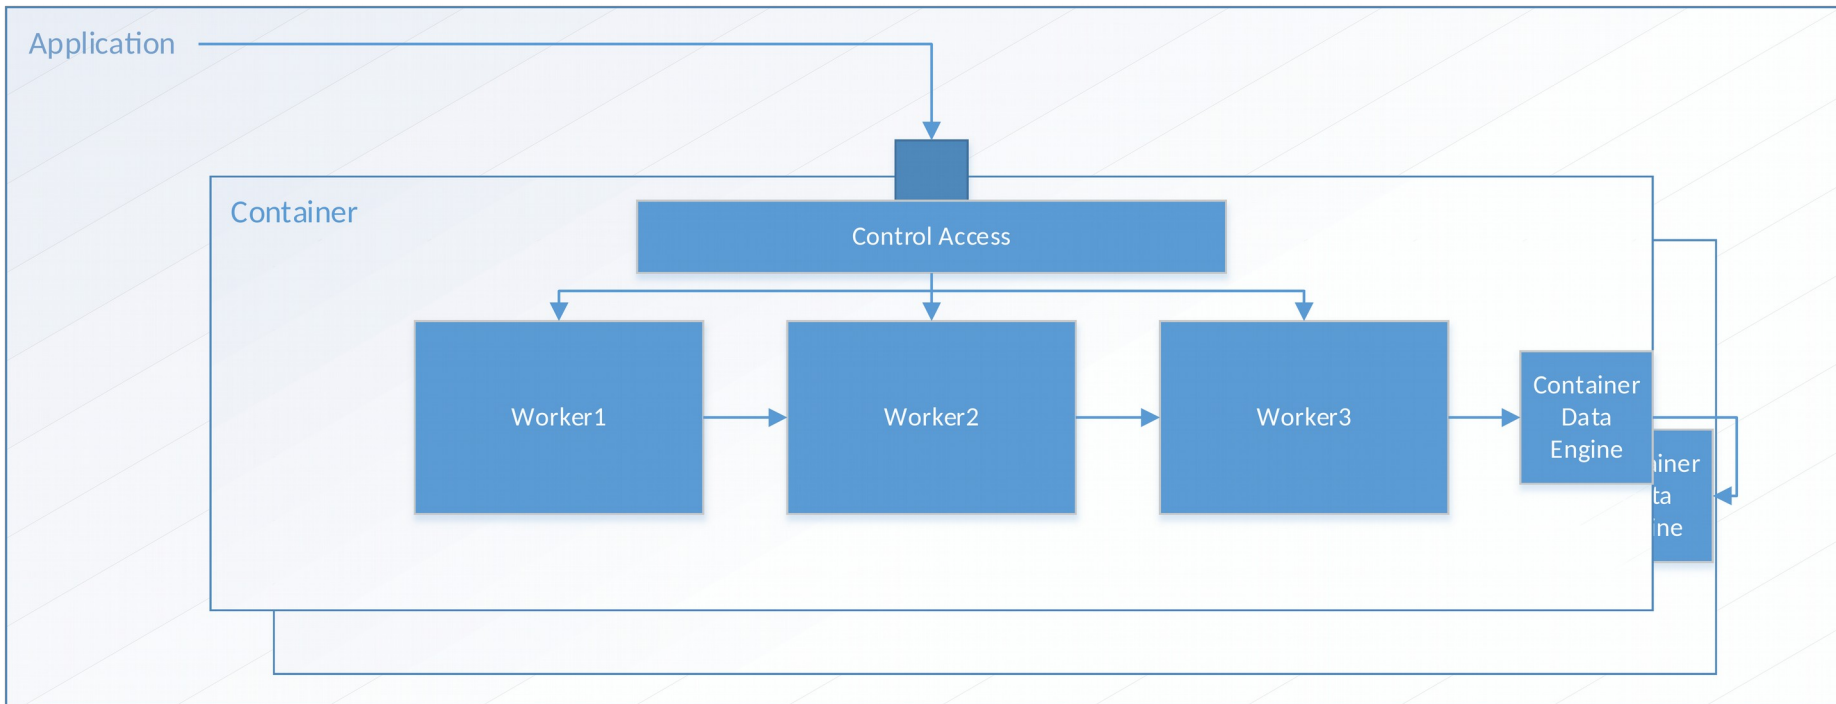

# Worker Life Cycle

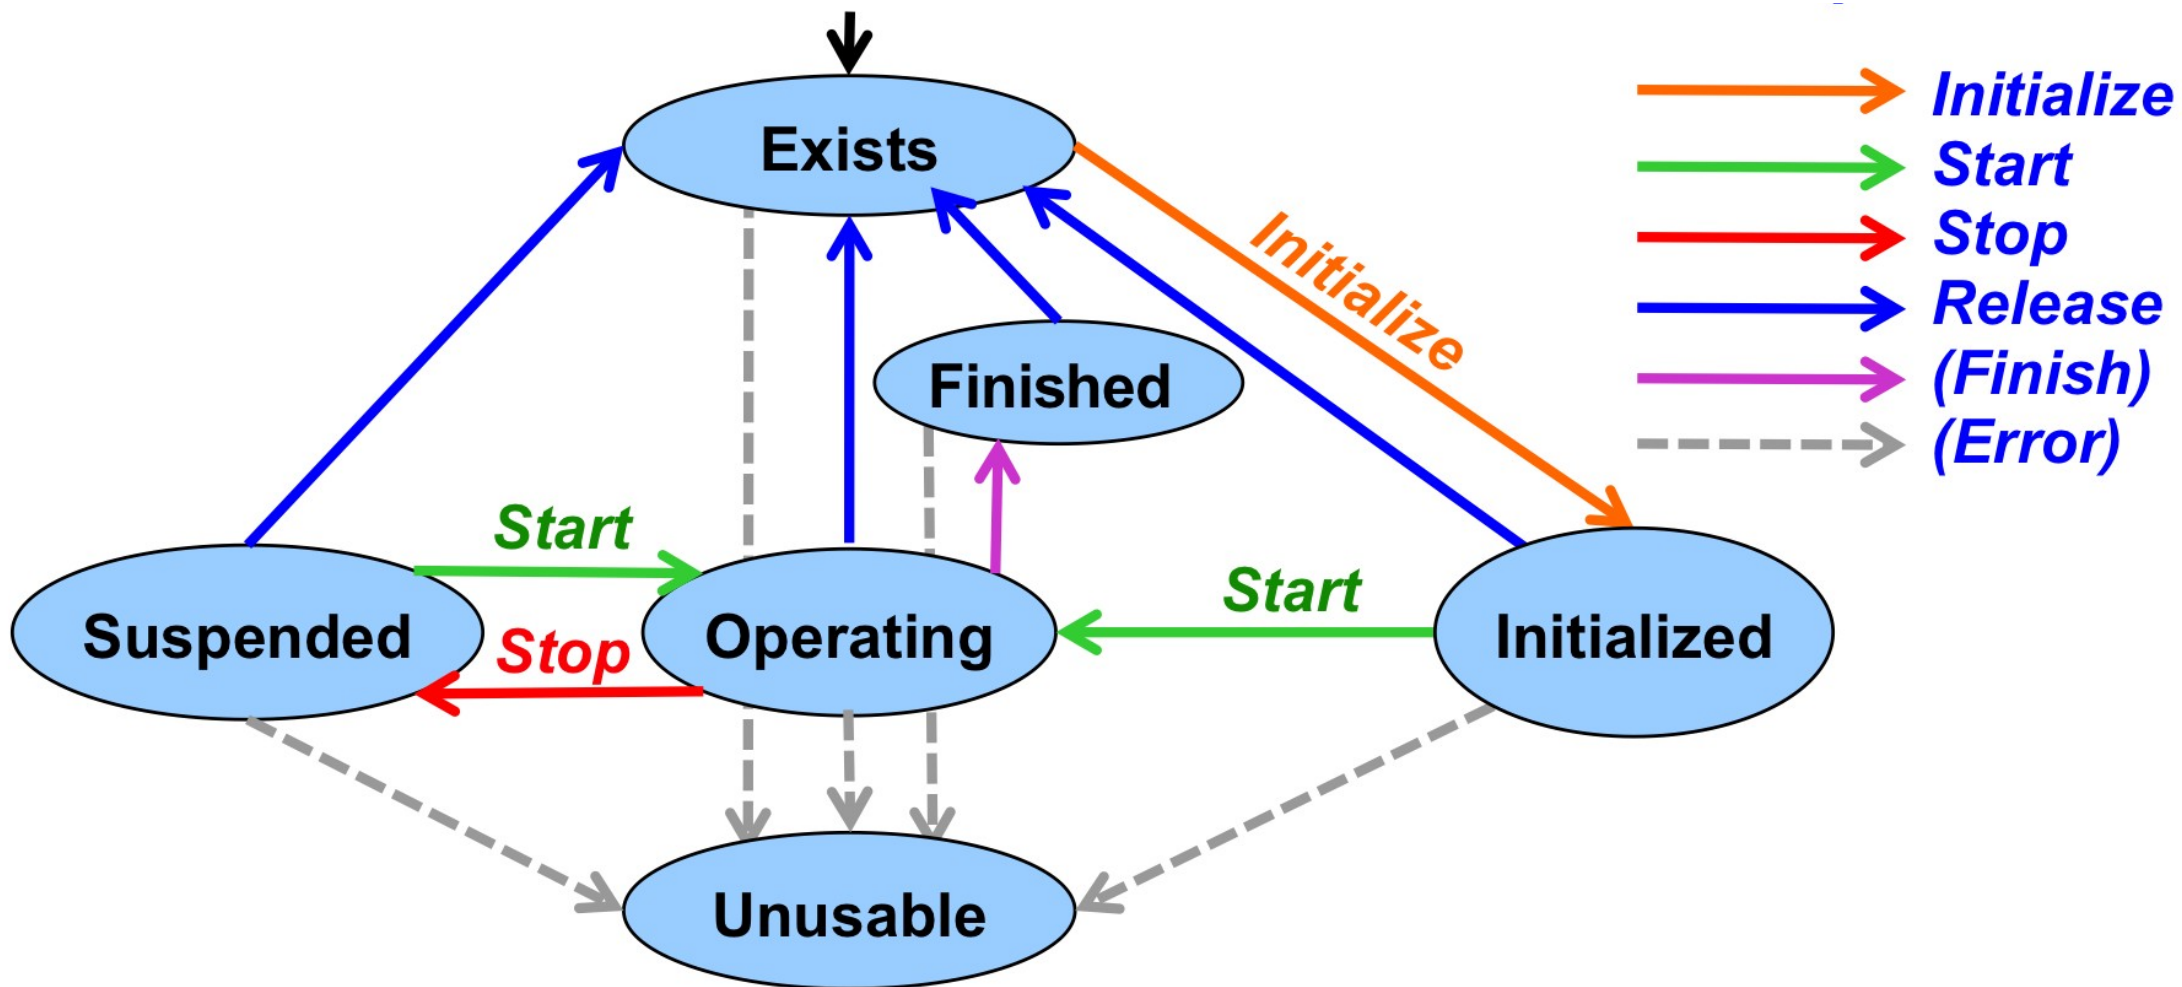

# Buffers and metadata

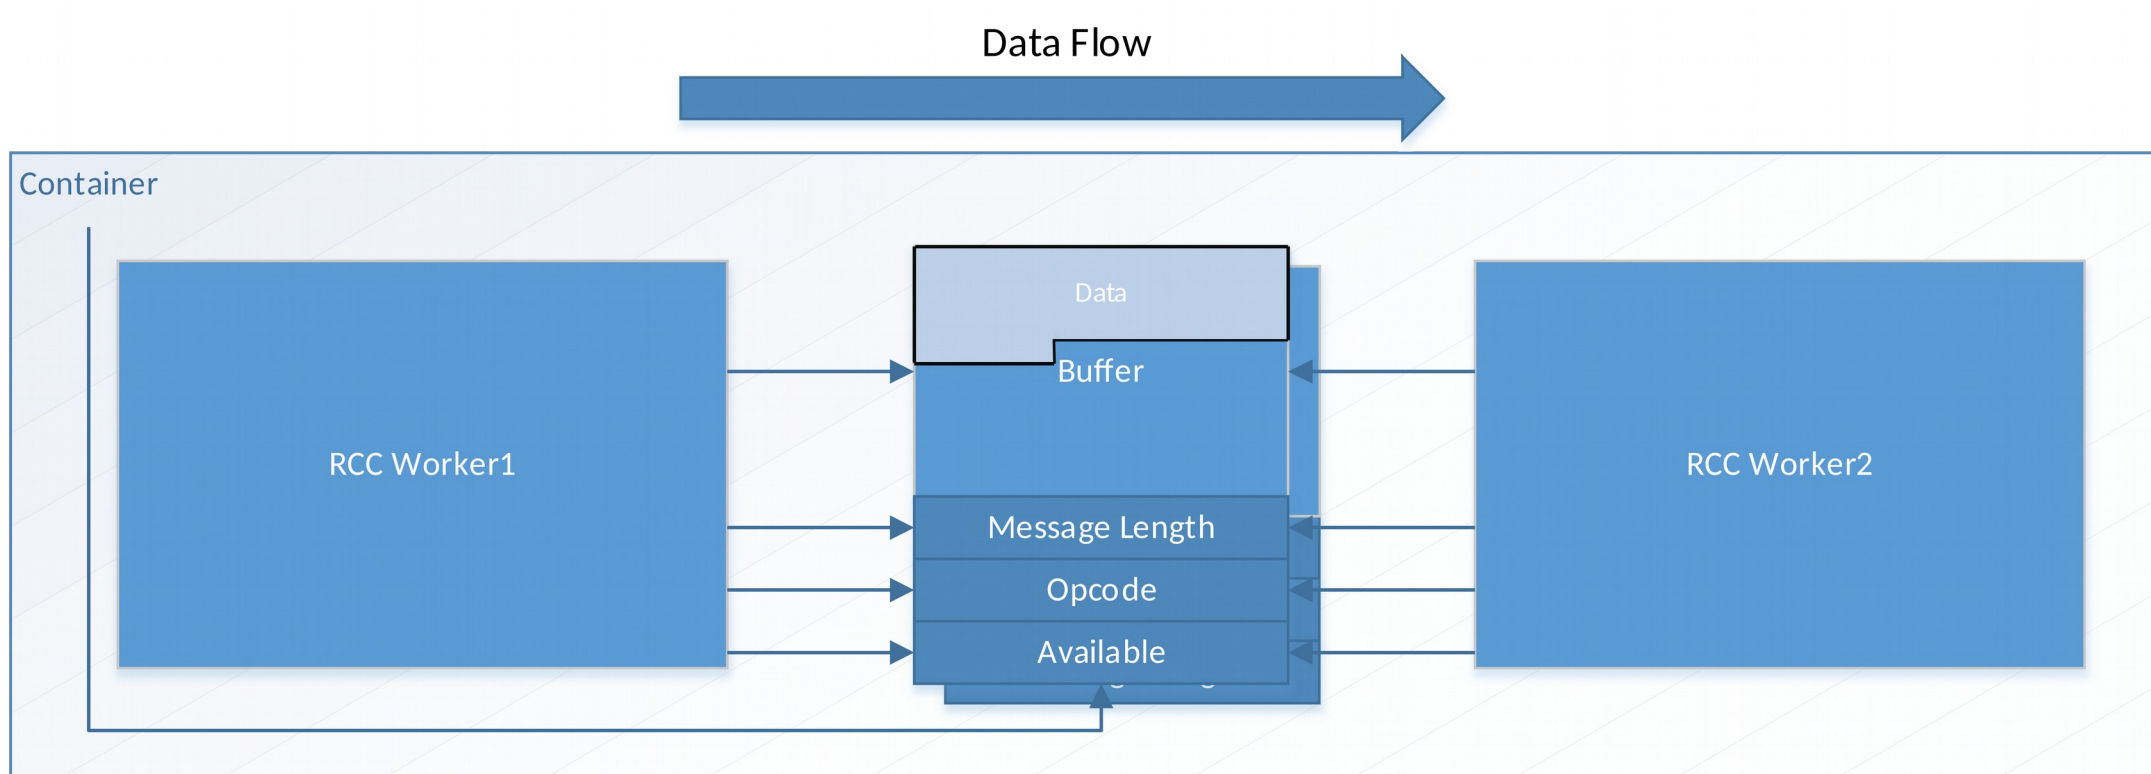


# Run Method



- Called by Container when all ports are ready (input ports have data and output ports have a free buffer)
  - Other advanced use cases, e.g. timeouts
- Return values to Container
  - RCC\_ADVANCE (good state + advance all ports)
  - RCC\_OK (good state)
  - RCC\_DONE (finished state)
  - RCC\_ADVANCE\_DONE (finished + advance all ports)
  - RCC\_ERROR (bad state: recoverable; still operating)
  - RCC\_FATAL (bad state: **unrecoverable**)



# Start/Initialize/Stop/Release



OWD XML:

```
<RCCWorker language="c++"  
spec="myname_spec.xml"  
ControlOperations="start, stop,  
initialize, release"/>
```

C++:

```
RCCResult start() // others are  
                  // initialize(),  
                  // stop(), and  
                  // release()  
{  
    // your code goes here  
    return RCC_OK;  
}
```


# Property Access

OCS XML:


```
<property name='myprop'  
type='bool' writeable='true'  
volatile='true' />
```

C++:

```
if (properties().myprop == true)  
{  
    // do something  
}  
  
properties().myprop = false;
```



# Port Access: Scalar Length



OCS XML:

```
<Port Name="myin" Producer="false"
Protocol="myprotocol2_protocol"/>
<Port Name="myout" Producer="true"
Protocol="myprotocol2_protocol"/>
```

OPS XML:

```
<Protocol>
<Operation name="myOp">
  <Argument name="Arg1" type="bool"/>
</Operation>
</Protocol>
```

Input ports can be assumed based on the protocol, because there is no variable length data. As of 1.1, output port lengths no longer need to be set as long as all arguments are scalar:

C++:

```
// Nothing to do
```

# Port Access: Scalar Data



OCS XML:

```
<Port Name="myin" Producer="false"  
Protocol="myprotocol_protocol"/>  
<Port Name="myout" Producer="true"  
Protocol="myprotocol_protocol"/>
```


C++:

```
const bool inArg1  = myin.myOp().myArg1();  
const bool inArg2  = myin.myOp().myArg2();  
myout.myOp().myArg1() = false;  
myout.myOp().myArg2() = true;
```

OPS XML:

```
<Protocol>  
  <Operation name="myOp">  
    <Argument name="myArg1" type="bool"/>  
    <Argument name="myArg2" type="bool"/>  
  </Operation/>  
</Protocol/>
```

# Port Access: Sequence Length



OCS XML:

```
<Port Name="myin" Producer="false"
Protocol="myprotocol1_protocol"/>
<Port Name="myout" Producer="true"
Protocol="myprotocol1_protocol"/>
```

OPS XML:

```
<Protocol>
<Operation name="myOp">
  <Argument name="Arg1" type="bool"
    SequenceLength='2048' />
</Operation>
</Protocol>
```

C++:

```
// length in elements
const size_t length =
    myin.myOp().myArg1().size();

myout.myOp().myArg1().data().resize(length);

// length in bytes
myout.setDefaultLength(2*sizeof(bool));
```

# Port Access: Sequence Data



OCS XML:

```
<Port Name="myin" Producer="false"  
Protocol="myprotocol_protocol"/>  
<Port Name="myout" Producer="true"  
Protocol="myprotocol_protocol"/>
```

OPS XML:

```
<Protocol>  
<Operation name="myOp">  
  <Argument name="Arg1" type="bool"  
    SequenceLength='2048' />  
</Operation>  
</Protocol>
```

C++:

```
const bool* inData =  
    myin.myOp().myArg1().data();  
  
bool*      outData =  
    myout.myOp().myArg1().data();  
  
for (int i = 0; length > i; i++)  
{  
    // do something with the data  
    inData++;  
    outData++;  
}
```

# Port Access: Opcode

## OCS XML:

```
<Port Name="myin" Producer="false"
Protocol="my_rstream"/>
<Port Name="myout" Producer="true"
Protocol="myprotocol_protocol"/>
```

## OPS XML:

```
<Protocol>
  <Operation name="MyOp1">
    <Argument name="myArg1" type="bool"/>
    <Argument name="myArg2" type="bool"/>
  </Operation>
  <Operation name="MyOp2">
    <Argument name="otherArg1" type="bool"
      SequenceLength='2048'/>
  </Operation>
</Protocol>
```

## C++:

```
//for all outputs on this port
myout.setDefaultOpCode(My_rstreamMyOp1_OPERATION);
// for the current output on this port
myout.setOpCode(My_rstreamMyOp1_OPERATION);

switch(myin.opCode())
{
  case My_rstreamMyOp1_OPERATION:
  {
    // do something
    break;
  }
  case My_rstreamMyOp2_OPERATION:
  {
    // do something different
    break;
  }
  default:
  {
    cout << "bad Opcode" << endl;
    break;
  }
}
```



# Port Access: Manually Advancing

OCS XML:

```
<Port Name="myin" Producer="false"  
Protocol="my_rstream_protocol"/>  
<Port Name="myout" Producer="true"  
Protocol="myprotocol_protocol"/>
```


C++ advance all:

```
return RCC_ADVANCE;
```

C++ advance manually:

```
myin.advance();  
myout.advance();
```

```
return RCC_OK;
```





# Local Worker Variables

Define any local variables that you need as class variable.

OCS XML:

```
<RccWorker spec='myworker-spec.xml'
language='C++'>
</RccWorker>
```


C++:

```
class My_workerWorker :
    public My_workerWorker base {

    bool myLocalVar1;
    bool myLocalVar2;

    ...

    RCCResult run()
    {
        // use local variables
    }
```



# RCC Worker Creation via AV IDE



ANGRYVIPER OpenCPI Asset Wizard

Create a new OpenCPI Asset  
Generate a new worker

Asset Type: Worker

Add to Project: /home/training/training Browse...

Worker Name: peak\_detector

Add To Library: components (default)

Component: ocpi.training.peak\_detector-spec

Model: RCC

Prog. Lang: C++

? < Back Next > Cancel Finish

```
peak_detector.rcc/  
|-- gen  
|   |-- peak_detector_map.h  
|   |-- peak_detector-build.xml  
|   |-- peak_detector-params.mk  
|   |-- peak_detector-skel.cc  
|   |-- peak_detector-skel.cc.deps  
|   |-- peak_detector-worker.hh  
|   `-- peak_detector-worker.hh.deps  
|-- Makefile  
|-- peak_detector.cc  
|-- peak_detector.xml
```

# Cross Building

- The only currently supported cross building target is Zynq-arm
- To enable cross build:

```
% ocpidev build --rcc --rcc-platform xilinx13_3
```

- To enable build for x86:

```
% ocpidev build --rcc
```

**OR JUST USE THE IDE!**




# RCC Build Artifacts

- A built RCC worker is a Linux Shared Object file
  - Dynamically loadable on the platform that it is built for
- Info about the worker (XML) embedded in .so


```
$ ocpixml get myworker.so
```





# <Basic RCC Lab>

# Advanced RCC Features and Functionality



# Parameter Access

OCS XML:

```
<RccWorker spec='myworker-spec.xml'
  language='C++'>
  <property name='myparam' type='bool'
    parameter='true'>
</RccWorker>
```

C++:

```
if (MYWORKER_MYPARAM == true)
{
    // do something
}
```




# Property Write Notifications

OWD XML:

```
<SpecProperty name='myprop'  
type='bool' writeSync='true' />
```

C++:

```
RCCResult myprop_written()  
{  
    //your code  
    return RCC_OK;  
}
```






# Property Read Notifications

OWD XML:

```
<SpecProperty name='myprop'  
type='bool' readSync='true' />
```

C++:

```
RCCResult myprop_read()  
{  
    //your code  
    return RCC_OK;  
}
```




# Optional Ports

OCS XML:

```
<Port Name="myout" Producer="true"  
  optional='true'  
  Protocol="rstream_protocol"/>
```


C++:

```
if (myout.isConnected())  
{  
    // output the data to the port  
}
```



# RCC worker as a Control Proxy


- An RCC worker can read/write other worker's properties
  - Can be 1:1 or 1:many using a different interface
- Main use case is for platform development to simplify the user interface for a BSP



# Running a worker in a debugger

- Documented in *RCC Development Guide*
  - Gives directions on how to break `gdb` in your worker when trying to debug
  - Can be used in a standalone graphical debugger as well such, e.g. DDD
  - It is possible to debug on the zynq as well using `gdbserver` no documentation available yet





# <Advanced RCC Lab(s)>