FPGA Platform Development





FPGA Platform Development

- OpenCPI Development Roles
 - What is an OpenCPI FPGA Platform?
- What is needed for an OpenCPI FPGA Platform?
- What comes with the framework?
- Case Study: Zedboard with MyriadRF Daughtercard
- Detailed Diagrams of OpenCPI FPGA Platforms
- Note: OpenCPI *Platform Development* in general includes enabling software platforms too. This briefing focuses on FPGA platforms.





Summary of OpenCPI Development Roles


3 types of development with common Makefile, XML driven worknow

	Application Development	Component Development	Platform Development
Objective	Create applications using components	 Create building blocks for applications 	 Create infrastructure for running applications
Examples	Tb_biasFSK app	BiasFIR filter	ZedboardMatchstiqTransceivers
Key functions	 Declare components and their connections and properties 	 Process data and interface between othe components Vendor agnostic (ideally 	 Provide interface to software and FPGA peripheral (devices workers)
Skills Required	Familiarity with component library	S/W: C, C++H/W: VHDL	 H/W: VHDL Strong knowledge of platform architecture and interfaces
	Knowledge of OpenCPI build flow		






Types of Platform Development enabling new platforms and devices for OpenCPI apps

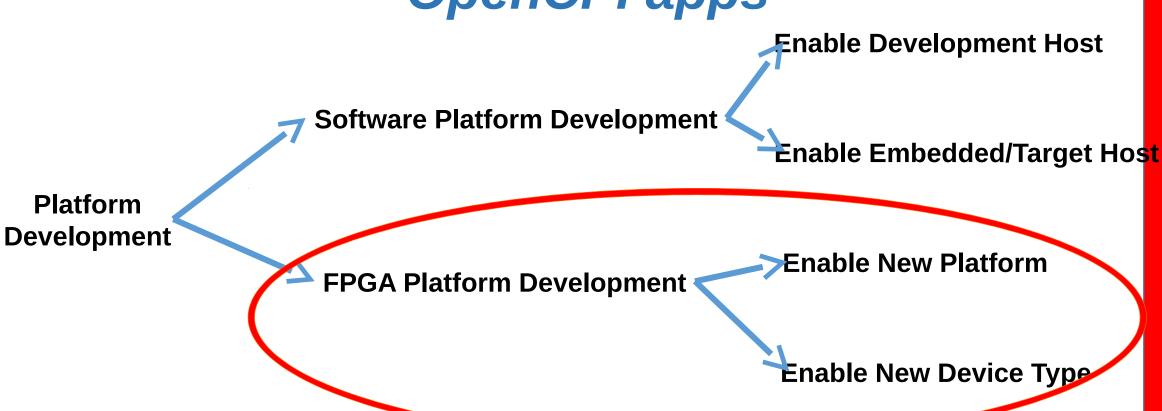

Types of OpenCPI Workers

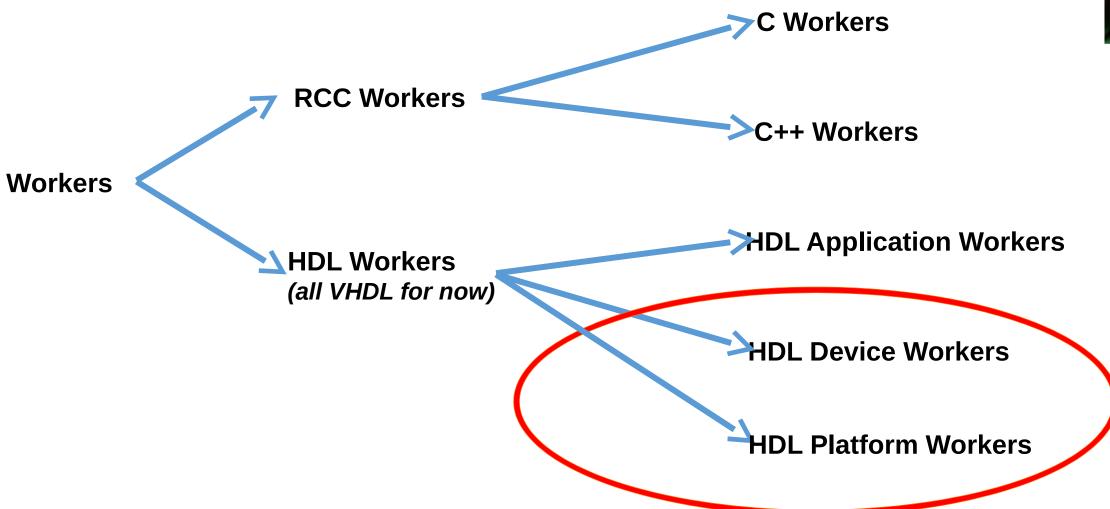





What is an OpenCPI FPGA Platform?

- An OpenCPI FPGA Platform is the FPGA, its surrounding infrastructure and attached devices.
- Enabling the platform allows it to be used for an OpenCPI application.
- Put another way...

What do I need to run an OpenCPI app...



Software Worker


FPGA Workers

On my hardware?












What does an OpenCPI FPGA Platform consist of?

- 1. The FPGA: a place where application workers may execute.
- 2. Interconnects: off-chip connections to processor(s) or other OCPI FPGA platforms
- 3. Devices: peripherals attached to the FPGA, useful to applications
- 4. Slots: hardware physical interfaces where cards (with devices) are plugged in.

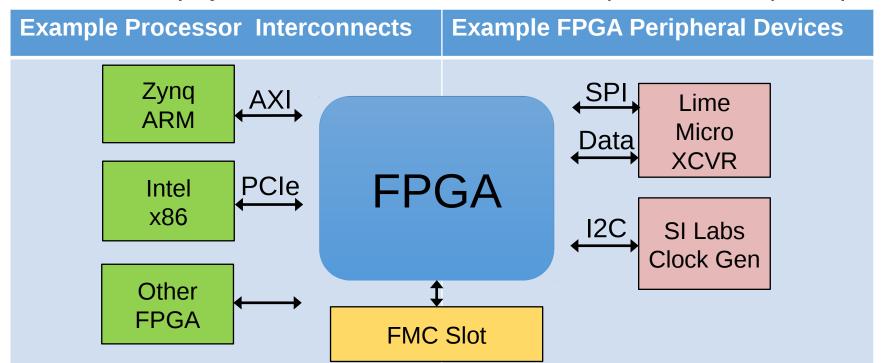






What is needed to enable an OpenCPI FPGA Platform?

- The OCPI on-chip clocks, control and data planes must be adapted to the external (off-FPGA)
 resources available in the platform: create the platform worker.
 - Control Plane: mechanisms to allow the processor to control and configure FPGA workers
 - Data Plane: mechanisms to allow messages to flow between on-chip workers and workers elsewhere
 - *Clocks:* the mechanisms to provide clocking and time-of-day to FPGA workers
- The attached devices must be supported by specialized workers acting as device drivers: create or reuse device workers.

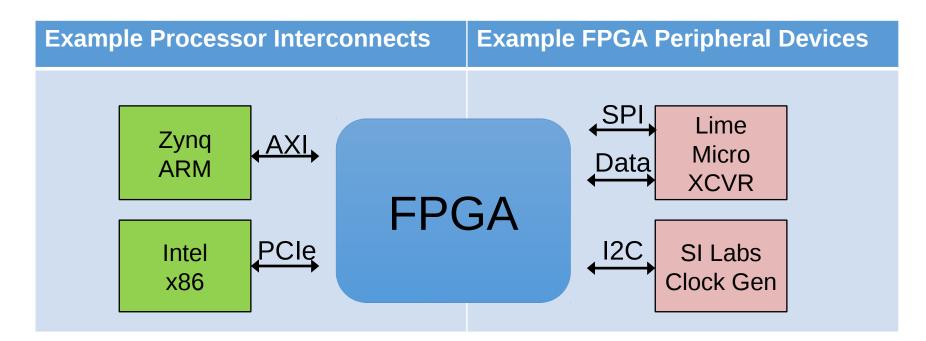






The Framework has a generic, platform-agnostic FPGA infrastructure, used in all platforms


- Generic Infrastructure Modules
 - For controlling FPGA worker registers/properties from software (control plane)
 - For data transfer from FPGA workers to/from other platforms and software (data plane)
 - These modules are instanced automatically as needed
- Some existing device workers/drivers for controlling certain devices (on any platform).
- Adapter logic for different processor/FPGA interconnects

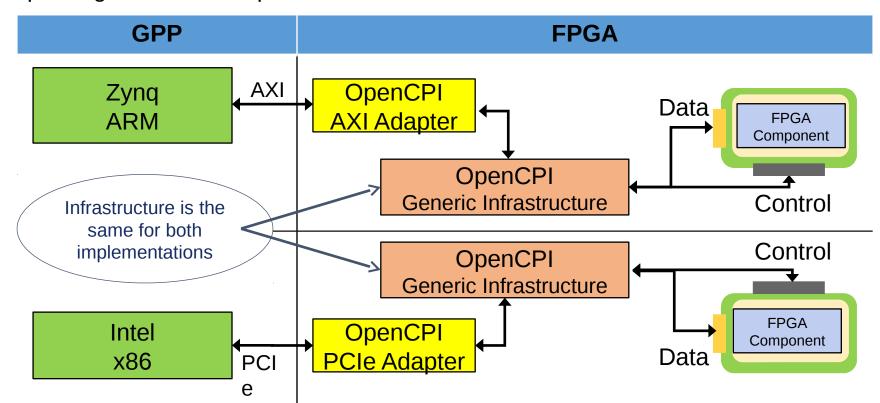





(treated as one board, ignoring the card/slot aspect for now)

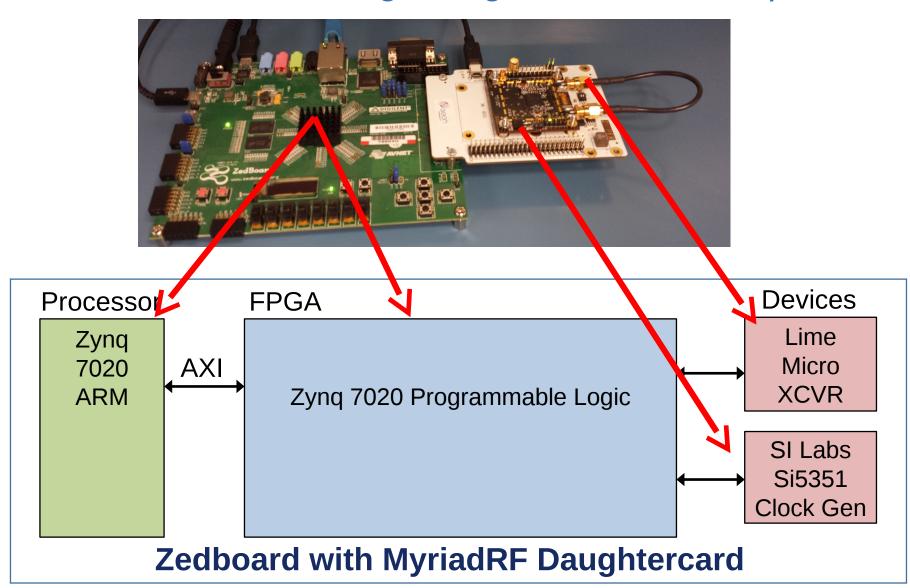






Case Study: What we started with


- Virtex6 PCIe development kit: ML605
- OpenCPI adapter logic for Virtex6 PCIe
- Existing application using file based input and output
- No devices used

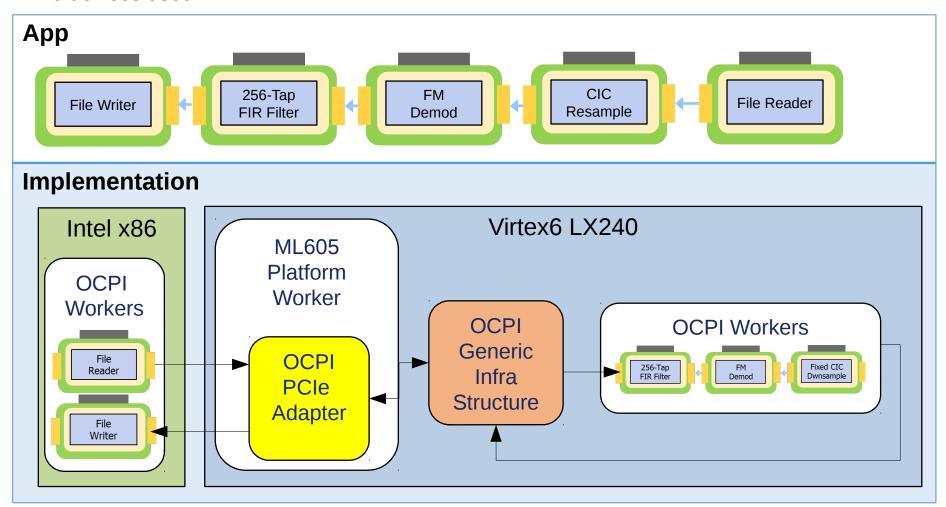






- What could be reused?
 - Generic infrastructure
 - HDL and Software Workers
 - Workers must be recompiled for Zynq/ARM. No code changes needed

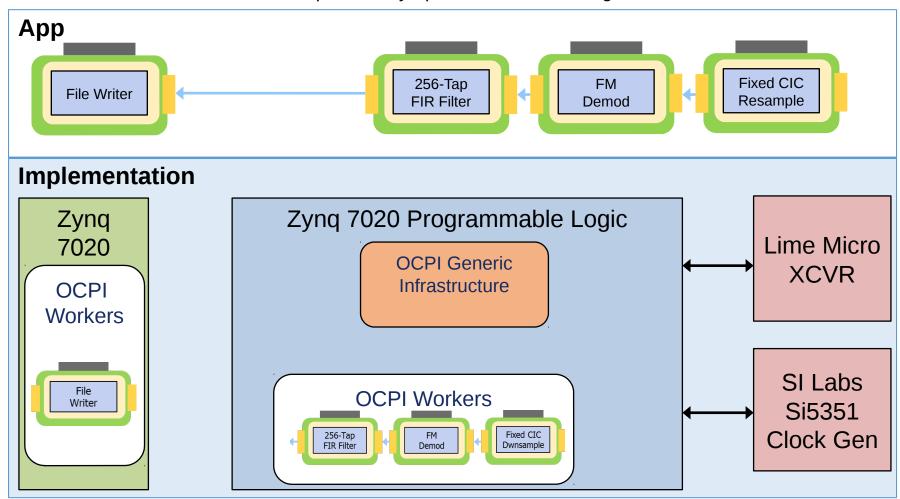






- What was needed?
 - Zed Platform Worker with OCPI Adapter
 - Device workers to ingest data and control devices

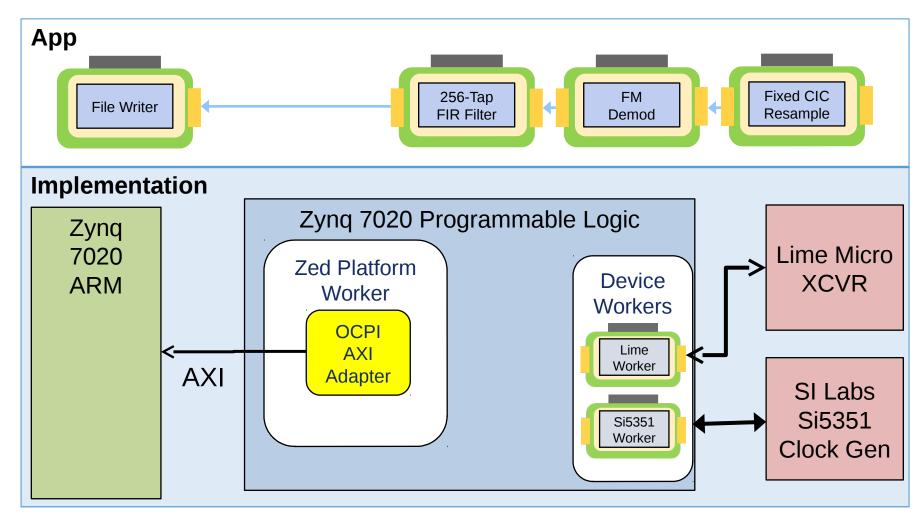





Final Implementation

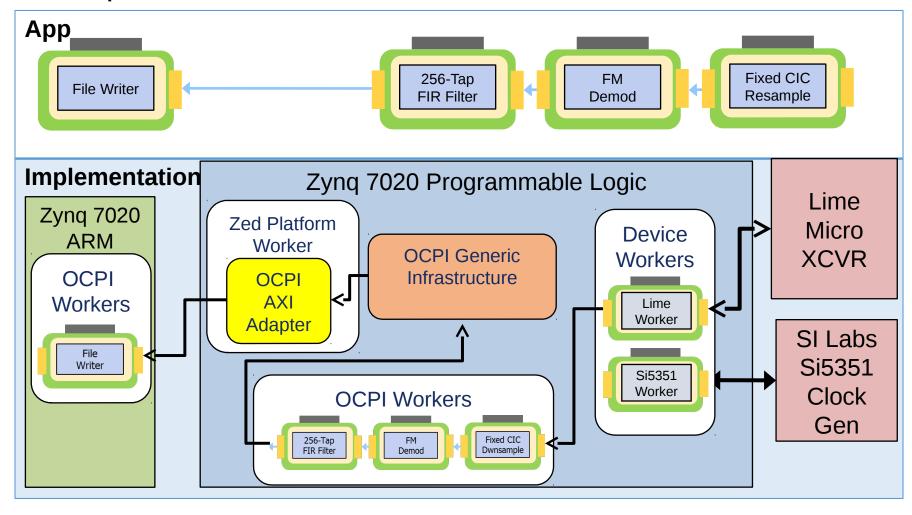






FPGA HDL Device Worker

- Acts as the controlling logic for an attached device: the device driver
- A superset of an application worker, with normal properties and ports
- Connects directly to the I/O pins for signals between FPGA and device
- HDL Device Worker OWD/XML has element: <Signal>
 - Declares signals to/from the device, with their direction, width, I/O attributes
 - These signals are made directly available in the VHDL architecture worker code

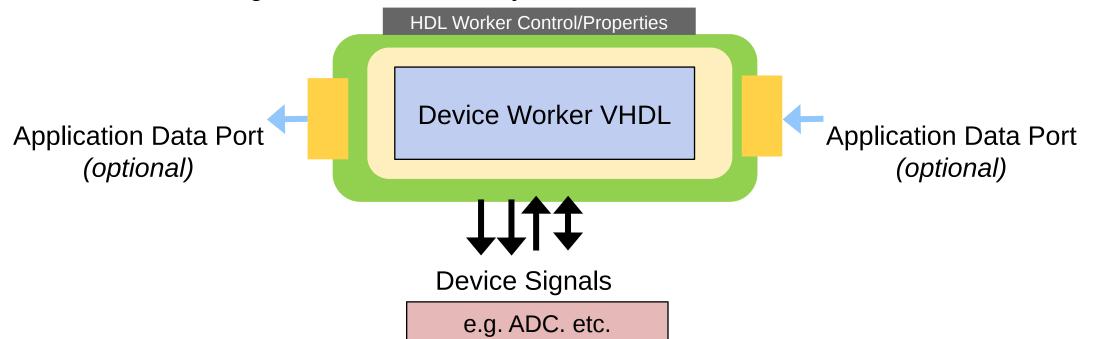





FPGA Device Worker OWD XML example


```
<!-- Example ADC worker -->
<HdlDevice language="vhdl" firstrawproperty='dc_regval' spec='qadc-spec'>
 <ControlInterface Timeout="1024"/> <!-- timeout long enough for the SPI access -->
 <Property name='USE_CTL_CLK_p' type='bool' default='1'/>
 <Property name='source' type='enum' enums='adc,count,loopback' initial='1'/>
 <!-- Properties in registers -->
 cproperty name='dc_regval' type='uchar' volatile='true'/>
 cproperty name='rccal_lpfcal' type='uchar' volatile='true'/>
 <!-- Ports -->
 <StreamInterface Name="OUT" producer='true' DataWidth="32"/>
 <!-- Signals to/from the device -->
 <Signal Output="RX CLK"/>
 <Signal Input="RX IQ SEL"/>
 <Signal Input="RXD" width="12"/>
 <Signal Input="RX CLK IN"/>
 <Signal Output="SEN"/>
 <Signal Input="SD0"/>
 <Signal Output="SDIO"/>
 <Signal Output="SCLK"/>
 <Signal Output="RESET"/>
</HdlDevice>
```





FPGA Platform Worker

- A special type of device worker
- Based on the "platform-spec" OCS, has properties
- As a device worker, has external hardware/pin signals via <signal>
- Has "infrastructure" ports to connect to generic infrastructure

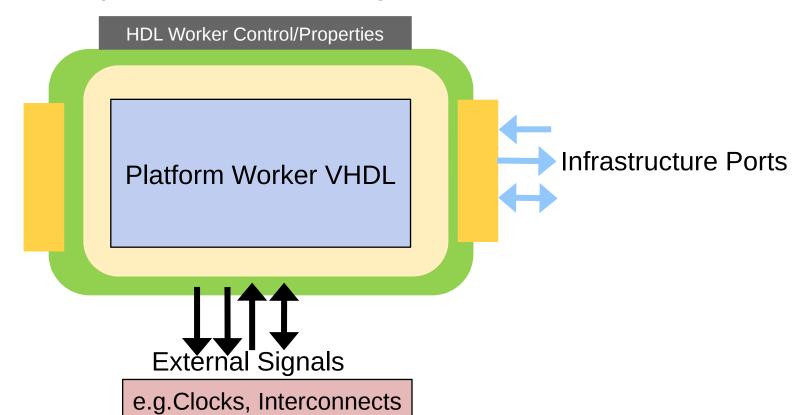





FPGA Platform Worker must provide:

- 1. A suitable clock for the control plane
 - Currently this is widely used as the "default clock" for many purposes
- 2. A suitable clock for timekeeping
 - Typically the highest quality/stability
- 3. A path for an external processor to perform control access ops
 - Typically allow processor to perform memory mapped load/store access
 - Adapt this path to the OpenCPI "control plane master" interface.
- 4. A bus-mastering/DMA path for the system interconnect(s)
 - Typically allow OCPI generic infrastructure to be bus master.
 - Adapt this path to the OCPI generic "data plane" interface





FPGA Platform Worker OWD:

- Top level element is <HdlPlatform>
- Spec is "platform-spec"
- Declare infrastructure ports using these elements:
 - <Timebase> for timekeeping clock
 - <Metadata> for access to in-bit-stream compressed artifact metadata
 - <CpMaster> for access to generic control plane infrastructure
 - <unoc> or <sdp> for access to generic data plane infrastructure
- Declare attached devices using <device> elements
 - including any build parameters and settings required for this platform
- Declare available slots using <slot> elements.
 - including any non-standard slot pin signal names





Complications for Device Workers


- Multiple devices may share some external signals
 - SPI and I2C configuration busses
 - Clocks, resets
- Complex multifunction devices should act as separate simple devices
 - Don't want to waste logic for unused functions
 - Want functional modularity of device workers to be consistent
- Solution is "subdevices", which are special device workers for:
 - Encapsulating signal sharing among device workers
 - Instantiated automatically when any of its supported devices are used.
 - May or may not have their own properties





Subdevice Worker Example

- ADC and DAC have separate data paths and clocks
- They share a SPI and master reset

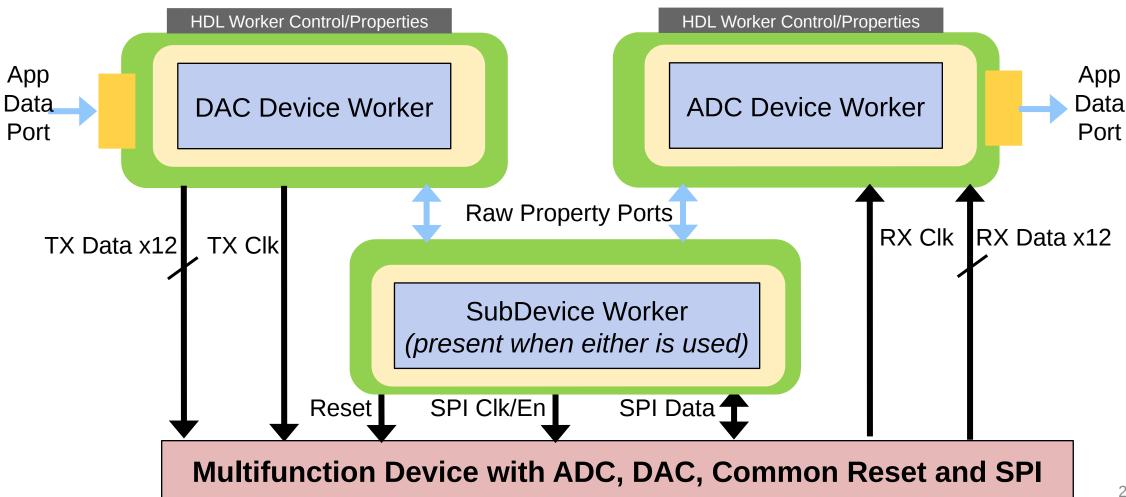







Detailed Platform Diagrams


- Platform modules can be found in the hdl/platforms directory
- They have Makefiles, implementation XML and source code
 - Just like other workers
- Responsible for instancing OpenCPI adapter logic and some generic infrastructure





ML605 Build Example – Single Worker App with File Read/File Write Outputs

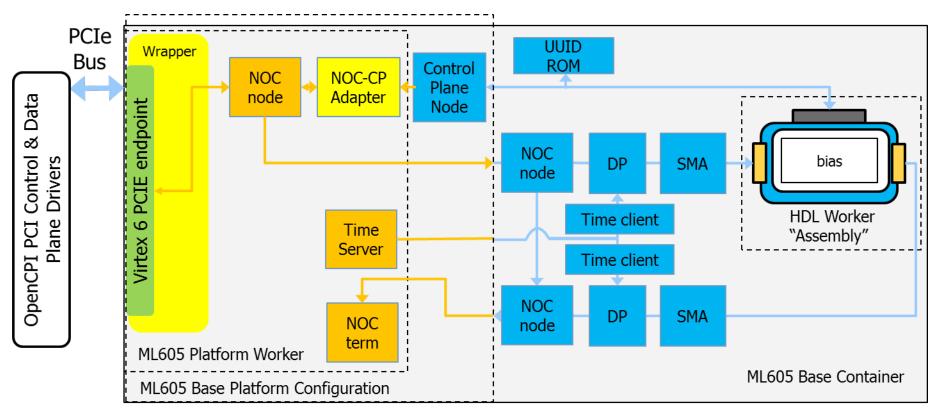



Generic Infrastructure included with OpenCPI – instanced by platform developer

Generic Infrastructure included with OpenCPI – automatically connected and instanced, as needed


Vendor supplied hard IP block


Custom code required for platform enablement





ALST4 Build Example – Single Worker App with File Read/File Write Outputs

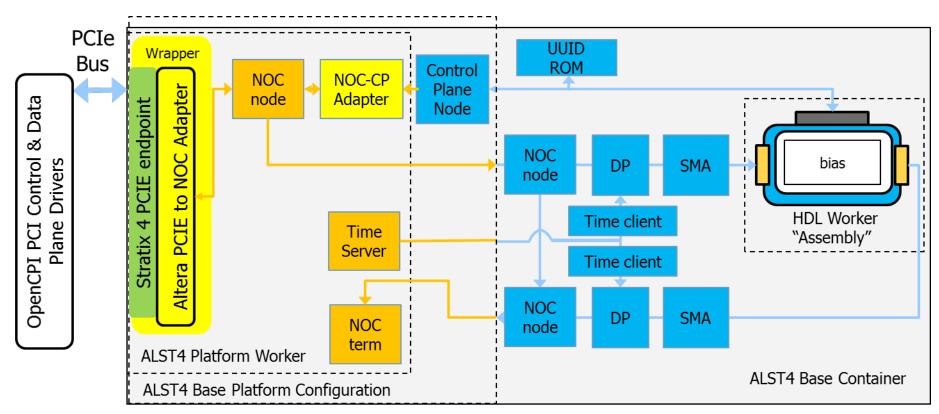



Generic Infrastructure included with OpenCPI – instanced by platform developer

Generic Infrastructure included with OpenCPI – automatically connected and instanced, as needed


Vendor supplied hard IP block

Custom code required for platform enablement





Zed Build Example – Single Worker App with File Read/File Write Outputs

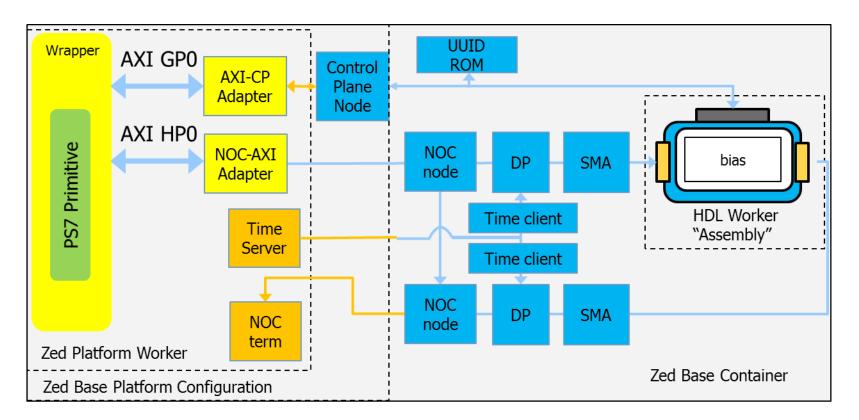





Generic Infrastructure included with OpenCPI – instanced by platform developer

Generic Infrastructure included with OpenCPI – automatically connected and instanced, as needed

Vendor supplied hard IP block

Custom code required for platform enablement

Where can I find out more information?

- Open **;©CPI**

- OpenCPI Platform Development Guide
 - https://opencpi.github.io/OpenCPI_Platform_Development.pdf
- Matchstiq BSP Case Study
 - https://opencpi.github.io/assets/Matchstiq BSP Case Study.pdf
- Matchstiq Platform Worker Datasheet
 - https://opencpi.github.io/assets/Matchstiq_Z1_Platform_Worker.pdf