

Testing

Components Used

Basic Concept

Introduction

Outline

Introduction

Basic Concept

Components Used

Testing

Summary

24th Feb 2012

Department of Physics and Astronomy
University of Birmingham

J. Wainwright

Building a Theremin

Introduction

Basic Concept

Components Used

Testing

Summary

Task

- As part of 2nd year Physics labs we had to choose a project to implement over a period of 11 weeks.
- We had to work in teams of 2 students
- The project which I chose was to "Build a Thermoin"

Implementation

First steps included;

- Research
- Complex circuits in commercial theremin
- First ideas
- Concept designs
- Started from scratch
- Modular design to allow testing separately
- Ordering parts

History

- Developed by Leon Termen, known in Europe as Leon Theremin.
- Invented in October 1920.
- By product of proximity sensor development.
- Shown to Lenin who dismissed it's usefulness but enjoyed the sound.
- Toured Europe to showcase the height of Russian technology.

Basic Concept

- One of the only instruments you don't touch to play.
- Use two hands to interact with the instrument;
- One hand to control pitch.
- One hand to control volume.
- The signals are produced by voltage control oscillators (VCOs).



Basic Theory

The electronics for each hand;

- Involves 2 VCOs
- 1 as a control, remains fixed.
- 1 is varied by the user
- 2 signals added and subtracted by a mixer circuit to produce final signal.

Signal Generator

- As proof of concept, use a signal generator to output sinusoidal waveform.
- Send this wave through control method then to speaker to test.
- Can vary between sinusoidal, triangle and square waves.
- Test mixer when using two signals from the generator.

Parallel Plate Capacitor


- User acts as a grounded plate of parallel plate capacitor.
- Moving closer decreases the capacitance.
- When further away, the capacitance increases.
- Can make rough estimate of capacitance from the following capacitor equation;

Capacitor Equation

$$C = \frac{k\epsilon_0 A}{d}$$

where

- k = relative permeability of the dielectric material between the plates, in this case $\text{air} = 1$,
- ϵ_0 = permittivity of free space $= 8.854 \times 10^{-12} \text{Fm}^{-1}$,
- A = area of the plates,
- d = separation of the plates, in this case the distance from the plate to the user's hand.

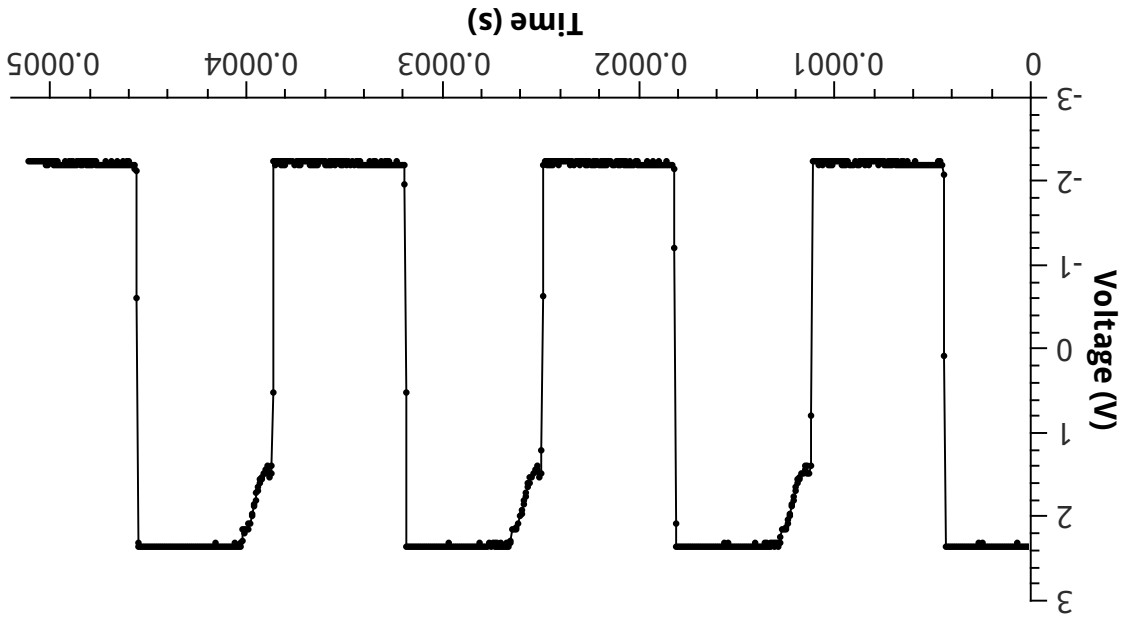

High Frequency

Introduction

Basic Concept

Components Used

Testing

Summary

$$\text{Frequency, } f = \frac{1}{\ln(2)C(R_1 + R_2)}$$

$$\text{Low time, } t_l = \ln(2)R_2C$$

$$\text{High time, } t_h = \ln(2)(R_1 + R_2)C$$

- The 555 timer IC outputs a square wave with frequency depending on the input voltage.
- Can be used as a VCO, changing the resistances changes the input voltage - voltage divider theorem.
- Characteristics of produced wave controlled by the equations;

555 Timer Chip

Introduction


Basic Concept

Components Used

Testing


Summary

Low Frequency

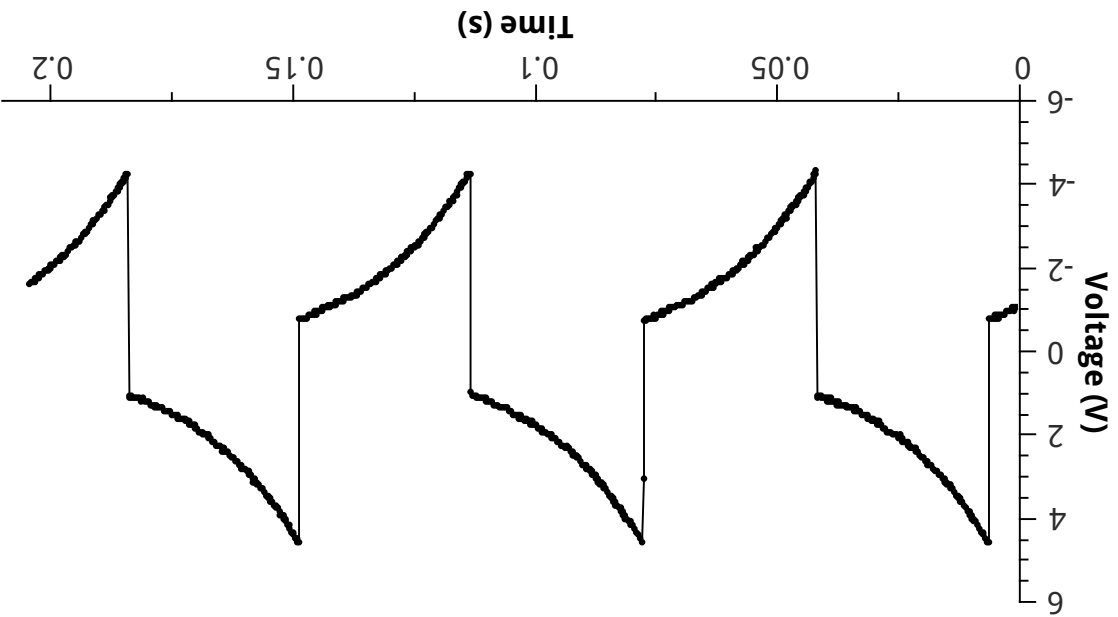



Mixer Circuit

- The SA612A mixer chip is used for the mixer circuit.
- Takes 2 input signals and outputs both the addition and subtraction of them.
- Contains internal oscillator, but not used for this purpose.

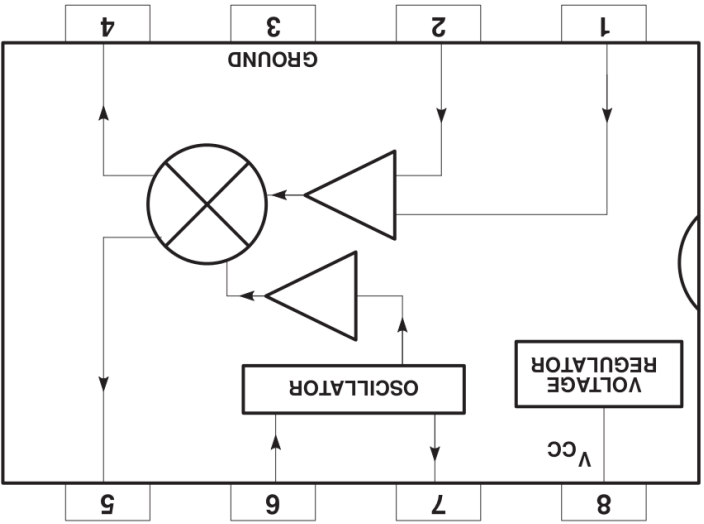


Low Pass Filter

- *Low pass filter* - electronic filter that passes low-frequency signals but reduces the amplitude of signals with frequencies higher than the cutoff frequency.
- Use to remove the high frequency oscillations in waveform
- Consists of simple cheap components;
- Resistors
- Capacitor
- Op-amp
- When arranged in the right way will give large control over frequencies blocked.

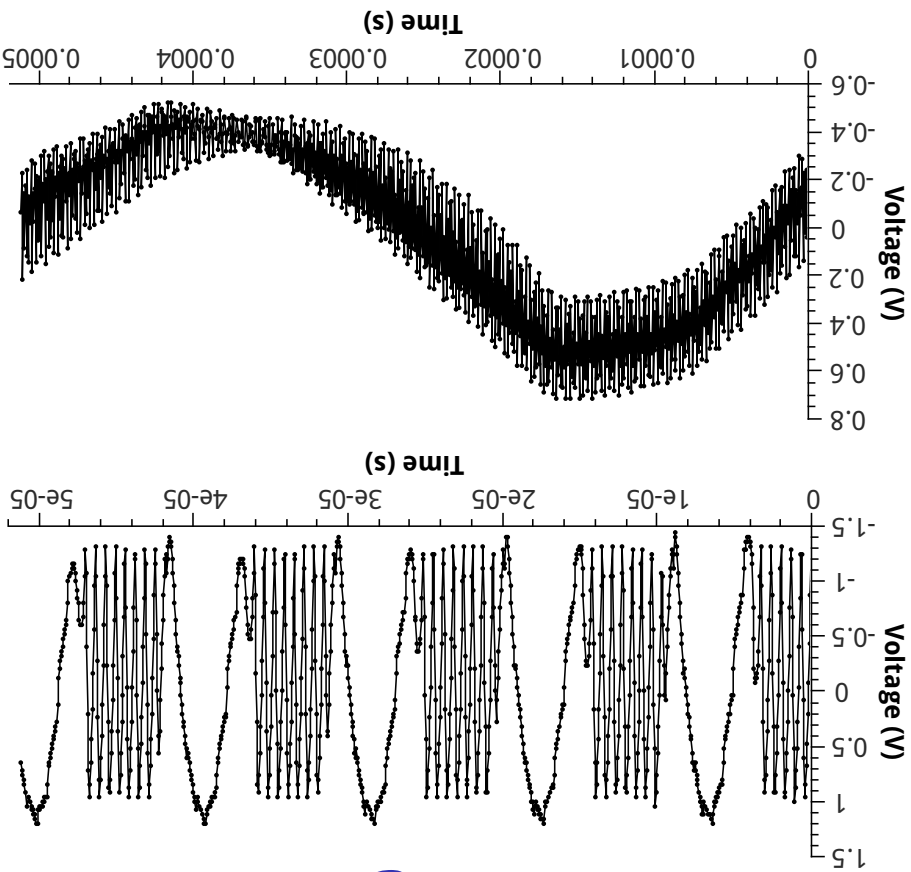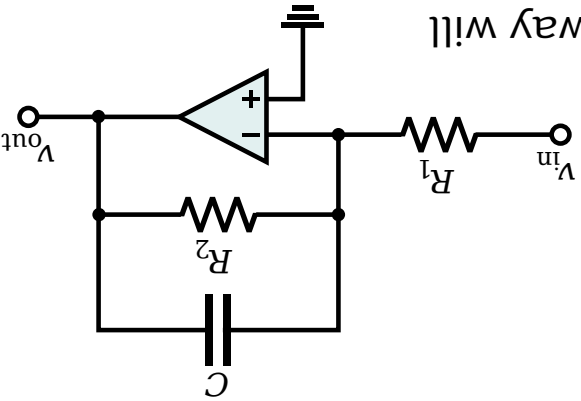

Mixer Signal

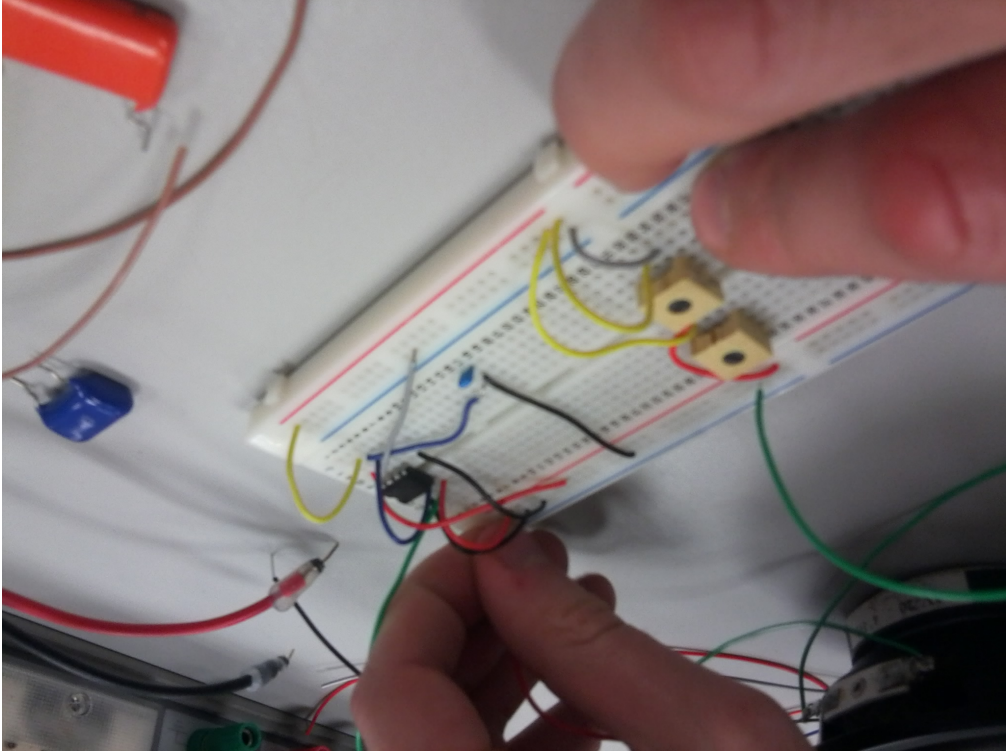

Progress


Introduction

Basic Concept

Components Used

Testing

Summary

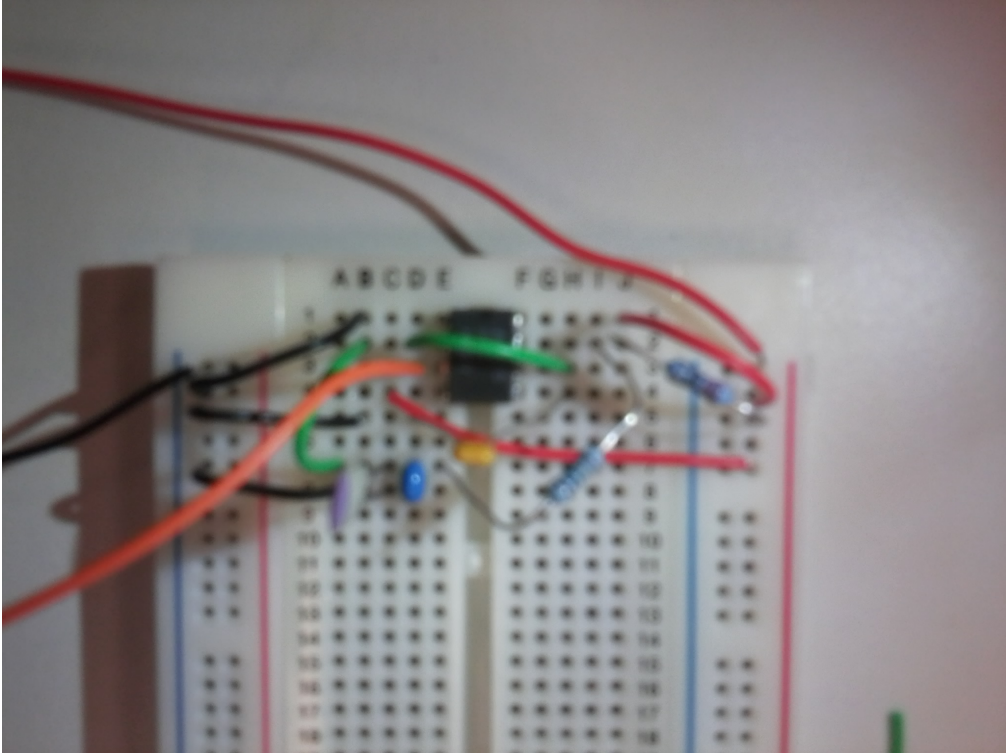

Progress


Introduction

Basic Concept

Components Used

Testing

Summary

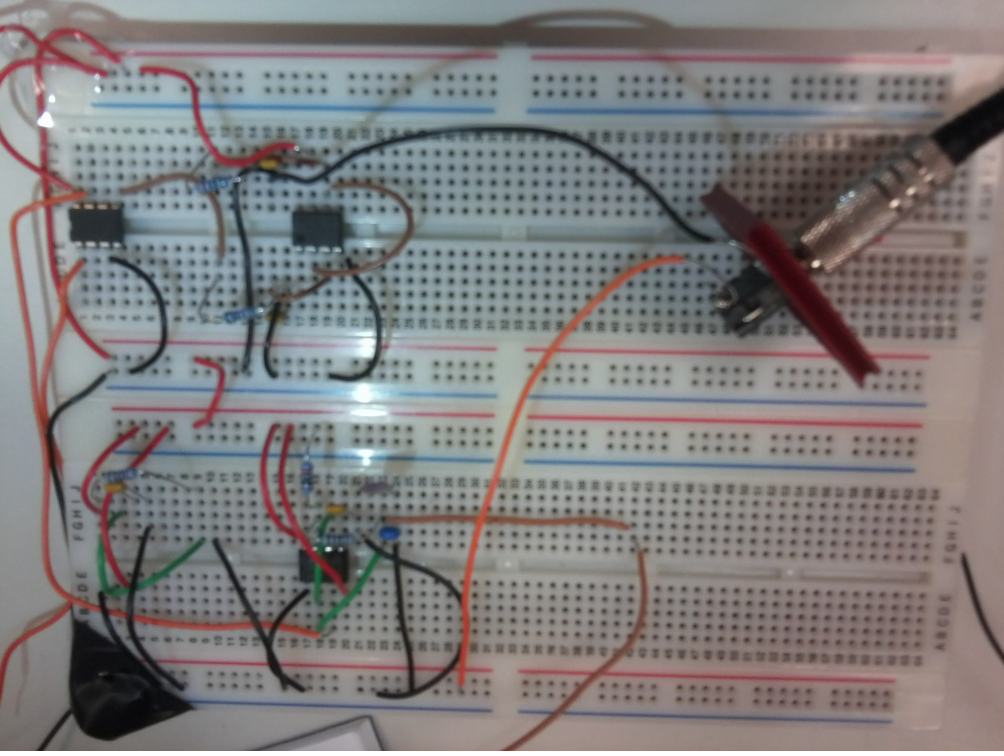

Progress


Introduction

Basic Concept

Components Used

Testing

Summary

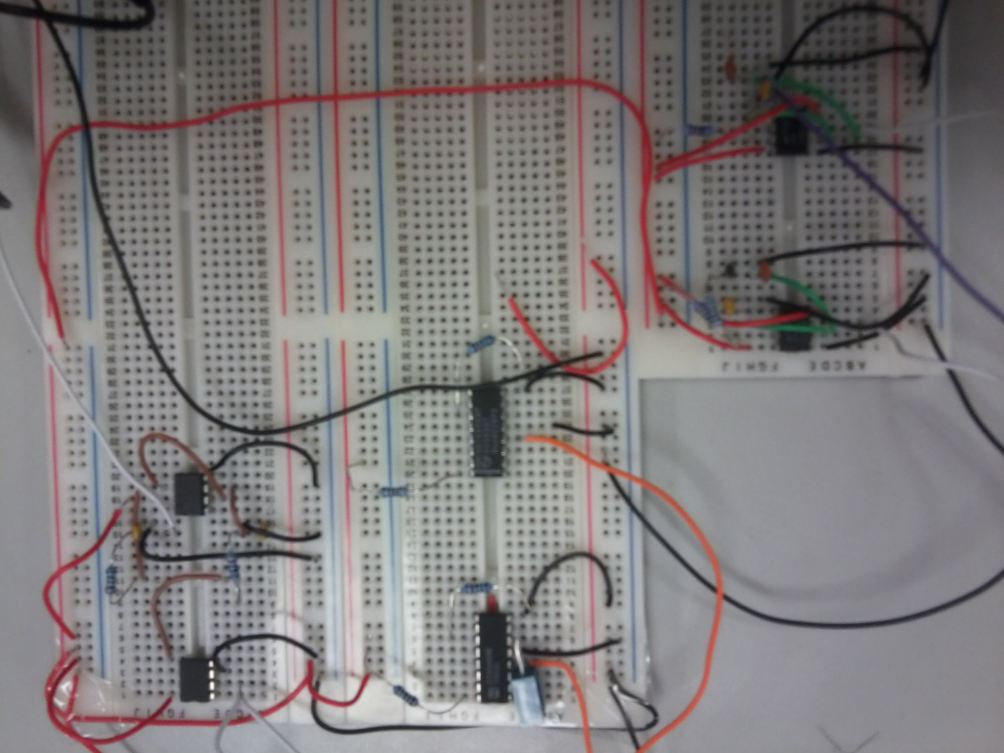

Progress

Introduction

Basic Concept

Components Used

Testing

Summary

Summary

- Building a **theremin** in 11 weeks from scratch.
- Using **commonly available** components and resources.
- Outlook
 - Testing to improve quality and performance.
 - Reduce size and power requirements for commercialisation.