

The rail spacing requirements given above should not apply to chain link or metal fabric fence support rails and posts. Mesh size in chain link or metal fabric fence should have openings no larger than 2.0 in.

13.8.2—Design Loads

The design live load for pedestrian railings shall be taken as $w = 0.050$ klf, both transversely and vertically, acting simultaneously. In addition, each longitudinal element will be designed for a concentrated load of 0.20 kips, which shall act simultaneously with the above loads at any point and in any direction at the top of the longitudinal element.

The posts of pedestrian railings shall be designed for a concentrated design live load applied transversely at the center of gravity of the upper longitudinal element or, for railings with a total height greater than 5.0 ft, at a point 5.0 ft above the top surface of the sidewalk. The value of the concentrated design live load for posts, P_{LL} , in kips, shall be taken as:

$$P_{LL} = 0.20 + 0.050L \quad (13.8.2-1)$$

where:

L = post spacing (ft)

The application of loads shall be as indicated in Figure 13.8.2-1, in which the shapes of rail members are illustrative only. Any material or combination of materials specified in Article 13.5 may be used.

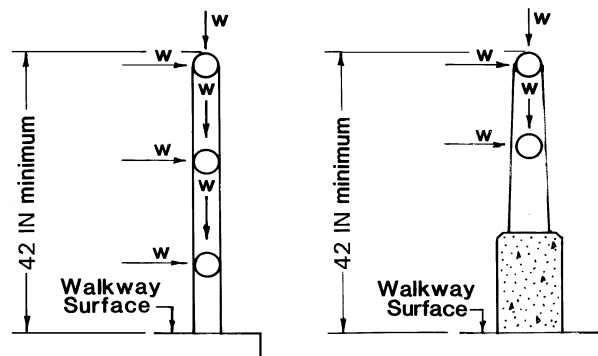


Figure 13.8.2-1—Pedestrian Railing Loads—To be used on the outer edge of a sidewalk when highway traffic is separated from pedestrian traffic by a traffic railing. Railing shape illustrative only.

The design wind load for chain link or metal fabric fence shall be taken as 0.015 ksf acting normal to the entire surface. The wind load need not be applied simultaneously with live load.

The size of openings should be capable of retaining an average size beverage container.

C13.8.2

These live loads apply to the railing. The pedestrian live load, specified in Article 3.6.1.6, applies to the sidewalk.