

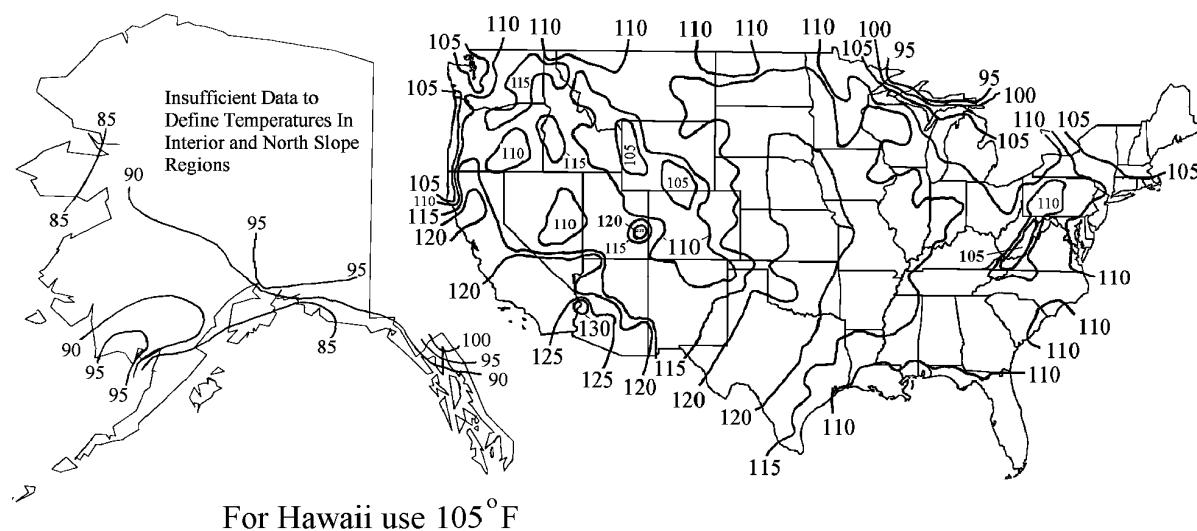


Figure 3.12.2.2-3—Contour Maps for $T_{MaxDesign}$ for Steel Girder Bridges with Concrete Decks

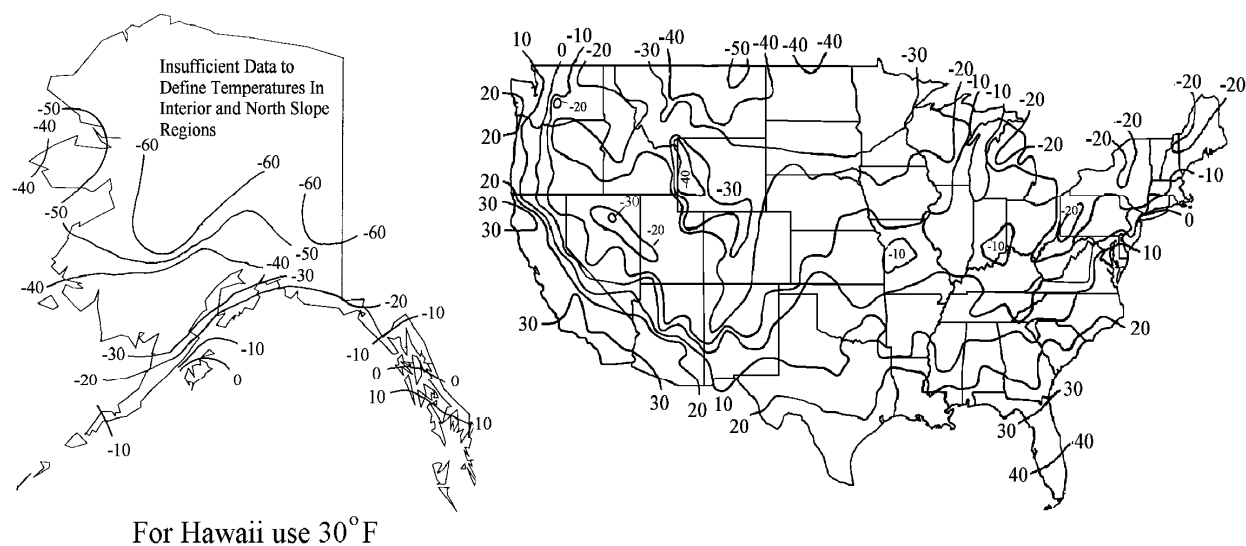


Figure 3.12.2.2-4—Contour Maps for $T_{MinDesign}$ for Steel Girder Bridges with Concrete Decks

3.12.2.3—Design Thermal Movements

The design thermal movement range, ΔT , shall depend upon the extreme bridge design temperatures defined in Article 3.12.2.1 or 3.12.2.2, and be determined as:

$$\Delta T = \alpha L (T_{MaxDesign} - T_{MinDesign}) \quad (3.12.2.3-1)$$

where:

L = expansion length (in.)

α = coefficient of thermal expansion (in./in./°F)