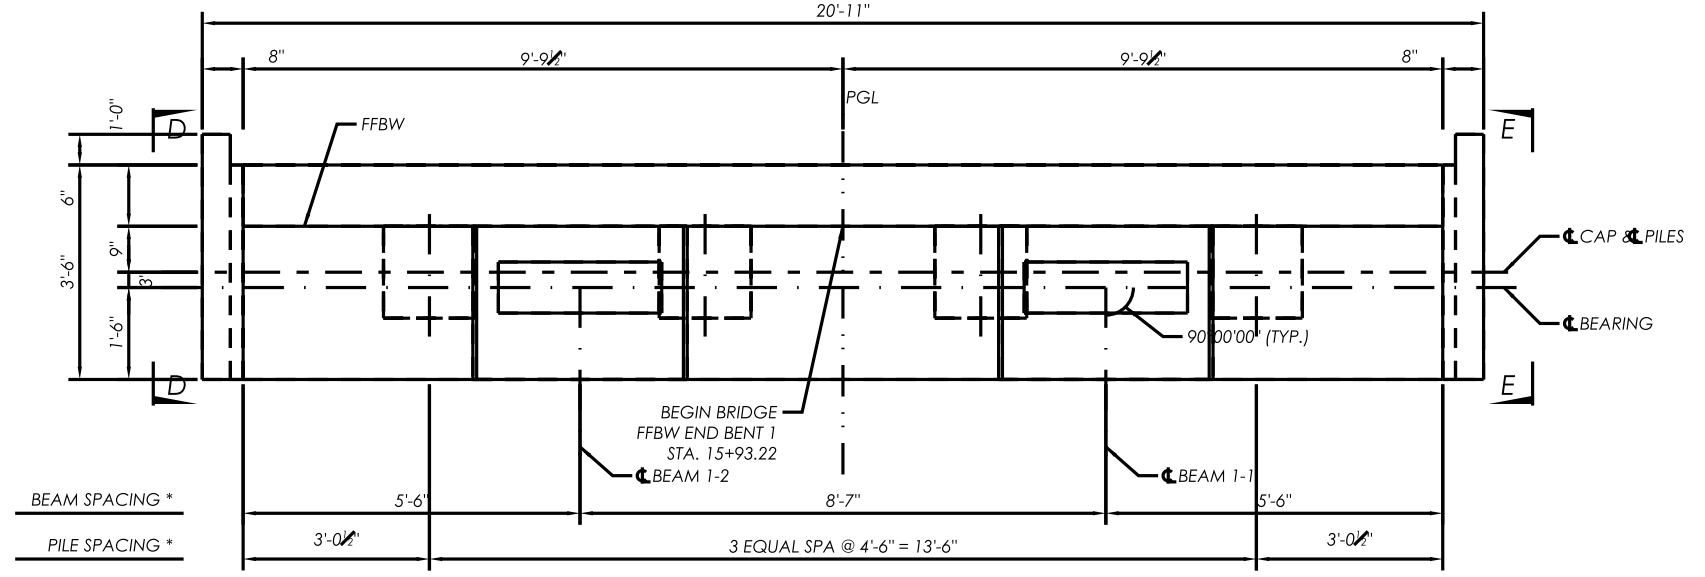
20'-11"
8"
9'-9½"
9'-9½"
8"
PGL
1'-0"
6"
3'-6"
9"
3"
1'-6"
D
D
E
E
FFBW
℄ CAP & ℄ PILES
℄ BEARING
90°00'00" (TYP.)
BEGIN BRIDGE
FFBW END BENT 1
STA. 15+93.22
℄ BEAM 1-2
℄ BEAM 1-1
BEAM SPACING *
5'-6"
8'-7"
5'-6"
PILE SPACING *
3'-0½"
3 EQUAL SPA @ 4'-6" = 13'-6"
3'-0½"

PLAN

DIRECTION OF STATIONING

TABLE OF ELEVATIONS	
POINT	ELEVATION
A	48.269
B	47.192
C	47.328
D	47.192
E	48.265
F	43.238
G	43.238
H	40.238
J	40.238
K	39.738
L	39.738

PILE CUTOFF ELEVATIONS		
PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-2. FOR VIEWS D-D AND E-E AND PEDESTAL DETAILS, SEE SHEET B4-3.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.
7. MODEL CHECK (REMOVE BEFORE ISSUE): BACKWALL TOP AT CAP END END BENT 1 IS 47.192 IN THE CAD MODEL AND 47.132 IN THE SELECTED GEOMETRY CAD TABLES; RECONCILE BEFORE ISSUE.

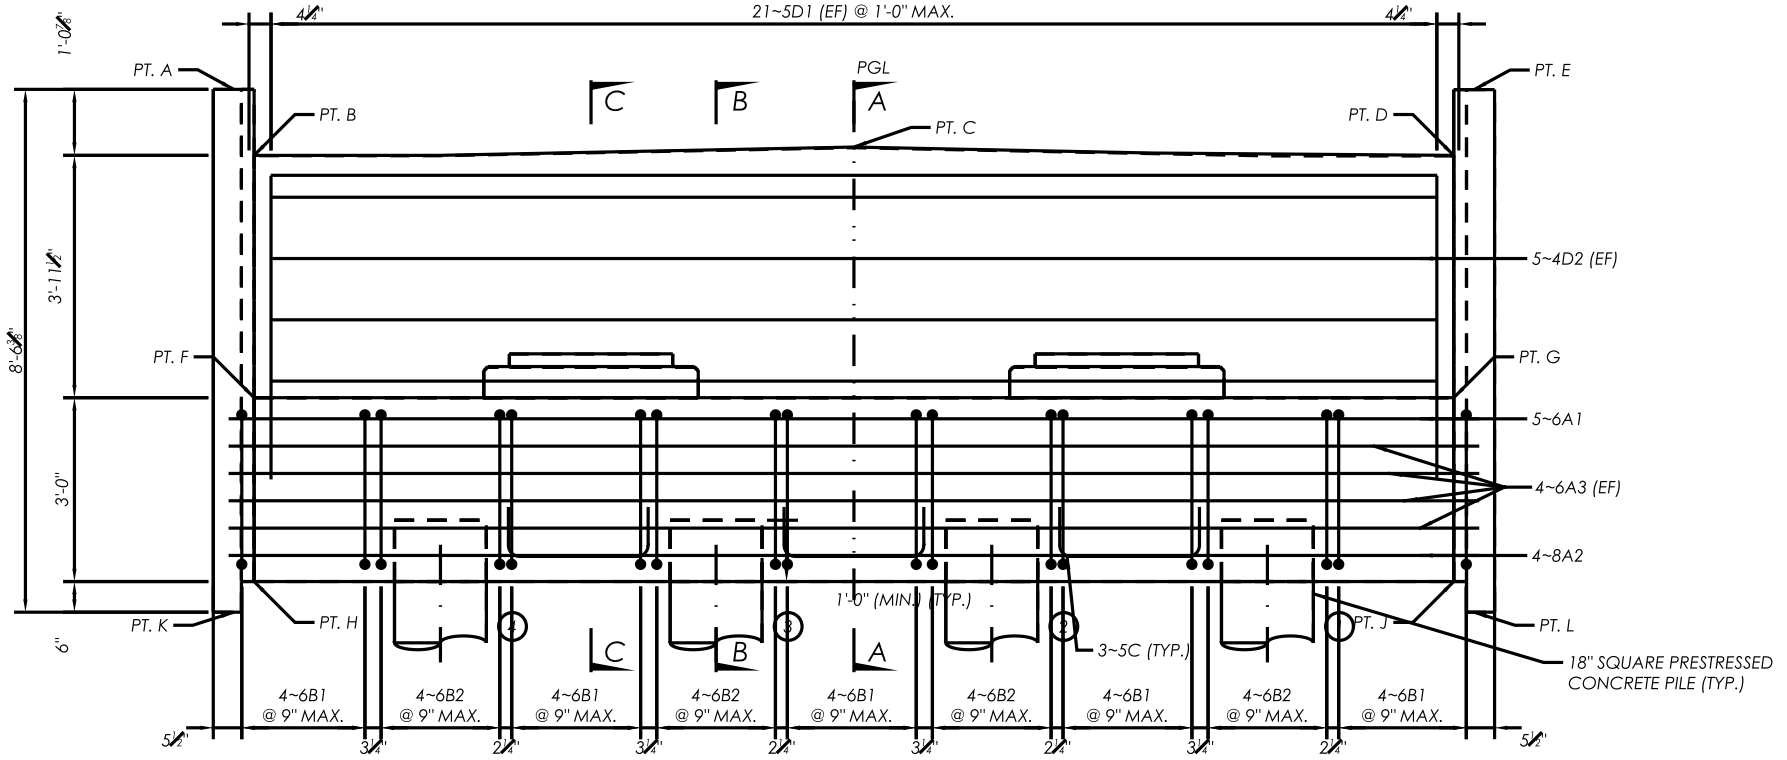
4¼"
21~5D1 (EF) @ 1'-0" MAX.
4¼"
1'-0⅞"
PT. A
PT. B
C
B
A
PGL
PT. C
PT. D
PT. E
8'-6⅜"
3'-11½"
5~4D2 (EF)
PT. F
PT. G
5~6A1
3'-0"
4~6A3 (EF)
4~8A2
1'-0" (MIN.) (TYP.)
6"
PT. K
PT. H
4
C
B
3
A
2
3~5C (TYP.)
1
PT. J
PT. L
18" SQUARE PRESTRESSED
CONCRETE PILE (TYP.)
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
5½"
3¼"
2¼"
3¼"
2¼"
3¼"
2¼"
3¼"
2¼"
5½"

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING BACK STATION)

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 1

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-1

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

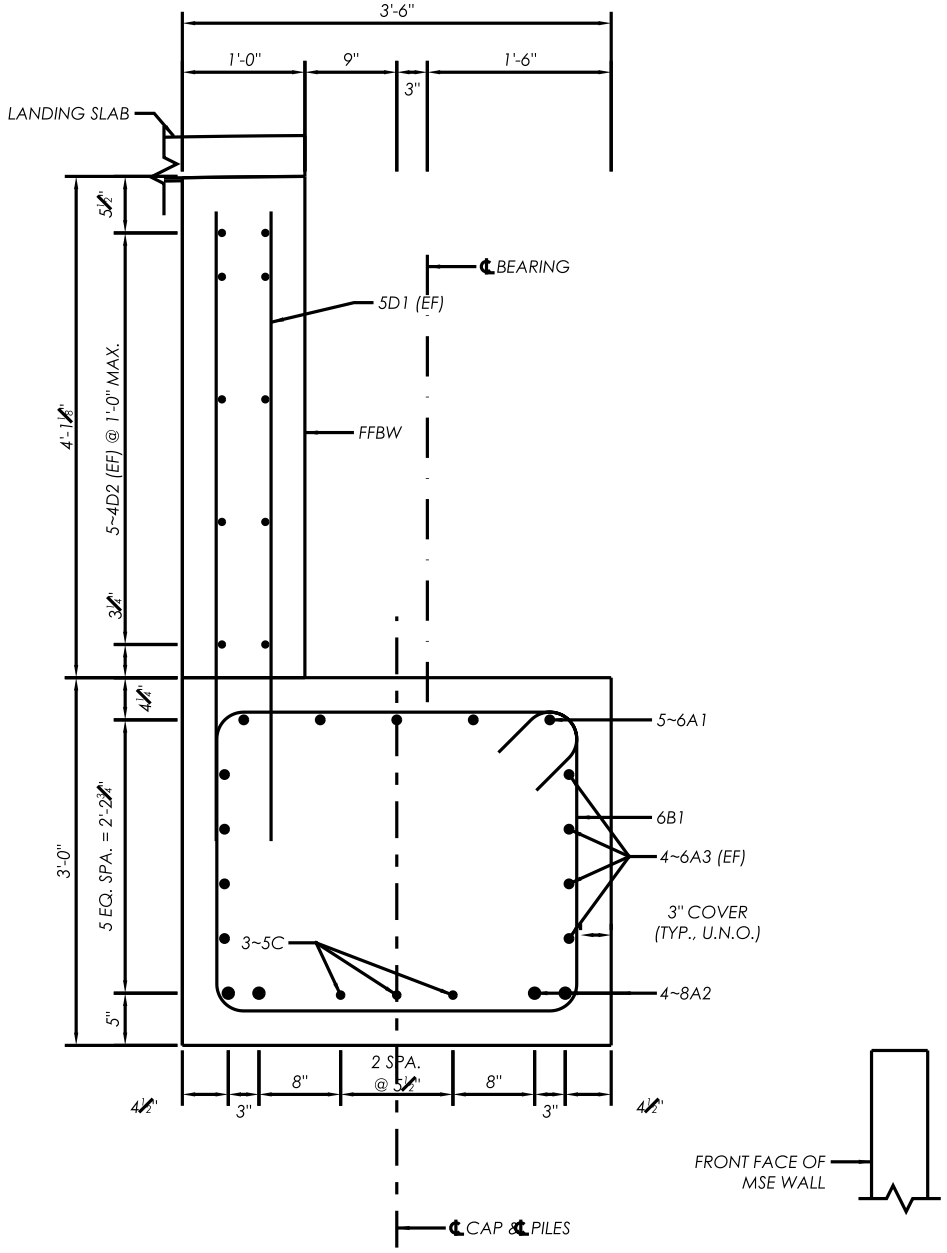
3'-6"
1'-0"
9"
1'-6"
3"
LANDING SLAB
5½"
4'-1⅛"
5~4D2 (EF) @ 1'-0" MAX.
3¼"
℄ BEARING
5D1 (EF)
FFBW
4¼"
5~6A1
6B1
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
3'-0"
5 EQ. SPA. = 2'-2¾"
3~5C
4~8A2
5"
4½"
3"
8"
2 SPA.
@ 5½"
8"
3"
4½"
FRONT FACE OF
MSE WALL
℄ CAP & ℄ PILES

SECTION A-A

(SECTION BETWEEN PILES)

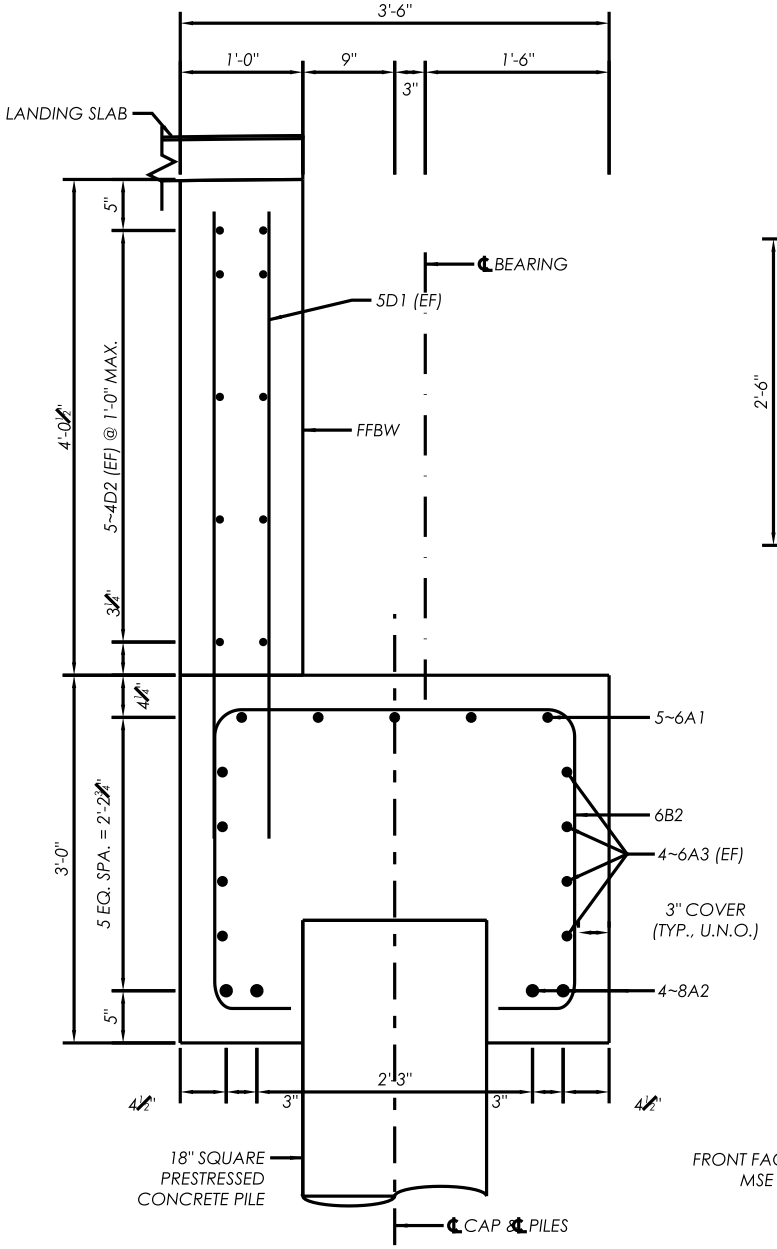
3'-6"
1'-0"
9"
1'-6"
3"
LANDING SLAB
5"
4'-0½"
5~4D2 (EF) @ 1'-0" MAX.
3¼"
℄ BEARING
5D1 (EF)
FFBW
4¼"
5~6A1
6B2
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
3'-0"
5 EQ. SPA. = 2'-2¾"
4~8A2
5"
4½"
3"
2'-3"
3"
4½"
18" SQUARE
PRESTRESSED
CONCRETE PILE
FRONT FACE OF
MSE WALL
℄ CAP & ℄ PILES

SECTION B-B

(SECTION AT PILES)

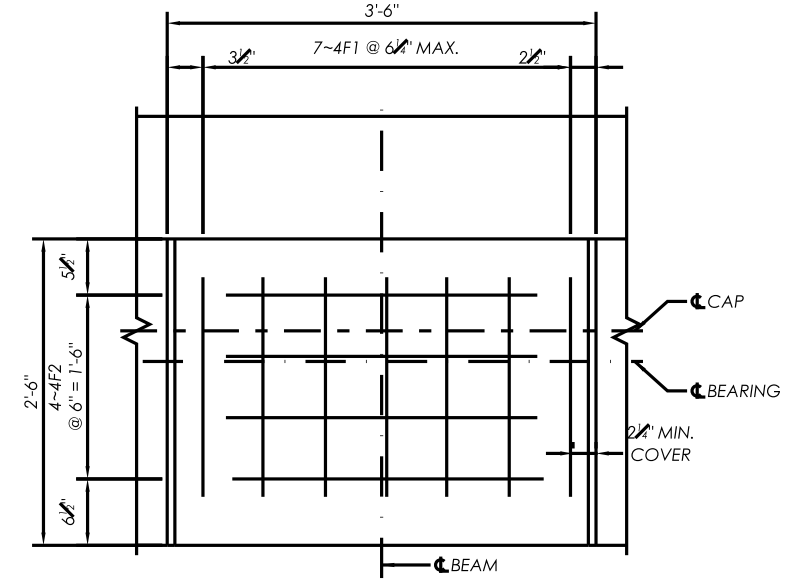
3'-6"
3½"
7~4F1 @ 6¼" MAX.
2½"
5½"
2'-6"
4~4F2
@ 6" = 1'-6"
6½"
℄ CAP
℄ BEARING
2¼" MIN.
COVER
℄ BEAM

PEDESTAL PLAN

(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

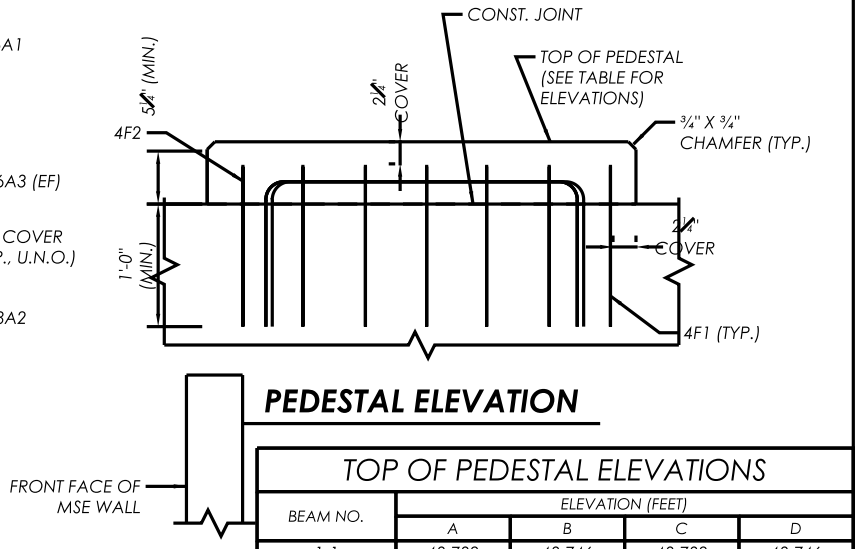
CONST. JOINT
TOP OF PEDESTAL
(SEE TABLE FOR
ELEVATIONS)
5¼" (MIN.)
2¼"
COVER
4F2
¾" X ¾"
CHAMFER (TYP.)
1'-0"
(MIN.)
2¼"
COVER
4F1 (TYP.)
FRONT FACE OF
MSE WALL

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS

BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
1-1	43.732	43.746	43.732	43.746
1-2	43.732	43.746	43.732	43.746

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-1.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4F3 IN PLACE OF 4F2 AT BEAM LINE 2.
4. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 1 DETAILS (1 OF 2)

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-2

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

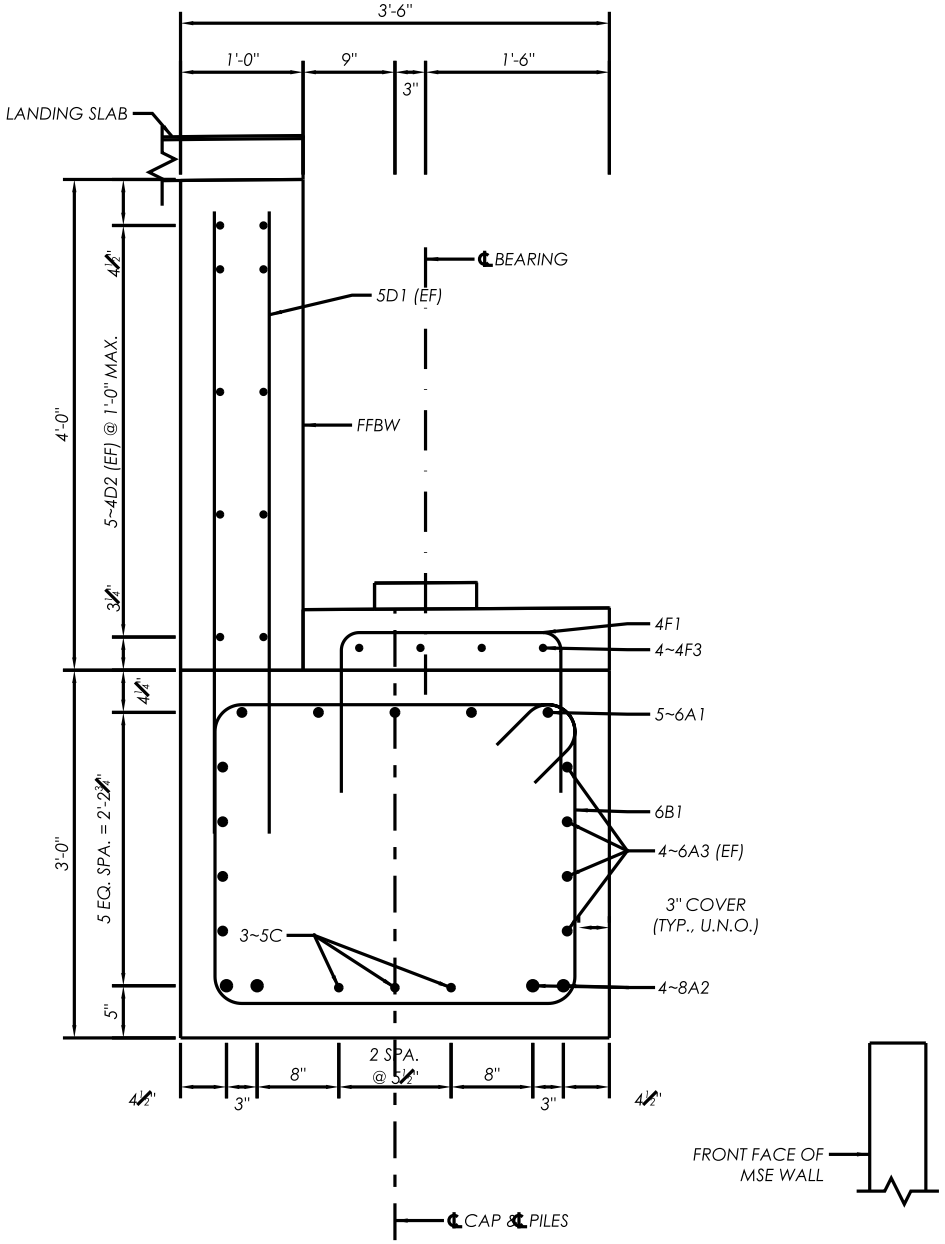
3'-6"
1'-0"
9"
3"
1'-6"
LANDING SLAB
℄ BEARING
5D1 (EF)
FFBW
4'-0"
4¼"
5~4D2 (EF) @ 1'-0" MAX.
3¼"
4F1
4~4F3
4¼"
5~6A1
6B1
4~6A3 (EF)
3'-0"
5 EQ. SPA. = 2'-2¾"
3" COVER
(TYP., U.N.O.)
3~5C
4~8A2
5"
4½"
3"
8"
2 SPA.
@ 5½"
8"
3"
4½"
FRONT FACE OF
MSE WALL
℄ CAP & ℄ PILES

SECTION C-C

(SECTION AT CENTERLINE OF BEAM)

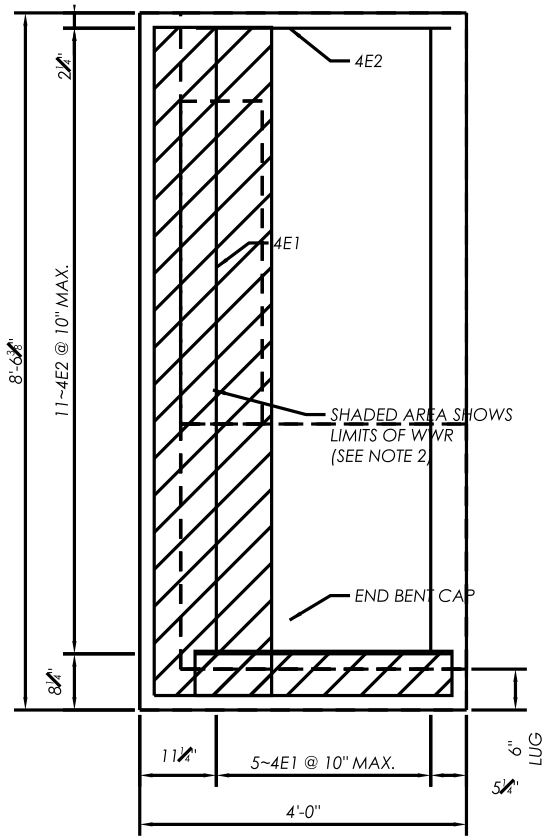
4E2
2¼"
8'-6⅜"
11~4E2 @ 10" MAX.
4E1
SHADED AREA SHOWS
LIMITS OF WWR
(SEE NOTE 2)
END BENT CAP
8¼"
6"
LUG
11¼"
5~4E1 @ 10" MAX.
5¼"
4'-0"

VIEW D-D

(LEFT CHEEK WALL)

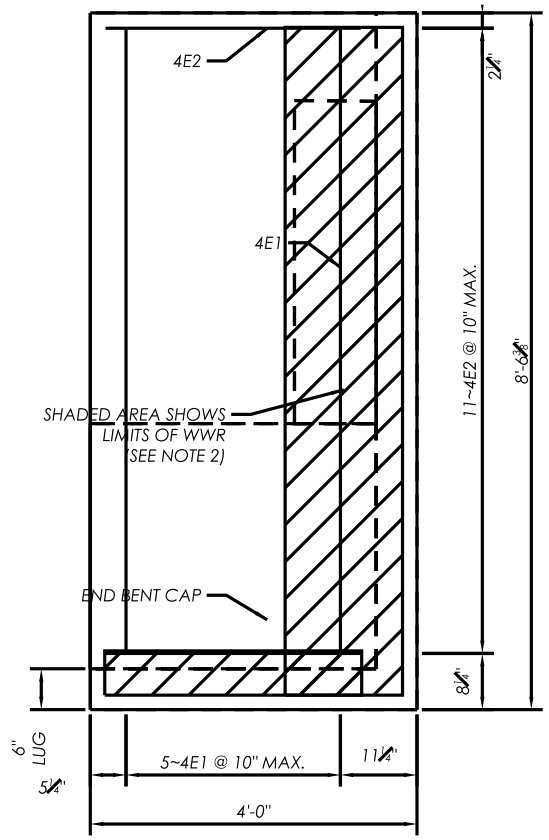
4E2
2¼"
4E1
11~4E2 @ 10" MAX.
8'-6⅜"
SHADED AREA SHOWS
LIMITS OF WWR
(SEE NOTE 2)
END BENT CAP
8¼"
6"
LUG
5¼"
5~4E1 @ 10" MAX.
11¼"
4'-0"

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-1.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-1.
4. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 1 DETAILS (2 OF 2)

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-3

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

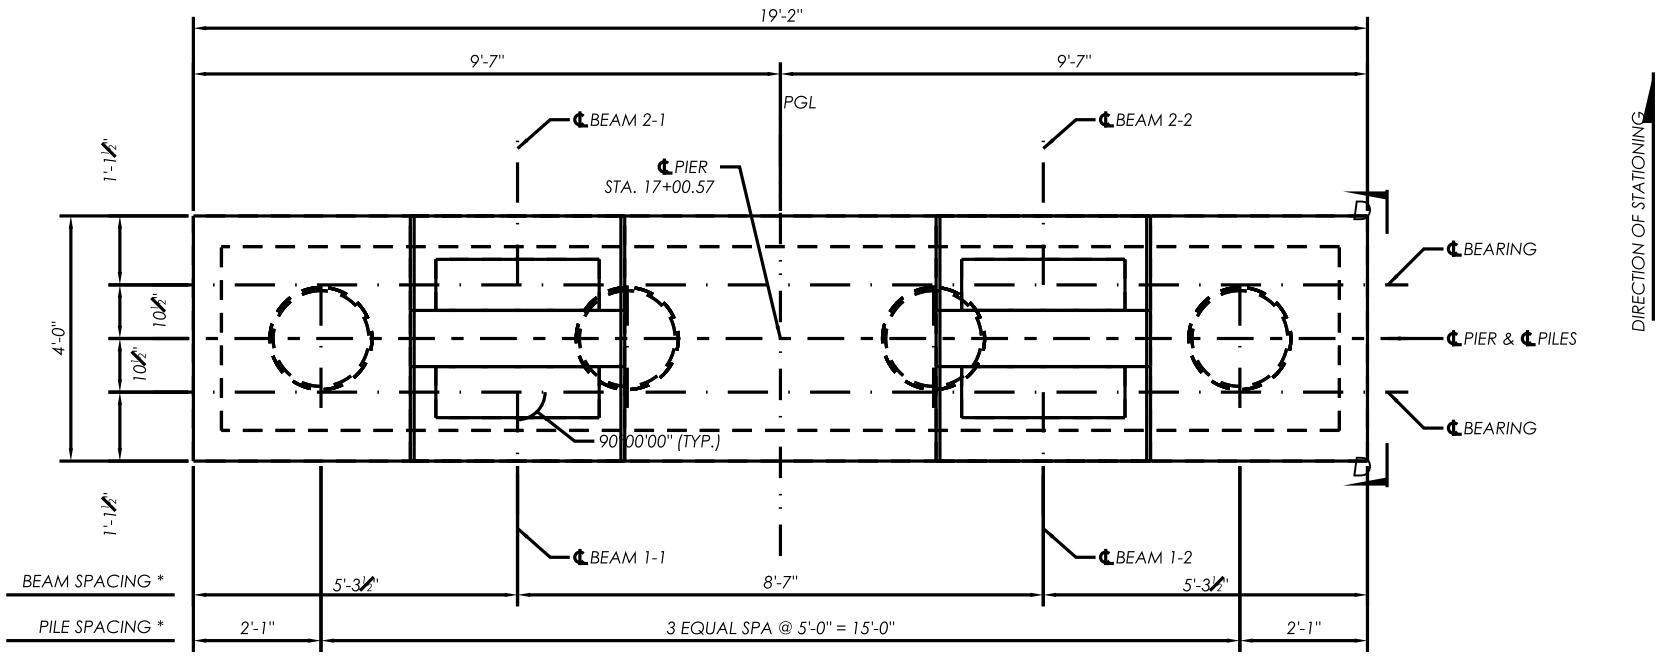
19'-2"
9'-7"
9'-7"
PGL
℄ BEAM 2-1
℄ BEAM 2-2
℄ PIER
STA. 17+00.57
DIRECTION OF STATIONING
1'-1½"
4'-0"
10½"
10½"
1'-1½"
D
D
℄ BEARING
℄ PIER & ℄ PILES
℄ BEARING
90°00'00" (TYP.)
℄ BEAM 1-1
℄ BEAM 1-2
BEAM SPACING *
5'-3½"
8'-7"
5'-3½"
PILE SPACING *
2'-1"
3 EQUAL SPA @ 5'-0" = 15'-0"
2'-1"

PLAN

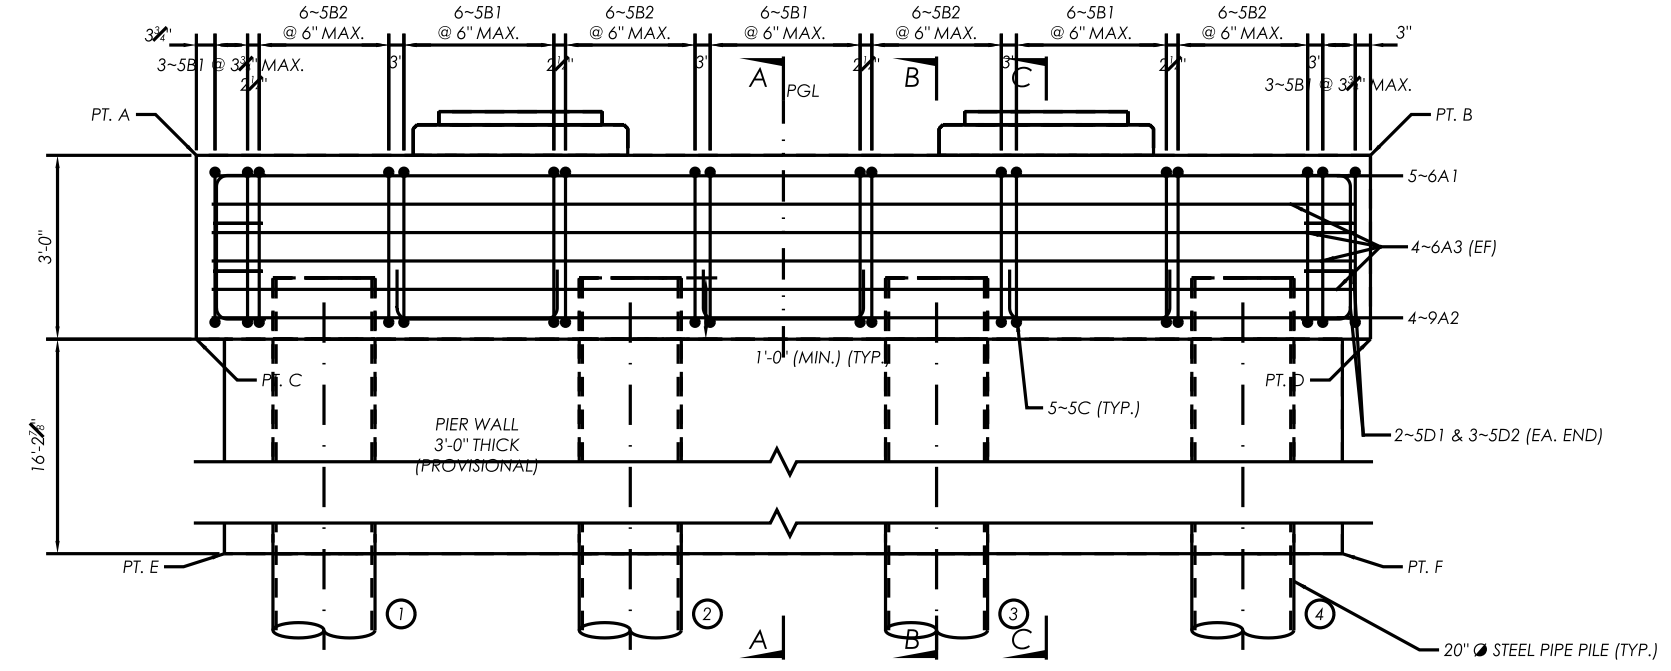
3¾"
6~5B2
@ 6" MAX.
6~5B1
@ 6" MAX.
6~5B2
@ 6" MAX.
6~5B1
@ 6" MAX.
6~5B2
@ 6" MAX.
6~5B1
@ 6" MAX.
6~5B2
@ 6" MAX.
3"
3~5B1 @ 3¾" MAX.
2½"
3'
2½"
3'
A
PGL
2½"
B
3'
C
2½"
3'
3~5B1 @ 3¾" MAX.
PT. A
PT. B
5~6A1
3'-0"
4~6A3 (EF)
4~9A2
PT. C
1'-0" (MIN.) (TYP.)
PT. D
5~5C (TYP.)
2~5D1 & 3~5D2 (EA. END)
16'-2⅞"
PIER WALL
3'-0" THICK
(PROVISIONAL)
PT. E
PT. F
①
②
③
④
A
B
C
20" ⌀ STEEL PIPE PILE (TYP.)

* DIMENSIONS MEASURED ALONG ℄ PIER

ELEVATION

(LOOKING AHEAD STATION)


4'-0"
℄ PIER & ℄ PILES
3'-0"

VIEW D-D

(END VIEW)

TABLE OF ELEVATIONS

POINT	ELEVATION
A	43.765
B	43.765
C	40.765
D	40.765
E	24.526
F	24.526

PILE CUTOFF ELEVATIONS

PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.8	-7'-6"
2	41.8	-2'-6"
3	41.8	2'-6"
4	41.8	7'-6"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C AND PEDESTAL DETAILS, SEE SHEET B4-5. FOR LOCATION OF VIEW D-D, SEE PLAN.
4. PIER WALL IS PROVISIONAL (3'-0" THICK); ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE: PIER

PROJECT NAME: D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO. B4-4

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

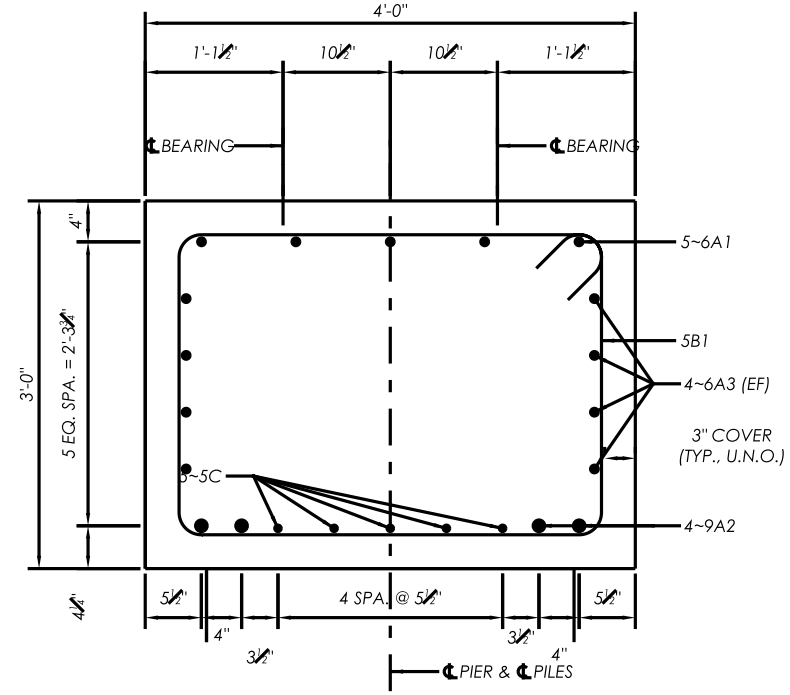
4'-0"
1'-1½"
10½"
10½"
1'-1½"
℄ BEARING
℄ BEARING
5~6A1
5B1
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
5~5C
4~9A2
3'-0"
5 EQ. SPA. = 2'-3¾"
4"
4¼"
5½"
4 SPA. @ 5½"
5½"
4"
3½"
3½"
4"
℄ PIER & ℄ PILES

SECTION A-A

(SECTION BETWEEN PILES)

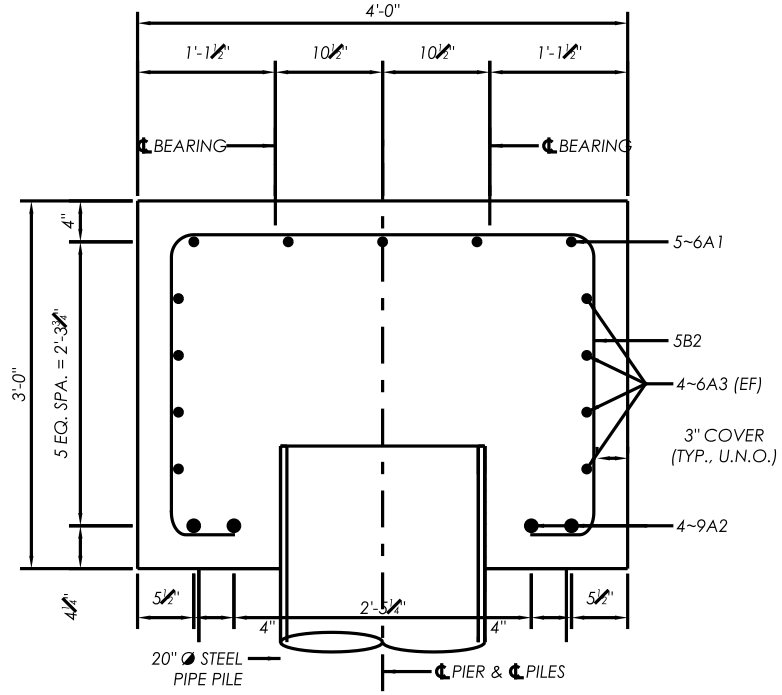
4'-0"
1'-1½"
10½"
10½"
1'-1½"
℄ BEARING
℄ BEARING
5~6A1
5B2
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
4~9A2
3'-0"
5 EQ. SPA. = 2'-3¾"
4"
4¼"
5½"
2'-5¾"
5½"
4"
4"
20" ⌀ STEEL
PIPE PILE
℄ PIER & ℄ PILES

SECTION B-B

(SECTION AT PILES)

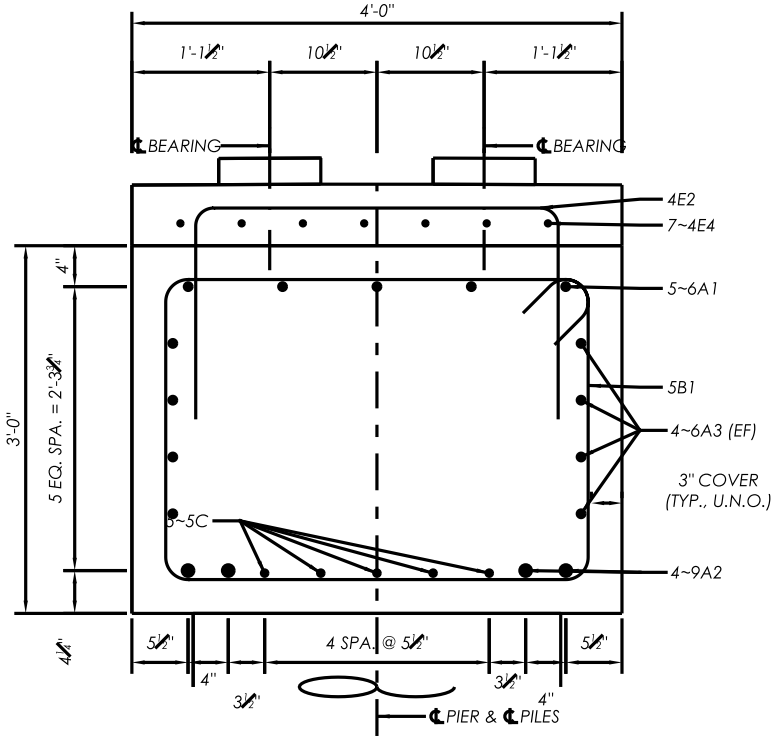
4'-0"
1'-1½"
10½"
10½"
1'-1½"
℄ BEARING
℄ BEARING
4E2
7~4E4
5~6A1
5B1
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
5~5C
4~9A2
3'-0"
5 EQ. SPA. = 2'-3¾"
4"
4¼"
5½"
4 SPA. @ 5½"
5½"
4"
3½"
3½"
4"
℄ PIER & ℄ PILES

SECTION C-C

(SECTION AT CENTERLINE OF BEAMS)

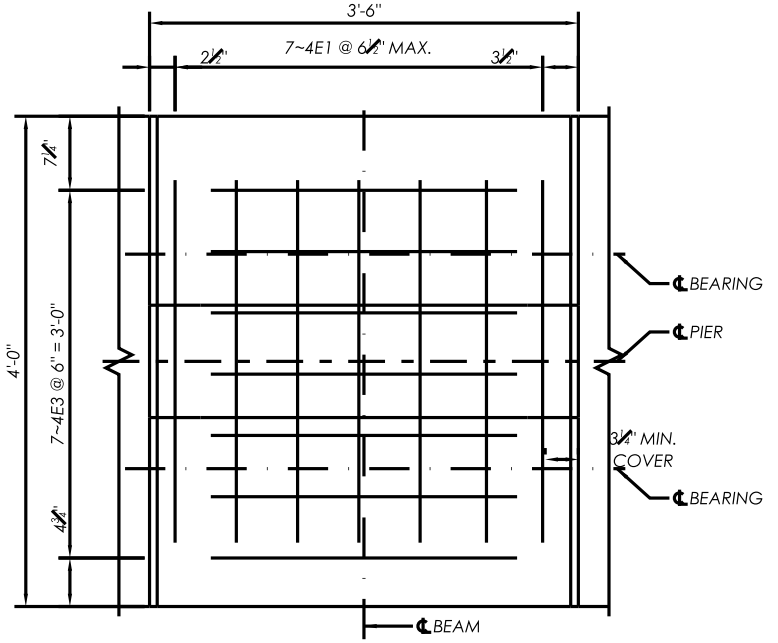
3'-6"
2½"
7~4E1 @ 6½" MAX.
3½"
℄ BEARING
℄ PIER
¾" MIN.
COVER
℄ BEARING
4'-0"
7~4E3 @ 6" = 3'-0"
7¼"
4¾"
℄ BEAM

PEDESTAL PLAN

(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

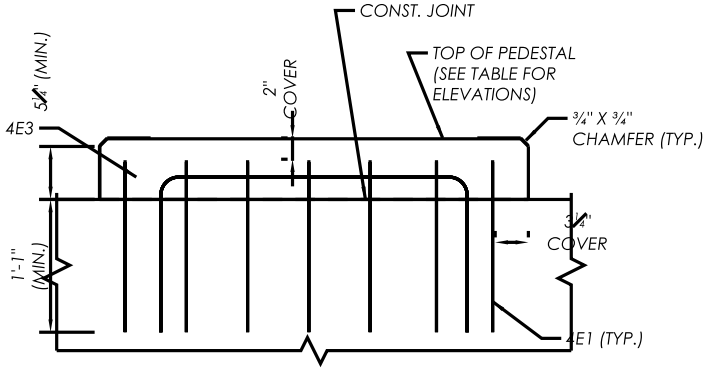
CONST. JOINT
TOP OF PEDESTAL
(SEE TABLE FOR
ELEVATIONS)
¾" X ¾"
CHAMFER (TYP.)
5¼" (MIN.)
2"
COVER
4E3
¾"
COVER
1'-1"
(MIN.)
4E1 (TYP.)

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS

BEAM NO.	ELEVATION (FEET)			
	A	E	F	B
1-1 / 2-1	44.260	44.267	44.266	44.261
1-2 / 2-2	44.260	44.267	44.266	44.261

A AT SPAN 1 EDGE, B AT SPAN 2 EDGE, E AND F AT THE PAD-END BREAKS.

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-4.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4E2 IN PLACE OF 4E1 AT BEAM LINE 2; 4E4 IN PLACE OF 4E3 AT BEAM LINE 2.
4. PIER WALL IS PROVISIONAL; ITS REINFORCEMENT IS NOT SHOWN.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
PIER DETAILS

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-5

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

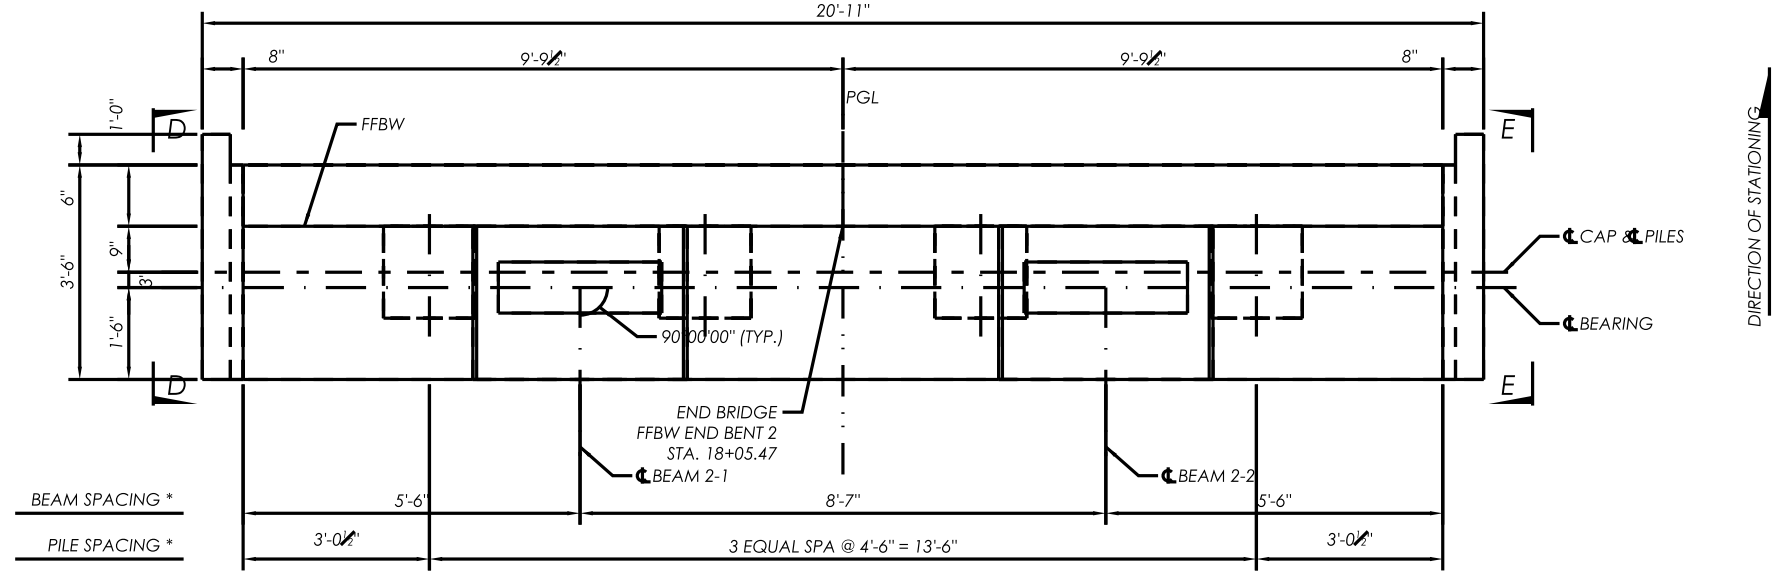
20'-11"
8"
9'-9½"
9'-9½"
8"
PGL
D
D
E
E
FFBW
1'-0"
6"
3'-6"
9"
3"
1'-6"
℄ CAP & ℄ PILES
℄ BEARING
90°00'00" (TYP.)
END BRIDGE
FFBW END BENT 2
STA. 18+05.47
℄ BEAM 2-1
℄ BEAM 2-2
BEAM SPACING *
5'-6"
8'-7"
5'-6"
PILE SPACING *
3'-0½"
3 EQUAL SPA @ 4'-6" = 13'-6"
3'-0½"
DIRECTION OF STATIONING

PLAN

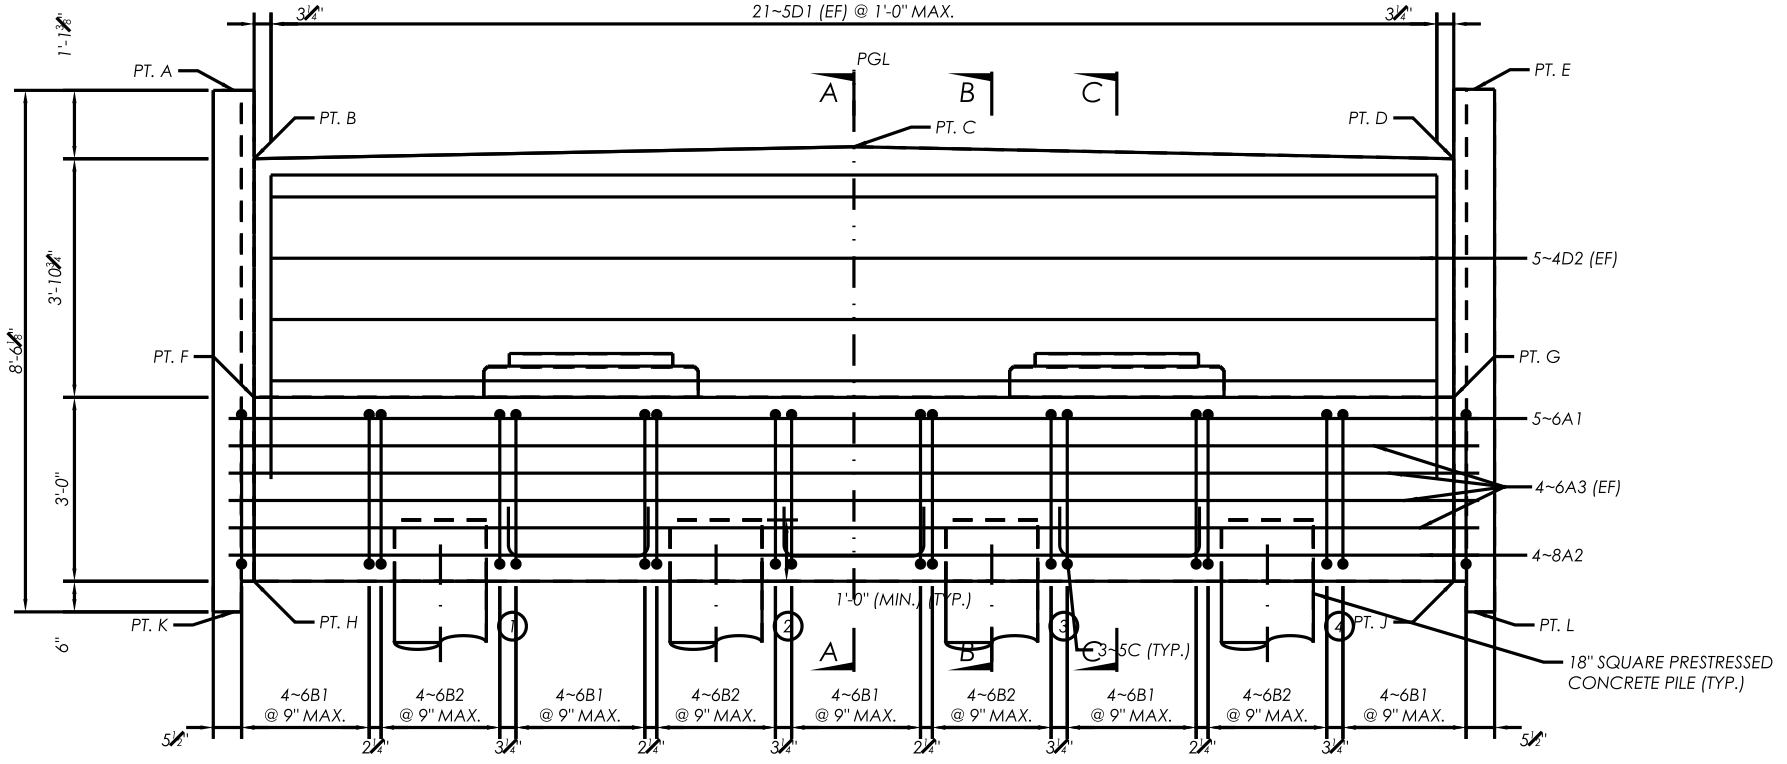
3¼"
21~5D1 (EF) @ 1'-0" MAX.
3¼"
1'-1⅜"
PGL
A
B
C
PT. A
PT. B
PT. C
PT. D
PT. E
8'-6⅛"
3'-10¾"
5~4D2 (EF)
PT. F
PT. G
5~6A1
3'-0"
4~6A3 (EF)
4~8A2
1'-0" (MIN.) (TYP.)
PT. K
PT. H
1
2
3
4
PT. J
PT. L
A
B
C
3~5C (TYP.)
18" SQUARE PRESTRESSED
CONCRETE PILE (TYP.)
6"
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
4~6B2
@ 9" MAX.
4~6B1
@ 9" MAX.
5½"
2¼"
3¼"
2¼"
3¼"
2¼"
3¼"
2¼"
3¼"
5½"

* DIMENSIONS MEASURED ALONG FFBW

ELEVATION

(LOOKING AHEAD STATION)

TABLE OF ELEVATIONS

POINT	ELEVATION
A	48.260
B	47.144
C	47.340
D	47.144
E	48.277
F	43.250
G	43.250
H	40.250
J	40.250
K	39.750
L	39.750

PILE CUTOFF ELEVATIONS

PILE NO.	CUTOFF EL.	PGL OFFSET
1	41.2	-6'-9"
2	41.2	-2'-3"
3	41.2	2'-3"
4	41.2	6'-9"

NOTES:

1. STIRRUP SPACING IS DIMENSIONED TO BAR CENTERLINES.
2. REINFORCEMENT IS SHOWN REPRESENTATIVELY: THE FIRST AND LAST BAR OF EACH RUN ARE DRAWN.
3. FOR SECTIONS A-A, B-B AND C-C, SEE SHEET B4-7. FOR VIEWS D-D AND E-E AND PEDESTAL DETAILS, SEE SHEET B4-8.
4. THE SOIL REINFORCEMENT ATTACHED TO THE BACKWALL SHALL BE DESIGNED BY A SPECIALTY ENGINEER FOR A SERVICE LOAD OF ___ K/FT AND A FACTORED LOAD OF ___ K/FT USING THE DESIGN CRITERIA FOR PERMANENT MSE WALLS. COST OF FURNISHING AND INSTALLING THE SOIL REINFORCEMENT IS CONSIDERED INCIDENTAL TO THE COST OF THE END BENT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.
6. PILE OFFSETS ARE FROM THE PGL, + TO THE RIGHT LOOKING UP-STATION. CUTOFF ELEVATIONS ARE TO THE NEAREST 0.1 FT.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 2

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-6

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

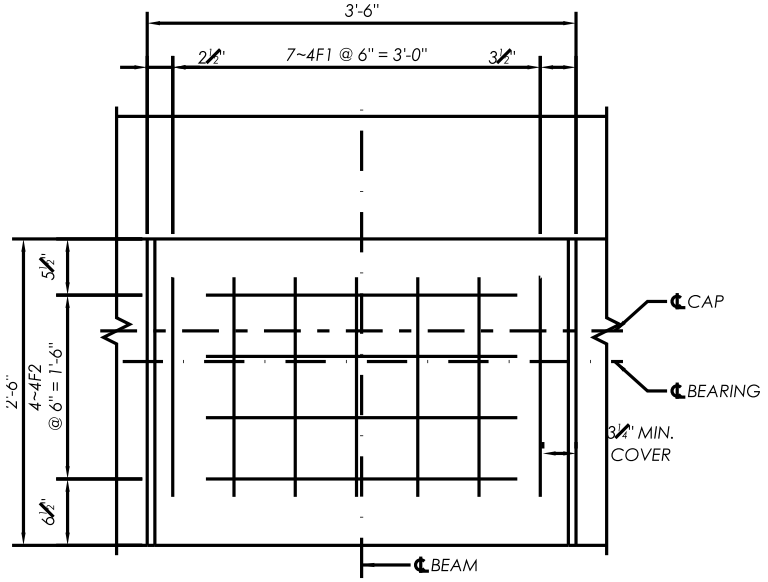
3'-6"
2½"
7~4F1 @ 6" = 3'-0"
3½"
5½"
2'-6"
4~4F2 @ 6" = 1'-6"
6½"
℄ CAP
℄ BEARING
3¼" MIN. COVER
℄ BEAM

PEDESTAL PLAN

(BEAM LINE 1 SHOWN. PEDESTAL BAR SPACING MAY BE SLIGHTLY ADJUSTED TO CLEAR CONFLICTS WITH MAIN CAP REINFORCEMENT)

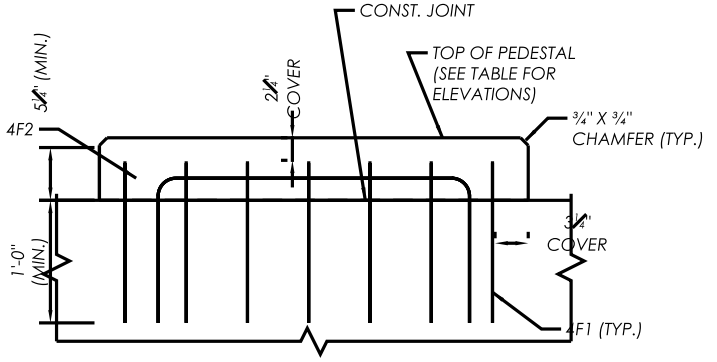
CONST. JOINT
TOP OF PEDESTAL (SEE TABLE FOR ELEVATIONS)
¾" X ¾" CHAMFER (TYP.)
5¼" (MIN.)
2¼" COVER
4F2
3¼" COVER
1'-0" (MIN.)
4F1 (TYP.)

PEDESTAL ELEVATION

TOP OF PEDESTAL ELEVATIONS

BEAM NO.	ELEVATION (FEET)			
	A	B	C	D
2-1	43.743	43.760	43.743	43.760
2-2	43.743	43.760	43.743	43.760

A, C AT FFBW EDGE; B, D AT SPAN EDGE (LEVEL TRANSVERSELY).

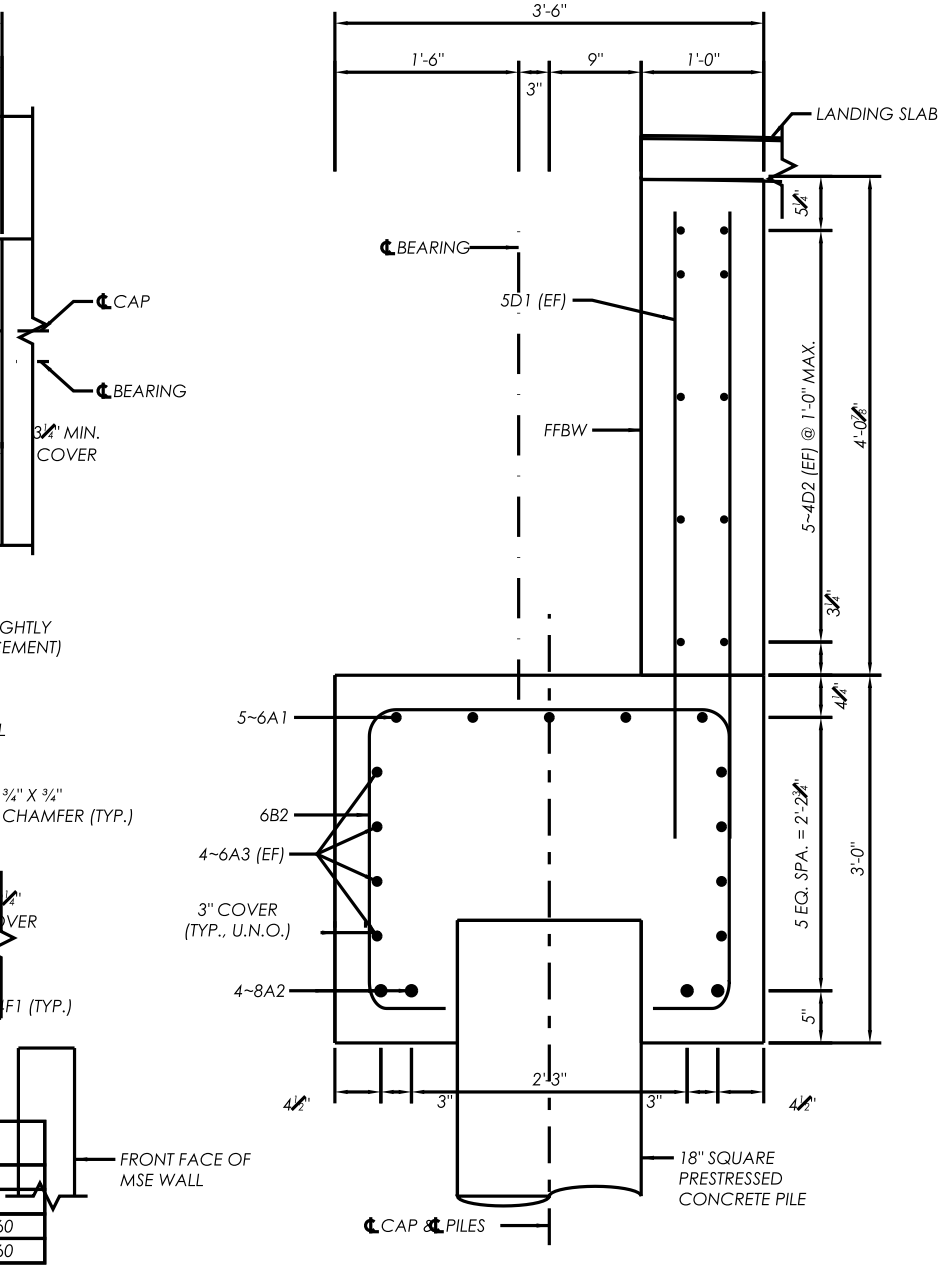
3'-6"
1'-6"
9"
1'-0"
3"
LANDING SLAB
℄ BEARING
5D1 (EF)
FFBW
5¼"
5~4D2 (EF) @ 1'-0" MAX.
4'-0⅞"
3¼"
4¼"
5~6A1
6B2
4~6A3 (EF)
3" COVER (TYP., U.N.O.)
4~8A2
5 EQ. SPA. = 2'-2¾"
3'-0"
5"
4½"
3"
2'-3"
3"
4½"
FRONT FACE OF MSE WALL
18" SQUARE PRESTRESSED CONCRETE PILE
℄ CAP & ℄ PILES

SECTION B-B

(SECTION AT PILES)

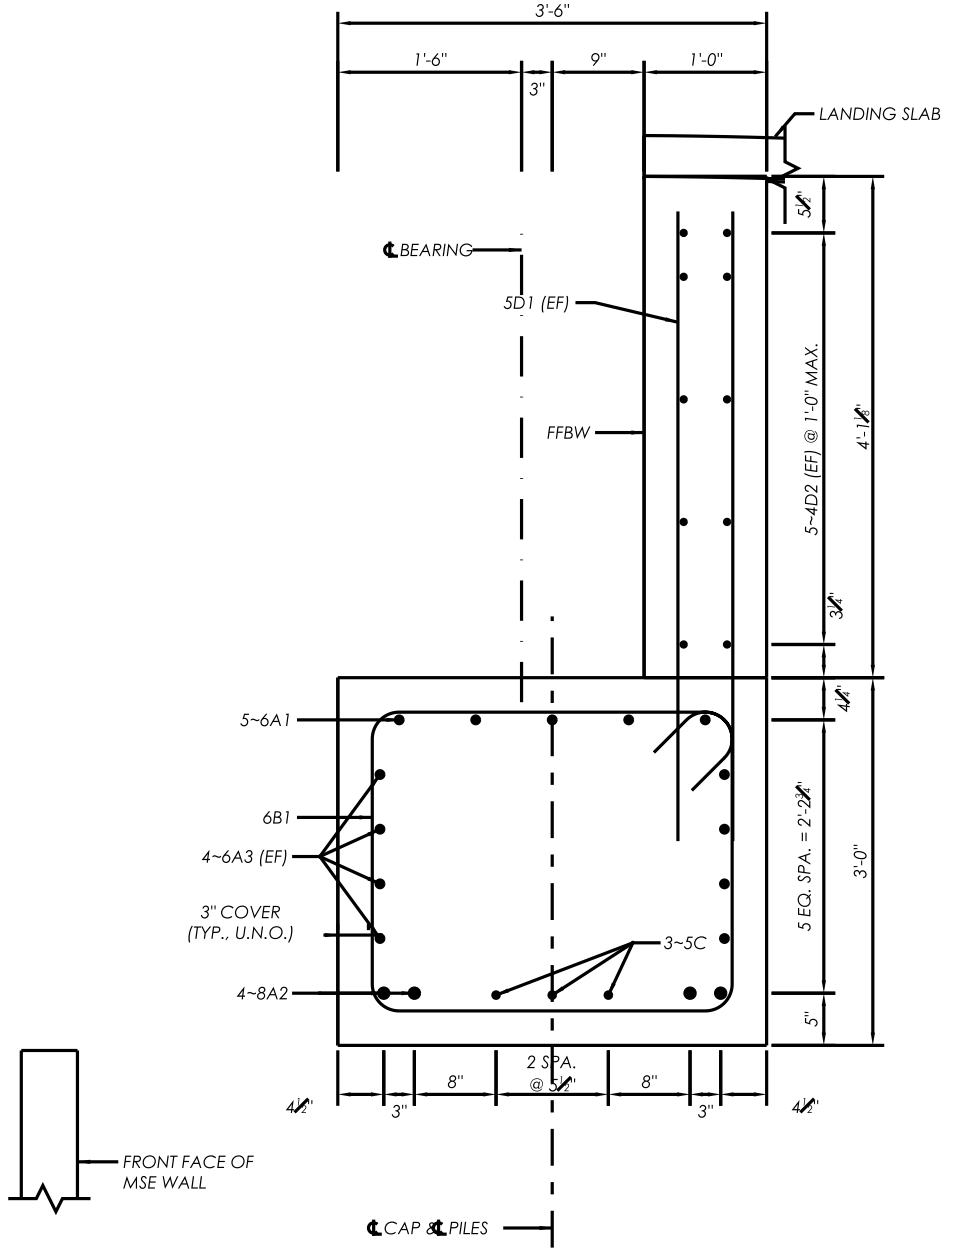
3'-6"
1'-6"
9"
1'-0"
3"
LANDING SLAB
℄ BEARING
5D1 (EF)
FFBW
5¼"
5~4D2 (EF) @ 1'-0" MAX.
4'-1⅛"
3¼"
4¼"
5~6A1
6B1
4~6A3 (EF)
3" COVER (TYP., U.N.O.)
3~5C
4~8A2
5 EQ. SPA. = 2'-2¾"
3'-0"
5"
4½"
3"
8"
2 SPA. @ 5½"
8"
3"
4½"
FRONT FACE OF MSE WALL
℄ CAP & ℄ PILES

SECTION A-A

(SECTION BETWEEN PILES)

NOTES:

1. FOR LOCATION OF SECTIONS, SEE SHEET B4-6.
2. ALL BARS ARE SHOWN IN SECTIONS; BARS IN THE SECTION PLANE ARE THE NEAREST BAR OF THEIR SERIES WITHIN 1'-3" BEYOND THE CUT.
3. PEDESTALS AT THE OTHER BEAM LINES ARE SIMILAR: 4F3 IN PLACE OF 4F2 AT BEAM LINE 2.
4. PEDESTALS ARE CAST ON THE CAP; THE CAP TOP IS A CONSTRUCTION JOINT.
5. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 2 DETAILS (1 OF 2)

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-7

FREECAD MODEL SHA-256 2D386AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

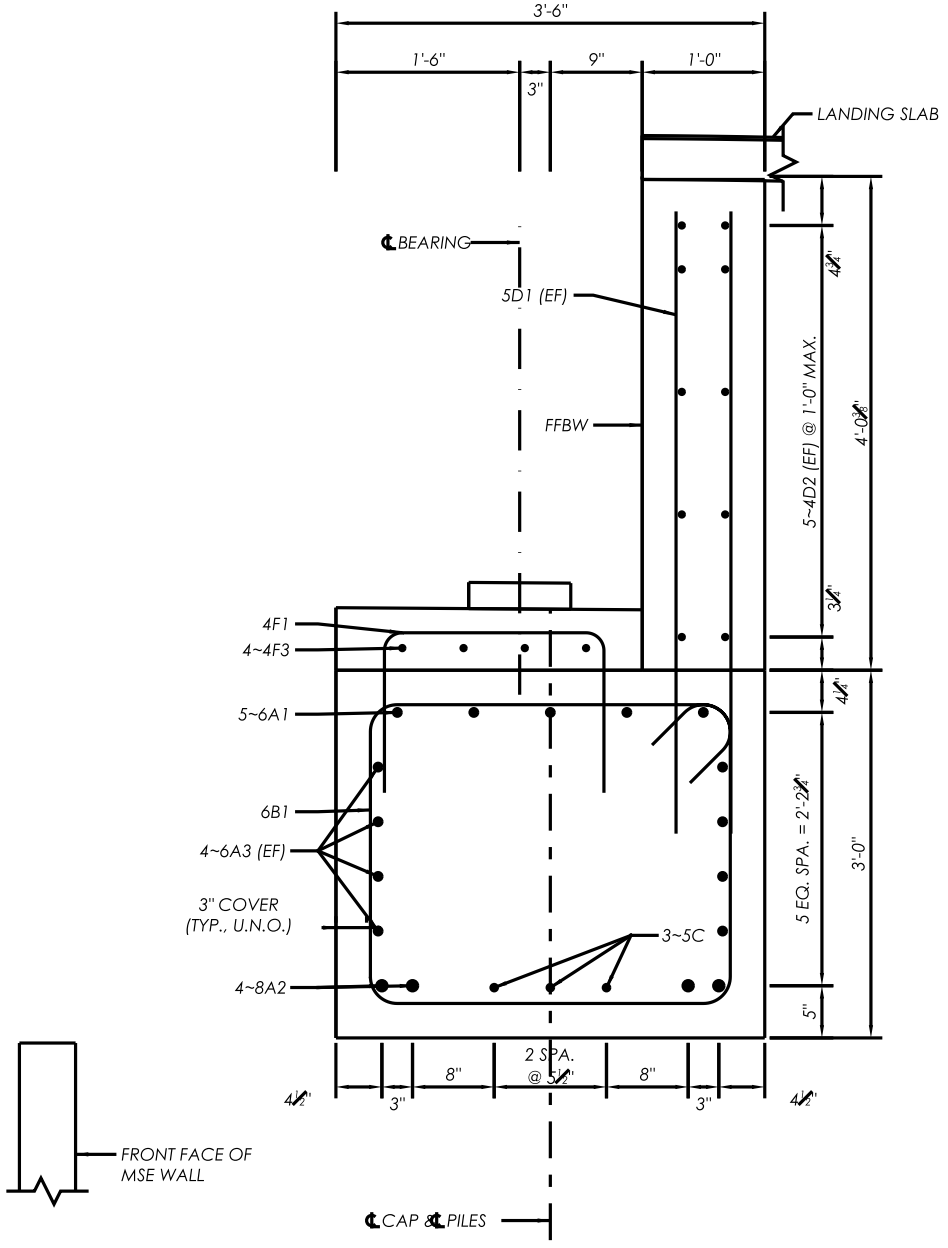
3'-6"
1'-6"
3"
9"
1'-0"
LANDING SLAB
℄ BEARING
5D1 (EF)
FFBW
4¾"
5~4D2 (EF) @ 1'-0" MAX.
4'-0⅜"
3¼"
4F1
4~4F3
5~6A1
4¼"
6B1
4~6A3 (EF)
3" COVER
(TYP., U.N.O.)
5 EQ. SPA. = 2'-2¾"
3'-0"
3~5C
4~8A2
5"
4½"
3"
8"
2 SPA.
@ 5½"
8"
3"
4½"
FRONT FACE OF
MSE WALL
℄ CAP & ℄ PILES

SECTION C-C

(SECTION AT CENTERLINE OF BEAM)

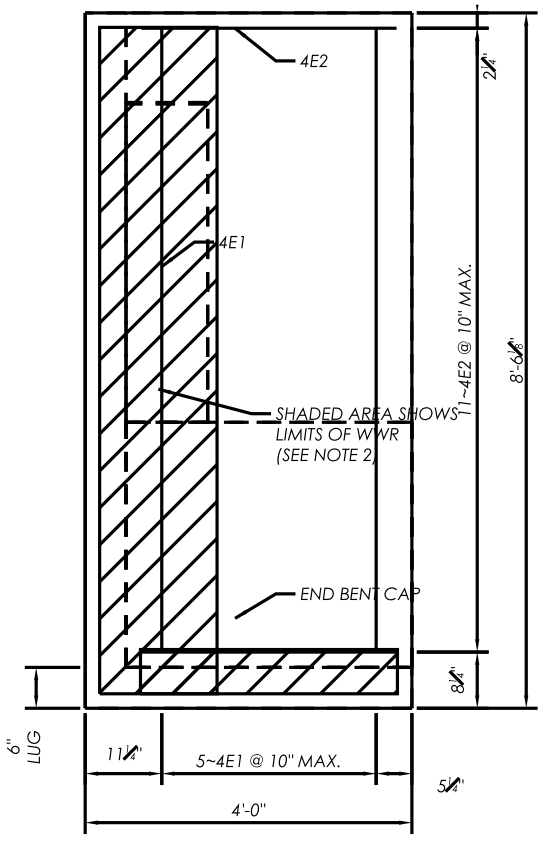
4E2
2¼"
4E1
11~4E2 @ 10" MAX.
8'-6⅛"
SHADED AREA SHOWS
LIMITS OF WWR
(SEE NOTE 2)
END BENT CAP
8¼"
6"
LUG
11¼"
5~4E1 @ 10" MAX.
5¼"
4'-0"

VIEW D-D

(LEFT CHEEK WALL)

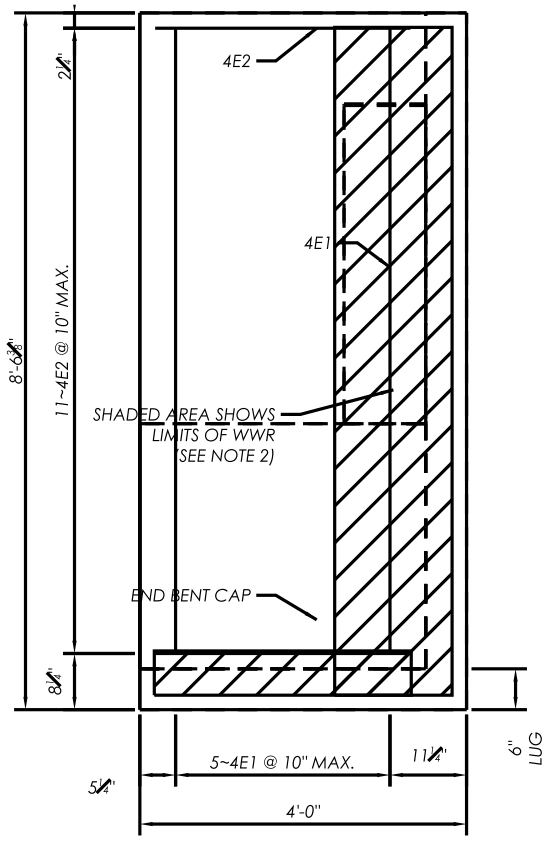
2¼"
4E2
8'-6⅜"
11~4E2 @ 10" MAX.
4E1
SHADED AREA SHOWS
LIMITS OF WWR
(SEE NOTE 2)
END BENT CAP
8¼"
5¼"
5~4E1 @ 10" MAX.
11¼"
6"
LUG
4'-0"

VIEW E-E

(RIGHT CHEEK WALL)

NOTES:

1. FOR LOCATION OF SECTION C-C AND VIEWS D-D AND E-E, SEE SHEET B4-6.
2. WELDED WIRE REINFORCEMENT (WWR) 4x4-W1.4xW1.4 IN THE CHEEK LUGS SHALL BE TIED TO THE END BENT REINFORCING STEEL.
3. FOR CHEEK TOP ELEVATIONS, SEE THE TABLE OF ELEVATIONS, SHEET B4-6.
4. FOR REINFORCING BAR LIST, SEE SHEET B4-9.

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
END BENT 2 DETAILS (2 OF 2)

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

REF. DWG. NO.

SHEET NO.
B4-8

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

PRELIMINARY - NOT FOR CONSTRUCTION - GENERATED FROM THE CURRENT FREECAD MODEL

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	◑
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
END BENT 1 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16				1-0	2-6	3-0	2-6	1-0					
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	42	1			4-11 TO 5-2									
4	D2	19-1	10	1			19-1									
4	E1	7-8	10	1			7-8									
4	E2	3-2	22	1			3-2									
4	F1	4-3	14	11			1-10	1-4	1-4							
4	F2	4-9	4	11			2-7	1-2½	1-2½							
4	F3	4-8	4	11			2-5½	1-2½	1-2½							
END BENT 2 (1 REQUIRED)																
6	A1	20-5	5	1			20-5									
8	A2	20-5	4	1			20-5									
6	A3	20-5	8	1			20-5									
6	B1	11-10	20	4	5	5	2-6	3-0								
6	B2	9-4	16				1-0	2-6	3-0	2-6	1-0					
5	C	3-9	9	11			2-4	0-10	0-10							
5	D1	4-11 TO 5-2	42	1			4-11 TO 5-2									
4	D2	19-1	10	1			19-1									
4	E1	7-8	10	1			7-8									
4	E2	3-2	22	1			3-2									
4	F1	4-3	14	11			1-10	1-4	1-4							
4	F2	4-9	4	11			2-7	1-2½	1-2½							
4	F3	4-9	4	11			2-6½	1-2½	1-2½							

NOTE:

FOR BAR BENDING DETAILS, REFER TO FDOT STANDARD PLANS INDEX 415-001.

MARK		LENGTH	NO	TYP	STY		B	C	D	E	F	H	J	K	N	◑
SIZE	DES	FT IN	BARS	BAR	A	G	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	FT IN	NO	ANG
PIER (1 REQUIRED)																
6	A1	18-8	5	1			18-8									
9	A2	18-8	4	1			18-8									
6	A3	18-8	8	1			18-8									
5	B1	12-8	24	4	5	5	2-6	3-6								
5	B2	9-8	24				0-10	2-6	3-6	2-6	0-10					
5	C	4-1	15	11			2-8	0-10	0-10							
5	D1	4-10	4	11			3-4¾	0-10	0-10							
5	D2	3-10	6	11			2-4¾	0-10	0-10							
4	E1	5-7	7	11			3-0	1-5	1-5							
4	E2	6-3	7	11			3-0	1-9	1-9							
4	E3	4-11	7	11			2-6½	1-3½	1-3½							
4	E4	5-8	7	11			2-7½	1-7½	1-7½							

OPEN STIRRUP (NOT TO SCALE)



LEGS B AND F TURNED IN PLAN
TO CLEAR THE PILE

NOTES:

1. TYP BAR AND STY ARE THE BAR TYPE AND HOOK STYLE OF STANDARD PLANS INDEX 415-001 (FY 2025-26): TYPE 1 STRAIGHT (B = LENGTH), TYPE 4 CLOSED STIRRUP (B = HEIGHT, C = WIDTH), TYPE 11 U-BAR (B = BASE, C AND D = LEGS); STYLE 5 = 135° STIRRUP HOOK.
2. OPEN STIRRUPS HAVE THEIR END LEGS TURNED IN PLAN TO CLEAR THE PILE AND MATCH NO STANDARD TYPE; THEIR DIMENSION LETTERS REFER TO THE BENDING DIAGRAM ON THIS SHEET.
3. LENGTHS ARE THE MODEL CENTERLINE LENGTHS ROUNDED TO THE NEAREST INCH; BEND DIMENSIONS ARE OUT-TO-OUT (SDM 4.3.10.C).
4. VARYING LENGTHS: END BENT 1 5D1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2". END BENT 2 5D1: 6 @ 4'-11", 16 @ 5'-0", 16 @ 5'-1", 4 @ 5'-2".
5. PILES AND THE CHEEK LUG WELDED WIRE REINFORCEMENT ARE NOT INCLUDED IN THIS LIST.

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

FREECAD MODEL SHA-256 2D3B6AF8FF550D4B
B4_Substructure_EndBents_Pier.dxf (substructure_drawings 2.0.0)

BRIDGE NO. ______
B4 PEDESTRIAN BRIDGE

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

ENGINEER OF RECORD:

DRAWN BY:
CHECKED BY:
DESIGNED BY:
CHECKED BY:

STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID

SHEET TITLE:
REINFORCING BAR LIST

REF. DWG. NO.

PROJECT NAME:
D2 I-95 PEDESTRIAN BRIDGE - B4

SHEET NO.
B4-9