


Title:

Size: A4

KiCad E.D.A.	kicad 5.1.4
--------------	-------------


ad 5.1.4

Id: 2/10

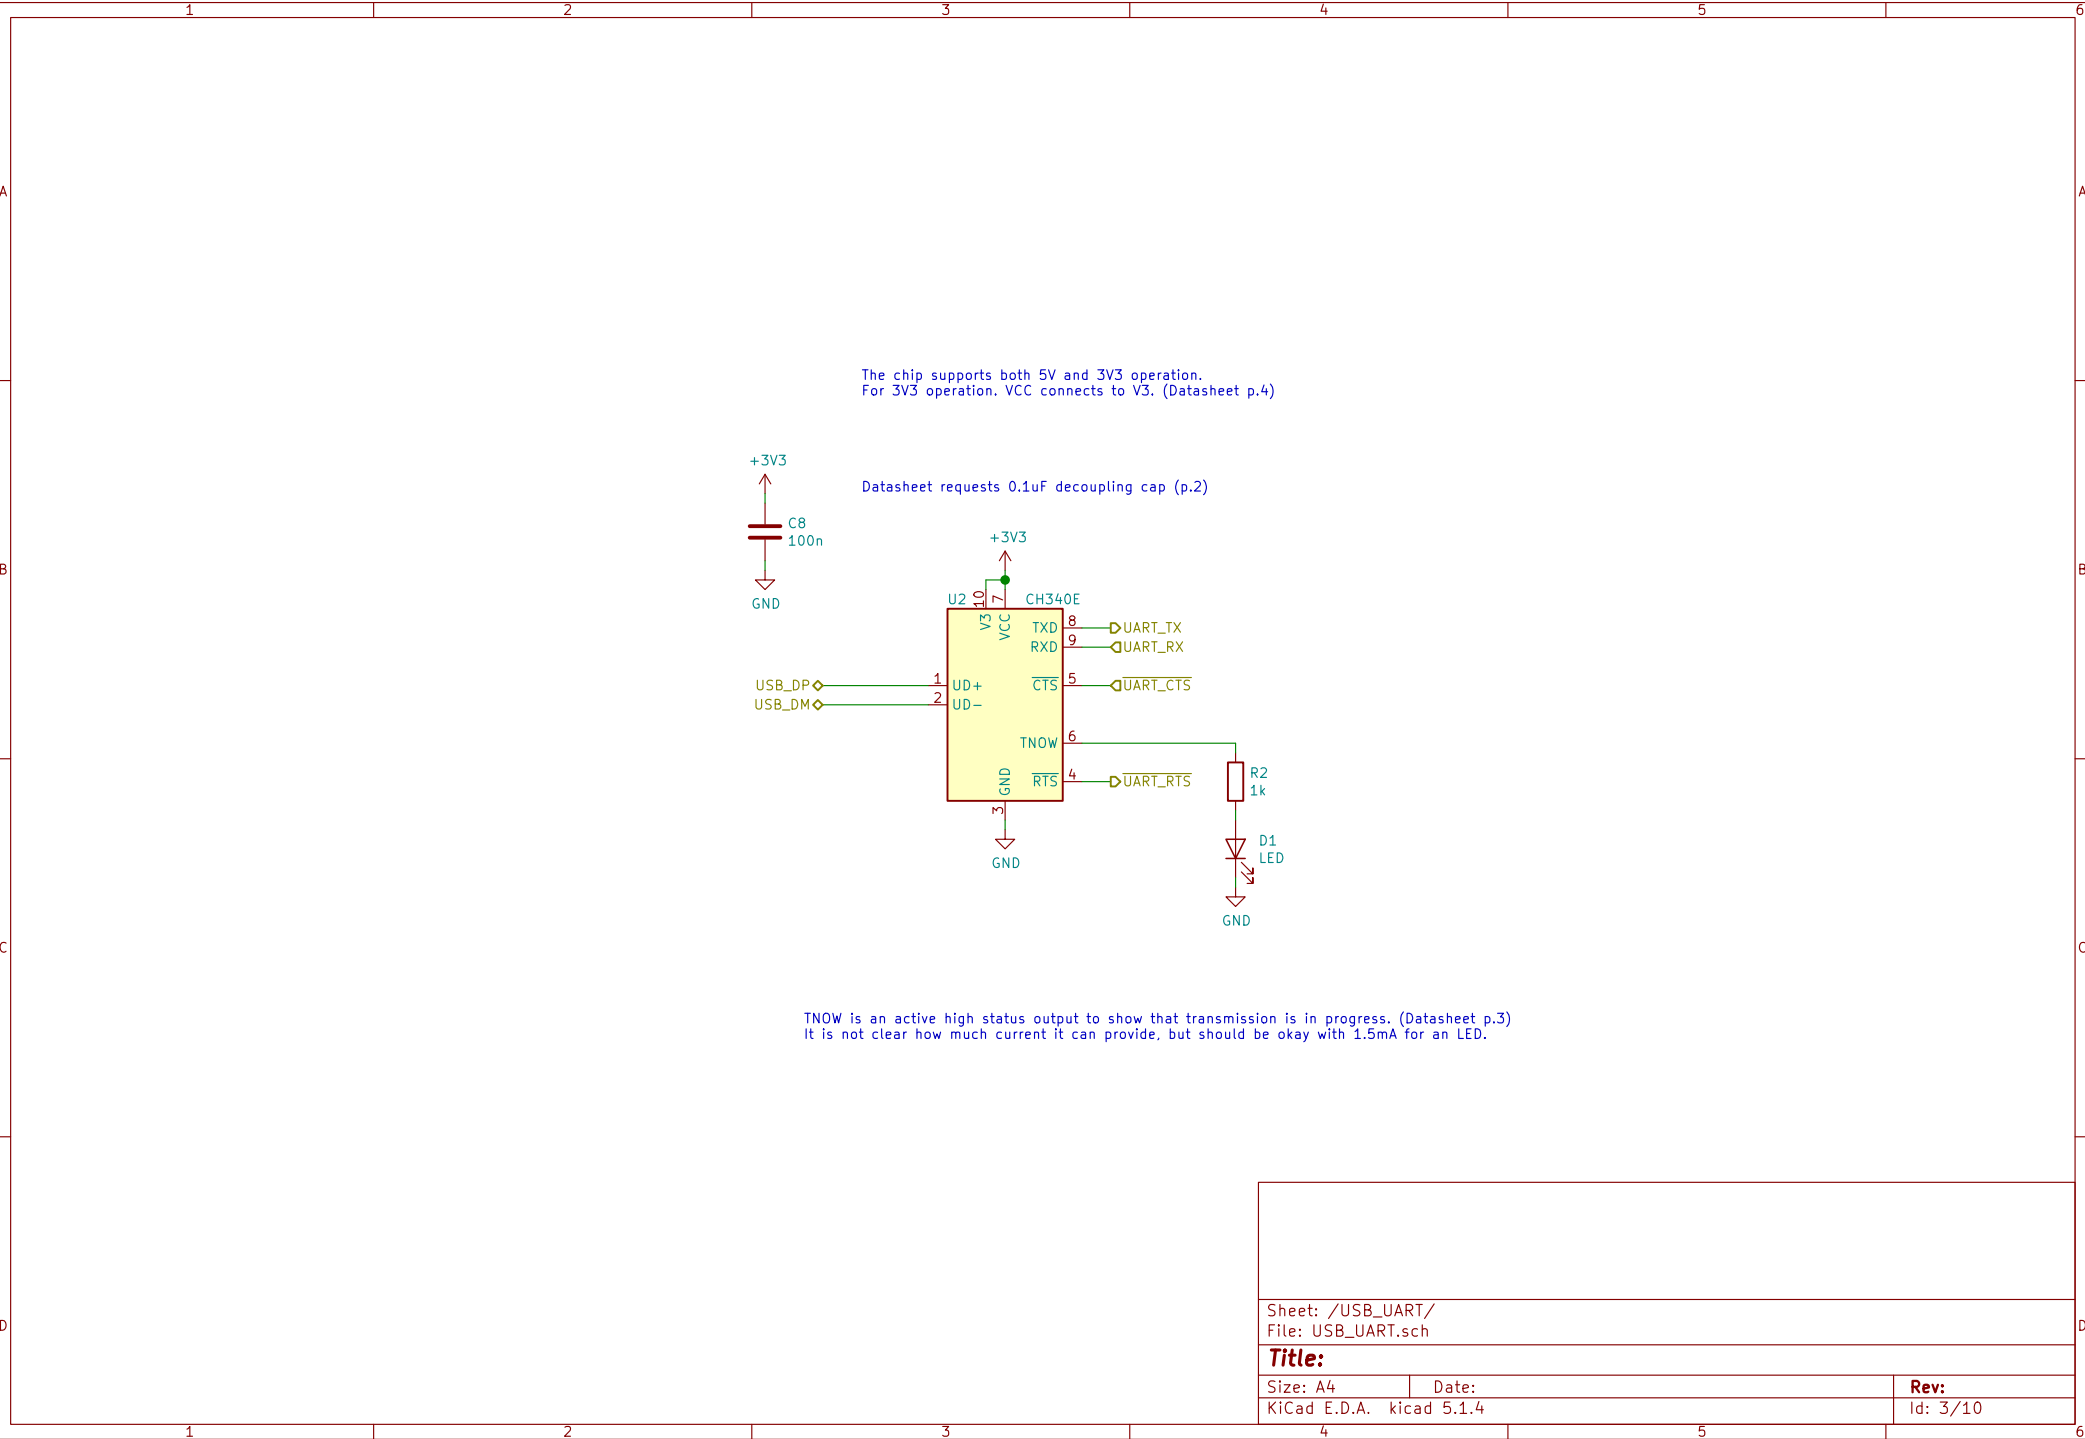



6.5V max input.
2A output.
Output caps from datasheet.
Vref is 0.5V


iCE40 has no particular requirements on power sequencing.
2A on each rail will be plenty.

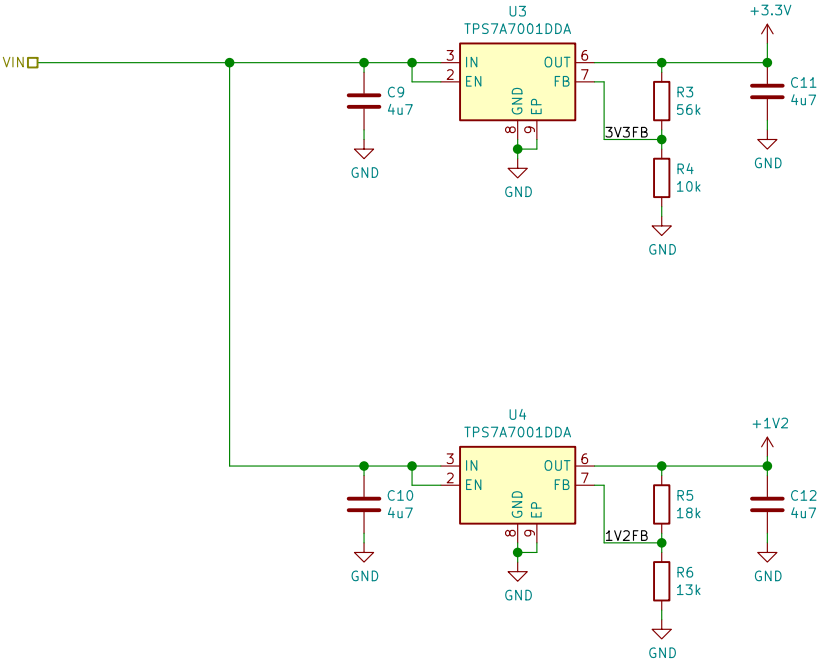


Sheet: /POWER/ File: POWER.sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 5.1.4		Id: 4/10

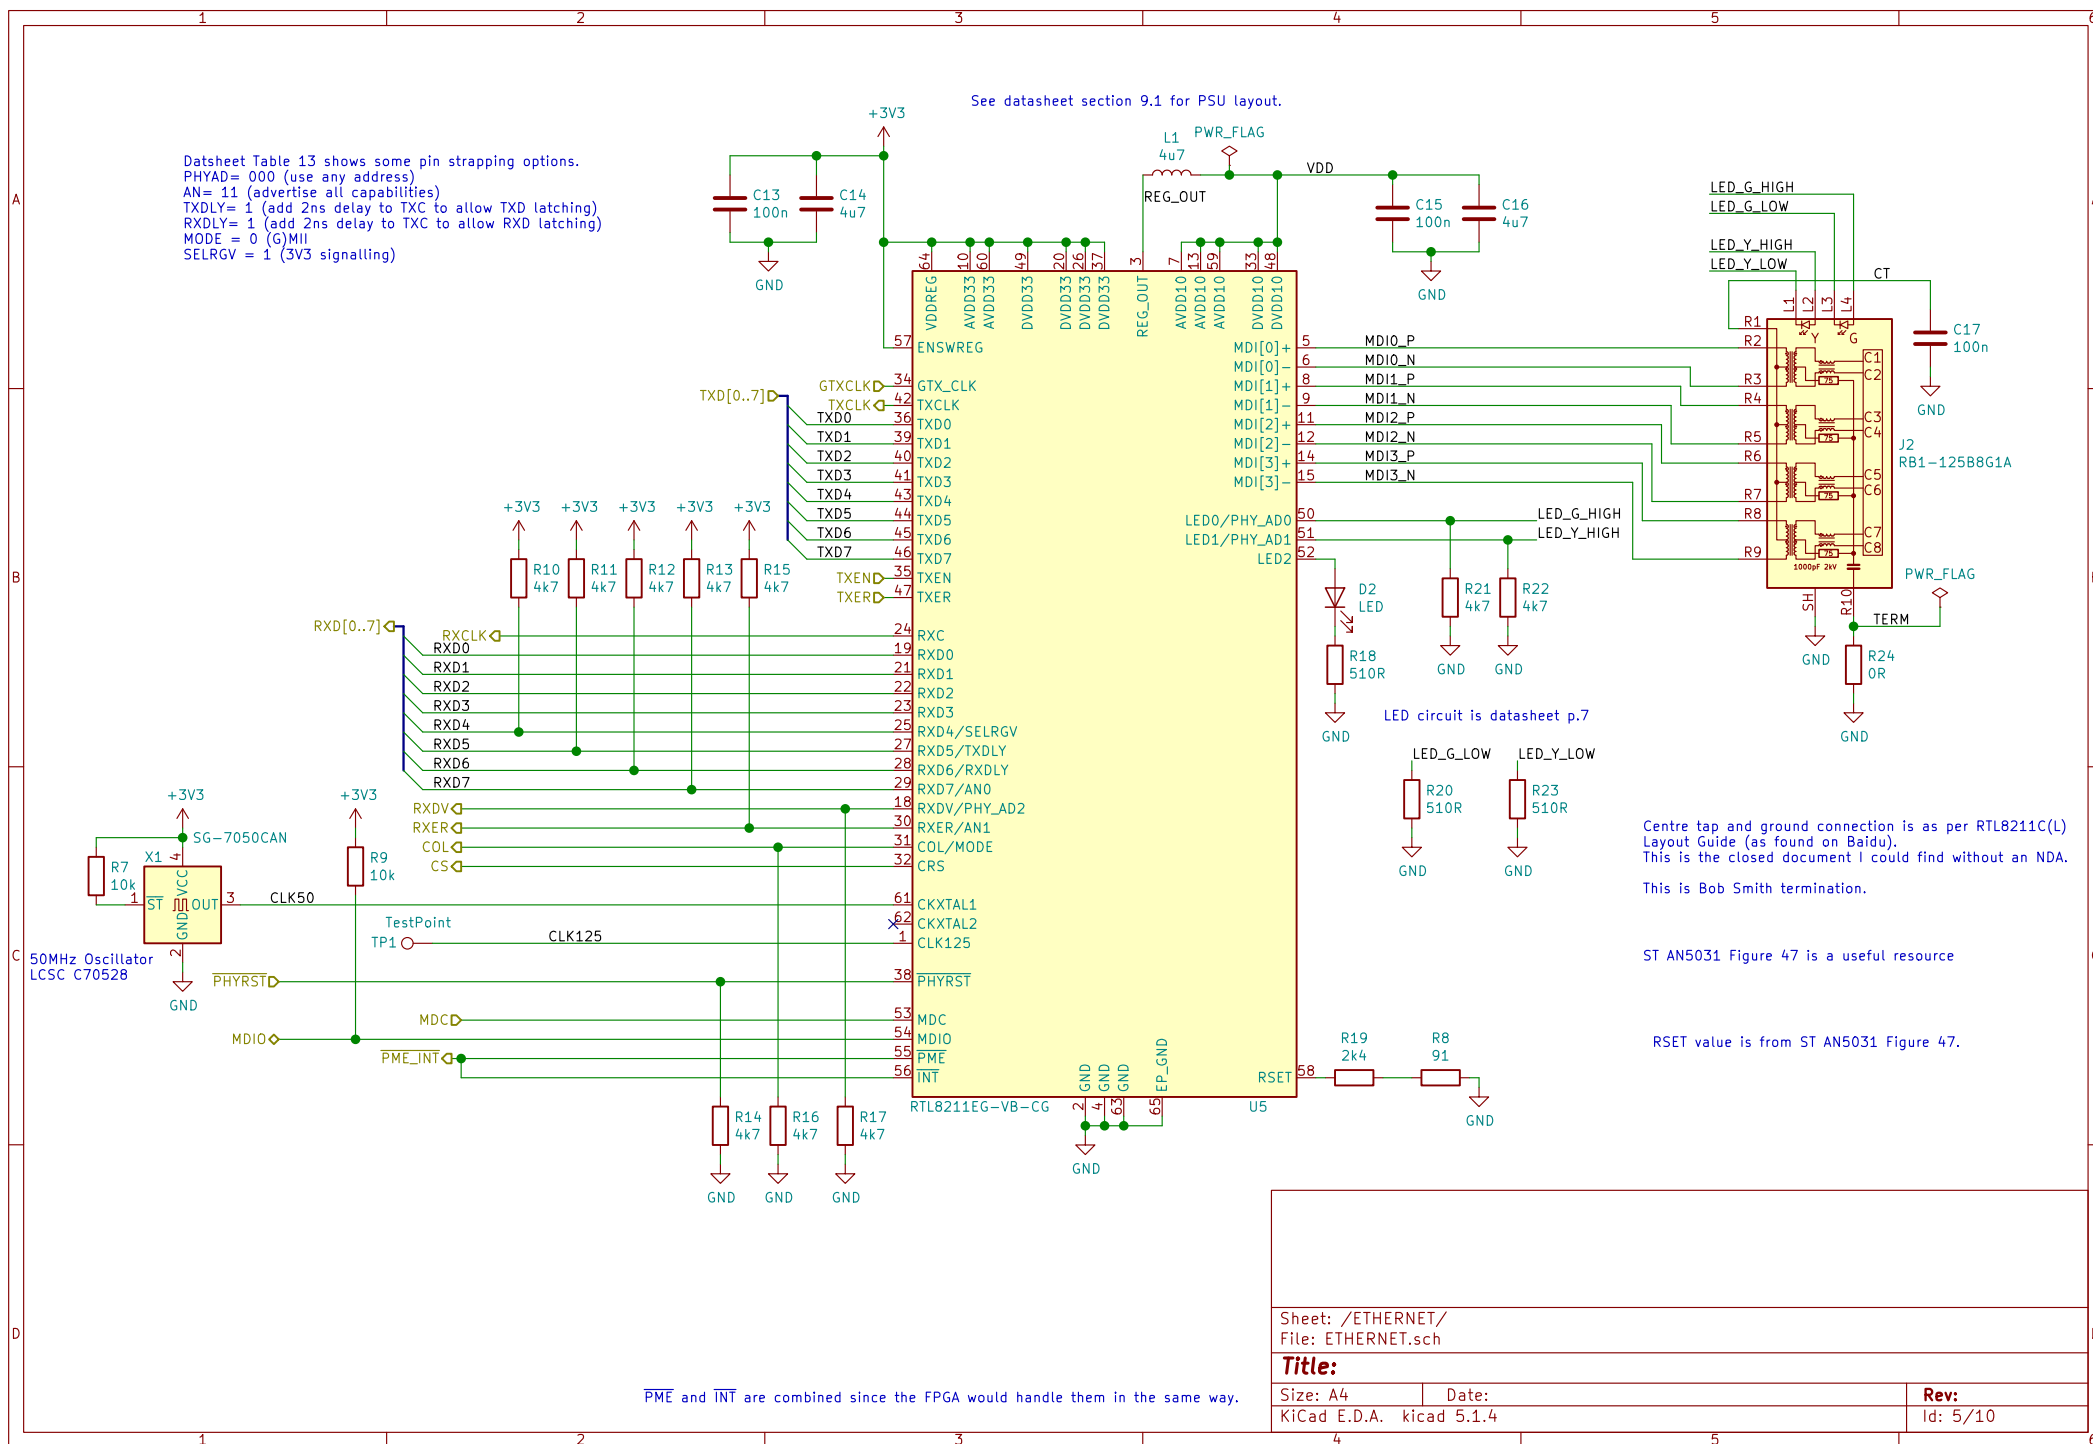


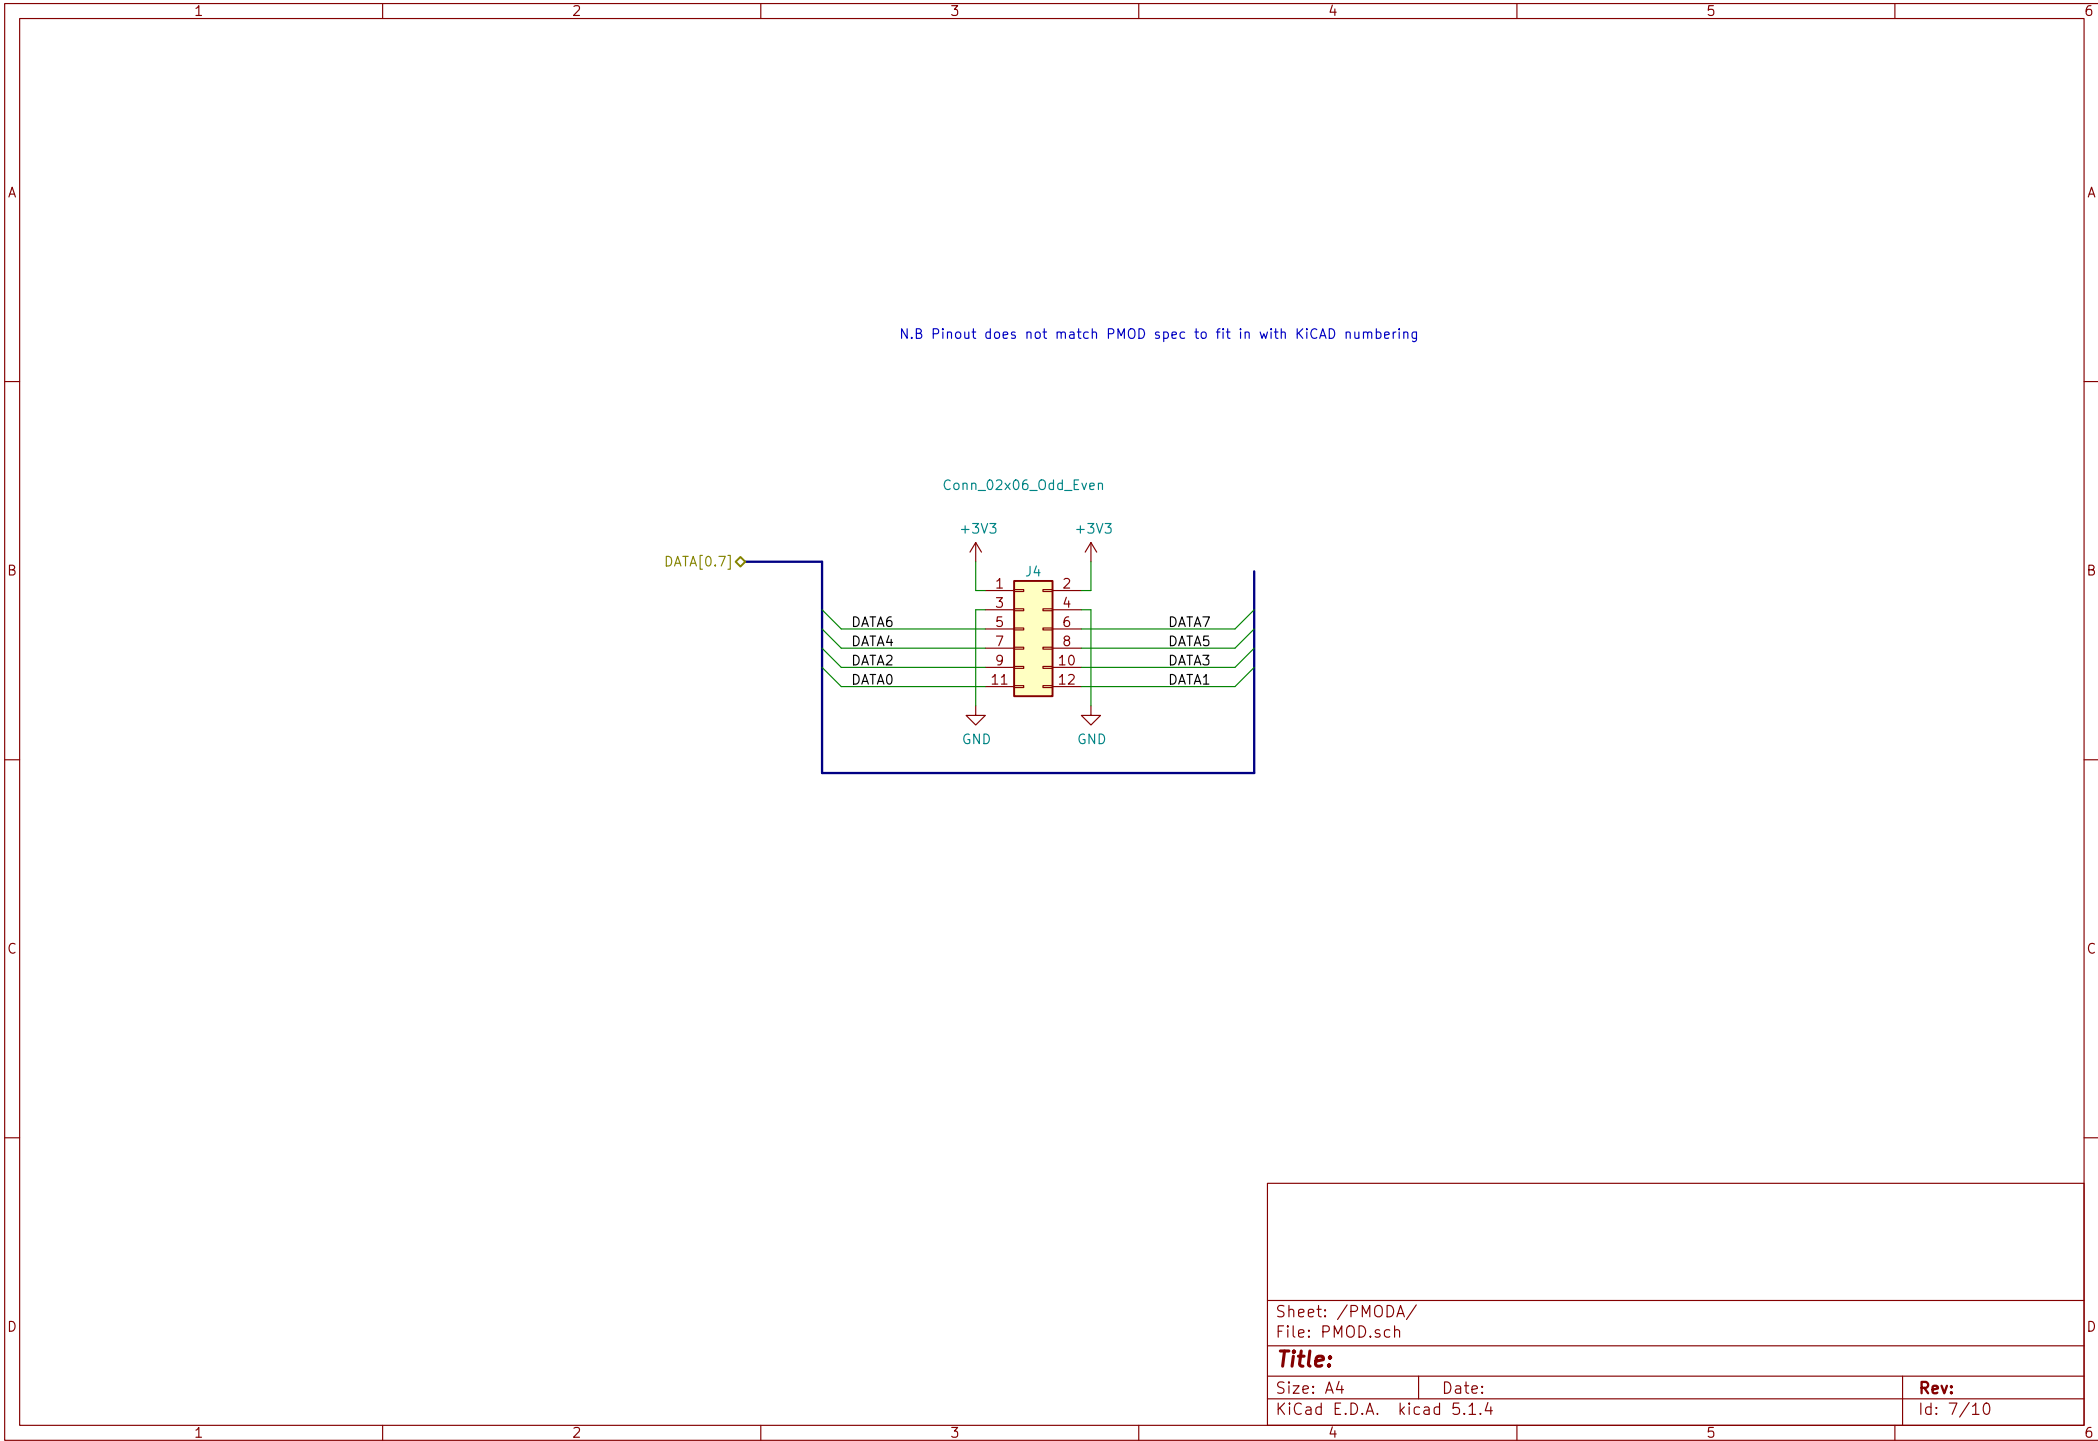

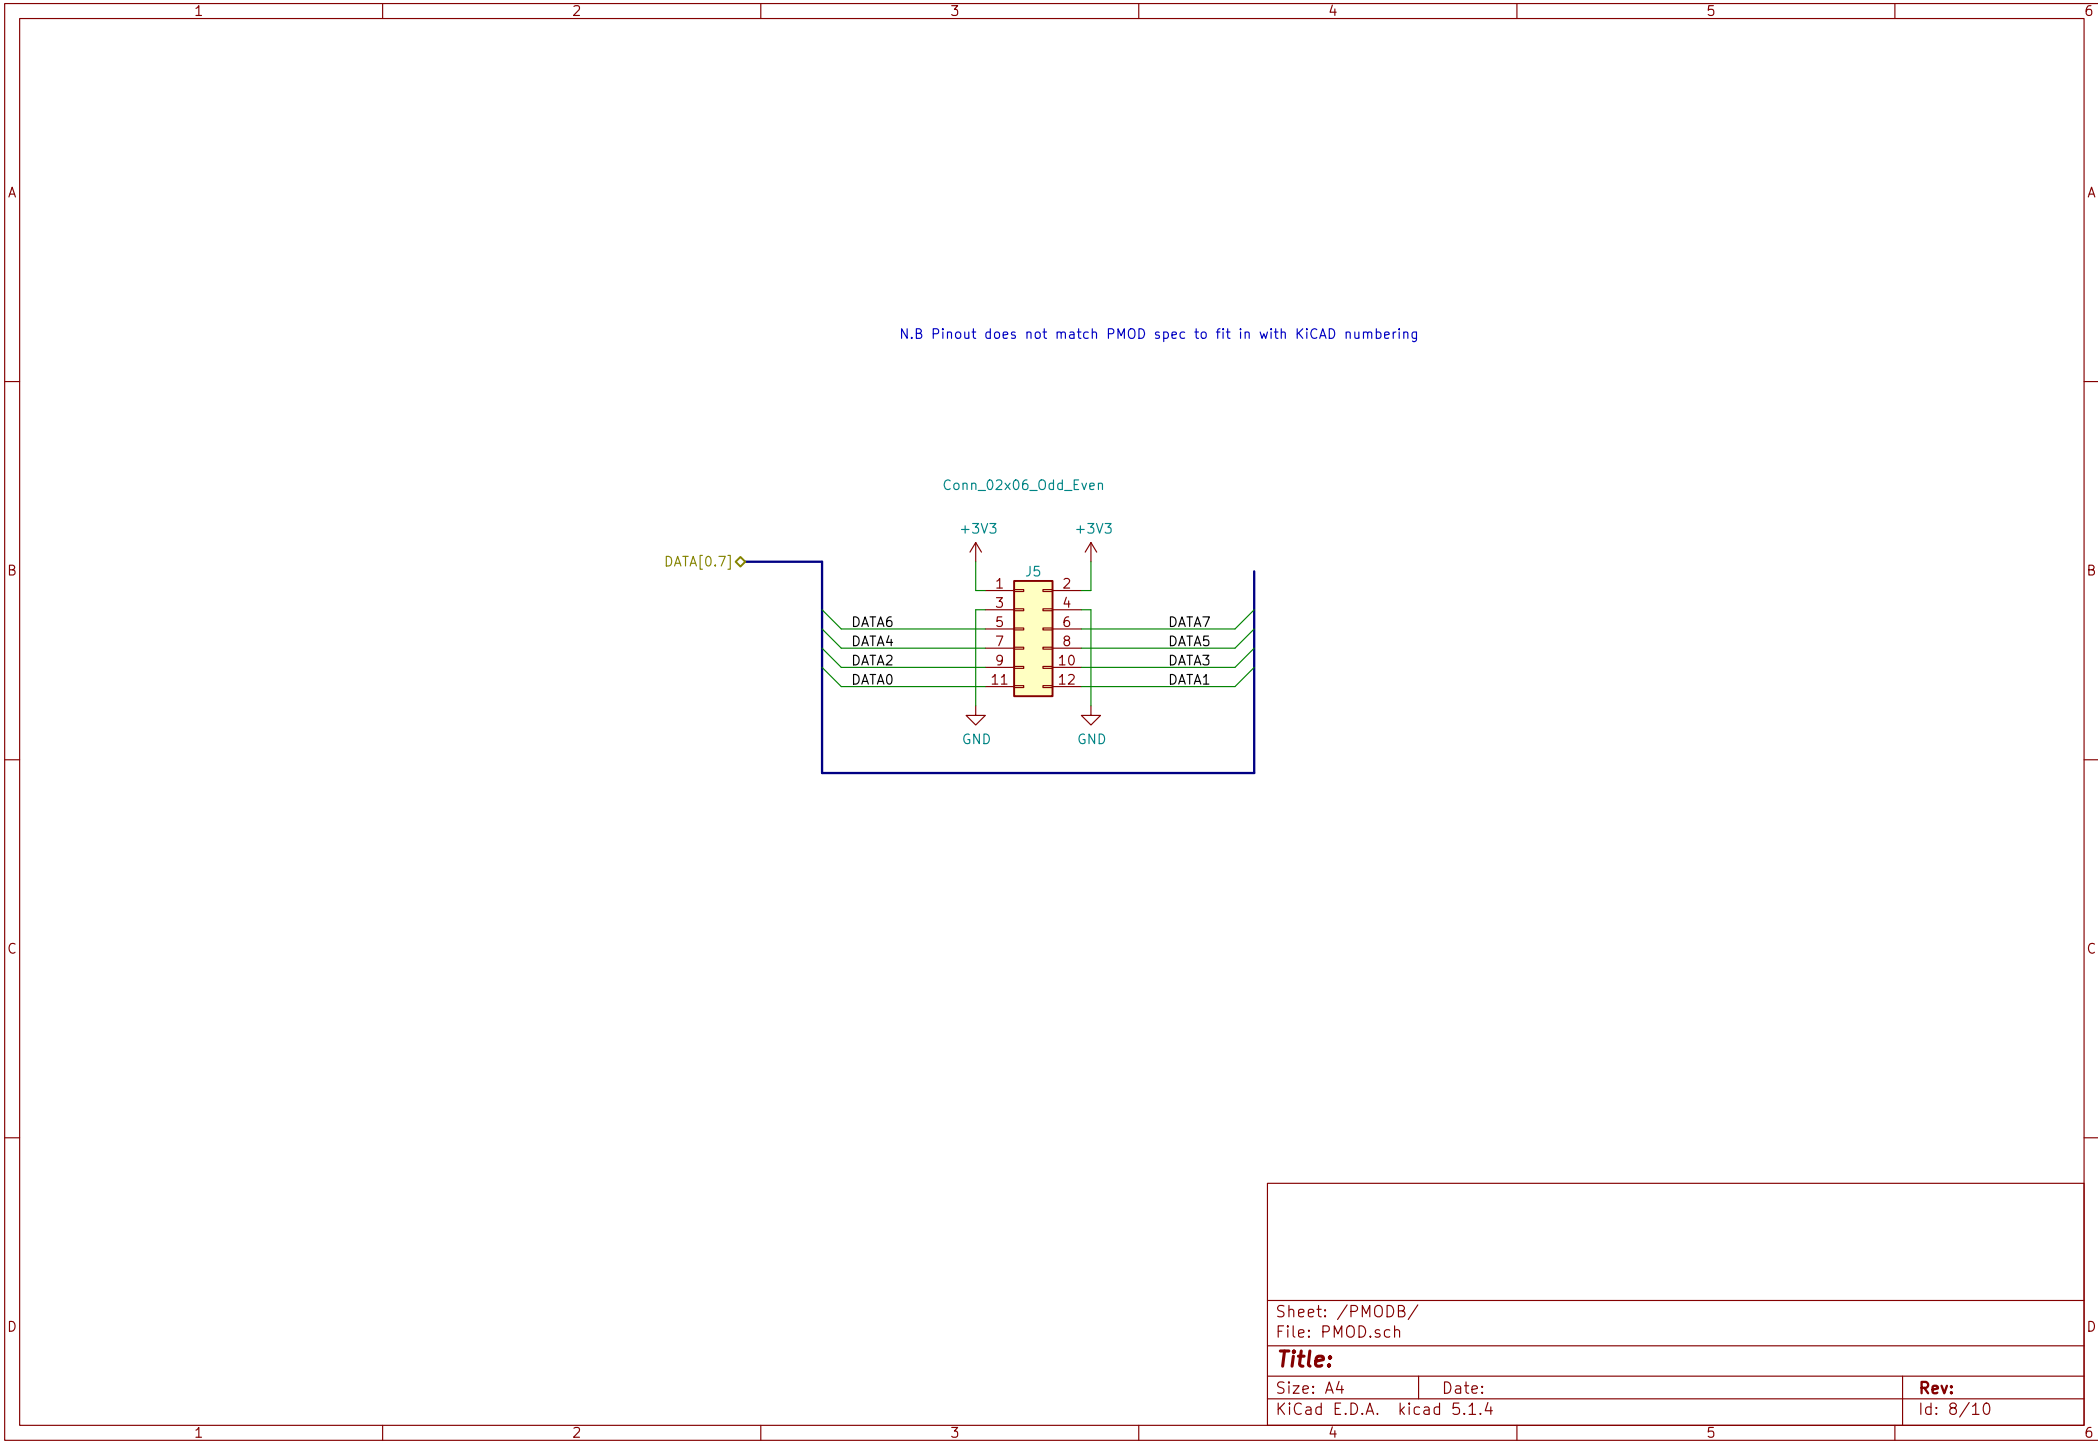

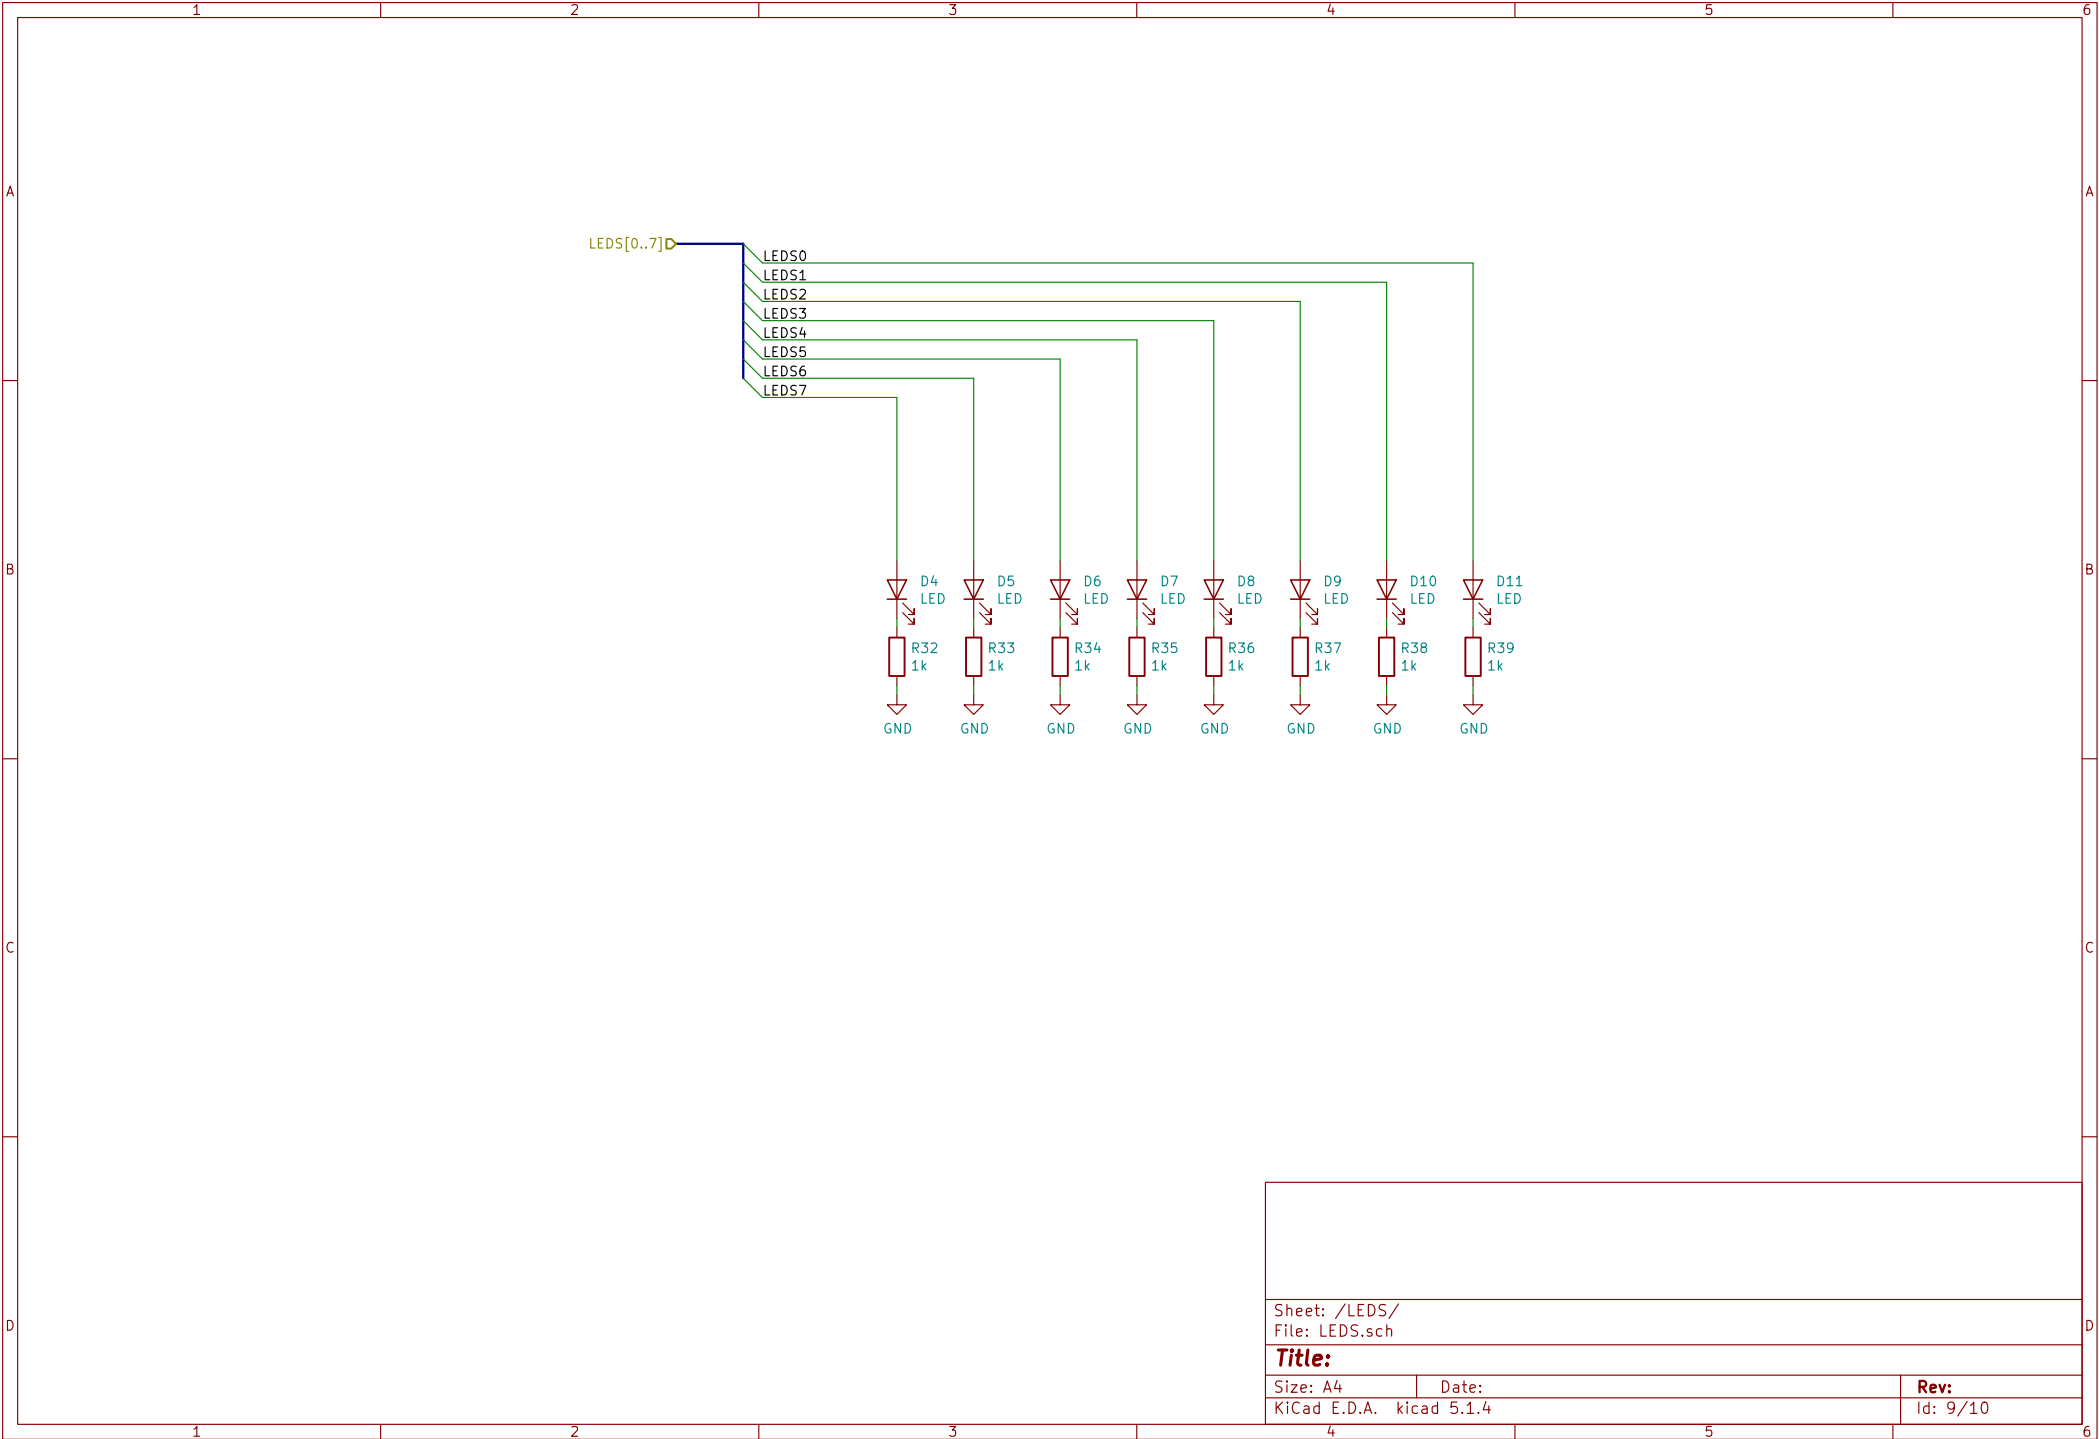

TODO: Change for real part: M24C64--RMN6TP
JLC C79988

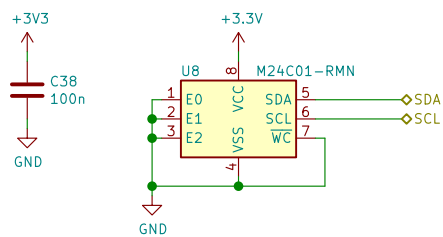

Sheet: /EEPROM/
File: EEPROM.sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 5.1.4

Rev:

Id: 10/10