


avg time per 1000-sample average (us): 121853.08
analogRead() conversions per second: 8206.60
mean (seq): 301.65
Sdev (seq): 0.48
mean (ave): 301.90
Sdev (ave): 0.20


**TWO CHANNEL
DIGITAL REAL-TIME OSCILLOSCOPE**

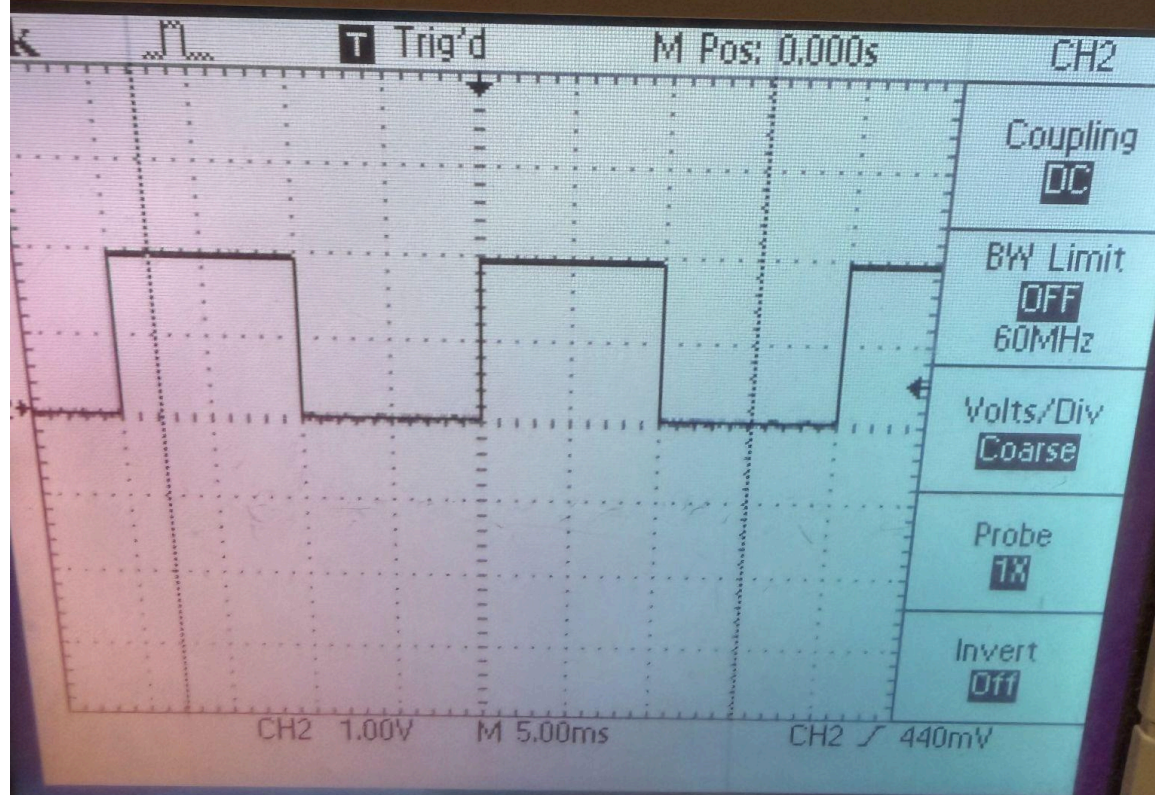

onix

TDS 210

TWO CHANNEL
DIGITAL REAL-TIME OSCILLOSCOPE

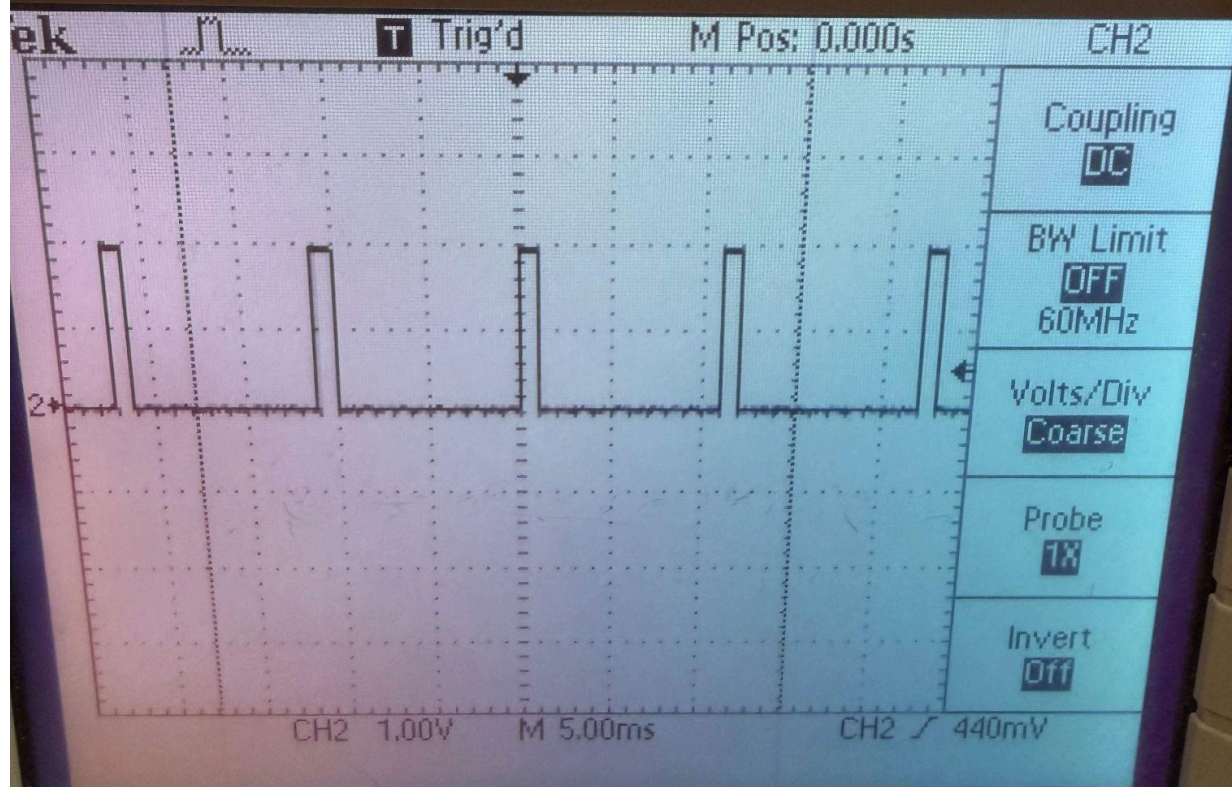


unix

TDS 210

TWO CHANNEL
DIGITAL REAL-TIME OSCILLOSCOPE


64
11

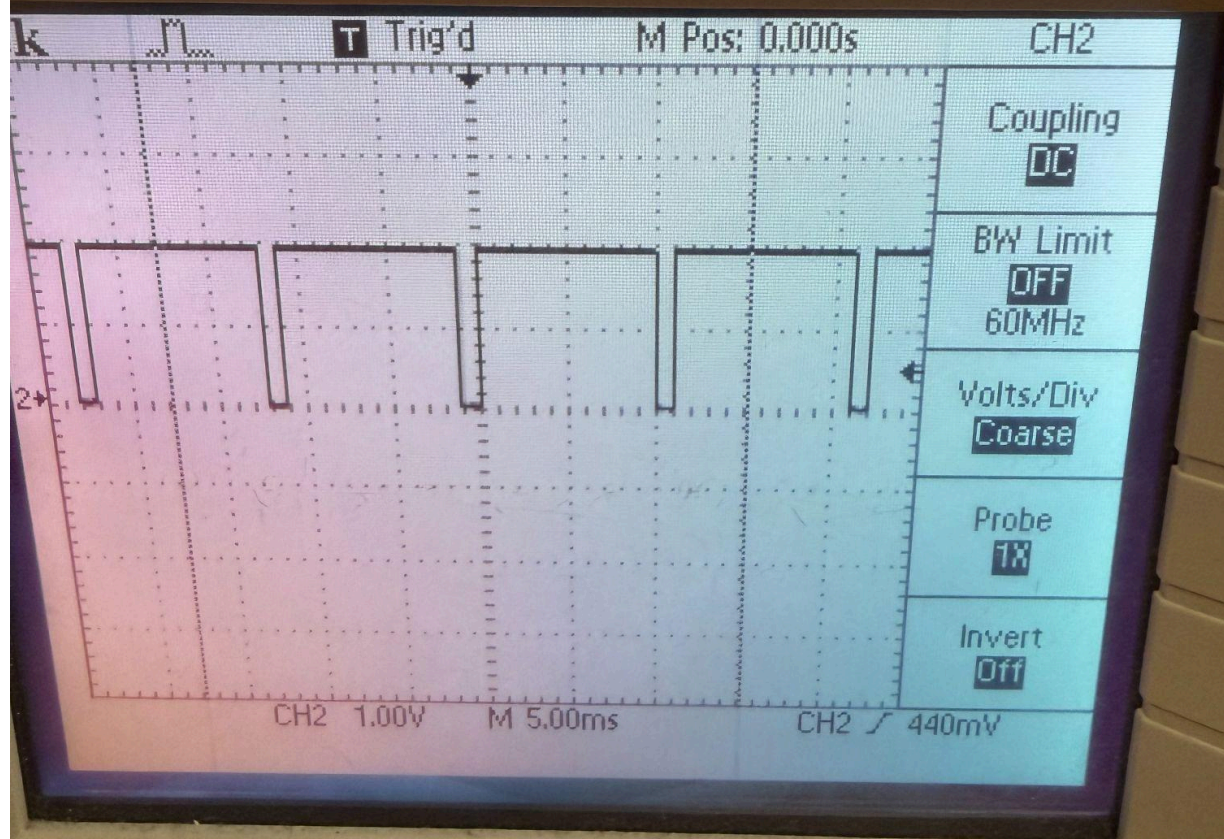

☒ count ☐ Sequential ☒ average

Interpolate ☐

RUN

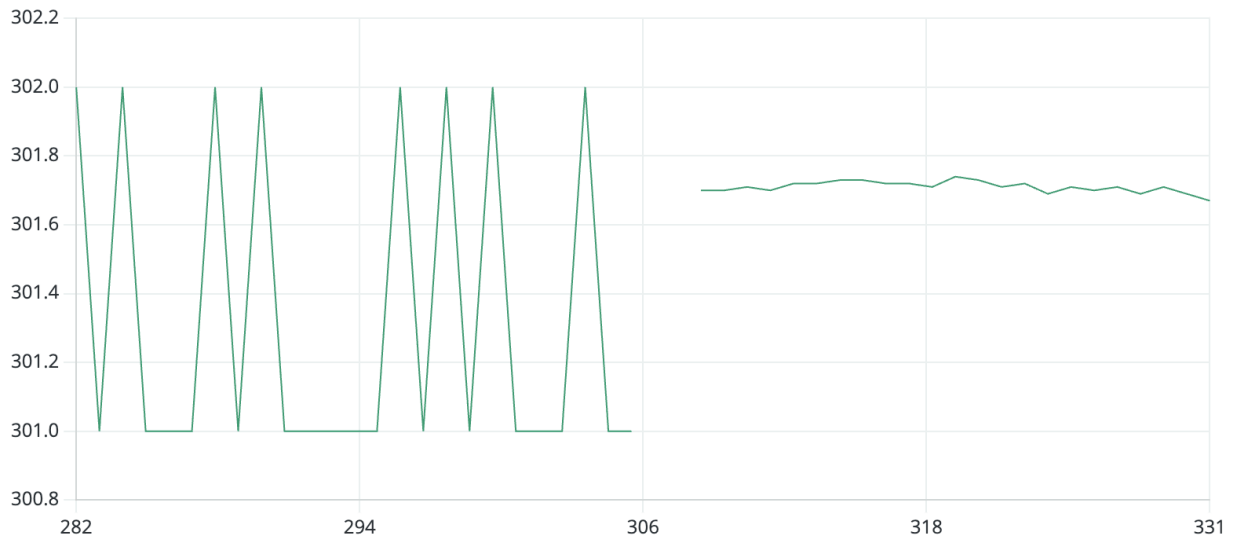

✓

→

⚙️

Arduino UNO

⌵

sketch_aug31a.ino

```
1 void setup() {  
2   Serial.begin(9600);  
3 }  
4  
5 void loop() {  
6   int sensorValue = analogRead(A0);  
7   Serial.println(sensorValue);  
8   delay(1);  
9 }  
10 \\nmax = 1023  
11 \\nmid = 511.5  
12
```

Output Serial Monitor

Message (Enter to send message to 'Arduino UNO' on '/dev/cu.usbmodem101')

New Line

9600 baud


511
512
512
512
512
512
512

Ln 12, Col 1 Arduino UNO on /dev/cu.usbmodem101 2

☒ value 1

Interpolate ☐

STOP

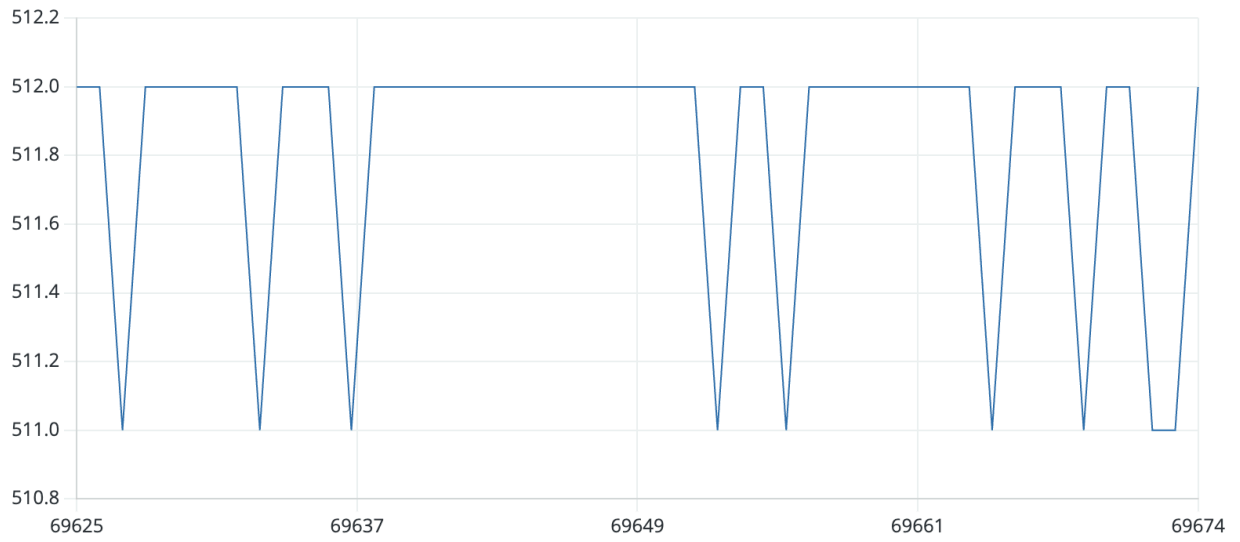

Type Message

SEND

New Line




9600 baud



☐ count ☒ Sequential ☒ average

Interpolate ☐


RUN

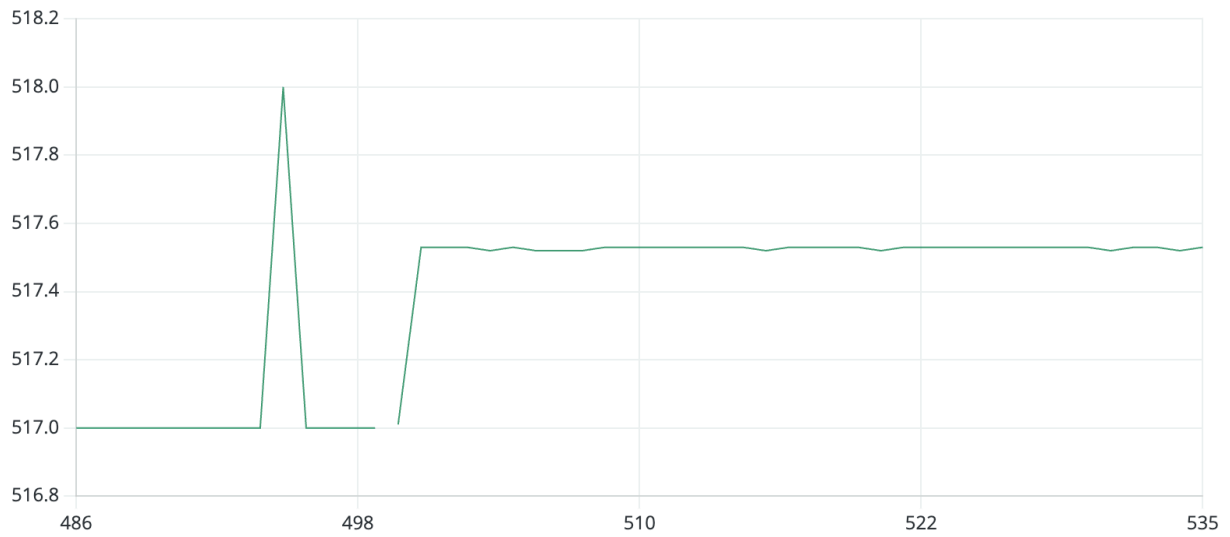

☒ Sequential ☐ count ☒ average

Interpolate ☐

STOP

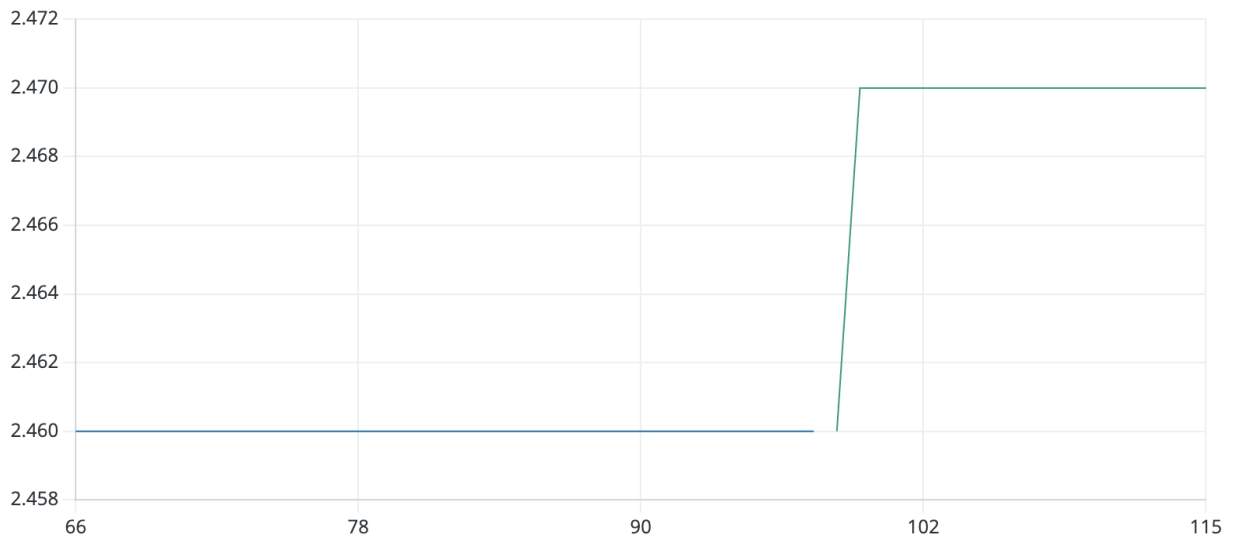

Type Message

SEND

New Line



9600 baud




mix

TDS 210

TWO CHANNEL
DIGITAL REAL-TIME OSCILLOSCOPE

60
1

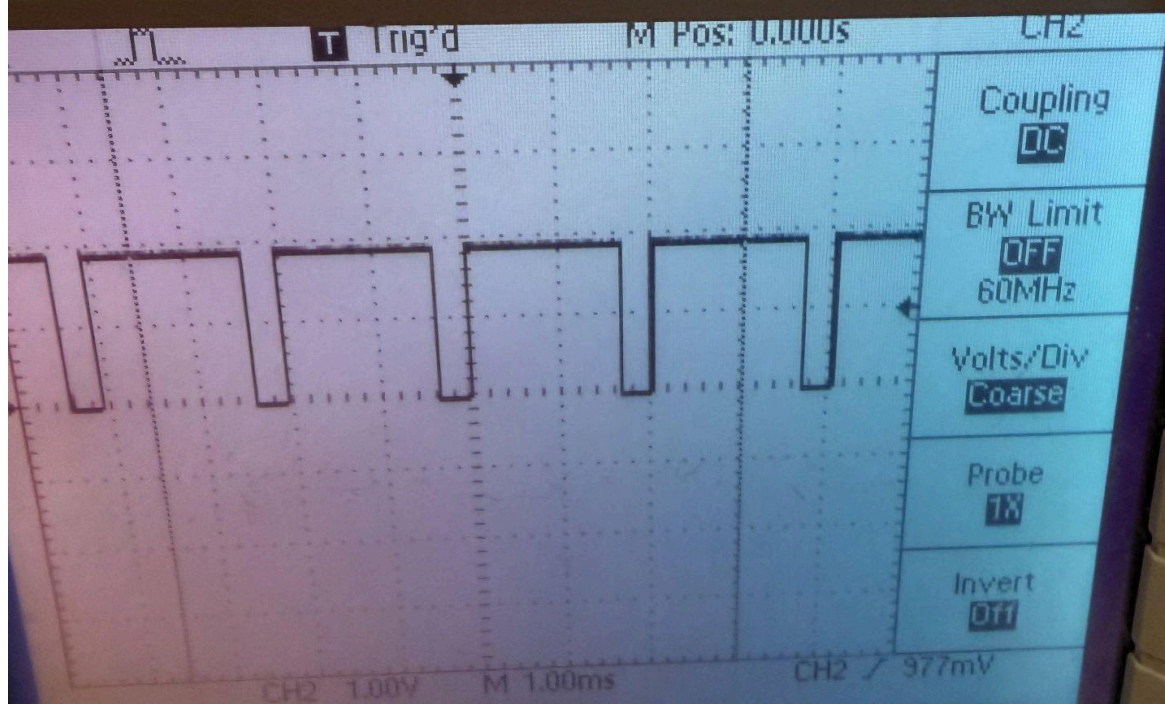

ix

TDS 210

TWO CHANNEL
DIGITAL REAL-TIME OSCILLOSCOPE

