


SPECIFICATIONS

DIMENSIONS

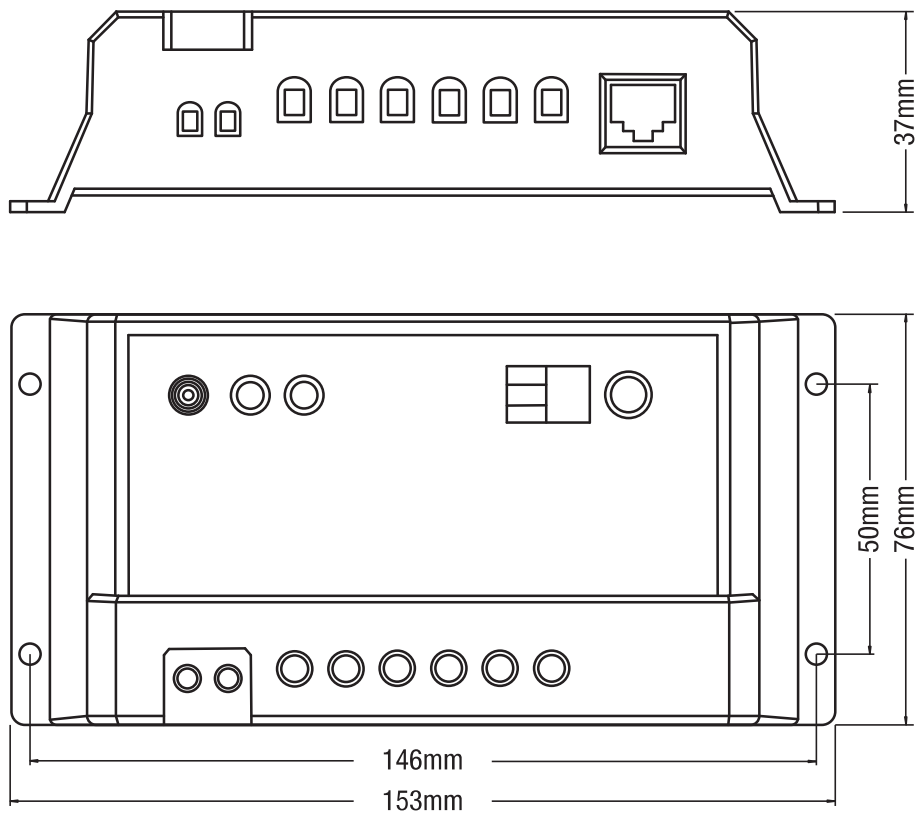

GENERAL SPECIFICATIONS

System Voltage	12V			24V		
Battery Type	AGM/Gel	SLA	Calcium	AGM/Gel	SLA	Calcium
Maximum Voltage*	14.4V	14.6V	14.8V	28.8V	29.2V	29.6V
Float Voltage*	13.6V	13.6V	13.6V	27.2V	27.2V	27.2V
Maximum Input Voltage	30V			55V		
Battery Voltage Range	9 -15V			18 - 30V		
Current Limit	10A (SRP0120) / 20A (SRP0240)					
Power Rating	120W (SRP0120) / 240W (SRP0240)					
Boost Time	2 hours					
Standby Current Draw	4mA					
Nominal Current Draw	10mA					
Remote Connection	8-pin RJ-45					
Temp. Compensation	-30mV/12V/°C					
Terminals	4mm ²					
Operating Temp.	-35°C to +50°C					

*Charge profile voltages will change with temperature compensation