




HLK 14000 Series **Industry Standard Cylinders**




- Highly versatile, hard anodised aluminium cylinders
- Lightweight and highly corrosion resistant
- Range of mounting adaptors
- Interchangeable with industry standard components
- Alternative hydraulic connection adaptors available
- Available in 10mm, 16mm, 20mm & 25mm bore diameters


Rear Eye Mount

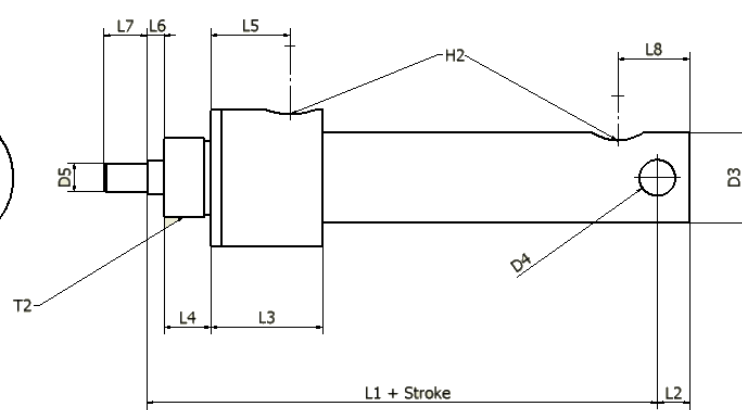

Nose thread Mount

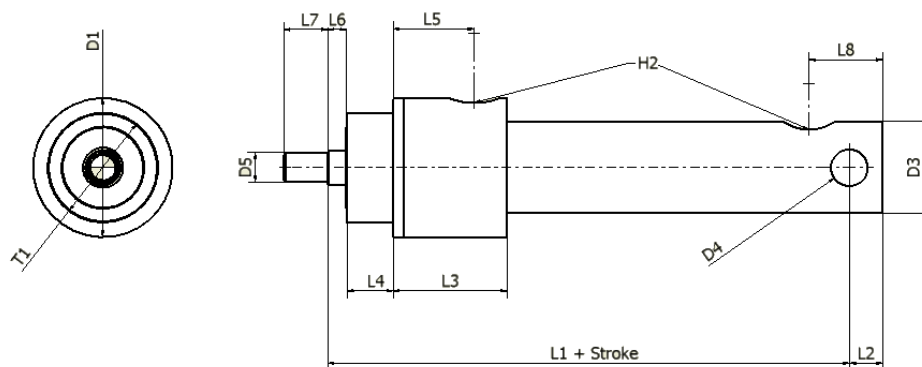

Rear Eye Mount

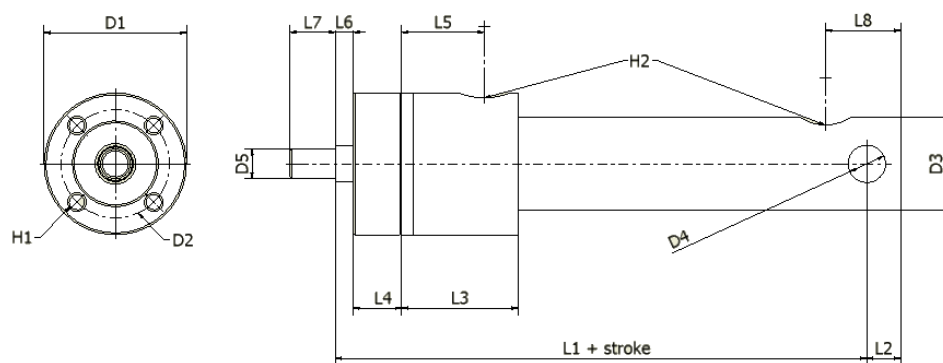

Cylinder	Rod	Bore	D1	D2	D3	D4	D5	L1	L2	L3	L4	L5	L6	L7	L8	H1	H2	T1	T2
14 – 10	6	10	32	24	20	5	M5x0.8	68	6	30	10	20	6	8	16	M4x0.7	M8x1.0	M22x1.5	M18x1.0
14 – 16	9.5	16	38	29	25	8	M8x1.25	85	8	31	13	21	8	12	20	M5x0.8	M8x1.0	M30x1.5	M22x2.5
14 – 20	12.7	20	44	34	32	10	M10 x1.5	97	9	38	16	26	10	18	22	M6x1.0	M8x1.0	M36x2.0	M24x2.0
14 – 25	15.9	25	50	40	38	12	M12x1.75	107	12	40	20	26	13	22	25	M6x1.0	M8x1.0	M42x2.0	M30x2.0

(All measurements in millimetres)

Specification:

Cylinder Construction	ISO6082 Hard Anodised Aluminium
Piston rod	316 Stainless Steel
Working Pressure	210 bar max
Temperature range	-40°C to +80°C
Face/Nose Mount Adapters	316 Stainless Steel
Hydraulic Ports	M8 x 1.0 pitch to suit Hydro-Lek banjo fittings or 1/8 NPT adapter