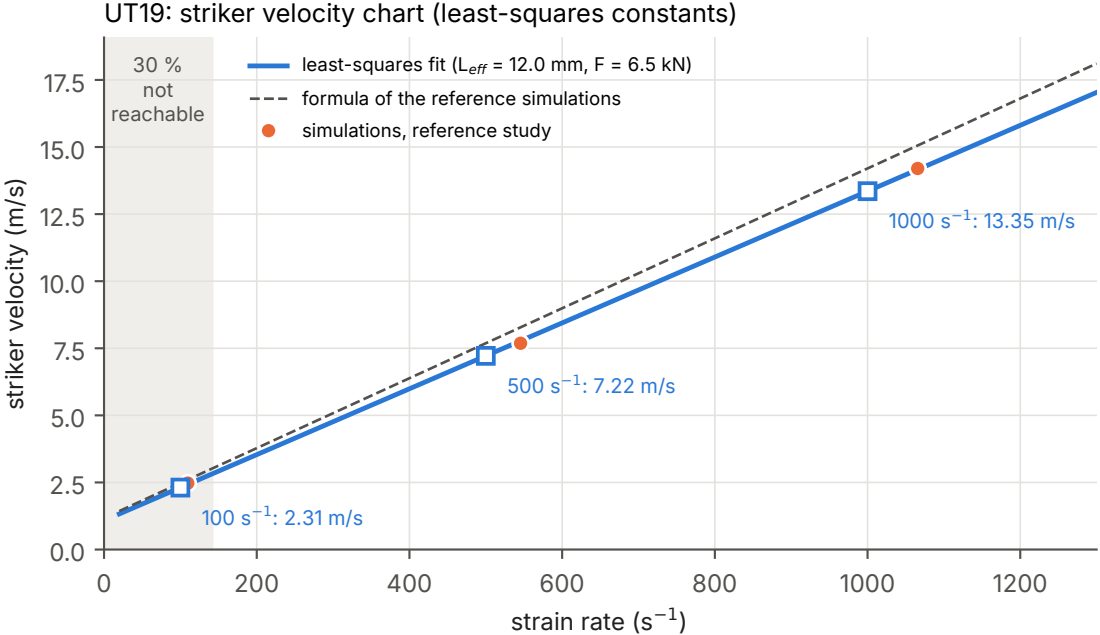
UT19: striker velocity chart (least-squares constants)
30 %
not
reachable
least-squares fit (L_eff = 12.0 mm, F = 6.5 kN)
formula of the reference simulations
simulations, reference study
100 s⁻¹: 2.31 m/s
500 s⁻¹: 7.22 m/s
1000 s⁻¹: 13.35 m/s
striker velocity (m/s)
strain rate (s⁻¹)
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
0
200
400
600
800
1000
1200