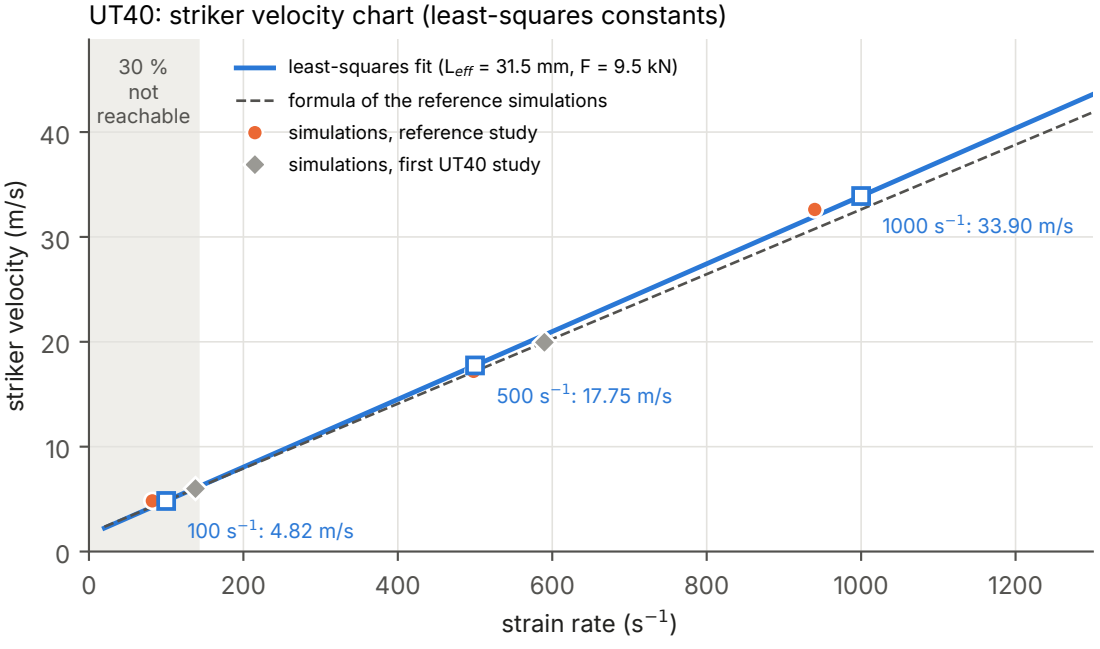
UT40: striker velocity chart (least-squares constants)
30 %
not
reachable
least-squares fit (L_eff = 31.5 mm, F = 9.5 kN)
formula of the reference simulations
simulations, reference study
simulations, first UT40 study
100 s⁻¹: 4.82 m/s
500 s⁻¹: 17.75 m/s
1000 s⁻¹: 33.90 m/s
striker velocity (m/s)
strain rate (s⁻¹)
0
10
20
30
40
0
200
400
600
800
1000
1200