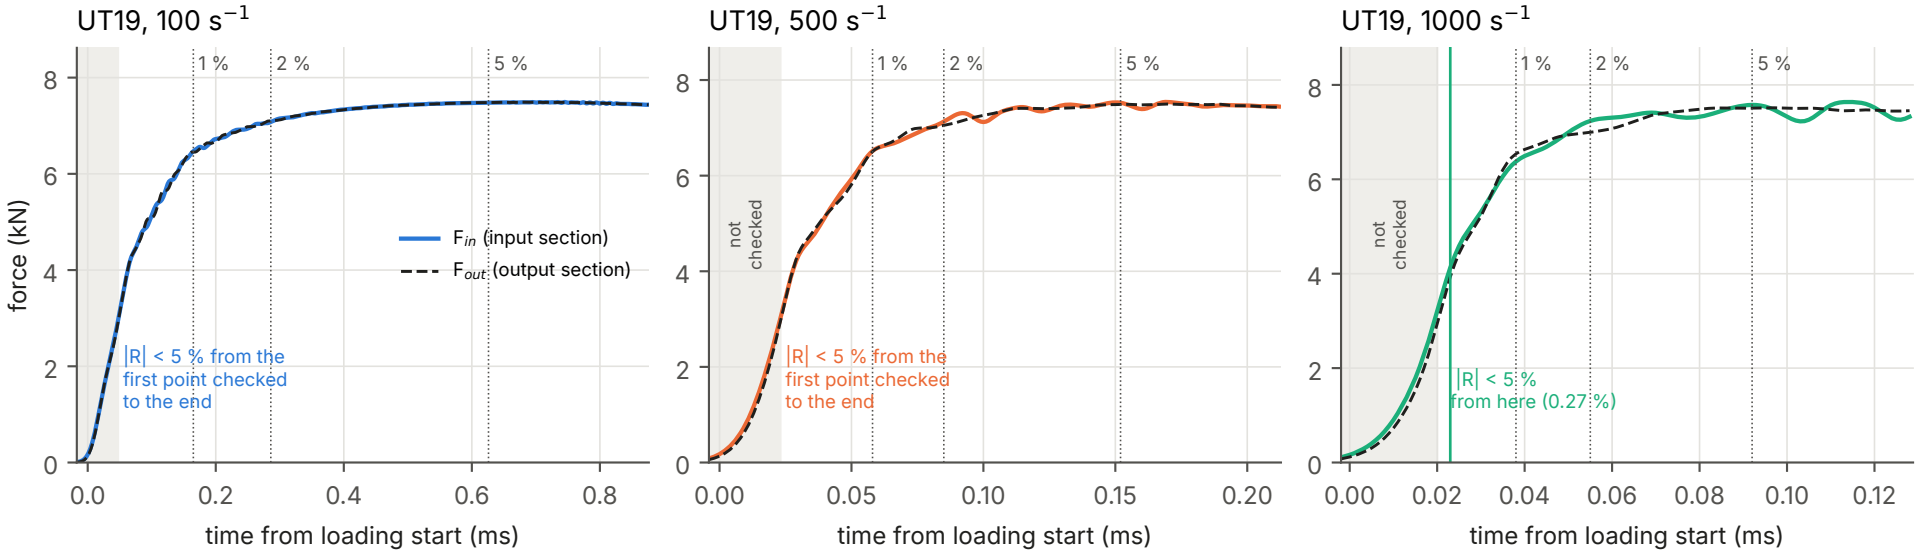
UT19, 100 s$^{-1}$
1 %
2 %
5 %
force (kN)
$F_{in}$ (input section)
$F_{out}$ (output section)
|R| < 5 % from the first point checked to the end
time from loading start (ms)
UT19, 500 s$^{-1}$
not checked
|R| < 5 % from the first point checked to the end
UT19, 1000 s$^{-1}$
|R| < 5 % from here (0.27 %)