EDM cutting sheet 1 / 1 – ETH_450×380mm_ShearEDM_v20250520_EDM

DXF: ETH_450×380mm_ShearEDM_v20250520_EDM.dxf
units mm · gap between parts ≥ 5 mm · sheet 300 (RD) × 400 (TD) · clamping left 40, bottom 40
machine area 250 (RD) × 350 (TD) · placement margin 5 · effective area 240 (RD) × 340 (TD) from x 45, y 45

Rolling direction 0°


Normal quality (Q3)

Medium quality (Q4)

Highest quality (Q5)

Mikrosteg: leave a bridge at the bottom of the half-circle recess (2 per part)

Numbers: specimen no. (see list). Only for information, bitte nicht gravieren.

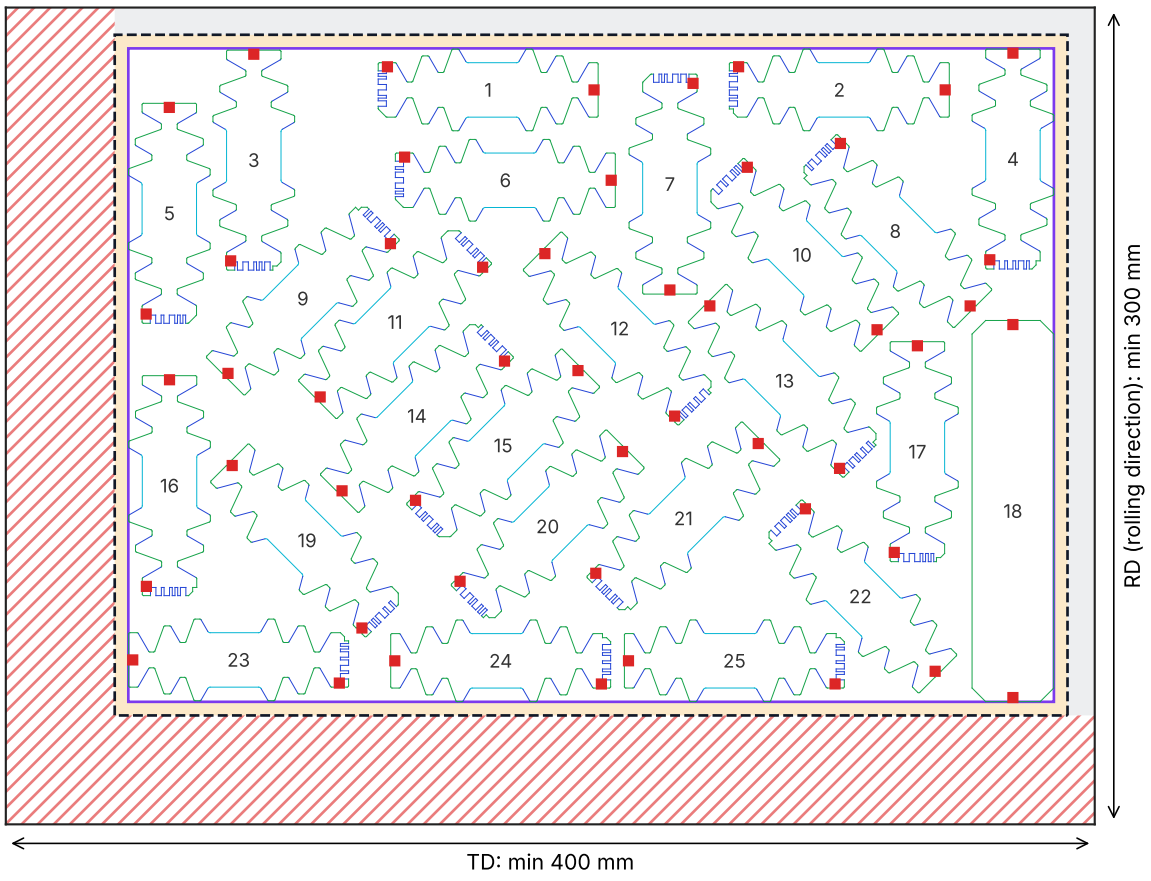

clamping (left 40, bottom 40 mm)
machine area 250 (RD) x 350 (TD) mm (wire travel)
placement margin 5 mm
effective area 240 (RD) x 340 (TD) mm (specimens)
sheet out of reach of the wire

ETH_450×380mm_ShearEDM_v20250520_EDM
sheet 1 / 1
2026-11-10

Specimen list – ETH_450×380mm_ShearEDM_v20250520_EDM (25 specimens)

No.	Sheet	Type	Angle to RD	Notch code (angle digit, index)	Specimen ID
1	1	SHMD	90°	6, 5	–
2	1	SHHD	90°	6, 8	–
3	1	SHHD	0°	0, 8	–
4	1	SHLD	0°	0, 2	–
5	1	SHMD	0°	0, 4	–
6	1	SHMD	90°	6, 4	–
7	1	SHMD	0°	0, 5	–
8	1	SHLD	45°	3, 2	–
9	1	SHLD	135°	9, 2	–
10	1	SHMD	45°	3, 5	–
11	1	SHMD	135°	9, 5	–
12	1	SHHD	45°	3, 8	–
13	1	SHHD	45°	3, 7	–
14	1	SHHD	135°	9, 8	–
15	1	SHMD	135°	9, 4	–
16	1	SHLD	0°	0, 1	–
17	1	SHHD	0°	0, 7	–
18	1	TENS_FULL	0°	–	–
19	1	SHMD	45°	3, 4	–
20	1	SHHD	135°	9, 7	–
21	1	SHLD	135°	9, 1	–
22	1	SHLD	45°	3, 1	–
23	1	SHHD	90°	6, 7	–
24	1	SHLD	90°	6, 1	–
25	1	SHLD	90°	6, 2	–